



HAL
open science

Extended quasimodes within nominally localized random waveguides

Patrick Sebbah, Bing Hu, Jerome M. Klosner, Azriel Genack

► **To cite this version:**

Patrick Sebbah, Bing Hu, Jerome M. Klosner, Azriel Genack. Extended quasimodes within nominally localized random waveguides. 2006. hal-00019145v1

HAL Id: hal-00019145

<https://hal.science/hal-00019145v1>

Preprint submitted on 16 Feb 2006 (v1), last revised 8 Mar 2006 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Quasimode expansion of spatially extended field distributions within nominally localized random waveguides

P. Sebbah,^{1,2,*} B. Hu,¹ J. M. Klosner,¹ and A. Z. Genack¹

¹*Department of Physics, Queens College of the City University of New York, Flushing, New York 11367*

²*Laboratoire de Physique de la Matière Condensée, Université de Nice - Sophia Antipolis,
Parc Valrose, 06108, Nice Cedex 02, France*

(Dated: February 16, 2006)

We have measured the spatial and spectral dependence of the microwave field inside an open absorbing waveguide filled with randomly juxtaposed dielectric slabs in the spectral region in which the average level spacing exceeds the typical level width. Whenever lines overlap in the spectrum, the field exhibits multiple peaks within the sample. Only then is substantial energy found beyond the first half of the sample. When the spectrum throughout the sample is decomposed into a sum of Lorentzian lines plus a broad background, their central frequencies and widths are found to be essentially independent of position. Thus, this decomposition provides a complete set of electromagnetic quasimodes underlying the extended field in nominally localized samples.

PACS numbers: 42.25.Dd,41.20.Jb,72.15.Rn,71.55.Jv

The nature of wave propagation in disordered samples reflects the spatial extent of the wave within the medium. [1, 2, 3] In part because of the inaccessibility of the interior of multiply-scattering samples, the problem of transport in the presence of disorder has been treated as a scattering problem with the transition from extended to localized waves charted in terms of characteristics of conductance and transmission. When gain, loss, and dephasing are absent, the nature of transport can be characterized by the degree of level overlap, δ , [2, 3] which is the ratio of average width and spacing of states of an open random medium, $\delta \equiv \delta\nu/\Delta\nu$. Here $\delta\nu$ may be identified with the spectral width of the field correlation function [4] and $\Delta\nu$ with the inverse of the density of states of the sample. When $\delta > 1$, resonances of the sample overlap spectrally, the wave spreads throughout the sample and transport is diffusive. [2] In contrast, when $\delta < 1$, coupling of the wave in different portions of the sample is impeded. Azbel showed that, when $\delta < 1$, transmission may occur via resonant coupling to exponentially peaked localized modes with spectrally isolated Lorentzian lines with transmission approaching unity when the wave is localized near the center of the sample. [5, 6] Given the sharp divide postulated between extended and localized waves, the nature of propagation when modes occasionally overlap in samples for which $\delta < 1$ is of particular interest.

Mott argued that interactions between closely clustered levels in a range of energy in which $\delta < 1$ would be associated with two or more centers of localization within the sample within the sample. [7] Pendry showed that, in this case, occasionally overlapping of electronic modes play an outsized role in transport since electrons may then flow through the sample via regions of high intensity which are strung together like beads in a necklace. [8, 9] Recent pulsed [10] and spectral [10, 11] measurements of optical transmission in layered samples were consistent

with the excitation of multiple resonances associated with necklace states. In related work, Lifshits had shown that the hybridization of overlapping defect states outside the allowed vibrational bands of the pure material led to the formation of a band of extended states. [12] Similar impurity bands can be created for electrons in the forbidden gap of semiconductors, photons in photonic band gaps, and polaritons in the polariton gap [13].

Because an open system with dissipation is not Hermitian, the question arises as to whether the field may be expanded as a linear superposition of orthogonal decaying quasimodes with widths equal to the rates of leakage and dissipation. [14, 15, 16, 17, 18] These questions arise in diverse contexts with regard to the nature of the wave function of decaying nuclei, atoms and molecules, electromagnetic waves in microspheres or chaotic cavities, and gravity waves produced by matter captured by black holes. [16]

In this Letter, we explore the nature of propagation in an open dissipative random one-dimensional dielectric medium embedded in a rectangular waveguide. Measurements of the microwave field spectrum are made at closely spaced points along the entire length of the waveguide over a spectral range in which $\delta < 1$. In all samples, we find spectrally isolated Lorentzian lines associated with exponentially localized waves. Whenever peaks in the field overlap spectrally, they also overlap spatially. Only then does the field penetrates substantially beyond the first half of the sample. When the field spectra at each points within the sample are decomposed into a sum of Lorentzian lines and a slowly varying background, the central frequencies and widths of the lines are found to be independent of position within the sample. This confirms the validity of the quasimode expansion of the field. The leakage rate through the boundaries and the absorption rates are determined independently and compared to the quasimode linewidth.

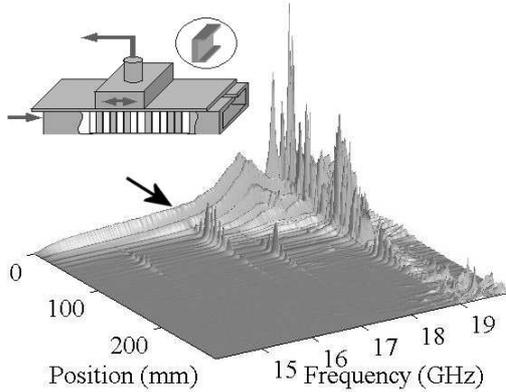


FIG. 1: Spectra of the field amplitude at each point along a typical random sample normalized to the amplitude of the incident field. The arrow points to the input direction. Inset: Description of the experimental set up and schematic of the ceramic structure element.

Field spectra are taken along the length of a slotted W-42 microwave waveguide using a vector network analyzer. The field is weakly coupled to a cable without a protruding antenna inside a copper enclosure. A 2 mm-diameter hole in the enclosure is pressed against the slot, which is otherwise covered by copper bars attached to both sides of the enclosure (inset Fig. 1). The entire detector assembly is translated in 1 mm steps by a stepping motor. Measurements are made in one hundred random sample realizations each composed of randomly juxtaposed dielectric elements. Ceramic blocks are milled to form a binary element of length $a = 7.74 \pm 0.04$ mm. The first half of the block is solid and the second half is two projecting thin walls on either side of the air space, as shown in the inset of Fig. 1. The orientation of the solid element towards or away from the front of the waveguide is randomly selected. This structure introduces states into the band gap of the corresponding periodic structure [19] close to the band edges. In order to produce states in the middle of the band gap, ceramic slabs of thickness $a/2$, corresponding to the solid half of the binary elements, or Styrofoam slabs, with refractive index close to unity, are inserted randomly. The samples are composed of 31 binary elements, 5 single ceramic elements and 5 Styrofoam elements with a total length of 28.8 cm.

Spectra of the field amplitude at equally spaced points along a typical random sample configuration normalized to the amplitude of the incident field amplitude are shown in Fig. 1. A few isolated exponential peaks corresponding to localized modes are seen below 18.7 GHz, with different Lorentzian linewidths. Between 18.7 GHz and 19.92 GHz, lines generally overlap so that $\delta > 1$ and the wave is extended. The field amplitude within the sample over a narrower frequency range in a different random

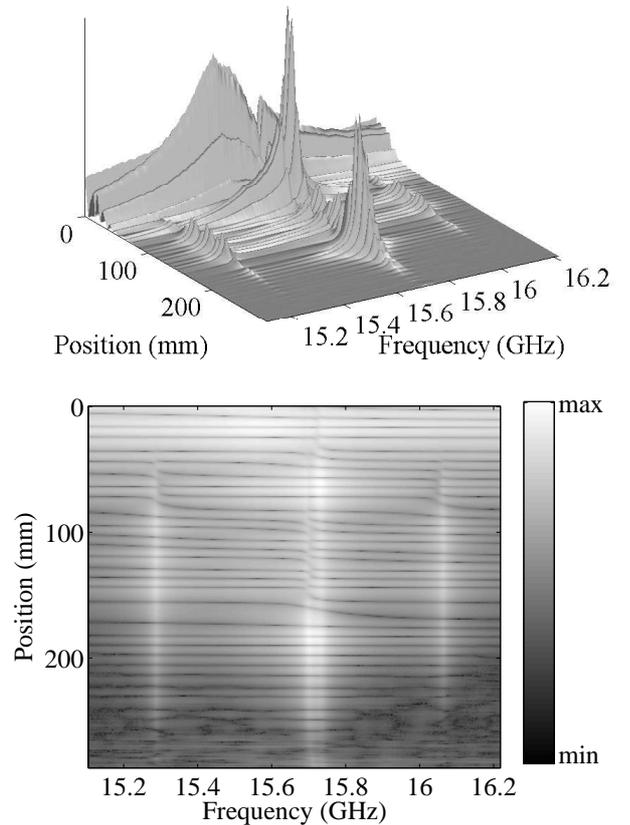


FIG. 2: (a) Spectra of the field amplitude at each point along a random sample with spectrally overlapping peaks normalized to the amplitude of the incident field. (b) The top view of Fig. 2a in logarithmic presentation.

configuration, in which spectrally overlapping peaks are observed, is shown in two projections in Fig. 2. In order to exhibit the progression of the phase within the sample, a top view of the logarithm of the amplitude of the data plotted in Fig. 2a is presented in Fig. 2b. In the periodic binary structure, the same projection as in Fig. 2b, shows parallel ridges corresponding to maxima of the field amplitude separated by a . Thus half the wavelength equals a throughout the band gap, or $\lambda = 2a$. When the frequency is tuned through a Lorentzian line, which corresponds to a localized state (e.g. $\nu = 15.3$ GHz), the phase through the sample increases by π rad and an additional peak in the amplitude variation across the sample is introduced. In the frequency interval between 15.6 and 15.8 GHz where multiple peaks are observed in the field distribution, the number of ridges is increased by 3. This suggests that the radiation is tuned through the central frequency of three successive resonances. This is tested by fitting the field spectrum to a sum N of Lorentzian

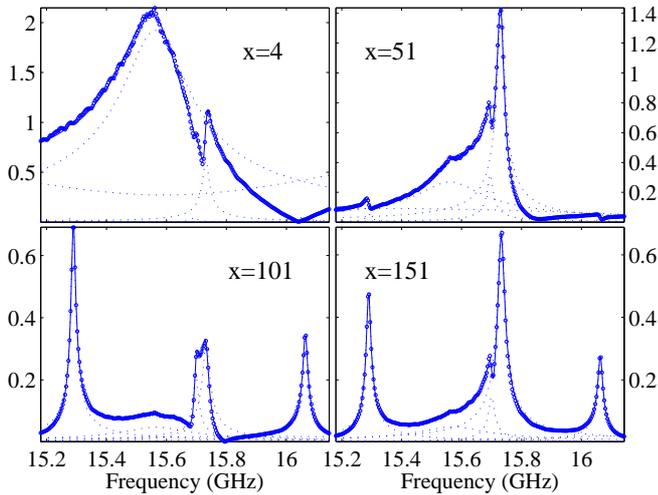


FIG. 3: Comparison of the measured field magnitude (dots) to Eq. 1 (full line) at four different locations. The Lorentzian lines and the polynomial in Eq. 1 are represented in dotted lines.

lines, as follows,

$$E(\nu, x) = \sum_{n=1}^N \frac{A_n(x)}{\Gamma_n(x) + i(\nu - \nu_n(x))} + \sum_{m=0}^2 C_m(x)(\nu - \nu_0)^m \quad (1)$$

where $A_n(x)$ and $C_n(x)$ are complex coefficients. The slowly varying polynomial of the second degree centered at ν_0 represents the sum of the evanescent wave and the tail of the response of distant lines. Here, $\nu_0 = 15.66$ GHz, which is the center of the frequency interval considered. We choose $N = 5$ to include the two “satellite” lines at 15.3 GHz and 16.06 GHz. An iterative double least-squares fit procedure is applied independently at each position x within the sample as follows: a first guess for the central frequencies, ν_n , and linewidths Γ_n is used to fit the data versus frequency to Eq. 1 at each position x , with the amplitude coefficients $A_n(x)$, and $C_n(x)$ as fitting parameters. These values are used in a second step in which, only the $\nu_n(x)$, and $\Gamma_n(x)$ are fitting parameters within a bounded spectral range. This double fitting procedure can be repeated to improve the fit. The quality of the fit can be seen in Fig. 3. Indeed, the χ^2 normalized by the product of the integrated spectrum and the degree of freedom (the number of point minus the number of free parameters), stays below 2×10^{-3} over 90% of the sample length. The noise is higher near the sample output where the signal is generally close to the noise level. The central frequencies, $\nu_n(x)$, and linewidths $\Gamma_n(x)$, found in the fit are shown in Fig. 4. A plot of the complex square of each term in Eq. 1 is shown in Fig. 5. Fluctuations in $\nu_n(x)$ and $\Gamma_n(x)$ are large only at positions for which the peak magnitude of the terms for the n th mode are low, as can be seen in Fig. 4. In the domain in which fluctuations in the central frequencies and linewidths for

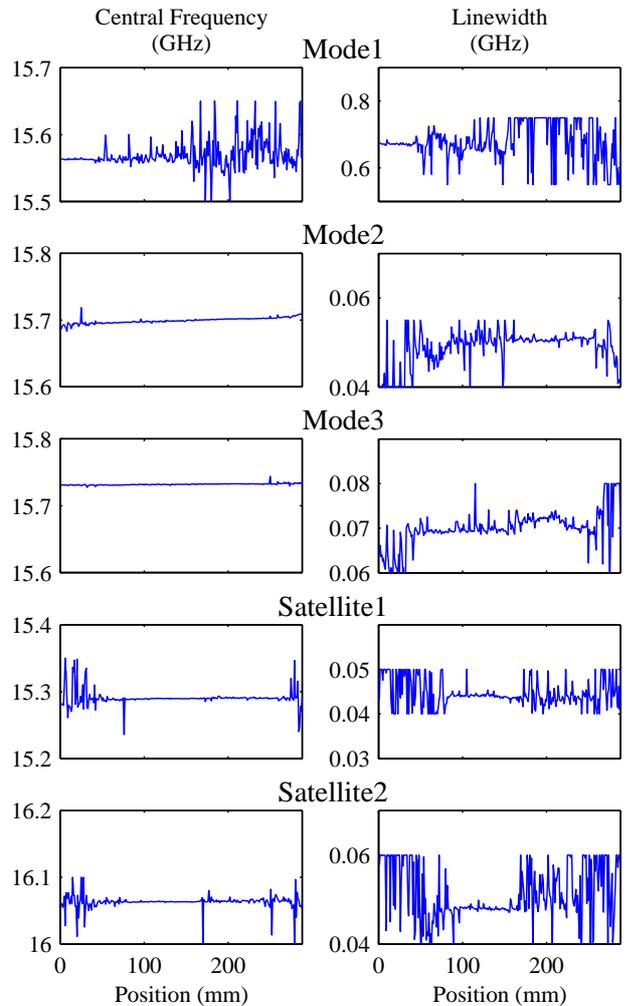


FIG. 4: Spatial dependence of central frequency and linewidth for the five modes shown in Fig. 5

a particular quasimode are low, these quantities are relatively independent of position and the field amplitude is given to good accuracy by substituting the average values of $\nu_n(x) = \nu_n$ and $\Gamma_n(x) = \Gamma_n$ in Eq. 1. The drift is greatest in mode 2, where it is less than 20% of the linewidth.

With ν_n and Γ_n specified, each of the Lorentzian terms in Eq. 1 corresponds to a quasimode. The Fourier transform of each term gives the response to an incident pulse in which the temporal and spatial variation factorize, $f_n(x, t) = f_n(x)\exp(-i(2\pi\nu_n - i\Gamma_n)t)$. Between the two “satellite modes”, “mode 1” ($\nu_1 \simeq 15.56$ GHz, $\Gamma_1 \simeq 0.67$ GHz) is broad as a result of its closeness to the input. “Mode 2” ($\nu_2 \simeq 15.70$ GHz, $\Gamma_2 \simeq 0.051$ GHz) and “mode 3” ($\nu_3 \simeq 15.73$ GHz, $\Gamma_3 \simeq 0.07$ GHz) are spatially extended and multi-peaked in a spectral range in which quasimodes are otherwise strongly localized. In fact, the

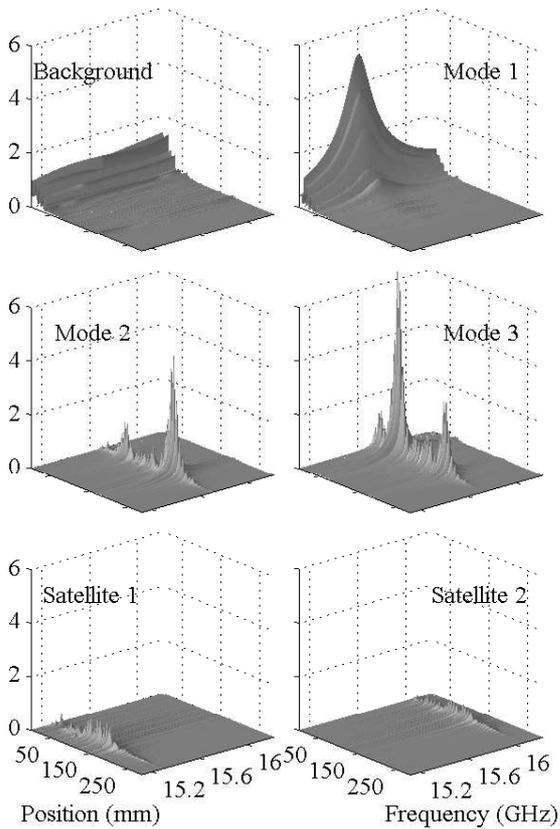


FIG. 5: Field magnitude for five quasimodes and slowly varying polynomial term in Eq. 1.

”satellite modes” are neither that isolated and extend beyond the expected localization length due to non negligible overlap with other modes.” The limited variation of the frequencies and linewidths with position indicates that, even for overlapping modes in an open dissipative sample, the states we have identified are part of complete orthogonal set.

Because of dissipation within and leakage from the random sample, the system is not Hermitian, but it remains symmetric since reciprocity is preserved. A non-Hermitian but symmetric Hamiltonian has complex orthogonal eigenvalues when the appropriate inner product is used. [16, 20] If the amplitudes found in the fit and shown in Fig. 5 are orthogonal, the linewidths of quasimodes would equal the sum of the absorption rate, Γ_a and the leakage rates for specific modes, Γ_{ln} , for the n th quasimode. The sample dissipation rate is given by the ratio of the net flux into the sample, which is the difference between the incident flux and the sum of the reflected and transmitted fluxes, and the steady-state electromagnetic energy in the sample, which is proportional to $\int_0^L \epsilon(x) E^2 dx$, where $\epsilon(x)$ is the effective relative permittivity determined from a model of waveguide dispersion and measurements in the periodic structure. Γ_{ln} is

determined from the ratio of flux away from the sample for a given quasimode to the energy in the sample for this quasimode for steady-state excitation. The leakage from the sample for a given quasimode is obtained by decomposing the scattered wave in the empty waveguide before and after the random sample into a sum of Lorentzian lines as given in the first sum on the right hand side of Eq. (1). The flux is then proportional to the product of the square of the amplitude of this field component and the group velocity in the waveguide. Within experimental uncertainty of 25%, we find that the mode linewidths are equal to the sum of the absorption and leakage rates. This supports the conclusion that quasimodes found are orthogonal.

In conclusion, we have shown that the field inside an open dissipative random single-mode waveguide can be decomposed into a complete set of quasimodes, even when the mode spacing is of the order or smaller than the linewidths. We find a multi-peaked extended field distribution whenever quasimodes overlap, and a single peaked field distribution in the rare cases of spectrally isolated modes. Because absorption suppresses long-lived, single-peaked states more strongly than short-lived multiply peaked states, the wave penetrates into the second half of the sample and transmission is substantial only when a number of closely spaced quasimodes are excited. Though waves may extend through the sample when quasimodes overlap in a spectral range in which $\delta < 1$, their envelope still falls exponentially near each peak representing a center of localization and the nature of transport may still be differentiated from diffusive regions for which $\delta > 1$. The demonstration that quasimodes are well-defined when the spacing between their central frequencies is comparable to their linewidth, suggests that a quasimode description may also be appropriate for diffusing waves in samples with $\delta > 1$.

We thank H. Rose, Z. Ozimkowski and L. Ferrari for suggestions regarding the construction of the waveguide assembly, and V. Freilikher, J. Barthelemy, L. Deych, V.I. Kopp, O. Legrand, A.A Lisyansky, F. Mortesagne, and R. Weaver for valuable discussions. This research is sponsored by the National Science Foundation (DMR0205186), by a grant from PSC-CUNY, by the CNRS (PICS #2531) and is supported by the Groupe-ment de Recherches IMCODE.

* Contact: sebbah@unice.fr

- [1] P.W. Anderson, Phys. Rev. **109**, 1492 (1958).
- [2] D.J. Thouless, Phys. Rev. Lett. **39**, 1167 (1977).
- [3] E. Abrahams, P.W. Anderson, D.C. Licciardello and T.V. Ramakrishnan, Phys. Rev. Lett. **42**, 673 (1979).
- [4] A.Z. Genack, Europhys. Lett. /bf 11, 733 (1990).
- [5] M. Ya. Azbel, Solid State Commun. **45** 527 (1983).
- [6] V.D. Freilikher and S.A. Gredeskul, in Progress in Optics

- 30**, 137 (1992).
- [7] N.F. Mott, *Phil. Mag.*, **22**, 7 (1970).
 - [8] J.B. Pendry, *J. Phys. C* **20**, 733 (1987).
 - [9] J.B. Pendry, *Adv. Phys.* **43**, 461 (1994).
 - [10] J. Bertolotti, S. Gottardo, D. S. Wiersma, M. Ghulinyan, and L. Pavesi *Phys. Rev. Lett.* **94**, 113903 (2005).
 - [11] V. Milner, A.Z. Genack, *Phys. Rev. Lett.* **94**, 073901 (2005).
 - [12] I.M. Lifshits, and V.Ya. Kirpichenkov, *Zh. Eksp. Teor. Fiz.* **77**, 989 (1979) [*Sov. Phys. JETP* **50**, 499 (1979)].
 - [13] L.I. Deych, D. Livdan and A.A. Lisyansky, *Phys. Rev. E*, **57**, 7254 (1998).
 - [14] K. Petermann, *IEEE J. Quant. Electron.* **15**, 566 (1979).
 - [15] A.E. Siegman, *Phys. Rev. A* **39**, 1253 (1989).
 - [16] E.S.C. Ching *et.al.*, *Rev. Mod. Phys.* **70**, 1545 (1998).
 - [17] S.M. Dutra and G. Nienhuis, *Phys. Rev. A* **62**, 063805 (2000).
 - [18] H. Schomerus, K.M. Frahm, M. Patra, and C.W.J. Beenakker, *Physica A* **278**, 469 (2000).
 - [19] S. John, *Phys. Rev. Lett.* **58**, 2486 (1987).
 - [20] U. Kuhl, H.-J. Stöckmann and R. Weaver, *J. Phys. A: Math. Gen.* **38**, 10433 (2005).