



HAL
open science

Estimation of SEA coupling loss factors using a dual formulation and FEM modal information, part I: theory

Laurent Maxit, Jean-Louis Guyader

► To cite this version:

Laurent Maxit, Jean-Louis Guyader. Estimation of SEA coupling loss factors using a dual formulation and FEM modal information, part I: theory. *Journal of Sound and Vibration*, 2001, 239 (5), pp.907-930. 10.1006/jsvi.2000.3192 . hal-01162185v1

HAL Id: hal-01162185

<https://hal.science/hal-01162185v1>

Submitted on 9 Jun 2015 (v1), last revised 11 Sep 2020 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

CALCULATION OF SEA COUPLING LOSS FACTORS USING THE DUAL FORMULATION AND FEM MODAL INFORMATION PART I: THEORY

Authors: Laurent MAXIT and Jean-Louis GUYADER

Address: INSA de Lyon (National Institute of Applied Sciences)
L.V.A. (Vibrations – Acoustic Laboratory)
Bat. 303
20, avenue Albert Einstein
69621 Villeurbanne Cedex
France

Phone: +33 4 72 43 80 80
+33 4 72 43 87 12 (fax)

Email: maxit@lva.insa-lyon.fr, guyader@lva.insa-lyon.fr

Headline: SEA COUPLINGS LOSS FACTORS

Total number of pages: 41

Total number of figures: 6

Total number of footnotes: 1

Summary:

The theoretical approach presented in this paper allows us to calculate SEA Coupling Loss Factors for subsystems modelled with FEM. It is then possible to take into account complicated substructure that can be encountered in practical industrial application. The technique relies on the basic SEA relation for coupled oscillators and the use of Dual Modal Formulation to describe vibration of coupled subsystems. With this approach, the boundary conditions of uncoupled subsystems are clearly defined and as assumed in SEA no modal coupling exists in a subsystem. Modes of two different subsystems are coupled together by gyroscopic elements and the coupling strength is related to eigenfrequencies of the uncoupled subsystems and mode shapes through the interaction modal works. A general expression of CLF has been obtained, it permits to determine CLF only from the knowledge of the modes of the uncoupled subsystems and the modal damping. Finite Element Model can be used to calculate the modal information in the case of complex substructures. It is possible to treat the case of heterogeneous subsystems having three dimensional vibration motions without difficulty. Contrary to classical approach based on SEA inverse matrix and numerical experiments, that necessitates calculations of subsystem energies for the coupled structures for a lot of excitation points, this technique calculates CLF directly from the governing equations, without solving them. In a companion paper, the present approach is applied about simple example to illustrate it and to present validations.

1. INTRODUCTION

Statistical Energy Analysis (S.E.A.) permits to predict vibro-acoustic behaviour of complex structures in mid and high frequency range. The method relates the power flow exchanged by two coupled subsystems to total subsystem energies by the so-called Coupling Loss Factor (CLF). Writing finally the power balance for stationary motion in each subsystem produces a linear equation system where the unknowns are total energies of subsystems. Then, the difficulty in applying SEA is not due to solving complicated equations, but to the evaluation of Coupling Loss Factors.

Several techniques have been developed to determine CLF. The travelling wave approach is the most popular to obtain theoretical expression in simple cases of coupled beams, plates, and shells (see[1], Chapter 10). Based on the evaluation of the wave transmission coefficient, this approach is very easy to use. However, it can lead to mistake for system having a low modal overlap (see [2]). CLF can be only calculated for academic substructures that limits the application in the cases of manufacturing structures. Different experimental approaches have been elaborated to evaluate CLF by measurement:[3] using measured point mobility; [4] with the concept of energetic mobility; [5] from measured impulse responses in the coupled system; [6], [7], [8] based about inversion of the SEA equation. This last one, called the power injection method is the most popular. The difficulty of the method relies on the number of transfer functions that are necessary to measure, also that the evaluation of the spatial averaged energy from some measurement points in the case of heterogeneous subsystems. These experimental techniques are very useful in an industrial context but they necessitate to have the mechanical structure, then, it is not a predictive method. To solve this problem, the possibility to use Finite Elements Method to calculate numerically the response of two coupled subsystems and then identify CLF has been used [9], [10], [11]. This type of approach is predictive, and has been used to study the validity of some SEA assumptions. The difficulties of


this approach are similar to experimental approach for heterogeneous substructures. The limit of application are, of course, the frequency range link to use FEM, and the difficulty to give different damping loss factor to the various subsystems because global modes are used. The approach presented in reference [12] differs from the previous method by the use of the numerical Green functions of the un-coupled subsystems and a receptance based approach. Then it is possible to take into account different damping for various subsystems and to increase, in some cases, the frequency range considered because the FEM calculation are made about individual uncoupled subsystem. However, it is necessary to include sufficient uncoupled modes to constitute the Green function that can be a frequency limitation.

The approach presented in this paper allows us to calculate CLF directly from subsystem modal equations. The method uses modal definition of CLF which are established in the basic SEA formulation (see [1] Chapter 3 ,[13], [14]) and remembered in section 2. The expression of the power flow exchanged by two oscillators coupled by gyroscopic element will be used to calculate the Coupling Loss Factor by summation of the different Intermodal Coupling Factors. One chose to consider deterministic structure although that it is easy possible to consider ensemble averaged over a population of structure. In section 3, one will see the major theoretical contribution of this paper. The purpose of this section is to propose one general approach allowing one to obtain modal equations of motion which can be represented as set of coupled oscillators (modes) by gyroscopic elements. These modal equations will permit to identify modal coupling coefficients necessary to calculate Intermodal Coupling Factors and thus, Coupling Loss Factors. The formulation will be presented in the general case of the two coupled continuous three-dimensional elasto-dynamic systems. This approach is based on two subsystem modes definitions, and on the use of the Dual Modal Formulation (D.M.F). It is analogous to the approach used to describe the mechanical structure - cavity coupling [15], [16], [17]. Therefore one presents here a generalisation like suggested in reference [18].

In the last section, D.M.F. is applied to discretized system to determine the modal coupling coefficients. Then, in the cases of complex subsystems, FEM can be used to calculate the modes of each uncoupled subsystem and to deduce Coupling Loss Factor.

2. CLF EXPRESSION DEDUCED FROM MODAL SEA FORMULATION

2.1. POWER FLOW EXCHANGED BY TWO OSCILLATORS COUPLED BY GYROSCOPIC ELEMENT

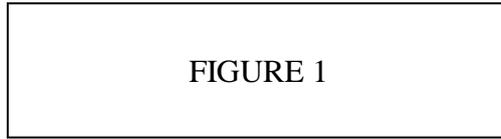

Two oscillators coupled via a gyroscopic element (see figure 1) are considered. M_1 , M_2 are the masses, and K_1 , K_2 are the stiffness of the oscillators. Then, the natural angular frequencies of each uncoupled oscillator are: $\omega_1 = \sqrt{K_1 \cdot M_1^{-1}}$ for oscillator 1 and $\omega_2 = \sqrt{K_2 \cdot M_2^{-1}}$ for oscillator 2.

Each oscillator is damped by viscous absorber of damping coefficient: Δ_1 for oscillator 1 and Δ_2 for oscillator 2. The coupling forces transmitted through the coupling of constant G_c are proportional to the mass velocities, \dot{y}_1 and \dot{y}_2 . It is assumed that when the velocity of oscillator 1 is positive, the force applied on oscillator 2 is negative and when the velocity of oscillator 2 is positive, the force applied on oscillator 1 is positive. Then, the equations of motion for the two coupled oscillators excited by external forces F_1 and F_2 are yielded by:

$$\begin{cases} \ddot{y}_1 + \Delta_1 \cdot \dot{y}_1 + \omega_1^2 \cdot y_1 - \sqrt{M_1^{-1} \cdot M_2} \cdot \gamma \cdot \dot{y}_2 = F_1, \\ \ddot{y}_2 + \Delta_2 \cdot \dot{y}_2 + \omega_2^2 \cdot y_2 + \sqrt{M_1 \cdot M_2^{-1}} \cdot \gamma \cdot \dot{y}_1 = F_2, \end{cases} \quad (1)$$

where the gyroscopic modal coupling coefficient, γ , is:

$$\gamma = \frac{G_c}{\sqrt{M_1 \cdot M_2}}. \quad (2)$$

Now, one assumes that external excitations are independent (uncorrelated), stationary and to have PSD constant (white noise). It has been demonstrated in this case [1] that the time averaged power flow from oscillator 1 to oscillator 2, Π_{12} , is proportional to the difference of the time averaged total energies of the oscillators ($E_1 - E_2$):

$$\Pi_{12} = \beta \cdot (E_1 - E_2), \quad (3)$$

where the coefficient β are expressed by:

$$\beta = \frac{\gamma^2 (\Delta_1 \cdot \omega_2^2 + \Delta_2 \cdot \omega_1^2)}{(\omega_1^2 - \omega_2^2)^2 + (\Delta_1 + \Delta_2) (\Delta_1 \cdot \omega_2^2 + \Delta_2 \cdot \omega_1^2)}. \quad (4)$$

One notices that the coefficient β depends on the natural angular frequencies of the uncoupled oscillators, the damping constants and the coupling coefficient γ .

2.2. FROM TWO COUPLED OSCILLATORS TO TWO COUPLED SUBSYSTEMS

Now consider two coupled mechanical subsystems. The interaction between these subsystems may correspondingly be studied by investigating the interaction between two sets of resonant modes in the considered frequency band. This assertion which is expressed with little attention in the literature will be the subject of a detailed study in section 3. One will show that for the good choice of modes and using dual modal formulation, the modal equations of motions have the form:

$$\left\{ \begin{array}{l} \ddot{c}_p^1(t) + \Delta_p^1 \cdot \dot{c}_p^1(t) + (\omega_p^1)^2 \cdot c_p^1(t) = \frac{F_p^1}{(\omega_p^1)^2 \cdot M_p^1} + \sum_{r=1}^{N_2} \left(\sqrt{\frac{M_r^2}{(\omega_p^1)^2 \cdot M_p^1}} \cdot \gamma_{pr}^{12} \cdot \dot{a}_r^2(t) \right), \\ \ddot{a}_q^2(t) + \Delta_q^2 \cdot \dot{a}_q^2(t) + (\omega_q^2)^2 \cdot a_q^2(t) = \frac{F_q^2}{M_q^2} - \sum_{m=1}^{N_1} \left(\sqrt{\frac{(\omega_m^1)^2 \cdot M_m^1}{M_q^2}} \cdot \gamma_{mq}^{12} \cdot \dot{c}_m^1(t) \right), \\ \forall p \in [1, N_1], \quad \forall q \in [1, N_2] \end{array} \right. \quad (5)$$

where: $c_p^1(t), M_p^1, \omega_p^1$ (resp. $a_q^2(t), M_q^2, \omega_q^2$) are modal amplitudes, generalised masses, and natural frequencies of subsystem 1 (resp. subsystem 2),

F_p^1 (resp. F_q^2) are generalised ‘forces’ applied on subsystem 1 (resp. subsystem 2),

γ_{pq}^{12} are the modal coupling coefficients between couple of modes.

One considers that in the frequency band, there are N_1 resonant modes for subsystem 1 and N_2 resonant modes for subsystem 2. One assumes, and the choice of modes of section 3 will go in this direction, that these resonant modes can approximately represent the dynamic behaviour of the coupled subsystems in the frequency band considered.

Then, equations (5) can be schematically represented as figure 2: One mode of one subsystem is not coupled with modes of the same subsystem but is coupled by gyroscopic elements with the modes of the other subsystem.



Isolating, in the equations system, the coupling between the mode 'p' of subsystem 1 and the mode 'q' of subsystem 2, one can write:

$$\begin{cases} \ddot{c}_p^1(t) + \Delta_p^1 \dot{c}_p^1(t) + (\omega_p^1)^2 c_p^1(t) - \sqrt{\frac{M_q^2}{M_p^1 (\omega_p^1)^2}} \gamma_{pq}^{12} \dot{a}_q^2(t) = \frac{L_{1pq}}{M_p^1 (\omega_p^1)^2}, \\ \ddot{a}_q^2(t) + \Delta_q^2 \dot{a}_q^2(t) + (\omega_q^2)^2 a_q^2(t) + \sqrt{\frac{M_p^1 (\omega_p^1)^2}{M_q^2}} \gamma_{pq}^{12} \dot{c}_p^1(t) = \frac{L_{2pq}}{M_q^2}, \end{cases} \quad (6)$$

where the terms L_{1pq} and L_{2pq} contain the generalised forces and the interactions forces with all the others modes.

Then, by analogy with the equations of motions of two coupled oscillators (1), the power flow, Π_{pq}^{12} , exchanged by these two modes can be deduced:

$$\Pi_{pq}^{12} = \beta_{pq}^{12} (E_p^1 - E_q^2), \quad (7)$$

where: E_p^1, E_q^2 are the modal energies of mode 'p' of subsystem 1 and mode 'q' of subsystem 2,

β_{pq}^{12} , called the Intermodal Coupling Factor (I.C.F.), can be determined by analogy

with (4) in function of the natural angular frequencies ω_p^1, ω_q^2 , the modal damping

bandwidth Δ_p^1, Δ_q^2 and the modal coupling coefficient γ_{pq}^{12} :

$$\beta_{pq}^{12} = \frac{(\gamma_{pq}^{12})^2 \cdot (\Delta_p^1 \cdot (\omega_q^2)^2 + \Delta_q^2 \cdot (\omega_p^1)^2)}{\left((\omega_p^1)^2 - (\omega_q^2)^2 \right)^2 + (\Delta_p^1 + \Delta_q^2) (\Delta_p^1 \cdot (\omega_q^2)^2 + \Delta_q^2 \cdot (\omega_p^1)^2)}. \quad (8)$$

The application of relation (3) for the coupling of these two modes implies that one supposes that the forces L_{1pq} and L_{2pq} are uncorrelated, stationary, and have relatively flat spectra in the frequency band. The condition of validity of this assumption is one of the more restrictive in SEA theory. Being not the subject of this paper, the reader will be able to find information in reference [19] for example.

The power flow exchanged by the two subsystems, Π_{1-2} , is the sum of all the individual mode-to-mode power flows. Then, one may write:

$$\Pi_{1-2} = \sum_{p=1}^{N_1} \sum_{q=1}^{N_2} \Pi_{pq}^{12} = \sum_{p=1}^{N_1} \sum_{q=1}^{N_2} \beta_{pq}^{12} (E_p^1 - E_q^2). \quad (9)$$

Modal energy equipartition assumption is made:

$$E_p^1 = e^1, \quad \forall p \in [1, \dots, N_1]; \quad E_q^2 = e^2, \quad \forall q \in [1, \dots, N_2], \quad (10)$$

where e^1 and e^2 are two constants.

With the orthogonality property of modes, one can write:

$$\xi_1 = \sum_{p=1}^{N_1} E_p^1, \quad \xi_2 = \sum_{q=1}^{N_2} E_q^2, \quad (11)$$

where ξ_1 and ξ_2 represent the total energies of subsystem 1 and 2.

Therefore, with (10) and (11), one may write:

$$E_p^1 = \frac{\xi_1}{N_1}, \quad E_q^2 = \frac{\xi_2}{N_2}, \quad (12)$$

that is injected in (9). Finally,

$$\Pi_{1-2} = \omega_c \cdot \eta_{12} \cdot \left(\xi_1 - \frac{N_1}{N_2} \cdot \xi_2 \right), \quad (13)$$

where the Coupling Loss Factor, η_{12} , is expressed by

$$\eta_{12} = \frac{\sum_{p=1}^{N_1} \sum_{q=1}^{N_2} \beta_{pq}^{12}}{N_1 \cdot \omega_c}, \quad (14)$$

with ω_c , central angular frequency of the frequency band of interest.

This final expression permits to calculate the Coupling Loss Factor from the Intermodal Coupling Factors which depend on subsystems modes and on modal coupling coefficients, γ_{pq}^{12} .

In some cases, one can be interested in developing averaged CLF for an ensemble of substructures. Then, one would have to average the Intermodal Coupling Factors over a population of structures. In reference [1], Lyon gives the mean values of the ICF for a population of structures such that the natural frequencies of each subsystem have their values uniformly probable over the frequency interval of interest, $\Delta\omega$:

$$\langle \beta_{pq}^{12} \rangle_{\omega_p^1, \omega_q^2} = \frac{\pi}{2 \cdot \Delta\omega} \left(\gamma_{pq}^{12} \right)^2. \quad (15)$$

This formula could replace the deterministic ICF in equation (13) in order to obtain the ensemble average Coupling Loss Factor:

$$\langle \eta_{12} \rangle_e = \frac{\sum_{p=1}^{N_1} \sum_{q=1}^{N_2} \langle \beta_{pq}^{12} \rangle_{\omega_p^1, \omega_q^2}}{N_1 \cdot \omega_c}, \quad (16)$$

One has not yet defined which boundary conditions are necessary to establish equations (5) and how to evaluate the modal coupling coefficients. It is the aim of the next section.

About the equipartition assumption, one can notice that with the approach presented in reference [20] and with the calculation of the Intermodal Coupling Factors by the present approach, it is possible to extend SEA to the case of non modal energy equipartition.

3. DEFINITION OF SUBSYSTEM MODES AND USE OF THE DUAL MODAL FORMULATION TO OBTAIN C.L.F.

The approach presented here is not classical for mechanical coupled systems. However, the dual formulation is the standard approach used to study the coupling cavity-structure (see [15], [16], [17]). Therefore, each time that it will be possible, one will make reference to this case to facilitate comprehension.

The present formulation is equally based on the work of Karnopp. Indeed, in reference [18]¹, he initiated the use of dual formulation (enunciated in [21]) to the coupling of mechanical subsystems and applies the method for the coupling of two rods of identical section. One presents here a generalisation of this approach for the coupling of two continuous mechanical systems.

3.1. STRUCTURE DESCRIPTION

One considers two elastic continuous mechanic systems which are rigidly coupled on $S_{Coupling}$ as shown in figure 3. V^1 (resp. V^2) represents the volume occupied by the subsystem 1 (resp. subsystem 2). $S_{Clamped}^1$ and S_{Free}^1 (resp. $S_{Clamped}^2$ and S_{Free}^2) are the boundary surfaces with blocked displacements and with free displacements for subsystem 1 (resp. subsystem 2). In a

¹ It may be noted that several typing errors and one error of sign are present in the equations of this paper.

first step, free vibration of elastic conservative systems is considered to find modal equations of motion of the coupled subsystems.

In Lagrangian coordinate x_i , ($i=1,2,3$), one defines on the surface of the volume V^1 (resp. V^2) the unit vector n_j^1 (resp. n_j^2) along the outer normal of the volume. The variables W_i^1 and W_i^2 are supposed to represent displacements in V^1 and V^2 , respectively. σ_{ij}^1 and σ_{ij}^2 are the stress tensors, ε_{ij}^1 and ε_{ij}^2 are the strain tensors. And S_{ijkl}^1 and S_{ijkl}^2 are the compliance tensors associated to materials of V^1 and V^2 , respectively. ρ^1 and ρ^2 are the mass densities and are supposed independant of time. One studies the dynamical behaviour of the structure between time t_0 and t_1 .



The continuity conditions on $S_{Coupling}$ can be expressed by:


$$W_i^1 = W_i^2 \quad \text{on } S_{Coupling} \times]t_0, t_1[, \quad (17)$$

$$\sigma_{ij}^1 \cdot n_j^1 + \sigma_{ij}^2 \cdot n_j^2 = 0 \quad \text{on } S_{Coupling} \times]t_0, t_1[. \quad (18)$$

3.2. DEFINITION OF SUBSTRUCTURES

For the sub-structuration of the problem, it is now necessary to imagine that one separates these two subsystems and that one prescribes displacements or forces on $S_{Coupling}$ for each subsystem.

One defines $S_{Coupling}^1$ (resp. $S_{Coupling}^2$) as the coupling surface $S_{Coupling}$ in subsystem 1 (resp. subsystem 2).

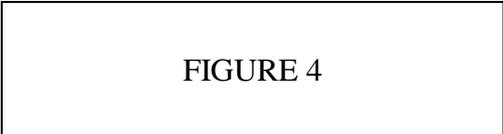

One chooses to prescribe displacements on $S_{Coupling}^1$ for the subsystem 1 and forces on $S_{Coupling}^2$ for the subsystem 2 (as shown figure 4). Then, for subsystem 1, one assumes the boundary condition on $S_{Coupling}^1$ to be:

$$W_i^1 = \bar{W}_i^c \quad \text{on } S_{Coupling}^1 \times]t_0, t_1[. \quad (19)$$

And, for subsystem 2, the boundary condition on $S_{Coupling}^2$ to be:

$$\sigma_{ij}^2 . n_j^2 = \bar{F}_i^c \quad \text{on } S_{Coupling}^2 \times]t_0, t_1[. \quad (20)$$

Note: For the cavity - structure coupling, the boundary conditions for the cavity coupled with the structure are the displacements imposed by the structure (like subsystem 1) and the boundary conditions for the structure coupled with the cavity are the pressures imposed by the cavity (like subsystem 2).

Then, from the fundamental equations and principles of continuum mechanics, the linear field equations describing the dynamics of both subsystems can be expressed.

For subsystem 1, the following equations constitute one first problem called problem 1:

- Equations of motion:

$$\rho^1 . \frac{\partial^2 W_i^1}{\partial t^2} = \sigma_{ij,j}^1 \quad \text{in } V^1 \times]t_0, t_1[. \quad (21)$$

- Constitutive equations for Hookean linear elastic solid:

$$\varepsilon_{ij}^1 = \frac{1}{2} . (W_{i,j}^1 + W_{j,i}^1) = S_{ijkl}^1 \sigma_{kl}^1 \quad \text{in } V^1 \times]t_0, t_1[. \quad (22)$$

- Boundary conditions:

$$\sigma_{ij}^1 . n_j^1 = 0 \quad \text{on } S_{Free}^1 \times]t_0, t_1[, \quad (23)$$

$$W_i^1 = 0 \quad \text{on } S_{Clamped}^1 \times]t_0, t_1[, \quad (24)$$

$$W_i^1 = \bar{W}_i^c \quad \text{on } S_{Coupling}^1 \times]t_0, t_1[. \quad (25)$$

And for the subsystem 2, one has problem 2:

- Equations of motion:

$$\rho^2 \cdot \frac{\partial^2 W_i^2}{\partial t^2} = \sigma_{ij,j}^2 \quad \text{in } V^2 \times]t_0, t_1[. \quad (26)$$

- Constitutive equations for Hookean linear elastic solid:

$$\varepsilon_{ij}^2 = \frac{1}{2} \cdot (W_{i,j}^2 + W_{j,i}^2) = S_{ijkl}^2 \sigma_{kl}^2 \quad \text{in } V^2 \times]t_0, t_1[. \quad (27)$$

- Boundary conditions:

$$\sigma_{ij}^2 \cdot n_j^2 = 0 \quad \text{on } S_{Free}^2 \times]t_0, t_1[, \quad (28)$$

$$W_i^2 = 0 \quad \text{on } S_{Clamped}^2 \times]t_0, t_1[, \quad (29)$$

$$\sigma_{ij}^2 \cdot n_j^2 = \bar{F}_i^c \quad \text{on } S_{Coupling}^2 \times]t_0, t_1[. \quad (30)$$

3.3. VARIATIONAL FORMULATION OF THE PROBLEMS USING REISSNER PRINCIPLE

For each subsystem, it is possible to express the dynamic problem by using Reissner principle.

This formulation will allow us to facilitate the use of the modal expansions.

For problem 1, the associate Reissner functional $\Psi_R^1(W_i^1, \sigma_{ij}^1)$ can be expressed by (see in reference [22] the second form of the Reissner functional):

$$\begin{aligned} \Psi_R^1(W_i^1, \sigma_{ij}^1): \Omega_R^1 \times \Sigma_R^1 &\rightarrow \mathbb{R} \\ (W_i^1, \sigma_{ij}^1) &\rightarrow \Psi_R^1(W_i^1, \sigma_{ij}^1) \\ \Psi_R^1(W_i^1, \sigma_{ij}^1) &= \int_{t_0}^{t_1} \left\{ \int_{V^1} \left[\frac{1}{2} \cdot \rho \cdot \left(\frac{\partial^2 W_i^1}{\partial t^2} \right) + \sigma_{ij,j}^1 \cdot W_i^1 + \frac{1}{2} \cdot \sigma_{ij}^1 \cdot S_{ijkl}^1 \cdot \sigma_{kl}^1 \right] dV - \int_{S_{Coupling}^1} \bar{W}_i^c \cdot \sigma_{ij}^1 \cdot n_j^1 \cdot dS \right\} dt. \end{aligned} \quad (31)$$

The associate admissible spaces are:

$$\Omega_R^1(V^1 \times]t_0, t_1[) = \{W_i^1 / W_i^1 \in H^1(V^1); W_i^1 = 0 / S_{Clamped}^1\}, \quad (32)$$

$$\Sigma_R^1(V^1 \times]t_0, t_1[) = \{\sigma_{ij}^1 / \sigma_{ij}^1 = \sigma_{ji}^1; \sigma_{ij}^1 \in L^2(V^1); \sigma_{ij,j}^1 \in L^2(V^1); \sigma_{ij}^1 \cdot n_j = 0 / S_{Free}^1\}. \quad (33)$$

The problem constituted by equations (21-25) can be replaced by searching W_i^1 and σ_{ij}^1 in their respective admissible spaces Ω_R^1 and Σ_R^1 such that they render the functional $\Psi_R^1(W_i^1, \sigma_{ij}^1)$ stationary.

In the same way, for problem 2, the Reissner functional $\Psi_R^2(W_i^2, \sigma_{ij}^2)$ can be expressed by (see in reference [22] the first form of the Reissner functional):

$$\begin{aligned} \Psi_R^2(W_i^2, \sigma_{ij}^2): \Omega_R^2 \times \Sigma_R^2 &\rightarrow \mathbb{R} \\ (W_i^2, \sigma_{ij}^2) &\rightarrow \Psi_R^2(W_i^2, \sigma_{ij}^2) \\ \Psi_R^2(W_i^2, \sigma_{ij}^2) &= \int_{t_0}^{t_1} \left\{ \int_{V^2} \left[\frac{1}{2} \cdot \rho \cdot \left(\frac{\partial^2 W_i^2}{\partial t^2} \right) - \sigma_{ij}^2 \cdot \frac{1}{2} \cdot (W_{i,j}^2 + W_{j,i}^2) + \frac{1}{2} \cdot \sigma_{ij}^2 \cdot S_{ijkl}^2 \cdot \sigma_{kl}^2 \right] dV - \int_{S_{Coupling}^2} \bar{F}_i^c \cdot W_i^2 dS \right\} dt. \end{aligned} \quad (34)$$

And the associate admissible spaces:

$$\Omega_R^2(V^2, x]_{t_0, t_1} [) = \{ W_i^2 / W_i^2 \in H^1(V^2); W_i^2 = 0 / S_{Clamped}^1 \}, \quad (35)$$

$$\Sigma_R^2(V^2, x]_{t_0, t_1} [) = \{ \sigma_{ij}^2 / \sigma_{ij}^2 = \sigma_{ji}^2; \sigma_{ij}^2 \in L^2(V^2); \sigma_{ij}^2 \cdot n_j = 0 / S_{Free}^1 \}. \quad (36)$$

In this case, the problem constituted by equations (26-30) can be replaced by searching W_i^2 and σ_{ij}^2 in their respective admissible spaces Ω_R^2 and Σ_R^2 such that they render the functional $\Psi_R^2(W_i^2, \sigma_{ij}^2)$ stationary.

3.4. MODES OF UNCOUPLED SUBSYSTEMS


3.4.1. Definition of subsystem modes

In a first step, modal expansion will be used to solve separately the two previous variational problems. The sets of mode shapes which will be considered, generate subspaces of admissible

spaces associated to each variational problem. Then, the approximate solutions of these problems will be found considering these subspaces. The definition of the modes of each subsystem must be judicious in order to permit to link the two problems in a second step. Indeed, the coupling of the problems will be possible if modal expansion of the stress field of subsystem 1 allows one to determinate the force excitation of subsystem 2, and ‘inversely’, if modal expansion of the displacement field of subsystem 2 allows one to calculate the displacement excitation of subsystem 1. The subspaces of admissible spaces, and by consequence, the mode’ definitions must be chosen adequately .

Then, modes of subsystem 1 are defined with blocked displacements on $S_{Coupling}^1$ (as shown figure 5 (a)). One calls them, the modes of the uncoupled - blocked subsystem or shortly the blocked modes. These modes respect the admissibility conditions on stresses for the problem 1. (In the case of cavity - structure coupling, the modes of the cavity are the blocked modes because they are determined with rigid walls.)

On the other hand, modes of subsystem 2 are calculated with null stresses on $S_{Coupling}^2$ (as shown figure 5 (b)). One calls them, the modes of the uncoupled - free subsystem or free modes. These modes respect the kinematic admissible conditions for the problem 2. (They correspond to the modes of the *in-vacuo* structure in the case of cavity - structure coupling.)

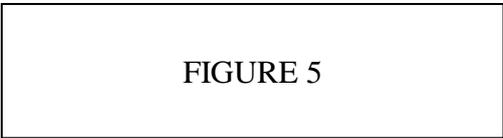

In SEA point of view, it is well known that the coupling between subsystems must be weak, that is to say those input mobilities on the coupling surface of the two subsystems must be ‘very’ different. Then, the choice of ‘which subsystems with which boundary conditions?’ find its answer in weak coupling’s definition in reference [23]: *“Under conditions of weak coupling, the system modes are ‘localised’ in the sense that they closely resemble in natural frequency and shape the*

modes of the uncoupled subsystems (given the appropriate boundary conditions), ...". Thus, the modes of the uncoupled subsystems must be chosen such they resemble the physical modes of the global structures. In the case of weak coupling, there is an impedance rupture between the two subsystems that leads one subsystem to vibrate rather freely and the other one to vibrate as it is clamped. Free modes are, then, the physical modes for the subsystem which vibrates freely, and the blocked modes are the physical modes for the other subsystem.

3.4.2. Calculations and properties of modes

The eigenvalue problems respected independently by each field can be obtained from equations of motion, constitutive law and boundary conditions expressed in mixed variables:

- For the displacement field of subsystem α ($\alpha = 1,2$), the eigenvalue problem called primal problem can be written after a separation of time and space, $W_i^\alpha(M, t) = \tilde{W}_i^\alpha(M) e^{j\omega^\alpha t}$:

$$\left\{ \begin{array}{l} -\rho^\alpha (\omega^\alpha)^2 \tilde{W}_i^\alpha = \frac{1}{2} S_{ijkl}^{\alpha -1} (\tilde{W}_{k,l}^\alpha + \tilde{W}_{l,k}^\alpha)_{,j} \quad \text{in } V^\alpha, \\ + \text{Boundary conditions.} \end{array} \right. \quad (37)$$

- And for the stress field of subsystem α , the eigenvalue problem called dual problem can be written with $\sigma_{ij}^\alpha(M, t) = \tilde{\sigma}_{ij}^\alpha(M) e^{j\omega^\alpha t}$:

$$\left\{ \begin{array}{l} -\rho^\alpha (\omega^\alpha)^2 \tilde{\sigma}_{ij}^\alpha = S_{ijkl}^{\alpha -1} (\tilde{\sigma}_{km,m,l}^\alpha + \tilde{\sigma}_{lm,m,k}^\alpha) \quad \text{in } V^\alpha, \\ + \text{Boundary conditions.} \end{array} \right. \quad (38)$$

These two problems (primal and dual) are extracted from the same problem expressed in mixed variables. In general, the problem in mixed variables is respected by the couples of solutions $(\omega^\alpha, \tilde{W}_i^\alpha, \tilde{\sigma}_{ij}^\alpha)$. However, one can notice that one solution of the dual problem having a null eigenvalue can exist and do not have equivalence in the primal problem. Then, this solution does not appear in mixed variables. For a cavity, it corresponds to the Helmholtz mode that is found in

term of pressure and not in term of displacement. This solution having a null eigenfrequency will have a negligible contribution in the modal expansion (because non-resonant) as soon as others resonant modes participate to the response. The CLF calculation taking only into account the resonant modes in a frequency band, the Helmholtz mode contribution can be neglected. Thus, one will use the problem in mixed variables to define the stress and displacement shapes of each mode.

Let us defined:

- for the uncoupled - blocked subsystem 1:

$$\begin{cases} \omega_p^1 : \text{the natural angular frequency of mode p,} \\ \tilde{W}_i^{1p}(M) : \text{the mode p displacements, and} \\ \tilde{\sigma}_{ij}^{1p}(M) : \text{the mode p stresses,} \end{cases}$$

with the following equations (for $\omega_p^1 \neq 0$):

$$-\rho^1 \cdot (\omega_p^1)^2 \cdot \tilde{W}_i^{1p} = \tilde{\sigma}_{ij,j}^{1p} \quad \text{in } V^1, \quad (39)$$

$$\frac{1}{2} \cdot (\tilde{W}_{i,j}^{1p} + \tilde{W}_{j,i}^{1p}) = S_{ijkl}^1 \tilde{\sigma}_{kl}^{1p} \quad \text{in } V^1, \quad (40)$$

$$\tilde{\sigma}_{ij}^{1p} \cdot n_j^1 = 0 \quad \text{on } S_{Free}^1, \quad \tilde{W}_i^{1p} = 0 \quad \text{on } S_{Clamped}^1, \quad \tilde{W}_i^{1p} = 0 \quad \text{on } S_{Coupling}^1, \quad (41)$$

- and for the uncoupled - free subsystem 2:

$$\begin{cases} \omega_q^2 : \text{the natural angular frequency of mode q,} \\ \tilde{W}_i^{2q}(M) : \text{the mode q displacements, and} \\ \tilde{\sigma}_{ij}^{2q}(M) : \text{the mode q stresses,} \end{cases}$$

with the following equations (for $\omega_q^2 \neq 0$):

$$-\rho^2 \cdot (\omega_q^2)^2 \cdot \tilde{W}_i^{2q} = \tilde{\sigma}_{ij,j}^{2q} \quad \text{in } V^2, \quad (42)$$

$$\frac{1}{2} \cdot (\tilde{W}_{i,j}^{2q} + \tilde{W}_{j,i}^{2q}) = S_{ijkl}^2 \tilde{\sigma}_{kl}^{2q} \quad \text{in } V^2, \quad (43)$$

$$\tilde{\sigma}_{ij}^{2q} \cdot n_j^2 = 0 \quad \text{on } S_{Free}^2, \quad \tilde{W}_i^{2q} = 0 \quad \text{on } S_{Clamped}^2, \quad \tilde{\sigma}_{ij}^{2q} \cdot n_j^2 = 0 \quad \text{on } S_{Coupling}^2. \quad (44)$$

These modes have the following orthogonality properties (see [24]) for subsystem α ($\alpha = 1, 2$):

$$\int_{V^\alpha} \omega_p^\alpha \cdot \omega_q^\alpha \cdot \rho \cdot \tilde{W}_i^{\alpha p} \cdot \tilde{W}_i^{\alpha q} \cdot dV = K_p^\alpha \cdot \delta_{pq}, \quad (45)$$

$$\int_{V^\alpha} \tilde{\sigma}_{ij}^{\alpha p} \cdot S_{ijkl}^\alpha \cdot \tilde{\sigma}_{kl}^{\alpha q} \cdot dV = K_p^\alpha \cdot \delta_{pq}, \quad (46)$$

$$\int_{V^\alpha} \tilde{\sigma}_{ij,j}^{\alpha p} \cdot \tilde{W}_i^{\alpha q} \cdot dV = K_p^\alpha \cdot \delta_{pq}, \quad (47)$$

$$\int_{V^\alpha} \tilde{\sigma}_{ij}^{\alpha p} \cdot \frac{1}{2} \cdot (\tilde{W}_{i,j}^{\alpha q} + \tilde{W}_{j,i}^{\alpha q}) \cdot dV = K_p^\alpha \cdot \delta_{pq}, \quad (48)$$

where K_p^α is the modal stiffness of mode p of subsystem α ,
and δ_{pq} is the Kronecker symbol ($\delta_{pq} = 0$ if $p \neq q$; $\delta_{pq} = 1$ if $p = q$).

The natural angular frequencies can be expressed by:

$$\omega_p^\alpha = \sqrt{\frac{K_p^\alpha}{M_p^\alpha}}, \quad \alpha = 1, 2 \quad (49)$$

where M_p^α is the modal mass of mode p of subsystem α .

Note: The blocked modes of subsystem 1 respect the admissibility conditions on stresses of the variational problem 1. Thus, the set of the stress mode shapes $\{\tilde{\sigma}_{ij}^{1p}(M), p = 1, 2, \dots, +\infty\}$ (taking into account the stress mode of null frequency if it exists) constitutes a base of the admissible space Σ_R^1 . In a same way, the uncoupled – free modes of subsystem 2 respect the kinematic admissible conditions of the variational problem 2. The set of the displacement mode shapes $\{\tilde{W}_i^{2q}(M), q = 1, 2, \dots, +\infty\}$ constitutes a base of Ω_R^2 (the displacement kinematically admissible space). This will allow one to calculate the stress field for subsystem 1 and the displacement field for subsystem 2 on the coupling boundary from the modal expansion.

3.5. MODAL EXPANSION OF THE SOLUTION

Expanding displacements and stresses of each subsystem in the modal bases, one can write:

$$W_i^1(M,t) = \sum_{n=1}^{\infty} a_n^1(t) \cdot \tilde{W}_i^{1n}(M), \quad \sigma_{ij}^1(M,t) = \sum_{m=1}^{\infty} b_m^1(t) \cdot \tilde{\sigma}_{ij}^{1m}(M), \quad (50)$$

$$W_i^2(M,t) = \sum_{r=1}^{\infty} a_r^2(t) \cdot \tilde{W}_i^{2r}(M), \quad \sigma_{ij}^2(M,t) = \sum_{s=1}^{\infty} b_s^2(t) \cdot \tilde{\sigma}_{ij}^{2s}(M). \quad (51)$$

The expansion allows one to find the weak solutions of the two problems (21-25), (26-30) by using Reissner Principle and subspaces of admissible spaces. These solutions are weak solutions because the subspace generated by mode shapes will not permit strictly verification of equation (25) for problem 1 and equation (30) for problem 2.

Introducing expansions (50,51) into the variational principles (31,34), and using the modes' orthogonality properties (45-48), the solution of each problem is then obtained by finding modal amplitudes that render stationary the Reissner's Functional. That is to say modal amplitudes satisfying Euler equation (52) associated to a_n^1, b_m^1 , (resp. a_p^2, b_q^2) for subsystem 1 (resp. subsystem 2):

$$\delta q_i : \frac{\partial}{\partial q_i} (F(q_i(t), \dot{q}_i(t))) - \frac{d}{dt} \left(\frac{\partial}{\partial \dot{q}_i} (F(q_i(t), \dot{q}_i(t))) \right) = 0, \quad (52)$$

where $F(q_i(t), \dot{q}_i(t))$ is the considered functional which depends on $q_i(t), \dot{q}_i(t)$.

One obtains finally, for subsystem 1:

$$\delta a_p^1 : - \frac{K_p^1}{(\omega_p^1)^2} \cdot \ddot{a}_p^1(t) - K_p^1 \cdot b_p^1(t) = 0, \quad (53)$$

$$\delta b_p^1(t) : - K_p^1 \cdot a_p^1(t) + K_p^1 \cdot b_p^1(t) - \int_{S_{Coupling}^1} \bar{W}_i^c \cdot \tilde{\sigma}_{ij}^{1p} \cdot n_j^1 dS = 0, \quad (54)$$

and, for subsystem 2:

$$/ a_q^2 : - \frac{K_q^2}{(\omega_q^2)^2} \ddot{a}_q^2(t) - K_q^2 b_q^2(t) + \int_{S_{Coupling}^2} \bar{F}_i^c \cdot \tilde{W}_i^{2q} dS = 0, \quad (55)$$

$$/ b_q^2(t): - K_q^2 a_q^2(t) + K_q^2 b_q^2(t) = 0, \quad (56)$$

According to dual formulation used by Karnopp [18], one must describe the behaviour of subsystem 1 with stress modal amplitudes, $b_p^1(t)$, and subsystem 2 with displacement modal amplitudes, $a_q^2(t)$. It is analogous to the coupling cavity - structure where the pressure is the descriptive variable for the subsystem with blocked modes (cavity), and the displacements are the descriptive variables for the subsystem with free modes (structure). Therefore, combining time second derivative of equation (54) with (53), and (55) with (56), give:

$$\ddot{b}_p^1(t) + (\omega_p^1)^2 b_p^1(t) = \frac{1}{(\omega_p^1)^2 M_p^1} \cdot \int_{S_{Coupling}^1} \ddot{\tilde{W}}_i^c \cdot \tilde{\sigma}_{ij}^{1p} \cdot n_j^1 dS, \quad (57)$$

$$\ddot{a}_q^2(t) + (\omega_q^2)^2 a_q^2(t) = \frac{1}{M_q^2} \cdot \int_{S_{Coupling}^2} \bar{F}_i^c \cdot \tilde{W}_i^{2q} dS. \quad (58)$$

3.6. FREE VIBRATIONS OF COUPLED SUBSYSTEMS

Equations (57) and (58) describe the coupling through specified displacements on subsystem 1 and forces on subsystem 2. To express coupling conditions, one has to say that the specified force acting on subsystem 2 is the opposite of stress boundary vector of subsystem 1 (see equation (18)), and, the prescribed displacements on subsystem 1 is the displacements of subsystem 2 on the coupling surface (see equation (17)). It is now easy to express the accelerations and the forces on the coupling surface by using modal expansions:

$$\bar{F}_i^c = - \sum_{m=1}^{\infty} b_m^1(t) \cdot \tilde{\sigma}_{ij}^{1m} \cdot n_j^1 \quad \text{on } S_{Coupling}, \quad (59)$$

$$\ddot{\tilde{W}}_i^c = \sum_{r=1}^{\infty} \ddot{a}_r^2(t) \tilde{W}_i^{2r} \quad \text{on } S_{Coupling}. \quad (60)$$

Injecting (60) in (57), and (59) in (58), one obtains the system of equations,

$$\left\{ \begin{array}{l} \ddot{b}_p^1(t) + (\omega_p^1)^2 . b_p^1(t) = \frac{1}{(\omega_p^1)^2 . M_p^1} . \sum_{r=1}^{\infty} \ddot{a}_r^2(t) . \int_{S_{Coupling}} \tilde{W}_i^{2r} . \tilde{\sigma}_{ij}^{1p} . n_j^1 dS , \quad \forall p \in [1, \dots, \infty[\\ \ddot{a}_q^2(t) + (\omega_q^2)^2 . a_q^2(t) = - \frac{1}{M_q^2} \sum_{m=1}^{\infty} b_m^1(t) . \int_{S_{Coupling}} \tilde{W}_i^{2q} . \tilde{\sigma}_{ij}^{1m} . n_j^1 dS , \quad \forall q \in [1, \dots, \infty[. \end{array} \right. \quad (61)$$

To have equations analogous to equations (5), it is necessary to carry out the change of variable:

$$b_p^1(t) = \dot{c}_p^1(t). \quad (62)$$

For the cavity – structure problem, the pressure is replaced by the acoustic – fluid velocity potential, which, with the Euler law in fluid medium, represents a change of variable similar to (62).

Finally, one obtains the equations governing free vibrations of coupled substructures:

$$\left\{ \begin{array}{l} \dot{c}_p^1(t) + (\omega_p^1)^2 . c_p^1(t) = \frac{1}{(\omega_p^1)^2 . M_p^1} . \sum_{r=1}^{\infty} \dot{a}_r^2(t) . \int_{S_{Coupling}} \tilde{W}_i^{2r} . \tilde{\sigma}_{ij}^{1p} . n_j^1 dS , \quad \forall p \in [1, \dots, \infty[\\ \ddot{a}_q^2(t) + (\omega_q^2)^2 . a_q^2(t) = - \frac{1}{M_q^2} \sum_{m=1}^{\infty} \dot{c}_m^1(t) . \int_{S_{Coupling}} \tilde{W}_i^{2q} . \tilde{\sigma}_{ij}^{1m} . n_j^1 dS , \quad \forall q \in [1, \dots, \infty[. \end{array} \right. \quad (63)$$

One notices, and it is an advantage of the dual formulation, that compared to displacement formulation there are not 'direct couplings' between modes of the same subsystem (see [25]). Indeed, from a formal point of view, mode 'p' of subsystem 1 is coupled with the modes of subsystem 2 but it is not directly coupled with the others modes of subsystem 1. In the same way, mode 'q' of subsystem 2 is coupled with the modes of subsystem 1 but it is not coupled with the other modes of subsystem 2.

3.7. FORCED VIBRATION OF COUPLED SUBSYSTEMS

By introducing excitation and damping in equations (63), one get the system of equations describing the forced response of the coupled subsystems from the modal amplitudes of the modes of uncoupled subsystems:

$$\left\{ \begin{array}{l} \ddot{c}_p^1(t) + \Delta_p^1 \dot{c}_p^1(t) + (\omega_p^1)^2 c_p^1(t) - \frac{1}{(\omega_p^1)^2 M_p^1} \sum_{r=1}^{\infty} \dot{a}_r^2(t) \int_{S_{Coupling}} \tilde{W}_i^{2r} \tilde{\sigma}_{ij}^{1p} n_j^1 dS = \frac{F_p^1}{(\omega_p^1)^2 M_p^1}, \\ \ddot{a}_q^2(t) + \Delta_q^2 \dot{a}_q^2(t) + (\omega_q^2)^2 a_q^2(t) + \frac{1}{M_q^2} \sum_{m=1}^{\infty} \dot{c}_m^1(t) \int_{S_{Coupling}} \tilde{W}_i^{2q} \tilde{\sigma}_{ij}^{1m} n_j^1 dS = \frac{F_q^2}{M_q^2}, \end{array} \right. \quad \forall p \in [1, \dots, \infty], \quad (64)$$

$$\forall q \in [1, \dots, \infty],$$

where one has introduced modal viscous damping through the modal damping bandwidths Δ_p^1 and Δ_q^2 , and external excitations through the generalised terms F_p^1 and F_q^2 .

To identify the modal coupling coefficient as defined in the basic model of two coupled oscillators, one considers only the coupling of the p^{th} mode of subsystem 1 and the q^{th} mode of subsystem 2:

$$\left\{ \begin{array}{l} \ddot{c}_p^1(t) + \Delta_p^1 \dot{c}_p^1(t) + (\omega_p^1)^2 c_p^1(t) \\ - \sqrt{\frac{M_q^2}{(\omega_p^1)^2 M_p^1}} \left[\frac{1}{\sqrt{(\omega_p^1)^2 M_p^1 M_q^2}} \int_{S_{Coupling}} \tilde{W}_i^{2q} \tilde{\sigma}_{ij}^{1p} n_j^1 dS \right] \dot{a}_q^2(t) = \frac{L_{1pq}}{(\omega_p^1)^2 M_p^1}, \\ \ddot{a}_q^2(t) + \Delta_q^2 \dot{a}_q^2(t) + (\omega_q^2)^2 a_q^2(t) \\ + \sqrt{\frac{(\omega_p^1)^2 M_p^1}{M_q^2}} \left[\frac{1}{\sqrt{(\omega_p^1)^2 M_p^1 M_q^2}} \int_{S_{Coupling}} \tilde{W}_i^{2q} \tilde{\sigma}_{ij}^{1p} n_j^1 dS \right] \dot{c}_p^1(t) = \frac{L_{2pq}}{M_q^2}, \end{array} \right. \quad \forall (p, q) \in ([1, \dots, \infty])^2, \quad (65)$$

where L_{1pq} and L_{2pq} contain the generalised 'forces' and the interaction 'forces' with all the others modes.

One deduces directly by comparison with (6) the modal coupling coefficient between the p^{th} mode and the q^{th} mode:

$$\gamma_{pq}^{12} = \frac{1}{\sqrt{(\omega_p^1)^2 M_p^1 M_q^2}} \int_{S_{Coupling}} \tilde{W}_i^{2q} \tilde{\sigma}_{ij}^{1p} n_j^1 dS. \quad (66)$$

Physically, it is important to notice that the integral represents the interaction modal work exchanged by the p^{th} blocked mode of subsystem 1 and the q^{th} free mode of subsystem 2. One notes the interaction modal work by:

$$\mathbf{W}_{pq}^{12} = \int_{S_{\text{Coupling}}} \tilde{W}_i^{2q} \cdot \tilde{\sigma}_{ij}^{1p} \cdot n_j \cdot dS . \quad (67)$$

This is demonstrated in the general case of three dimensional continuum mechanical subsystems, and thus can be accepted as a basic principle that can be applied in simplified models of beams, plates and shells. In these cases, one has to consider the work associated to dual variables introduced in 1D or 2D models (force - displacement, moment - rotation, etc.).

3.8. CALCULATION OF COUPLING LOSS FACTORS

Combining equations (8), (14), (66) and (67), one obtains a general expression allowing us to calculate the Coupling Loss Factors from subsystem modal information:

$$\eta_{12} = \frac{1}{N_1 \cdot \omega_c} \cdot \sum_{p=1}^{N_1} \sum_{q=1}^{N_2} \left[\frac{(\mathbf{W}_{pq}^{12})^2}{(\omega_p^1)^2 \cdot M_p^1 \cdot M_q^2} \left(\frac{[\Delta_p^1 \cdot (\omega_q^2)^2 + \Delta_q^2 \cdot (\omega_p^1)^2]}{\left((\omega_p^1)^2 - (\omega_q^2)^2 \right)^2 + (\Delta_p^1 + \Delta_q^2) (\Delta_p^1 \cdot (\omega_q^2)^2 + \Delta_q^2 \cdot (\omega_p^1)^2)} \right) \right] . \quad (68)$$

3.9. ENERGY PROPERTIES

The equation system (64) can be interpreted as the coupling between a set of oscillators associated to subsystem 1 with another set of oscillators associated to subsystem 2. One is interested here in evaluating the energy properties of these associated oscillators. In a first step, one establishes the relations between subsystem energies and modal energies, and in a second step one evaluates the links between the energies associated to amplitudes $a_q^2(t)$ and $c_p^1(t)$, and the modal energies.

3.9.1. Subsystem energy and modal energy

- The instantaneous kinetic energy of subsystem α ($\alpha = 1, 2$) is expressed by :

$$E_K^\alpha = \int_{V^\alpha} \frac{1}{2} \cdot \rho \cdot \left(\frac{\partial W_i^\alpha}{\partial t} \right)^2 dV . \quad (69)$$

Using the displacement modal expansion and taking into account the modal orthogonality property (45), gives

$$E_K^\alpha(t) = \frac{1}{2} \sum_{n=1}^{\infty} M_n^\alpha \cdot (\dot{a}_n^\alpha(t))^2, \quad (70)$$

therefore,

$$E_K^\alpha(t) = \sum_{n=1}^{\infty} E_K^{cn}(t), \quad (71)$$

where $E_K^{cn}(t) = \frac{1}{2} \cdot M_n^\alpha \cdot (\dot{a}_n^\alpha(t))^2$ is the modal kinetic energy of mode n of subsystem α .

- With the same manner, the instantaneous potential energy of subsystem α is expressed by:

$$E_P^\alpha(t) = \frac{1}{2} \int_{V^\alpha} \sigma_{ij}^\alpha \cdot S_{ijkl}^\alpha \cdot \sigma_{kl}^\alpha dV. \quad (72)$$

Using the stress modal expansion, and taking into account the modal orthogonality property (46), gives finally

$$E_P^\alpha(t) = \frac{1}{2} \sum_{n=1}^{\infty} K_n^\alpha \cdot (b_n^\alpha(t))^2. \quad (73)$$

Therefore,

$$E_P^\alpha(t) = \sum_{n=1}^{\infty} E_P^{cn}(t), \quad (74)$$

where $E_P^{cn}(t) = \frac{1}{2} \cdot K_n^\alpha \cdot (b_n^\alpha(t))^2$ is the modal potential energy of mode n of subsystem α .

In conclusion, the total energy of a subsystem is equal to the sum of the modal total energies of all modes.

3.9.2. Energy properties associated to amplitudes $a_q^2(t)$ and $c_p^1(t)$

From the form of (64), the modal amplitudes $a_q^2(t)$ can be associated to the displacement amplitude of an oscillator whose its mass is the generalised mass and its stiffness is the generalised stiffness of mode q. It is well known that the kinetic (resp. potential) energy of the oscillator

represents the mode q kinetic energy (resp. potential energy, taking into account (56)). Thus the total energy of the oscillator is the modal total energy.

For subsystem 1, the parameters, which must be associated to the oscillator, are not classical (as for subsystem 2). Calculations are then necessary to identify what are represented by kinetic energy and potential energy of the corresponding oscillator:



One notes M , the mass, K , the stiffness and $y(t)$, the amplitude of the oscillator. By identification from the form of equation (64), one associate the modal parameters of the p^{th} blocked mode of subsystem 1 to the oscillator parameters as shown in figure 6: The oscillator mass, M , is equal to the

modal stiffness, K_p^1 ; And the oscillator stiffness, K , is equal to $\frac{(K_p^1)^2}{M_p^1}$.

The kinetic energy of the oscillator at any time can be expressed by:

$$E_K(t) = \frac{1}{2} \cdot M \cdot (\dot{y}(t))^2 = \frac{1}{2} \cdot K_p^1 \cdot (\dot{c}_p^1(t))^2. \quad (75)$$

By introducing relation (62), one obtains:

$$E_K(t) = \frac{1}{2} \cdot K_p^1 \cdot (b_p^1(t))^2. \quad (76)$$

Thus, the kinetic energy of the associated oscillator is the potential energy of the p^{th} blocked mode.

For the potential energy of the oscillator, one can write:

$$E_P(t) = \frac{1}{2} \cdot K \cdot (y(t))^2 = \frac{1}{2} \cdot \frac{(K_p^1)^2}{M_p^1} \cdot (c_p^1(t))^2. \quad (77)$$

Injecting (62) in (53), then calculating the integral over the time (taking into account that one considers stationary motion), one has:

$$c_p^1(t) = -\frac{M_p^1}{K_p^1} \cdot \dot{a}_p^1(t). \quad (78)$$

Injecting in (77), gives:

$$E_P(t) = \frac{1}{2} \cdot M_p^1 \cdot \left(\dot{a}_p^1(t)\right)^2. \quad (79)$$

Thus, the potential energy of the associated oscillator is the kinetic energy of the p^{th} blocked mode. It is, however, important to notice that the total energy of the associated oscillator is equal to the total energy of the p^{th} blocked modes.

4. CLF CALCULATION WITH FEM DATA

4.1. INTRODUCTION

The goal of the present approach is to apply SEA to complicated substructures. In that case only a finite element model of each subsystem can be performed. The advantages of the proposed method to calculate CLF in this case are:

- Subsystem boundary conditions are clearly defined (the uncoupled modes are clearly defined).
- Heterogeneous subsystems having three dimensional vibration motions can be treated without any difficulty. This can be quite difficult to do with the classical numerical experiment and inverse SEA technique due to the choice of the position and type of force which should be applied.
- The present technique has a short computing time, because the resolution of the equation of motion is not necessary. The CLF are calculated directly from the coefficients of modal equations.

4.2. INTERACTION MODAL WORK FOR DISCRETIZED SYSTEM

In our approach, CLF are calculated from the interaction modal work of couple of modes. For a FEM discretized system, one can determine the expression of the interaction modal work directly from the nodal variables. For the node i , the displacement variables are the three displacements $(u_k^i, k = 1,2,3)$ and the three rotations $(u_k^i, k = 4,5,6)$; And the dual variables are the three forces $(f_k^i, k = 1,2,3)$, and the three moments $(f_k^i, k = 4,5,6)$.

One considers a system composed of two vibrating subsystems discretized by Finite Element and coupled together. When they are coupled, the two subsystems have some common nodes called 'coupling node set' on the coupling boundary. As in section 3, one supposes that subsystem 1 is the uncoupled - blocked subsystem and that subsystem 2 is the uncoupled - free subsystem. Then, subsystem 1 must be described by the nodal forces $(f_k^{1i}, k = 1, \dots, 6)$ and subsystem 2 by the nodal displacement $(u_k^{2i}, k = 1, \dots, 6)$. One deduces from the physical interpretation that the interaction modal work between the p^{th} mode of subsystem 1 and the q^{th} mode of subsystem 2 is expressed by:

$$W_{pq}^{12} = \sum_{i \in \left\{ \begin{array}{l} \text{Coupling} \\ \text{node set} \end{array} \right\}} \sum_{k=1}^6 \tilde{f}_{pk}^{1i} \tilde{u}_{qk}^{2i}, \quad (80)$$

where \tilde{f}_{pk}^{1i} is the k^{th} component force of node i of the p^{th} mode of subsystem1,
and \tilde{u}_{qk}^{2i} is the k^{th} component displacement of node i of the q^{th} mode of subsystem2.

N.B.: All nodal variables must be described in the same global co-ordinate system for the two subsystems.

In conclusion, to calculate the Coupling Loss Factor of complicated system only eigenvalue problem using FEM must be solved for each uncoupled subsystem. The informations, which must be extracted, are the natural angular frequencies, the generalized masses and the mode shapes (nodal forces or nodal displacement) on the coupling boundary (coupling node set). Equation (80) permits to determine the modal interaction works. Then, expression (68) can be applied directly to calculate the CLF between the two subsystems.

5. CONCLUSIONS

One has presented here a technique to calculate SEA Coupling Loss Factors for complicated subsystem modelled with FEM. The technique relies on the basic modal formulation of SEA and the use of a formulation called Dual Modal Formulation. The use of the DMF presents some advantages: (a) the modal equation have no direct coupling between modes of the same subsystem (like SEA assumes); (b) The considered subsystem modes are the physical local modes when weak coupling is respected. Therefore these resonant modes are able to represent the behaviour of the structure in a frequency bandwidth; (c) The natural frequencies which must be considered to determine the CLF are the natural frequencies of the uncoupled (free or blocked) subsystems. (d) There is not the problem of stored energy in the coupling between modes because it is only gyroscopic (no mass and stiffness coupling that store energy are necessary with the present approach); (e) The method is simple to apply because it is possible to use directly the physical interpretation of the interaction modal work.

The final expression of CLF which has be obtained allows us to determine it only from the knowledge of the modes of the uncoupled – subsystems and the modal damping. Finite Element Method can be used to calculate the modal information in the case of complex subsystems that allows one to apply this technique to industrial structures. Contrary to classical SEA matrix – inversion technique, the present method does not require solving equations of motion for a lot of excitation. CLF are directly obtained by equation (68) without resolution of equation. This saves an enormous computing time. In addition, one can use different damping loss factor for subsystem without difficulty. In the numerical simulation technique and SEA matrix inversion, one has often the technical difficulty that FEM codes use a global damping loss factor for the considered structure. It is then impossible to use different damping loss factors for substructures.

It can be noticed that it is also possible to establish an ensemble averaged estimate of the CLF by replacing deterministic Intermodal Coupling Factors by ensemble average of the Intermodal Coupling Factors.

ACKNOWLEDGMENT

The authors are grateful for the interest and financial support of DGA/DSP-CNRS (Direction des Systèmes de forces et de la Prospective) and CTSN Toulon (Centre Technique des Systèmes Navals), without which this work would not have been done.

REFERENCES

- [1] R.H. LYON and R.G. DEJONG 1995 *Theory and Application of Statistical Energy Analysis*, Butterworth-Heinemann.
- [2] F.F. YAP and J. WOODHOUSE 1996, *Journal of Sound and Vibration* 197(3), 351-371. Investigation of damping effects on statistical energy analysis of coupled structures.
- [3] C. CACCIOLATI and J.L. GUYADER 1994 *Phil. Trans. R. Soc. Lond.* 346, 465-475. Measurement of SEA coupling loss factors using point mobilities.
- [4] G. OREFICE 1997 *Ph.D. Thesis, Institut National des Sciences Appliquées de Lyon, France*. Description par Mobilités Energétiques des échanges vibratoires dans les systèmes couplés.
- [5] K.O. LUNDBERG 1997 *Acustica* 83, 605-610. A method for estimating SEA loss factors.
- [6] F.J. FAHY 1998 *Journal of Sound and Vibration* 214(2), 261-267. An alternative to the SEA coupling loss factor: rationale and method for experimental determination.
- [7] D.A. BIES and S. HAMID 1980 *Journal of Sound and Vibration* 70(2), 187-204. In situ determination of coupling loss factors by the power injection method.
- [8] N. LALOR 1997 The practical implementation of SEA. *In: IUTAM Symposium on SEA. ISVR, university of Southampton, UK, 8-11 July 1997* (ed. F.J. Fahy & W.G. Price, Kluwer Academic Publishers).
- [9] J.A. STELL and R.J.M. CRAIK 1994 *Journal of Sound and Vibration* 178(4), 553-561. Statistical energy analysis of structure-borne sound-transmission by finite-element methods.
- [10] C. SIMMONS and C. FREDO 1990, Vibration analysis of coupled stiffened plates using the finite element method. *In: internoise '90. International Conference on Noise Control Engineering, Gothenburg, Sweden, August 1990*.
- [11] C.R. FREDO 1997 *Journal of Sound and Vibration* 199(4), 645-666. A SEA-like approach for the derivation of energy flow coefficients with a finite element model.
- [12] K. SHANKAR and A.J. KEANE 1997 *Journal of Sound and Vibration* 201(4), 491-513. Vibrational energy flow analysis using a substructure approach: the application of receptance theory to FEA and SEA.
- [13] G. MAIDANIK and J. DICKEY 1987 Modal and wave approaches to the Statistical Energy Analysis (SEA). *In The winter annual meeting of the American society of mechanical engineers, Massachusetts USA, 13-18 December 1987*.
- [14] E.E. UNGAR 1966 *Fundamentals of Statistical Energy Analysis of Vibrating Systems*. U.S. Air Force AFFDL-TR 66-52, April 1966.
- [15] F.J. FAHY 1969 *Journal of Sound and Vibration* 10(3), 490-512. Vibration of containing structures by sound in the contained fluid.
- [16] F.J. FAHY 1970 *Journal of Sound and Vibration* 13(2), 171-194. Response of a cylinder to random sound in the contained fluid.
- [17] R.H. LYON and G. MAIDANIK 1962 *The Journal of the Acoustical Society of America* 34(5), 623-639. Power flow between linearly coupled oscillators.
- [18] D. KARNOPP 1966, *The Journal of the Acoustical Society of America* 40(2), 380-384. Coupled vibratory-system analysis, using the dual formulation.

[19] F.J. FAHY 1994, *Phil. Trans. R. Soc. Lond.* A346, 431-447. Statistical energy analysis: a critical overview.

[20] L. MAXIT and J.L. GUYADER 1999 Statistical modal Energy distribution Analysis (SmEdA). In 6th *International Congress on Sound and Vibration, Copenhagen, Denmark, 5-8 July 1999.*

[21] S.H. CRANDALL, D.C. KARNOPP, E.F. KURTZ, JR., and D.C. PRIDMORE-BROWN 1968 *Dynamics of mechanical and electromechanical systems*. Ed. S.H. Crandall, McGraw-Hill Book Company.

[22] R.M. DESEIGNE 1983, *Ph.D. Thesis, Institut National des Sciences Appliquées de Lyon, France*. Méthodes variationnelles mixtes en élastostatique, application à des structures composites: plaques multicouches et composites plans collés.

[23] P.P. JAMES and F.J. FAHY, An indicator of coupling strength between SEA subsystems. In: *IUTAM Symposium on SEA. ISVR, university of Southampton, UK, 8-11 July 1997* (ed. F.J. Fahy & W.G. Price, Kluwer Academic Publishers).

[24] J.L. GUYADER 1984, *Thèse de doctorat d'Etat es-science, Institut National des Sciences Appliquées de Lyon and University Claude Bernard Lyon I, France*. Méthode d'étude des vibrations des milieux continus imparfaitement caractérisés.

[25] S.H. CRANDALL and R. LOTZ 1971, *The Journal of the Acoustical Society of America* 49(1),352-356. On the coupling loss factor in statistical energy analysis.

APPENDIX : NOMENCLATURE

| | |
|--|--|
| $a_p^1(t), a_q^2(t)$ | modal amplitude of displacement expansion |
| $b_p^1(t), b_q^2(t)$ | modal amplitude of stress expansion |
| $c_p^1(t), c_q^2(t)$ | modal amplitude defined by equation (62) |
| E_1, E_2 | time averaged total energy of oscillator |
| E_K^{1p}, E_K^{2q} | instantaneous modal kinetic energy |
| E_P^{1p}, E_P^{2q} | instantaneous modal potential energy |
| E_p^1, E_q^2 | time averaged modal total energy |
| E_K^1, E_K^2 | instantaneous subsystem kinetic energy |
| E_P^1, E_P^2 | instantaneous subsystem potential energy |
| f_k^{1i}, f_k^{2i} | force nodal variable |
| $\tilde{f}_{pk}^{1i}, \tilde{f}_{qk}^{2i}$ | force nodal mode shape |
| F_1, F_2 | external force |
| F_p^1, F_q^2 | generalised ‘force’ |
| \bar{F}_i^c | specified forces on $S_{Coupling}^2$ |
| G_c | gyroscopic constant |
| K_1, K_2 | oscillator’s stiffness |
| K_p^1, K_q^2 | modal stiffness |
| L_{pq}^1, L_{pq}^2 | generalised ‘forces’ and interaction ‘forces’ with others modes |
| m, n, p, q, r, s | modal order |
| M_1, M_2 | oscillator’s mass |
| M_p^1, M_q^2 | modal mass |
| n_j^1, n_j^2 | outer normal vector |
| N_1, N_2 | number of resonant modes in the considered frequency bandwidth |
| S_{ijkl}^1, S_{ijkl}^2 | compliance tensor |
| S_{Free}^1, S_{Free}^2 | boundary surface with free displacement |
| $S_{Clamped}^1, S_{Clamped}^2$ | boundary surface with blocked displacement |
| $S_{Coupling}^1, S_{Coupling}^2$ | coupling boundary surface |
| t_0, t_1 | time |
| u_k^{1i}, u_k^{2i} | displacement nodal variable |
| $\tilde{u}_{pk}^{1i}, \tilde{u}_{qk}^{2i}$ | displacement nodal mode shape |
| V^1, V^2 | volume occupied by subsystem |
| W_{pq}^{12} | interaction modal work between mode p of subsystem 1 and mode q of subsystem 2 |
| W_i^1, W_i^2 | displacement vector |
| $\tilde{W}_i^{1p}, \tilde{W}_i^{2q}$ | displacement mode shape |
| \bar{W}_i^c | specified displacements on $S_{coupling}^1$ |
| y_1, y_2 | oscillator amplitude |
| β | proportional constant between Π_{12} and $(E_1 - E_2)$ |
| β_{pq}^{12} | Intermodal Coupling Factor (ICF) between mode p of subsystem 1 and mode q of subsystem 2 |
| $\Delta\omega$ | angular frequency bandwidth of interest |

| | |
|--|---|
| Δ_1, Δ_2 | oscillator's damping bandwidth |
| Δ_p^1, Δ_q^2 | modal damping bandwidth |
| $\varepsilon_{ij}^1, \varepsilon_{ij}^2$ | strain tensor |
| η_{12} | Coupling Loss Factor (CLF) |
| η^1, η^2 | Damping Loss Factor (DLF) |
| γ | gyroscopic coupling coefficient between two oscillators |
| γ_{pq}^{12} | gyroscopic modal coupling coefficient between mode p of subsystem 1 and mode q of subsystem 2 |
| Π_{1-2} | time averaged power flow exchanged by two subsystems |
| Π_{12} | time averaged power flow from oscillator 1 to oscillator 2 |
| Π_{pq}^{12} | time averaged power flow from mode p of subsystem 1 to mode q of subsystem 2 |
| $\tilde{\theta}_y^{2q}$ | angular rotation mode shape of beam 2 |
| ω_c | central angular radian frequency of the frequency bandwidth $\Delta\omega$ |
| ω_1, ω_2 | oscillator's natural angular frequency |
| ω_p^1, ω_q^2 | mode's natural angular frequency |
| Ω_R^1, Ω_R^2 | displacement admissible space |
| ρ^1, ρ^2 | mass density |
| $\sigma_{ij}^1, \sigma_{ij}^2$ | stress tensor |
| $\tilde{\sigma}_{ij}^{1p}, \tilde{\sigma}_{ij}^{2q}$ | stress mode shape |
| Σ_R^1, Σ_R^2 | stress admissible space |
| ξ_1, ξ_2 | time averaged total energy of subsystem |
| Ψ_R^1, Ψ_R^2 | Reissner functional |

FIGURE CAPTIONS

- Figure 1: Two oscillators coupled by gyroscopic element.
- Figure 2: Illustration of coupling of N_1 modes of subsystem 1 with N_2 modes of subsystem 2.
- Figure 3: Representation of the coupling of the two elastic continuum systems.
- Figure 4: Illustration of the fictive separation of subsystems.
- Figure 5: Subsystem definition (a) Uncoupled - blocked subsystem 1 (b) uncoupled - free subsystem 2.
- Figure 6: Illustration of the oscillator associated to the p^{th} blocked modes.

FOOTNOTE:

Foot note 1: It may be noted that several typing errors and one error of sign are present in the equations of this paper.

FIGURE 1

L.MAXIT, J.L. GUYADER

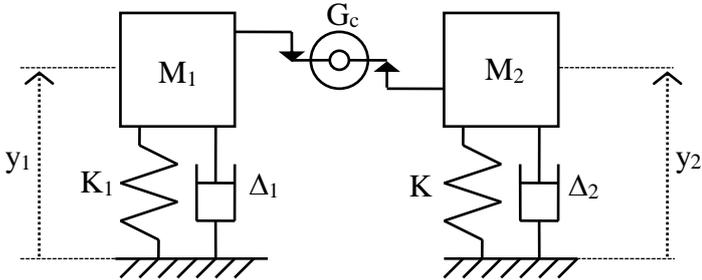


FIGURE 2

L.MAXIT, J.L. GUYADER

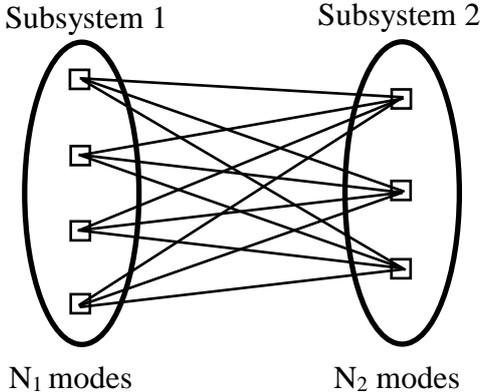


FIGURE 3

L.MAXIT, J.L. GUYADER

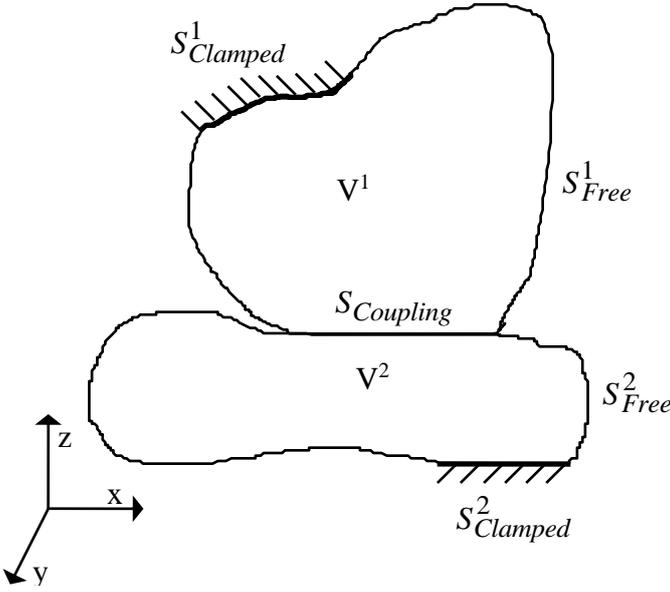


FIGURE 4

L.MAXIT, J.L. GUYADER

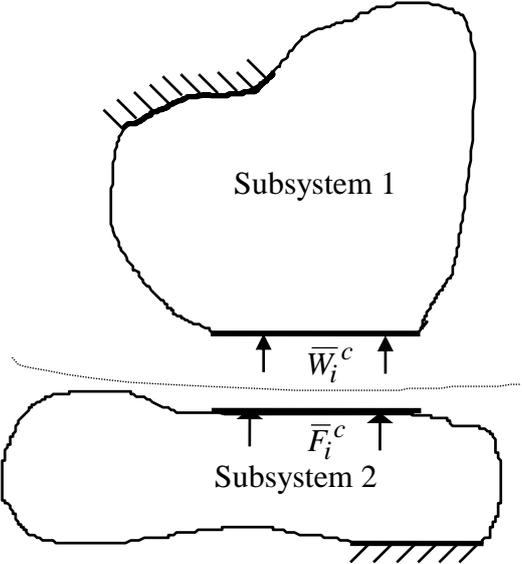


FIGURE 5

L.MAXIT, J.L. GUYADER

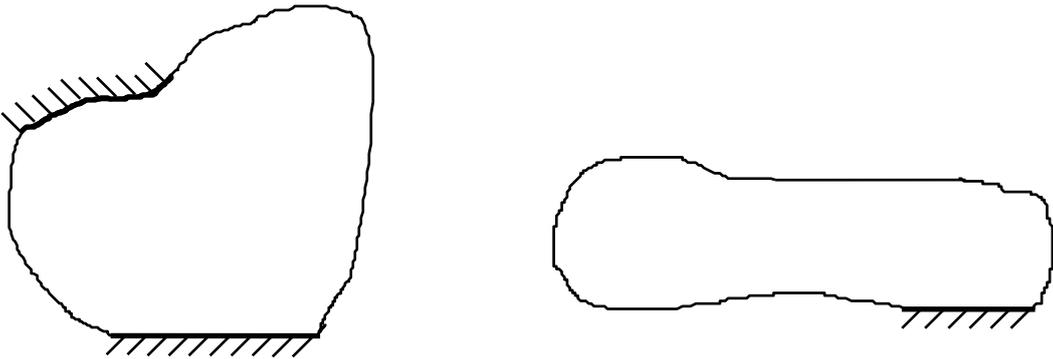


FIGURE 6

L.MAXIT, J.L. GUYADER

