



HAL
open science

Near-wall velocity measurements by Particle-Shadow-Tracking

Pierre Lancien, Eric Lajeunesse, François Métivier

► **To cite this version:**

Pierre Lancien, Eric Lajeunesse, François Métivier. Near-wall velocity measurements by Particle-Shadow-Tracking. 2007. hal-00123732

HAL Id: hal-00123732

<https://hal.science/hal-00123732>

Preprint submitted on 10 Jan 2007

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Pierre Lancien · Éric Lajeunesse · François Métivier ·

Near-wall velocity measurements by Particle-Shadow-Tracking

the date of receipt and acceptance should be inserted later

Abstract We report a new method to measure the velocity of a fluid in the vicinity of a wall. The method, that we call Particle-Shadow Tracking (PST), simply consists in seeding the fluid with a small number of fine tracer particles of density close to that of the fluid. The position of each particle and of its shadow on the wall are then tracked simultaneously, allowing one to accurately determine the distance separating tracers from the wall and therefore to extract the velocity field. We present an application of the method to the determination of the velocity profile inside a laminar density current flowing along an inclined plane.

Keywords Velocity profile · PIV

1 Introduction

Measuring the velocity of a fluid in the vicinity of a wall is relevant to a great number of fundamental and applied investigations such as understanding the structure and dynamics of boundary layers (8; 2; 3). In practice, such measurements are difficult as they require to achieve a high accuracy on both the velocity and the distance to the wall, the proximity of which makes unfortunately difficult to reach. Optical methods such as Particle Image Velocimetry (PIV) or laser anemometry usually fail to meet these two criteria when operating too close to a wall and are therefore inappropriate for such measurements (1; 7).

In this paper, we present a new and simple experimental technique developed to perform local measurement of the velocity field of a fluid near a wall. This method, that we call Particle-Shadow Tracking (PST), consists in seeding the fluid with a very low number of fine tracer particles of density close to that of the fluid. Simultaneous tracking of each particle and its shadow on the wall allows us to accurately

determine the distance separating tracers from the wall and therefore to extract the velocity field.

The paper is organized as follows. The technique is presented and discussed in section 2. Section 3 describes an application of the method to the measurement of the velocity profile of a laminar density current flowing along an inclined plane. We then make some brief suggestions about how the technique may be further developed and conclude.

2 The PST method

For the sake of simplicity, we will illustrate the PST method in the case of a fluid flowing above a inclined wall as schemed on figure 1. The x and y axes are oriented respectively along and transverse to the flow direction. The z axis is normal to the wall. The fluid of density ρ and viscosity η is seeded with a small number of fine tracer particles of diameter D . Ideally the best is to use neutrally buoyant particles, that is of density $\rho_p = \rho$. In practice, a perfect density matching is difficult to achieve. But, as discussed hereafter, the use of tracer particles of density slightly larger than that of the fluid can be a plus for the method.

A punctual light source enlightens the wall under a small incidence angle α . A camera oriented perpendicularly to the plane is used to acquire digitized images of the wall at regular time intervals. The images are then processed to extract the lateral coordinates (x_p, y_p) of each particle and (x_s, y_s) of the shadow it projects on the wall (see fig. 1). The third coordinate z_p of the particle is then deduced from the distance d separating the particle from its shadow:

$$z_p = \tan \alpha d \approx \alpha d \quad (1)$$

Measurement of $x_p(t)$, $y_p(t)$ and $z_p(t)$ at regular time intervals therefore allows us to determine the velocity field along the particle trajectory:

$$u(x_p, y_p, z_p) = \frac{x_p(t + \delta t) - x_p(t)}{\delta t} \quad (2)$$

where δt is the time step separating the acquisition of two successive frames. The complete velocity profile $u(x, y, z, t)$

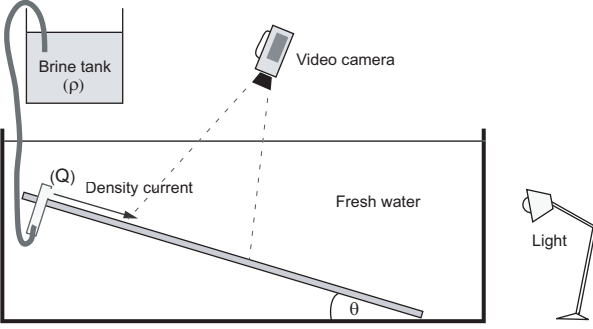


Fig. 2 Setup for the density current experiment

From the above discussion, it follows that the maximum wall-distance z_{max} which can be explored by PST is given by the minimum between z_1 , z_2 and possibly z_3 . For $z > z_{max}$, PST fails and the velocity profile has to be measured using classical techniques such as PIV.

3 Application

We first developed the PST method in order to measure the velocity profile of a dense current running out on a slope (5; 6). We were particularly interested in the profile in the immediate vicinity of the wall as our goal was to measure the shear stress applied on the latter by the current. We will therefore illustrate PST for this particular application. The corresponding experimental setup is sketched on figure 2. It consists of a $100cm \times 50cm$ incline, immersed in a $200cm \times 50cm \times 50cm$ flume filled with fresh water. The flow is generated by injecting a brine of density ρ_b larger than that of fresh water at a constant flow rate Q from the top of the ramp. The resulting gravity current is laminar, steady and varies slowly along the x axis (5; 6).

Our camera definition is 700×570 pixels, the width of the imaged zone is $S = 7cm$ and the spatial resolution of the camera is $R = 100\mu m/pixel$. The acquisition rate is $25 \text{ frames } s^{-1}$ corresponding to $\delta t = 40ms$. The experimental plane is enlightened with a projector under an incidence angle $\alpha = 20^\circ$. The angular diameter of the lamp is $\delta\alpha \approx 0.4^\circ$. The tracers are fine plastic particles (Rilsan) with a characteristic size of $30\mu m$. Their density $\rho_p = 1080Kg.m^{-3}$ is slightly larger than that of the brine. As a result, they slowly settle so that one particle allows us to explore a wide range of z . Note that, as our flow is steady and varies slowly along the x axis, tracking only one particle is enough to establish the velocity profile $u(z)$.

Equations (6), (8) and (11) lead to: $z_1 \approx 10mm$, $z_2 \approx 1.5mm$ and $z_3 \approx 5mm$. In this experimental configuration, the maximum wall-distance z_{max} which can be explored by PST is set by the size of the light source which forbids to measure velocity above $z_{max} = z_2 \approx 1.5mm$. Figure 3 shows typical velocity measurements obtained by applying PST to 5 different particles located in the same area. All data collapse on the same velocity profile $u(z)$. The flow that we consider

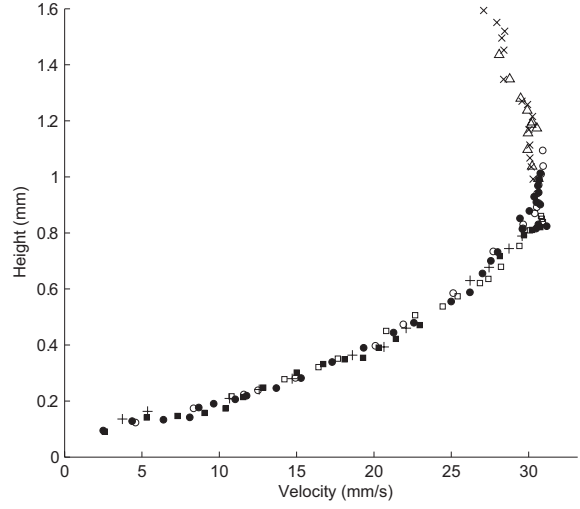


Fig. 3 Near-wall velocity profile of the density current, measured $0.3m$ downslope of the entrance with PST. Each symbol correspond to a different particle. $\rho = 1025Kg.m^{-3}$, $Q = 0.95mL.s^{-1}$, $\theta = 16^\circ$.

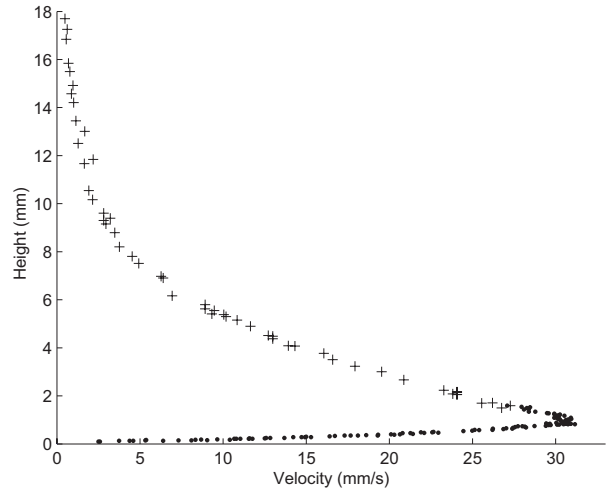


Fig. 4 Complete velocity profile. PST data from figure 3 (dots) are completed using classical side-view particle tracking (crosses).

in this section is laminar and stationary. By performing several repeated measurements and performing slide averages of the data, we were able to establish the velocity profile with an accuracy of $0.3mm.s^{-1}$ and a vertical resolution of $30\mu m$ (that is inferior to the pixel size) up to a maximum distance $z_{max} \approx 1.5mm$.

Above $z \approx 1.5mm$, the velocity profile was measured with a more classical particle tracking technique using side-views of the flow acquired by a camera placed on the side of the tank. The lower and upper part of the resulting velocity profile are perfectly consistent and overlap in the vicinity of $z \approx 1.5mm$, as visible on figure 4. To our knowledge, this is the first measurement of a complete velocity profile obtained for laminar density current experiments.

4 Conclusion

We have described a new method to measure near-wall velocity profiles. This so-called Particle-Shadow Tracking method (PST) consists in seeding the fluid with a very low number of fine tracer particles. Tracking simultaneously both the particles and their shadow permits to measure the velocity profile in the direction transverse to the wall. As illustrated through an example, this new method is cheap, simple and accurate. Measurements are however restricted in a layer at the wall of thickness which mainly depends on light conditions, flow velocity and particles size and density. Determination of the velocity profile out of this layer have to be performed using more classical techniques such as PIV. PST should be therefore considered as a complementary method particularly adapted to the investigation of boundary layers.

Using two light sources with two different incidence angles, a small one and a large one, might improve PST method by extending the thickness of the measurement layer. In fact, each particle would therefore project two different shadows on the wall. When possible, the particle-wall distance would be calculated from the most distant shadow. When the latter is not in the field of view, particle-wall distance would be calculated from the nearest shadow. It would thus be possible to increase the thickness of the measurement layer without degrading the vertical resolution.

Our motivation to develop the PST method was indeed to measure the velocity profile inside a laminar density current. Therefore we did not apply the method to a turbulent flow. In principles, PST (that is simultaneous tracking of the position of a particle and its shadow) should work in a turbulent flow. Of course, in practice, applying the PST technique to a turbulent flow would be more difficult: a higher frame rate is needed and the size and density of the particles need to be adapted to prevent slip effects.

References

1. Adrian RJ (1991) Particle imaging techniques for experimental fluid mechanics. *Ann Rev Fluid Mech* 23:261-304
2. Alfredsson HP, Johansson AV, Haritonidis JH, Eckelmann H (1988) The fluctuating wall-shear stress and the velocity field in the viscous sublayer. *Phys Fluids* 31:1026-1033
3. Buschmann MH, Gad-El-Hak M (2003) Debate concerning the mean-velocity profile of a turbulent boundary layer. *AIAA Journal* 41:565-572
4. Lamb SH (1945) *Hydrodynamics*, 6th ed. New York. Dover:599
5. Lancien P, Métivier F, Lajeunesse E, Cacas MC (2005) Velocity structure of the gravity current in submarine channels experiments. 4th IAHR Symposium on River Coastal and Estuarine Morphodynamics:527-533
6. Lancien P, Métivier F, Lajeunesse E (2005) Simulating submarine channels in flume experiments. *Physicalia Magazine* 27:377-384
7. Somandepalli VSR, Mungal MG (2004) A Novel Technique to Improve Near Wall Resolution in PIV using Cylindrical Lenses. 12th International Symposium on Applications of Laser Techniques to Fluid Mechanics
8. Townsend AA (1976) *The Structure of Turbulent Shear Flow*. Cambridge University Press