



HAL
open science

Increased reliability of AlGa_N/Ga_N HEMTs versus temperature using deuterium

Guilhem Astre, Jean-Guy Tartarin, Jacques Chevallier, S Delage

► **To cite this version:**

Guilhem Astre, Jean-Guy Tartarin, Jacques Chevallier, S Delage. Increased reliability of AlGa_N/Ga_N HEMTs versus temperature using deuterium. EuMC 2008, Oct 2008, Amsterdam, Netherlands. 10.1109/EMICC.2008.4772260 . hal-01343347

HAL Id: hal-01343347

<https://hal.science/hal-01343347>

Submitted on 8 Jul 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Increased reliability of AlGa_N/Ga_N HEMTs versus temperature using deuterium.

G. Astre^{#1}, J.G. Tartarin^{#2}, J. Chevallier⁺³, S. Delage^{°4}.

[#] *University of Toulouse, LAAS CNRS & Paul Sabatier University, 7 av. Colonel Roche, 31.077 Toulouse cedex 4, France*

¹gastre@laas.fr

²tartarin@laas.fr

⁺ *GEMaC, 1 place Aristide Briand, 92195 Meudon, France*

³jacques.chevallier@cnrs-bellevue.fr

[°] *TIGER, Alcatel-Thales III-V Lab, Route de Nozay, 91460 Marcoussis, France*

⁴Sylvain.delage@3-5lab.fr

Abstract— Low frequency noise (LFN) is a reliable diagnostic tool to evaluate and locate the defects of a technology. In this study, LFN is used to assess effects of deuterium (H^+ ions) in diffusion condition on the robustness of $0.25 \times 2 \times 75 \mu m^2$ gate area AlGa_N/Ga_N high electron mobility transistors (HEMT) grown on Si substrate. H^+ ions are diffused from the above AlGa_N/Ga_N layer through the AlGa_N/Ga_N interface and Ga_N layer, notably under the gated channel where the defects are located. Two batches of devices are stressed under high temperature condition at 400°C during 5 minutes (step 1) and 500°C during 15 minutes (step 2). The first batch is composed with 8 deuterated transistors while the second batch is composed with 8 non deuterated transistors. Static measurements and low frequency noise spectral density measurements of the drain current (S_{ID}) are examined after each step of temperature. The first step does not reveal any degradation, while the second step highlights significant differences between the deuterated and non deuterated devices: LFN of deuterated devices remains constant, whereas LFN of non deuterated devices increases (GR superimposed with 1/f flicker noise). The deuteration of the devices can open the way to robust temperature devices, as AlGa_N/Ga_N HEMT are dedicated to applications at high power and high temperature.

I. INTRODUCTION

The development of wideband gap technology is convenient for integrated circuits design such as VCO and LNA. AlGa_N/Ga_N high electron mobility transistors stand as promising candidates to substitute GaAs and SiGe technologies for power applications at high frequency. They take advantages from a higher breakdown voltage, higher power density and higher thermal conductivity that are suitable for power applications while keeping good carrier mobility for high frequency applications. Recent studies revealed also very good low noise performances for this technology [1] [2]. Thus, Ga_N devices can pretend to be used in transceivers for power amplification, for low noise amplification and for frequency synthesis (voltage controlled oscillation) over a wideband of frequencies ranging from L up to Ka band.

LFN measurements provide valuable information about noise source location and failure prediction [3], and can also assess devices robustness. In a previous work, deuterium has been used as a probe in diffusion condition to locate the

defects density at the AlGa_N/Ga_N interface as well as in the Ga_N 2DEG using SIMS (Secondary Ions Mass Spectrometry) measurements [4]. This result corroborates interpretations from LFN measurements for devices grown on SiC substrate [5] [6]. In this work, we focus on the effects of deuterium on AlGa_N/Ga_N HEMT devices under thermal stress in order to improve devices robustness. LFN and static measurements are performed at two time and temperature steps to evidence the different behaviours between the deuterated devices and the non-deuterated devices.

II. ALGAN/GAN HEMT ON SI

HEMT devices are grown by MOCVD techniques on silicon substrate using the AlGa_N/Ga_N HEMT TIGER usual process. Transistors feature $0.25 \times 2 \times 75 \mu m^2$ gate area and 24% alumina content.

For this study, deuterium is brought in a half of the wafer before gate deposition, while the second half is finalized without deuterium. After this process step, deuterium is located in AlGa_N/Ga_N layer (from source to drain) and diffuses toward the Ga_N layer by means of a RF plasma (3W during 30 minutes at a temperature of 300 K) (figure 1).

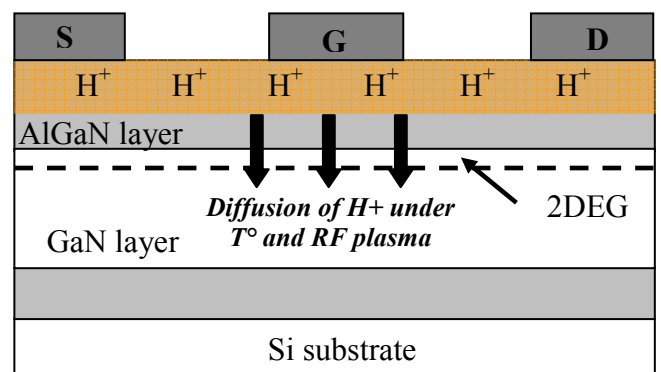


Fig. 1 Deuterium diffusion in AlGa_N/Ga_N structure

III. INITIAL MEASUREMENTS

Initial static and LFN measurements are performed on each batch of samples (15 deuterated devices for “batch 1” and 58

non-deuterated devices for “batch 2”). No significant difference is found between the deuterated and non deuterated samples before the application of the temperature stress, neither on the DC characteristics (I_{dss} , V_T , R_{on} ...), nor on the LFN spectra. A slightly higher drain current on batch 1 can be attributed to an increase of the charge density due to the deuterium diffusion. The two batches have equivalent R_{on} of 34,5 Ω (meaning value) and an I_{dss} of 100 mA and 105 mA respectively for the meaning value of batch 2 and batch 1 (figure 2).

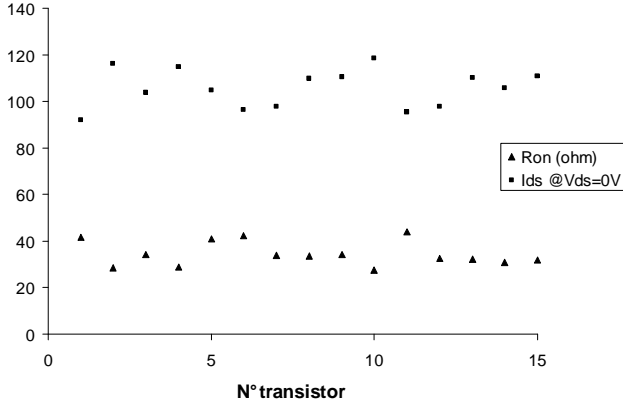


Fig. 2 DC characteristics repartition of devices from batch 1

S_{ID} spectra, measured at $V_{GS}=-3$ V and $V_{DS}=10$ V feature a $1/f^\gamma$ behaviour (with $\gamma=1,27$) (figure 3).

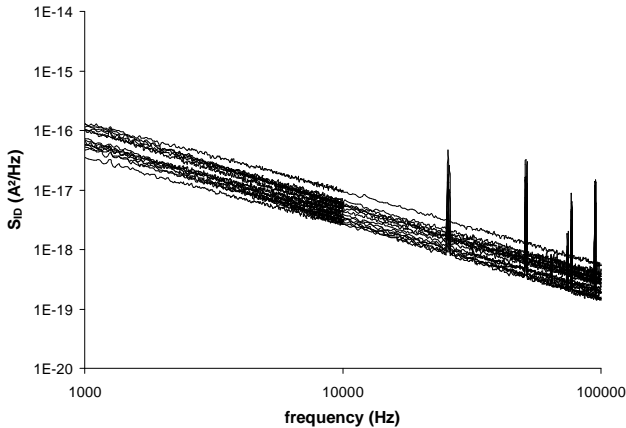


Fig. 3 S_{ID} spectra repartition of batch 1

We can conclude about the initial good homogeneity of the two batches. Next, two batches of 8 transistors, representative of each initial batch are chosen for the study.

A. Stress conditions

First, the two batches are thermally stressed at 400°C during 5 minutes in an air oven (step 1), above the classic deuterium diffusion temperature (300°C). Then, temperature is elevated at 500°C during 15 minutes (step 2). All devices are measured at T_0 (initial), T_1 (step 1) and T_2 (step 2).

B. Results and discussion

Static measurements reveal a decrease of drain and gate leakage currents after each step. The decrease of leakage current can be attributed to the improvement of surface states induced by thermal annealing.

After step 1, constant or improved (slightly lower) spectra are measured for both batch 1 and batch 2: it thus cannot be attributed to deuterium effects. This is probably due to AlGaIn/GaN interface improvement during the burn-in phase. Step 2 represents harder stress conditions applied to the samples of each batch. However, no degradation is measured on DC characteristics and LFN spectra for the deuterated structures (figure 4).

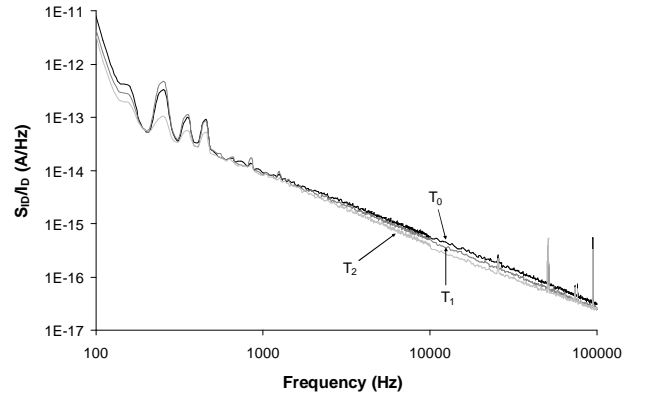


Fig. 4 S_{ID} spectra at T_1 , T_2 and T_3 of deuterated device

Samples from batch 2 systematically have their LFN spectra degraded after this step 2, with different degradation signatures: the flicker noise $1/f^\gamma$ source increases for some devices, while LFN spectra of some other devices have changes on their frequency index γ . Whatever the variation of the flicker noise source, all the devices from batch 2 suffer from the apparition of a trapping-detrapping noise source (G-R center) (figure 5). These defects for devices of batch 2 are attributed to the lower crystal quality under the gate (where the defects are located). Temperature plays here a strong role in the activation of new noise sources.

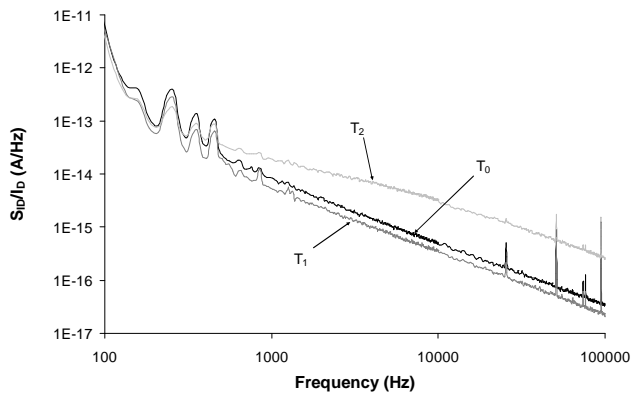


Fig. 5 S_{ID} spectra at T_1 , T_2 and T_3 of non deuterated device

The devices from batch 2 seem to be sensitive to different degradation mechanisms and their LFN spectra systematically degrades whatever the cause. The investigation on the comprehension of the degradation mechanisms is not in the scope of this study as we propose here the evidence of deuteration effect on the devices robustness improvement.

Recent studies [3][5][6] have already underlined traps location at the AlGaIn/GaN interface and in GaN bulk (2DEG) under the gated channel. Temperature activates defects for devices without deuterium in the noisy part of the device (batch 2), and the devices degrades. Transistors with deuterium in the channel under the gate (batch 1) do not suffer from any degradation: H^+ seems to passivate the defects, and the devices are thus more reliable.

V. CONCLUSION

Conspicuous effect of deuterium on devices robustness seems to offer a new solution to improve the reliability of GaN devices. We have evidenced the effect of deuterium diffusion in the noisy part of the devices on the low frequency

noise spectra. Deuteration can open the way to more temperature-robust GaN technologies, but other investigations must be driven using different stress and bias conditions.

REFERENCES

- [1] Lan, X. Wojtowicz, M. Smorchkova, I. Coffie, R. Tsai, R. Heying, B. Truong, M. Fong, F. Kintis, M. Namba, C. Oki, A. Wong, T., "A Q-band low phase noise monolithic AlGaIn/GaN HEMT VCO", IEEE Microwave and Wireless Components Letters, Vol. 16 (2006), pp 425-427.
- [2] G. Soubercaze-Pun, J.G. Tartarin, L.Bary, J.Rayssac, E.Morvan, B. Grimbert, S.L. Delage, J-C. De Jaeger, J. Graffeuil 'Design of X-band GaN oscillator: from the low frequency noise device characterization and large signal modeling to circuit design', IEEE MTT Symposium 2006, San Francisco (U.S.A), pp.747-750.
- [3] J.G. Tartarin, G. Soubercaze-Pun, A Rennane, L. Bary, R. Plana, J.C. De Jaeger, M. Germain, S. Delage, J. Graffeuil, «Using low frequency noise characterization of AlGaIn/GaN HEMT as a tool for technology assessment and failure prediction», Noise in Devices and circuits II, Proc. of SPIE, Vol. 5470, Masapolmas, Spain, MAY 2004, pp 296-306.
- [4] J. Mimila Arroyo, "Effects of deuterium diffusion on the electrical properties of AlGaIn/GaN heterostructures", Material Research Society Symposium, MRS 2005, San Fransisco, USA, Symp.E.
- [5] J.G Tartarin, G. Soubercaze-Pun, L.Bary, C.Chambon, S.Gribaldo, O. Llopis, L. Escotte, R. Plana, S. Delage, C. Gacquièrre, J. Graffeuil, "Low frequency and linear high frequency noise performances of AlGaIn/GaN grown on SiC substrate", 13th GAAS Symposium, Paris, 2005, pp 277-280.
- [6] J.G. Tartarin, G. Soubercaze-Pun, J.L. Grondin, L. Bary, J. Mimila-Arroyo, J. Chavallier, "Generation-Recombination In AlGaIn/GaN HEMT On SiC Substrate, Evidenced By Low Frequency Noise Measurements And SIMS Characterisation", International Conference on Noise and Fluctuations, 2007, Tokyo, Japon.