



HAL
open science

Electroacoustic absorbers based on finite-time control of loudspeakers: a numerical investigation

Tristan Lebrun, Marc Wijnand, Thomas Hélie, David Roze, Brigitte d'Andréa-Novel

► To cite this version:

Tristan Lebrun, Marc Wijnand, Thomas Hélie, David Roze, Brigitte d'Andréa-Novel. Electroacoustic absorbers based on finite-time control of loudspeakers: a numerical investigation. International Nonlinear Dynamics Conference, Feb 2019, Rome, Italy. hal-02046069v1

HAL Id: hal-02046069

<https://hal.science/hal-02046069v1>

Submitted on 2 Sep 2020 (v1), last revised 29 Oct 2020 (v2)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Electroacoustic absorbers based on finite-time control of loudspeakers: a numerical investigation

Tristan Lebrun¹, Marc Wijnand¹, Thomas Hélie², David Roze²,
and Brigitte d'Andréa-Novel²

¹ Sorbonne University, STMS Lab. (UMR 9912, IRCAM-CNRS-SU), Paris, France,
tristan.lebrun@ircam.fr,

² CNRS, STMS Lab. (UMR 9912, IRCAM-CNRS-SU), Paris, France.

Abstract. This paper proposes a numerical investigation of a controlled loudspeaker designed to absorb acoustic plane waves at a duct termination. More precisely, a nonlinear control for a current-driven loudspeaker is presented, that relies on (i) measurements of velocity and acoustic pressure at the membrane, (ii) a linear electroacoustic loudspeaker model and (iii) a nonlinear finite-time control method. Numerical tests are carried out by a passive-guaranteed simulation of the loudspeaker dynamics in the port-Hamiltonian systems formalism. The sound absorption efficiency is evaluated up to 300Hz by computing the reflected pressure at the membrane. The results are compared with a similar control architecture: the finite-time control for sound absorption proves effective, especially in the low frequency range.

Keywords: Finite-time control, Port-Hamiltonian systems, Electroacoustic transducer

1 Introduction

One limitation of passive sound absorbers is the bad efficiency at low frequencies due to the required size of the material. Electrically controlled loudspeakers used as active absorbers have shown to be a way to extend the frequency bandwidth of absorption. A possible approach consists in controlling the loudspeaker dynamics in order to match the membrane impedance to the acoustic characteristic impedance of the medium, thus forcing the system to behave like an acoustic transmission line [1]. In particular, Rivet et al. [2] propose an active absorber that uses a feedback based on pressure or velocity for a current-driven boxed loudspeaker, showing broadband absorption results. The present paper restates the model and control architecture proposed in [2] and evaluates the efficiency of a feedback law based on a finite-time control [3,4], an alternative to asymptotic or exponential control methods.

2 Open-loop electroacoustic system

This section presents the considered models for the acoustic propagation (§2.1) and the current-driven loudspeaker (§2.2).

2.1 Plane wave propagation in a tube

Consider a semi-infinite duct with a loudspeaker located at $z = 0$, with a membrane modeled as a flat piston (see Fig. 1). Acoustic plane wave propagation is assumed, therefore the pressure field can be decomposed into progressive waves $p^+(t - z/c)$ and $p^-(t + z/c)$, where c is the speed of sound. At $z = 0$, the particle velocity field equals the piston velocity, leading to the following relation between the pressure field $p_{ac}(t)$ at $z = 0$ and the piston velocity $\dot{\xi}(t)$,

$$p_{ac}(t) = 2p^+(t) - \rho c \dot{\xi}(t), \quad (1)$$

where ρ is the air density.

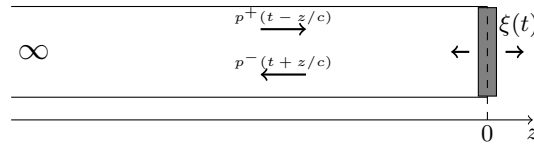


Fig. 1. Plane wave propagation in a semi-infinite duct. A loudspeaker, modeled as a flat piston, is located at $z = 0$.

2.2 Current-driven electrodynamic loudspeaker model

Physical model. A lumped model of boxed loudspeaker is adopted, considered as a mechanical oscillator with displacement $\xi(t)$ and momentum $\mathbf{p}(t) = M_m \dot{\xi}(t)$, where M_m is the moving mass. The oscillator is excited by the Lorentz force $Bl i(t)$ and the force due to the acoustic pressure $S_d p_{ac}(t)$. This yields the following mechanical equation that states the force balance of the system,

$$K_m \xi(t) + R_m \dot{\xi}(t) + \dot{\mathbf{p}}(t) + Bl i(t) = S_d p_{ac}(t), \quad (2)$$

where K_m (N/m) is the stiffness coefficient associated with the suspension and the sealed enclosure, R_m (Ns/m) is the mechanical damping coefficient, Bl (N/A) is the electromechanical coupling factor and i is the input electric current. The current drive enables rejection of undesired electric behaviour due to induction effect of the coil, usually described by a resistance R_e (Ω) and an inductance L_e (H).

Port-Hamiltonian formulation. The loudspeaker model described in (2) is restated in the port-Hamiltonian formalism [5], that relies on the expression of the system's energy,

$$\mathcal{H}(\xi, \mathbf{p}) = \frac{K_m \xi^2}{2} + \frac{\mathbf{p}^2}{2M_m}, \quad (3)$$

that is the sum of the potential and kinetic energy stored by the system. Denoting the state and input of the system by

$$\mathbf{x}(t) = \begin{bmatrix} \xi(t) : \text{displacement} \\ \mathbf{p}(t) : \text{momentum} \end{bmatrix}, \quad \mathbf{u}(t) = \begin{bmatrix} i(t) : \text{electric current} \\ p_{ac}(t) : \text{acoustic pressure} \end{bmatrix},$$

a state-space representation of the loudspeaker dynamics can be derived:

$$\begin{aligned} \dot{\mathbf{x}} &= \left(\underbrace{\begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix}}_{\mathbf{J}} - \underbrace{\begin{bmatrix} 0 & 0 \\ 0 & R_m \end{bmatrix}}_{\mathbf{R}} \right) \nabla \mathcal{H}(\mathbf{x}) + \underbrace{\begin{bmatrix} \mathbf{G}_i & \mathbf{G}_p \end{bmatrix}}_{\mathbf{G}} \mathbf{u}, \\ \{\mathcal{S}\} : \quad \mathbf{y} &= \underbrace{\begin{bmatrix} \mathbf{G}_i^\top \\ \mathbf{G}_p^\top \end{bmatrix}}_{\mathbf{G}^\top} \nabla \mathcal{H}(\mathbf{x}), \end{aligned} \quad (4)$$

where \mathbf{J} is skew-symmetric, \mathbf{R} is positive semi-definite, $\mathbf{G}_i = [0 \ -Bl]^\top$ and $\mathbf{G}_p = [0 \ S_d]^\top$. The outputs are defined as the dual quantities of the inputs $\mathbf{u}(t)$:

$$\mathbf{y}(t) = \begin{bmatrix} e(t) : \text{back-EMF voltage} \\ v_{ac}(t) : \text{acoustic outflow} \end{bmatrix}.$$

The port-Hamiltonian formulation (4) ensures the passivity property of the physical system through its power balance

$$\frac{d\mathcal{H}(\mathbf{x}(t))}{dt} = \underbrace{\nabla \mathcal{H}(\mathbf{x})^\top \dot{\mathbf{x}}}_{\mathcal{P}_{\text{stored}}} = - \underbrace{\nabla \mathcal{H}(\mathbf{x})^\top \mathbf{R} \nabla \mathcal{H}(\mathbf{x})}_{\mathcal{P}_{\text{diss}}} + \underbrace{\mathbf{y}^\top \mathbf{u}}_{\mathcal{P}_{\text{ext}}}, \quad (5)$$

where $\mathcal{P}_{\text{stored}}$, $\mathcal{P}_{\text{diss}}$ and \mathcal{P}_{ext} are respectively the stored, dissipated and external power.

3 Closed-loop system

This section describes the derivation of a controller that provides an input current $i^*(t)$ given (i) a target membrane motion $\xi^*(t)$, $\dot{\xi}^*(t)$ and (ii) the measurement of the acoustic pressure $p_{ac}(t)$ and the velocity $\dot{\xi}(t)$ at the loudspeaker membrane. The target membrane velocity can be deduced from the measured pressure

$$\dot{\xi}^*(t) = \frac{p_{ac}(t)}{\rho c} \quad (6)$$

so that the acoustic impedance at the membrane equals ρc . First, a nonlinear control law that reaches the target $\dot{\xi}^*(t)$ in finite-time is presented in §3.1. Then the law is recast as a port-Hamiltonian system in order to guarantee control passivity in §3.2.

3.1 Finite-time control law

A system controlled in finite-time will reach an equilibrium point in a finite time (see [6] for a formal definition). Thus, finite-time stability is a stronger property than asymptotic or exponential stability. It is useful for time-constrained and robust control. We first state following result.

Theorem 1 (Finite-time control of a double integrator [3]) *Consider the double integrator*

$$\begin{cases} \dot{z}_1 = z_2 \\ \dot{z}_2 = v. \end{cases} \quad (7)$$

The origin is a finite-time stable equilibrium point of this system when it is controlled by the input

$$v = -k_1 |z_1|^{\frac{\alpha}{2-\alpha}} - k_2 |z_2|^\alpha,$$

with $k_1, k_2 > 0$, $\alpha \in]0, 1[$ and $|x|^\alpha \triangleq \text{sgn}(x)|x|^\alpha$.

By identification (cf. [4]), one can find a transformation between the system (4) and the double integrator (7) controlled in finite-time. We thus obtain the resulting nonlinear law on the input current that reads

$$i^*(t) = \frac{S_{\text{d}} p_{\text{ac}}(t) - K_{\text{m}} \xi(t) - R_{\text{m}} \dot{\xi}(t) + M_{\text{m}} \left(k_1 |\xi(t) - \xi^*(t)|^{\frac{\alpha}{2-\alpha}} + k_2 [\dot{\xi}(t) - \dot{\xi}^*(t)]^\alpha \right)}{Bl}. \quad (8)$$

3.2 Passive finite-time control law

Principle. The aim of this part is the derivation of a controller that guarantees (i) control towards specific system dynamics $\xi^*(t)$ and (ii) stability in case of badly tuned control parameters. In order to meet these requirements, we impose to the controller the following port-Hamiltonian structure,

$$\{\mathcal{C}\} : \begin{cases} \dot{\mathbf{x}}_c = (\mathbf{J}_c - \mathbf{R}_c) \nabla \mathcal{H}_c(\mathbf{x}_c) + \mathbf{G}_c \mathbf{u}_c \\ \mathbf{y}_c = \mathbf{G}_c^T \nabla \mathcal{H}_c(\mathbf{x}_c), \end{cases} \quad (9)$$

where \mathbf{J}_c is skew-symmetric and \mathbf{R}_c is positive semi-definite. The power-preserving interconnection [7] of the controller with the actual loudspeaker system $\{\mathcal{S}\}$ is achieved by (see Fig. 2)

$$\begin{bmatrix} i(t) \\ \mathbf{u}_c(t) \end{bmatrix} = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} e(t) \\ \mathbf{y}_c(t) \end{bmatrix}, \quad (10)$$

allowing the closed-loop system $\{\mathcal{S} + \mathcal{C}\}$ to be written as a port-Hamiltonian system

$$\{\mathcal{S} + \mathcal{C}\} : \begin{cases} \begin{bmatrix} \dot{\mathbf{x}} \\ \dot{\mathbf{x}}_c \end{bmatrix} = \left(\begin{bmatrix} \mathbf{J} & -\mathbf{G}_i \mathbf{G}_c^T \\ \mathbf{G}_c \mathbf{G}_i^T & \mathbf{J}_c \end{bmatrix} - \begin{bmatrix} \mathbf{R} & \mathbf{0}_{2 \times 2} \\ \mathbf{0}_{2 \times 2} & \mathbf{R}_c \end{bmatrix} \right) \begin{bmatrix} \nabla \mathcal{H}(\mathbf{x}) \\ \nabla \mathcal{H}_c(\mathbf{x}_c) \end{bmatrix} + \begin{bmatrix} \mathbf{G}_p \\ \mathbf{0}_{2 \times 1} \end{bmatrix} p_{\text{ac}} \\ v_{\text{ac}} = [\mathbf{G}_p^T \ \mathbf{0}_{1 \times 2}] \begin{bmatrix} \nabla \mathcal{H}(\mathbf{x}) \\ \nabla \mathcal{H}_c(\mathbf{x}_c) \end{bmatrix}. \end{cases} \quad (11)$$

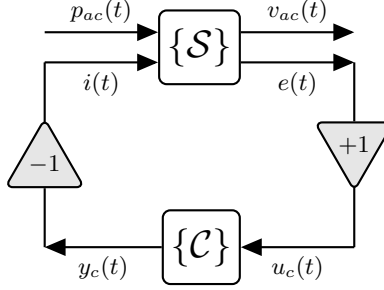


Fig. 2. Block diagram of the proposed control architecture.

In the sequel, we chose the same states for the system and the controller: $\mathbf{x} = \mathbf{x}_c$. Modifying the total energy $\mathcal{H}_{s+c}(\mathbf{x})$ and the interconnection matrices in (11) corresponds to an IDA-PBC control [8]. The controller $\{C\}$ is derived by following the steps below :

1. Chose a closed-loop energy $\mathcal{H}_{s+c}(\mathbf{x}) \geq 0$ that has a minimum at a desired target state \mathbf{x}^* , so that the closed loop system converges toward the equilibrium point \mathbf{x}^* .
2. Deduce the energy of the controller by $\mathcal{H}_c(\mathbf{x}) = \mathcal{H}_{s+c}(\mathbf{x}) - \mathcal{H}(\mathbf{x}) \geq 0$.
3. The control law is provided by the second line of (9) : $\mathbf{y}_c = \mathbf{G}_c^T \nabla \mathcal{H}_c(\mathbf{x})$.

Application to the proposed finite-time control law. The following closed-loop energy is chosen:

$$\begin{aligned} \mathcal{H}_{s+c}(q, \mathbf{p}) = & M_m k_1 \frac{2-\alpha}{2} |\xi - \xi^*|^{\frac{2}{2-\alpha}} + \frac{M_m k_2}{R_m} \frac{1}{\alpha+1} \left| \frac{\mathbf{p} - \mathbf{p}^*}{M_m} \right|^{\alpha+1} \\ & + \frac{\beta}{2} (\xi - \xi^*)^2 + \frac{\gamma}{2M_m} (\mathbf{p} - \mathbf{p}^*)^2, \end{aligned} \quad (12)$$

that has a minimum at $\xi = \xi^*$ and $\mathbf{p} = \mathbf{p}^*$. This energy expression is therefore a good candidate to control the closed-loop system $\{S + C\}$ towards the desired targets ξ^* , \mathbf{p}^* . The energy of the controller is deduced by subtracting (3) from (12), leading to

$$\begin{aligned} \mathcal{H}_c(q, \mathbf{p}) = & M_m k_1 \frac{2-\alpha}{2} |\xi - \xi^*|^{\frac{2}{2-\alpha}} + \frac{M_m k_2}{R_m} \frac{1}{\alpha+1} \left| \frac{\mathbf{p} - \mathbf{p}^*}{M_m} \right|^{\alpha+1} \\ & + \frac{\beta}{2} (\xi - \xi^*)^2 + \frac{\gamma}{2M_m} (\mathbf{p} - \mathbf{p}^*)^2 - \frac{1}{2M_m} \mathbf{p}^2 - \frac{K_m}{2} \xi^2, \end{aligned} \quad (13)$$

where $\beta > K_m$ and $\gamma > 1$ ensure that $\mathcal{H}_c(\xi, \mathbf{p})$ has a global minimum. Finally, by imposing the following port-Hamiltonian formulation:

$$\{\mathcal{C}\} : \begin{aligned} \dot{\mathbf{x}} &= \underbrace{\begin{pmatrix} 0 & 0 \\ 0 & 0 \end{pmatrix}}_{\mathbf{J}_c} - \underbrace{\begin{pmatrix} 0 & 0 \\ 0 & 0 \end{pmatrix}}_{\mathbf{R}_c} \nabla \mathcal{H}_c(\mathbf{x}) + \underbrace{\begin{bmatrix} \frac{1}{Bl} \\ \frac{R_m}{Bl} \\ \frac{1}{Bl} \end{bmatrix}}_{\mathbf{G}_c} \mathbf{u}_c \\ \mathbf{y}_c &= \underbrace{\begin{bmatrix} \frac{1}{Bl} & \frac{R_m}{Bl} \end{bmatrix}}_{\mathbf{G}_c^\top} \nabla \mathcal{H}_c(\mathbf{x}_c), \end{aligned} \quad (14)$$

the controller output yields

$$\begin{aligned} \mathbf{y}_c &= \frac{1}{Bl} \left[M_m k_1 [\xi - \xi^*]^{\frac{\alpha}{2-\alpha}} + M_m k_2 \left[\frac{\mathbf{p} - \mathbf{p}^*}{M_m} \right]^\alpha - K_m \xi - R_m \frac{\mathbf{p}}{M_m} \right. \\ &\quad \left. + \gamma R_m \left(\frac{\mathbf{p} - \mathbf{p}^*}{M_m} \right) + \beta(\xi - \xi^*) \right]. \end{aligned} \quad (15)$$

The proposed finite-time control law (15) is a passive version of (8) presented in §3.1.

4 Numerical results

Two control laws are assessed for an up-chirp pressure excitation $p_{ac}(t)$ from 20Hz to 300Hz at levels 94dB and 114dB.

Law 1: The proposed passive finite-time control law (15). The law is evaluated through simulations of the closed-loop system $\{\mathcal{S} + \mathcal{C}\}$ based on a dedicated numerical scheme [9] that preserves the power balance in discrete time.

Law 2: Proposed in [2]. The law relies on a modification of the inherent electromechanical properties of the loudspeaker, taking the form of a transfer function between the measured acoustic pressure and the electric current,

$$I^*(s) = \frac{S_d \rho c - s M_m (1 - \mu) - R_m - \frac{K_m}{s} (1 - \mu)}{Bl \left(\mu s \frac{M_m}{S_d} + \rho c + \mu \frac{K_m}{s S_d} \right)} P(s), \quad (16)$$

where $P(s)$ and $I^*(s)$ are respectively the Laplace transforms of $p_{ac}(t)$ and $i^*(t)$ and $\mu \in [0, 1]$ is a control parameter that adjusts the absorption bandwidth.

Simulations take the total acoustic pressure $p_{ac}(t)$ as input and provide electric currents generated by the control laws and the induced membrane velocities. Then the reflected pressure $p^-(t)$ at the membrane is calculated as

$$p^-(t) = \frac{p_{ac}(t) - \rho c \dot{\xi}(t)}{2}. \quad (17)$$

The chosen control parameters are $k_1 = 750000$, $k_2 = 50$, $\alpha = 0.8$, $\mu = 0.15$ and the loudspeaker model parameters are those used in [2]. The sampling rate is set to $f_s = 44100\text{Hz}$.

Time domain simulations of the reflected pressure $p^-(t)$ at the loudspeaker membrane for an input $p_{ac}(t)$ at 94dB are depicted in Figure 3. The weak value of the reflected pressure $p^-(t)$ compared to the total pressure $p_{ac}(t)$ reveals an efficient sound absorption for both control laws.

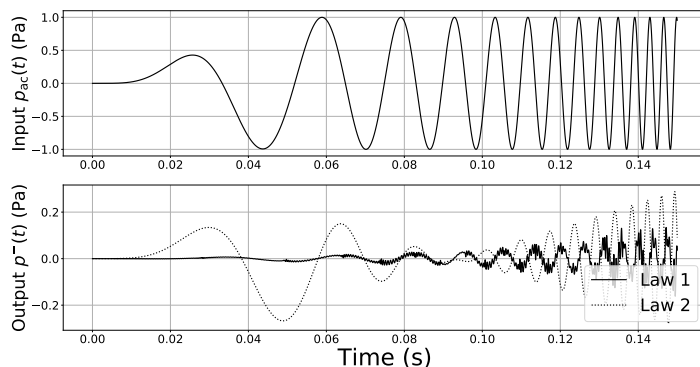


Fig. 3. Time domain simulations of the reflected pressure $p^-(t)$ at the loudspeaker membrane for an input $p_{ac}(t)$ at 94dB, for both control laws.

The absorption capabilities are also evaluated in the frequency domain by calculating the absorption coefficient as a function of the frequency f defined as

$$\alpha(f) = 1 - \left| \frac{Z(f) - \rho c}{Z(f) + \rho c} \right|^2, \quad (18)$$

where $Z(f) = P(f)/V(f)$ and $P(f)$ and $V(f)$ are respectively the Fourier transform of the pressure signal $p_{ac}(t)$ and the velocity signal $\dot{\xi}(t)$.

The coefficient $\alpha(f)$ is depicted in Figure 4. It can be noted that **Law 2** achieves the best sound absorption (α very close to 1) around the resonance frequency of the loudspeaker (84 Hz). The proposed **Law 1** is especially efficient at lower frequencies below and has a slightly broader frequency bandwidth. Note that the closed loop consisting of a linear model (4) and a nonlinear controller (15) is nonlinear. Thus its performance varies with the amplitude of the control input, as illustrated in Figure 4 for $p_{ac}(t)$ at levels 94dB and 114dB.

5 Conclusion

This work deals with sound absorption in a duct by a current-driven loudspeaker control. A passive nonlinear control that provides an electric current from the

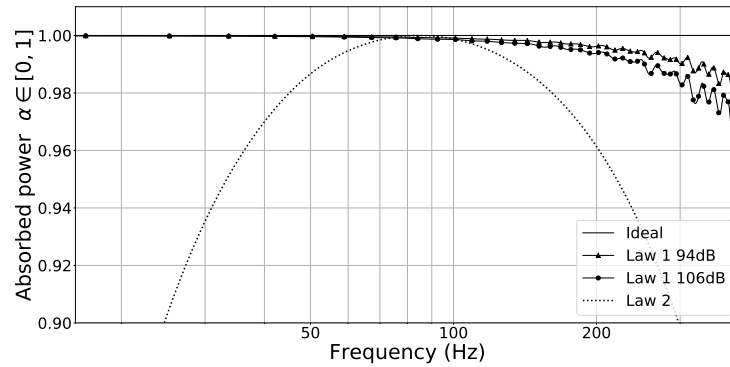


Fig. 4. Absorption coefficient versus frequency for both controls laws at 94dB and 106dB. The (nonlinear) **Law 1** is calculated for two input pressure levels, whereas the (linear) **Law 2** does not depend on the input amplitude.

measurements of the acoustic pressure and the membrane velocity has been presented, based on a finite-time control method. Its passivity property ensures robustness against modelling errors. Numerical evaluation of the proposed nonlinear control law shows an efficient sound absorption, especially below the resonance frequency of the loudspeaker. Further study will focus on a passive control that handles a one-sample delay between the controller input and output, towards its application on a test bench.

Acknowledgments

BdAN and MW are supported by ANR project Finite4SoS (ANR 15 CE23 0007). TH, DR and MW thank ANR-DFG project Infidhem (ANR 16 CE92 0028).

References

1. R.J. Bobber. An active transducer as a characteristic impedance of an acoustic transmission line. *The Journal of the Acoustical Society of America*, vol. 48, pp. 317–324, 1970.
2. E. Rivet, S. Karkar, and H. Lissek. Broadband low-frequency electroacoustic absorbers through hybrid sensor-/shunt-based impedance control. *IEEE Transactions on Control Systems Technology*, vol. 25, pp. 63-72, 2017.
3. E. Bernuau, W. Perruquetti, D. Efimov, and E. Moulay. Robust finite-time output feedback stabilisation of the double integrator. *International Journal of Control*, vol. 88(3), pp. 451–460, 2015.
4. M. Wijnand, B. d’Andréa-Novel, T. Hélie, et D. Roze. Contrôle des vibrations d’un oscillateur passif : stabilisation en temps fini et par remodelage d’énergie. *14ème Congrès Français d’Acoustique* (Le Havre, France), pp. 1370-1375, 2018.

5. B.M. Maschke and A.J. van der Schaft. Port-controlled Hamiltonian systems: modelling origins and systemtheoretic properties. *IFAC Proceedings Volumes*, 25(13) pp. 359-365, 1992.
6. S.P. Bhat and D.S. Bernstein. Finite-time stability of continuous autonomous systems. *SIAM Journal on Control and Optimization*, 38(3), pp. 751-766, 2000.
7. R. Ortega, A. van der Schaft, B. Maschke, and G. Escobar. Energy-shaping of port-controlled Hamiltonian systems by interconnection. *Proceedings of the 38th IEEE Conference on Decision and Control*, Vol. 2, pp. 1646-1651, 1999.
8. R. Ortega, A. van der Schaft, B. Maschke and G. Escobar. Interconnection and damping assignment passivity-based control of port-controlled Hamiltonian systems. *Automatica*, 38(4), pp. 585-596, 2002.
9. T. Hélie, A. Falaize, et N. Lopes. Systèmes Hamiltoniens à Ports avec approche par composants pour la simulation à passivité garantie de problèmes conservatifs et dissipatifs. *Colloque National en Calcul des Structures*, volume 12, 2015.