



New stability method of a multirate controller for a three-axis high-Q MEMS accelerometer with simultaneous electrostatic damping

Lavinia Ciotîrcă, Olivier Bernal, Jerome Enjalbert, Thierry Cassagnes, Hélène Tap, Hugues Beaulaton, Serdar Sahin

► To cite this version:

Lavinia Ciotîrcă, Olivier Bernal, Jerome Enjalbert, Thierry Cassagnes, Hélène Tap, et al.. New stability method of a multirate controller for a three-axis high-Q MEMS accelerometer with simultaneous electrostatic damping. IEEE Sensors Journal, 2018, 18 (15), pp.6106 - 6114. 10.1109/jsen.2018.2844682 . hal-02092959v2

HAL Id: hal-02092959

<https://hal.science/hal-02092959v2>

Submitted on 12 Sep 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

New stability method of a multirate controller for a three-axis high-Q MEMS accelerometer with simultaneous electrostatic damping

Lavinia E. Ciotirca, Olivier Bernal, *Member, IEEE*, Jérôme Enjalbert, Thierry Cassagnes, Hélène Tap, Hugues Beaulaton, Serdar Şahin

Abstract — Over the past years, cutting-edge advances in electronics and microfabrication have allowed the integration of multiple sensors within integrated analog and digital circuits to design Micro Electro Mechanical Systems (MEMS). The multiple sensor integration or sensor fusion, enables both cost and surface reduction, while maintaining high performances. This paper presents a new control system for an underdamped three-axis accelerometer, which allows the co-integration in the same cavity with a three-axis Coriolis gyroscope, to design a Six Degrees of Freedom (DoF) combo sensor. The accelerometer Analog Front End (AFE) consumes $300\mu A$ from a $1.6V$ power supply and is able to reach its steady state in $800\mu s$ compared to a $400 ms$ open – loop and no damping configuration. The transducer control is implemented using a simultaneous multirate electrostatic damping method. To conclude on the closed loop system stability, an innovative approach, based on the multirate signal processing, theory has been developed.

Index Terms — inertial sensors, MEMS accelerometers, electrostatic damping, multi-axis simultaneous damping, multirate controller

I. INTRODUCTION

RECENTLY, consumer electronics industry has known a spectacular growth that would have not been possible without pushing the integration barrier further and further. Inertial MEMS sensors (e.g. accelerometers, gyroscopes) provide high performance, low power, low die cost solutions and are, nowadays, embedded in most consumer applications. In addition, the sensors fusion has become a new trend and combo sensors are gaining growing popularity since the co-integration of a three-axis MEMS accelerometer and a three-axis MEMS gyroscope provides complete navigation information. The resulting device is an Inertial Measurement Unit (IMU) able to sense multiple DoF. Nevertheless, the performances of the accelerometers and the gyroscopes are conditioned by the MEMS cavity pressure: the capacitive accelerometer is usually a damped system functioning under an atmospheric pressure, while the Coriolis vibratory gyroscope is a highly resonant system. Thus, to conceive a combo sensor, a unique low cavity pressure is required. The integration of both transducers within the same low-pressure cavity necessitates a method to control and reduce the ringing phenomena by increasing the damping factor of the MEMS accelerometer.¹

The most used control configurations for the capacitive accelerometers are the digital closed loop ($\Sigma\Delta$ architecture) [1], [2], [3] and the analog loop [4], enabling artificial damping by superimposing two electrostatic forces on the accelerometer proof mass to produce a linear feedback characteristic.

Although $\Sigma\Delta$ interfaces can provide high resolution digital output [5], [6], they have a complicated implementation for a higher order electromechanical closed loop.

In [7] and [8] the transducer control is implemented using electrostatic damping. The control voltage is generated using a proportional derivative block and is applied on the sensors middle plate. The same electrodes are used during measurement and damping phases, and the circuits are designed for sensing one single degree of freedom.

A micropower interface for a three-axis capacitive accelerometer has been presented in [9]. The AFE architecture enables time-multiplexed sampling in an open-loop configuration, since the sensor has no ringing constraint and no control operation is required. Moreover, in [10] each of the three-axes has its own interface circuitry and the x , y or z accelerations can be measured simultaneously.

Both continuous-time front-ends [11] and switched capacitor techniques [7], [8], [9], [12] have been studied in recent years. Concerning the switched capacitor topologies, since the MEMS accelerometer is a continuous-time system, and the analog front-end, as well as the controller, can be discrete time systems, a general method to analyze the overall system operation is needed [13].

In this paper, a new electrostatic damping architecture, which allows sensing and controlling more than one degree of freedom, is presented. For a fully differential specific MEMS design that shares its middle plate between the three-axis: x , y and z , and has only one pair of excitation electrodes for each

This manuscript was first submitted on December 2017, revised on May 2018.

L. E. Ciotirca was with LAAS CNRS, University of Toulouse, INP, Toulouse, France and is now with NXP Semiconductors Toulouse, 31000 France (e-mail: laviniaelena.ciotirca@enseeiht.fr).

O. Bernal and H. Tap are with the LAAS CNRS, University of Toulouse, INP, Toulouse, France.

J. Enjalbert, T. Cassagnes and H. Beaulaton are with NXP Semiconductors Toulouse, 31000 France.

S. Şahin is with the University of Toulouse, INP, Toulouse, France.

axis, a new interface has been designed in order to enable low power, low surface and high-performance results. The read-out circuit is multiplexed between the three axes to reduce area and a new simultaneous multirate damping technique is applied, to improve the system settling time. To assess the method efficiency, the settling time results are compared to the classical successive damping architecture. Using the multirate signal processing theory, the multirate controller has been modeled and based on the closed loop transfer function, a new stability method is proposed.

This paper is organized as follows: Section II describes the electrostatic damping principle. The novel system architecture and the simultaneous damping chronograms are presented in detail in Section III. Section IV presents the multirate controller modeling and the stability study. Model simulation results are discussed in Section V, followed by the conclusion in Section VI.

II. ELECTROSTATIC DAMPING PRINCIPLE

MEMS accelerometers can be modeled using the second order mass spring damper equation (1). In the presence of an external acceleration a_{ext} , the proof mass m will be deflected from its equilibrium position with a certain displacement x .

$$ma_{ext}(t) = m\ddot{x}(t) + b\dot{x}(t) + kx(t) \quad (1)$$

$$Q = \frac{\sqrt{km}}{b}$$

where k is the spring constant, b the mechanical damping coefficient and Q the quality factor.

When the MEMS cavity pressure starts decreasing, the quality factor Q increases, causing oscillations that can result in measurement perturbations and even in physical part destruction, if the oscillation amplitude is too large. To avoid the above-mentioned inconveniences, one would develop a control system that reduces the quality factor Q by increasing the damping factor b . By adding a term proportional to the proof mass velocity $\dot{x}(t)$ in (2), the damping coefficient will be increased with a B value.

$$ma_{ext}(t) = m\ddot{x}(t) + (b + B)\dot{x}(t) + kx(t) \quad (2)$$

The electrostatic damping principle consists in generating an electrical damping force (3) that will assist the mechanical damping.

$$\Delta F(t) = B\dot{x}(t) \quad (3)$$

The proposed MEMS structure for one axis comprises three electrodes: one movable electrode, i.e. the proof mass, and two fixed excitation electrodes (Fig. 1); note also that this movable electrode is shared by the three axes. In the presence of an external acceleration, the proof mass moves, which induces a capacitance variation between these electrodes. In addition, when a voltage is applied on the two fixed electrodes and on the proof mass (v_{ex1} , v_{ex2} and V_m respectively), electrostatic forces are generated; in particular between the proof mass and the excitation electrodes (F_1 , F_2).

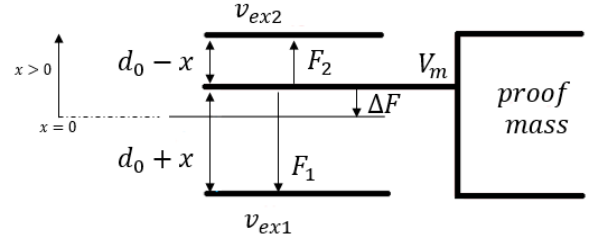


Fig. 1. Parallel plate model of a capacitive sensor

The net electrostatic force ΔF , detailed in (4), and applied to the proof mass, is an attractive force.

$$\Delta F = F_1 - F_2 = \frac{1}{2} \epsilon_0 \epsilon_r A \left(\frac{(v_{ex1} - V_m)^2}{(d_0 + x)^2} - \frac{(v_{ex2} - V_m)^2}{(d_0 - x)^2} \right) \quad (4)$$

where d_0 is the gap at rest between the fixed electrodes and the proof mass and x the proof mass displacement, A the total sense surface, ϵ_0 the vacuum permittivity and ϵ_r the relative vacuum permittivity.

For a parallel plate capacitive sensor, when the voltage difference between the fixed plates and the middle one is 0, no electrostatic force is applied on the proof mass. Let's suppose for now that on the fixed plates, a differential bias $\pm V_B$ is superimposed on the common mode voltage $V_m + v_{ctrl}$ as in (5), then the net electrostatic force applied on the MEMS will depend on both V_B and v_{ctrl} .

$$\begin{aligned} v_{ex1} &= V_m + v_{ctrl} + V_B \\ v_{ex2} &= V_m + v_{ctrl} - V_B \end{aligned} \quad (5)$$

where v_{ctrl} is the control voltage generated by the control block to damp the transducer.

Further, if the proof mass displacement is very small compared to d_0 and the control voltage v_{ctrl} is proportional to the proof mass velocity, then the net electrostatic force applied to the proof mass is also proportional to the velocity as a first-order approximation. In this way, in (2) a new term is artificially added to assist the mechanical damping. The force generated using a control block, during a predefined damping time t_{damp} within the sampling period T_s is presented in (6).

$$\Delta F \cong - \frac{t_{damp}}{T_s} \frac{2\epsilon_0 \epsilon_r A}{d_0^2} V_B v_{ctrl} \quad (6)$$

Therefore, if the design aim is to have the fastest transducer settling time, a maximum amount of electrostatic force should be applied to the proof mass. From (6) one can notice that several parameters can be adjusted in order to increase the electrostatic force: the excitation electrodes surface, the control voltage and the damping duty cycle. Assuming that the MEMS design parameters are fixed and the maximum control voltage that can be applied is fixed by a certain technology power supply and no charge pump is added, the only parameter which can vary is the damping duty cycle or the electrostatic force application duration.

Nevertheless, note also that the voltage controlled electrostatic actuation has several nonlinearities sources such as the voltage to electrostatic force conversion ((6) is an

When *Phase 3* occurs, the voltages applied to the y-axis excitation electrodes are $2V_m$ and $0V$, and a new y-axis C2V output sample is then available.

A new damping force value is calculated and applied during *Phase 4*. Furthermore, the same x damping force, which has been first applied during *Phase 2*, and still stored, and the z damping force, which has been calculated in the previous sampling period $(n-1)T_s$ and hold, are applied on x and z MEMS electrodes.

Finally, during *Phase 5*, a new z -axis acceleration value is measured and a new z -axis control signal is available. This new value will then be applied on z -axis excitation electrodes when *Phase 6* occurs.

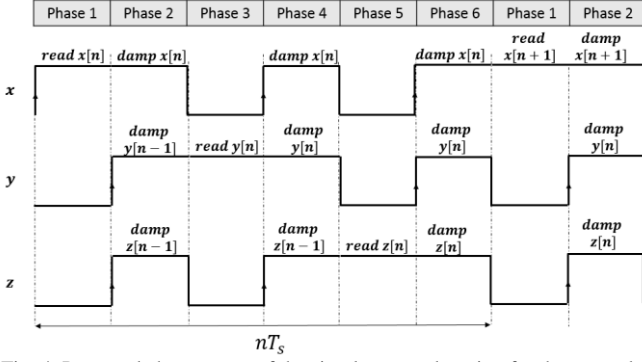


Fig. 4. Proposed chronograms of the simultaneous damping for the x,y and z axis

During the same *Phase 6*, the x -axis damping force which has been first applied during *Phase 2* and the y -axis damping force which has been first applied during *Phase 4*, are also applied on MEMS electrodes.

In this way, when one sampling period is completed, the three axes have been measured once and damped three times; in addition, the electrostatic force applied to the transducer compared to the classical successive reading and damping approach (Fig. 10) is tripled. When the amount of electrostatic force applied is increased so is the artificial damping coefficient and the sensor ability to oscillate are diminished. Consequently, the main parameter one would like to improve is the system settling time.

IV. MULTIRATE CONTROLLER AND STABILITY STUDY

The overall system has been modeled to find the closed loop transfer function and to conclude on the stability.

Fig. 5. presents the block diagram for a one-axis high-Q accelerometer with multirate electrostatic damping control. The sampling frequency of each block is shown below them. Note that f'_s , which is the MEMS sampling frequency, is the fastest sampling frequency of the system. The MEMS transfer function $H_{sens}(z')$ should be expressed using a high sampling frequency f'_s in order to improve the modeling of the continuous time proof mass natural movement.

Firstly, the MEMS accelerometer's s -domain transfer function (7) is transformed into z -domain using the Bilinear Transform method.

$$H_{MEMS}(z') = \frac{1}{k} \frac{\gamma^2(1+z')^2}{z'^2(\gamma^2 + \frac{2}{Q}\gamma + 4) + z'(-8+2\gamma^2) + (\gamma^2 - \frac{2}{Q}\gamma + 4)} \quad (9)$$

where $\gamma = \omega_0 T'_s$, $T'_s = 1/f'_s$ and $z' = e^{sT'_s}$.

Since the C2V bandwidth is much larger than the sensor bandwidth and no filtering is applied to the signal in the first stage of the electronic interface, the C2V operation can be modeled with a constant gain k_{c2v} .

Next, to obtain the derivative transfer function, the Z -transform is applied to (8). If the controller output is updated once each T_s period, then

$$v_{ctrl}(z) = k_d * v(z)(1 - z^{-1}) \quad (10)$$

where $z = e^{sT_s}$.

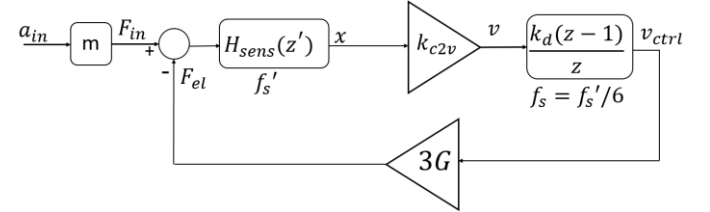


Fig. 5. Simplified block diagram of the proposed discretized closed loop accelerometer

Finally, it has been shown in (6) that the net electrostatic force applied to the proof mass is proportional to $v_{ctrl}(z)$. Therefore, G models the control voltage to electrostatic force conversion gain and is defined as:

$$G = \frac{2\varepsilon_0\varepsilon_r A}{d_0^2} V_B \quad (11)$$

The electrostatic force is applied three times during the sampling period T_s thus there is a $3G$ gain to be considered for the voltage to electrostatic force conversion for one axis.

Due to the fact that the system shown in Fig. 5. has more than one sampling rate: T_s and T'_s , one will use the multirate signal processing theory to model it. Further, since f'_s is the fastest sampling frequency, the blocks having another sampling rate should change it to f'_s . The main operations that enable such transformations are the downsampling and upsampling operations [14].

After introducing the upsampling and downsampling, a new block diagram of the model is derived and shown in Fig. 6, where up/downsampling operations are described by the $\uparrow M/\downarrow M$ symbol respectively, with $M = 6$.

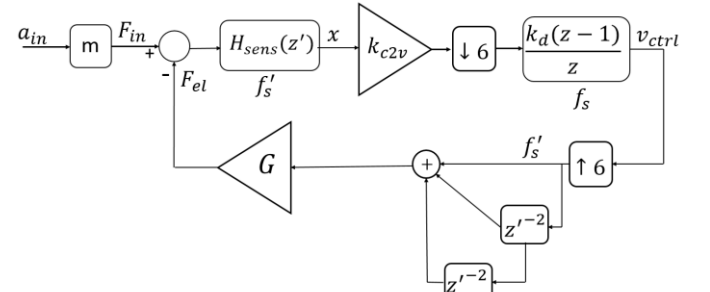


Fig. 6. Discrete model of the closed loop accelerometer architecture using upsampling / downsampling blocks

Multirate signal processing theory uses the noble identities (Fig.7) to deal with upsampling and downsampling blocks, where $H(z)$ is an arbitrary transfer function.

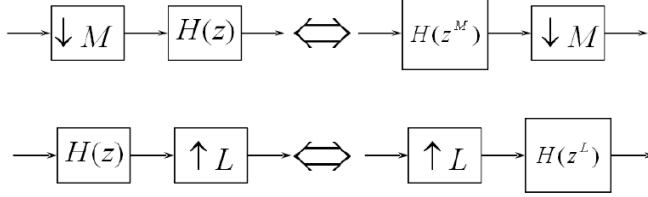


Fig. 7. Noble identities

Therefore, if $H(z') = k_{c2v} \times H_{sens}(z')$, $D(z) = \frac{k_d(z-1)}{z}$ and $Q(z') = G \times (1 + z'^{-2} + z'^{-4})$, where $z' = e^{sT_s'}$ and f_s'

It can be noticed that:

$$F_{el}(z') = Q(z') \times F(z') = Q(z') \times C(z'^6)$$

$$C(z') = D(z') \times B(z')$$

$$B(z') = \frac{1}{6} \sum_{m=0}^5 A(e^{-\frac{j2\pi m}{6}} z'^{\frac{1}{6}})$$

$$B(z'^6) = \frac{1}{6} \sum_{m=0}^5 A(e^{-\frac{j2\pi m}{6}} z')$$

$$A(z') = H(z') \times E(z')$$

$$E(z') = F_{in}(z') - F_{el}(z')$$

$$\begin{aligned} C(z'^6) &= D(z'^6) \times B(z'^6) = D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 A(e^{-\frac{j2\pi m}{6}} z') = D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H(e^{-\frac{j2\pi m}{6}} z') \times E(e^{-\frac{j2\pi m}{6}} z') = \\ &= D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H(e^{-\frac{j2\pi m}{6}} z') \times \left(F_{in}(e^{-\frac{j2\pi m}{6}} z') - F_{el}(e^{-\frac{j2\pi m}{6}} z') \right) = \\ &= D(z'^6) \times \left[\left(\frac{1}{6} \sum_{m=0}^5 H(e^{-\frac{j2\pi m}{6}} z') \times F_{in}(e^{-\frac{j2\pi m}{6}} z') \right) - \left(\frac{1}{6} \sum_{m=0}^5 H(e^{-\frac{j2\pi m}{6}} z') \times F_{el}(e^{-\frac{j2\pi m}{6}} z') \right) \right] \end{aligned} \quad (12)$$

Then:

$$\sum_{m=0}^5 F_{el}(e^{-\frac{j2\pi m}{6}} z') = \sum_{m=0}^5 Q(e^{-\frac{j2\pi m}{6}} z') \times C(e^{-\frac{j2\pi m}{6} \times 6} z'^6)$$

(13)

But:

$$C(e^{-j2\pi m} z'^6) = C(z'^6)$$

Replacing (13) in (12), eq. (12) can be rewritten:

the system fastest sampling frequency, the model from Fig. 6. can be depicted in Fig. 8.

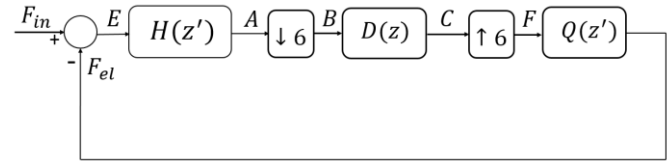


Fig. 8. Simplified discrete model of the multirate closed loop accelerometer

To analyze the system presented in Fig. 8, several methods have been proposed in the literature [15], [16]. Due to the downsampling and upsampling processes, this model is time-variant and consequently, an overall transfer function does not exist in the general case. The aim of this study is to find an input-output relationship in the z-domain, based on which, the system stability can be estimated.

$$C(z'^6) = D(z'^6) \times \frac{1}{6} \left[\left(\sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times F_{in}\left(e^{-\frac{j2\pi m}{6}} z'\right) \right) - C(z'^6) \times \left(\sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times Q\left(e^{-\frac{j2\pi m}{6}} z'\right) \right) \right]$$

$$C(z'^6) = \frac{D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times F_{in}\left(e^{-\frac{j2\pi m}{6}} z'\right)}{1 + D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times Q\left(e^{-\frac{j2\pi m}{6}} z'\right)}$$

$$F_{el}(z') = Q(z') \times C(z'^6) = \frac{D(z'^6) \times Q(z') \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times F_{in}\left(e^{-\frac{j2\pi m}{6}} z'\right)}{1 + D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times Q\left(e^{-\frac{j2\pi m}{6}} z'\right)}$$

If we define $K(z')$ as:

$$K(z') = \frac{D(z'^6) \times Q(z')}{1 + D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times Q\left(e^{-\frac{j2\pi m}{6}} z'\right)}$$

Then the equivalent system is represented in Fig. 9.




Fig. 9. Equivalent open loop system

The transfer function $K(z')$ represents the input-to-output relationship that best describes the discrete multirate controller. Moreover, its stability or instability can be deduced from $K(z')$ stability/instability [10]. It can be noticed that all the transfer functions $H(z')$, $D(z) = D(z'^6)$, $Q(z')$ that appear in the loop in Fig. 8 also appear in $K(z')$'s characteristic equation:

$$1 + D(z'^6) \times \frac{1}{6} \sum_{m=0}^5 H\left(e^{-\frac{j2\pi m}{6}} z'\right) \times Q\left(e^{-\frac{j2\pi m}{6}} z'\right)$$

If $K(z')$ output is bounded for all bounded inputs, though stable, the overall system is stable. If $K(z')$ is unstable, the overall system will be unstable.

This novel approach, validated with behavioral models and numerical simulations, allows studying the stability of a multirate controller for a three-axis high Q MEMS accelerometer.

V. SYSTEM MODELING AND SIMULATIONS RESULTS

The architecture presented in Fig.3 has been fully modeled and simulated using Matlab – Simulink. The accelerometer MEMS movement was modeled using the equation (1) and the capacitance variation ΔC is approximated using the proof mass displacement x .

$$\Delta C \approx \frac{\epsilon_0 \epsilon_r A}{d_0} x \quad (14)$$

Sample and hold techniques have been employed to model system sequences and depending on the phase, a different voltage level is applied on the electrodes. The MEMS natural frequency is $f_0 = 4 \text{ kHz}$ and the open loop quality factor Q is 2000 corresponding to a low-pressure cavity of 0.7 torr. Note that although a higher MEMS quality factor implies a lower MEMS Brownian noise (estimated here to be around $1 \mu\text{g}/\sqrt{\text{Hz}}$), for this architecture, the electronic noise ($\approx 200 \mu\text{g}/\sqrt{\text{Hz}}$) is much higher. Consequently, the MEMS cavity pressure advantage is not relevant for the total system noise performances. Here, the MEMS proof mass sensitivity is $\Delta C = 2.5 \text{ fF/g}$ ($1\text{g} = 9.8 \text{ m/s}^2$) of capacitance variation.

In addition, the charge to voltage converter has been modeled and designed to achieve a sensitivity of $V = 13 \text{ mV/g}$ for a feedback capacitor $C_{fb} = 300 \text{ fF}$ and under a 1.6 V power supply. As a result, the system has an acceleration input range of $\pm 8\text{g}$.

However, without any additional damping applied to the MEMS, the system settling time is approximately 400 ms . To assess the damping efficiency, the settling time performances of the simultaneous damping have been compared with the classical approach, which is the successive damping. In a classical damping approach (i.e. successive damping – see Fig. 10.), the sampling period also comprises six phases; three measuring phases and three damping phases and the three axes are successively measured and damped.

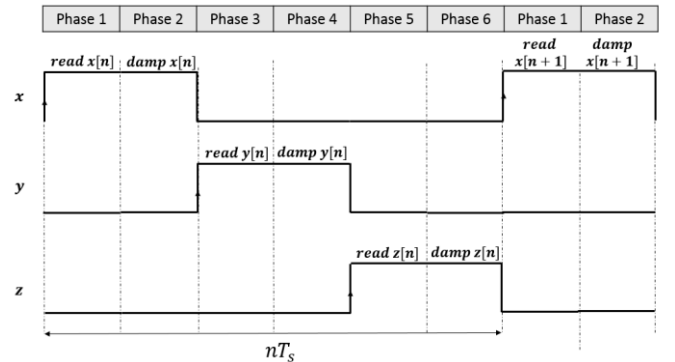


Fig. 10. Successive damping sequence

Firstly, both approaches have been modeled and their operation validated. A plot of the closed-loop electrostatic forces for both successive and simultaneous damping is shown in Fig. 11. The electrostatic force applied on the mass should reach also a steady state of 0N. The same sampling period $T_s = 21 \mu s$ and derivative gain $k_d = 400$ are used for both cases. From Fig.11, one can notice the single damping phase for the successive damping approach and the three times application of the same electrostatic force level for the simultaneous damping.

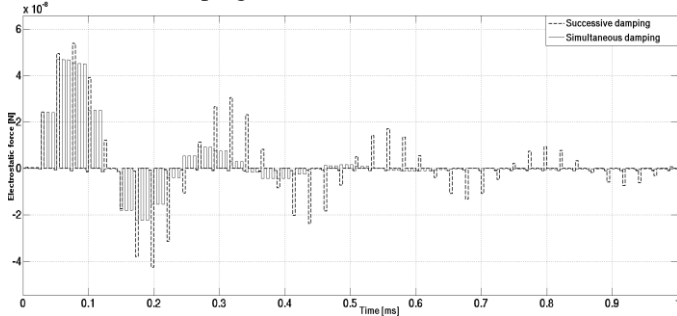


Fig. 11. Electrostatic force waveforms for both approaches: successive (dashed) and simultaneous (solid) damping

However, to quantify the performances in terms of settling time, additional simulations have been performed. As stated previously, the settling time depends both on T_s and on k_d and consequently, to check the settling performances, the sampling period has been varied from $6 \mu s$ to $42 \mu s$ and k_d fixed to 600. It is desired to obtain results compatible within a 1.6V power supply technology, therefore $V_m = \frac{V_{supply}}{2}$, $V_B = \frac{V_m}{2} = 0.4V$ and the control voltage v_{ctrl_x} is limited to $-0.4V < v_{ctrl_x} < 0.4V$. The settling time simulation results are presented in Figure 12.

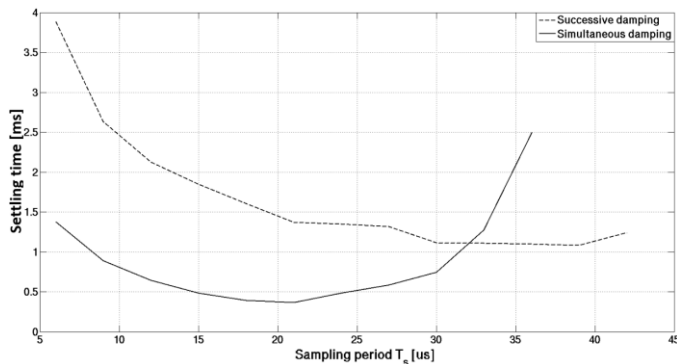


Fig.12. Settling time simulation results for both approaches: successive damping (dashed) and simultaneous damping (solid)

From Fig.12, one can notice that the settling time performances for the simultaneous damping are better. When the sampling frequency is high, the simultaneous damping is very efficient, and the settling time is, as expected, roughly three times smaller than for the successive damping. Then, when the sampling frequency starts decreasing, the successive damping architecture can be a better choice. The intuitive explanation of the simultaneous damping performances degradation at low sampling frequencies is the loss of correlation between the instantaneous velocity and the

be null during the non-damping phases for the respective axis. Additionally, when the proof mass reaches the steady state and the velocity estimation is 0, the net electrostatic force must

electrostatic force value during the second and the third damping phase. When the sampling period is large, it is expected to apply on the excitation electrodes, during the second and the third damping phase, a velocity estimation which is no more related to the real mass movement.

Next, the multirate controller presented in Fig. 6. has been modeled and the $K(z')$ stability has been completed. Since the system is discrete, if $K(z')$ has all its poles inside the z-domain unity gain circle, then, the overall system is stable. That is the condition one will impose when choosing the system parameters: derivative gain k_d and sampling frequency f_s' .

Fig. 13 shows all the pairs (k_d, T_s) that drives the system stable when varying k_d between 20 and 1000 and T_s between $8 \mu s$ and $56 \mu s$ ($T_s = 6T_s'$).

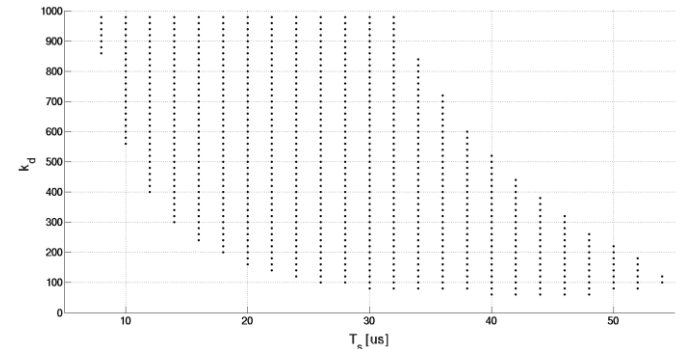


Fig. 13. Derivative gain and sampling period (k_d, T_s) pairs that ensures the system stability

When the system is fast, even if the loop gain is large, this will not drive the loop instable. On the other hand, when the sampling frequency starts decreasing, there are a limited number of points for which the system is still stable.

The proposed method can be used, for instance, to choose the design parameters (k_d, T_s) of the associated integrated circuit (IC) implementation of this architecture. The IC has been designed in a $0.18 \mu m$ CMOS process and its performances are summarized in Table 1, together with others closed loop accelerometer architectures for comparison purpose.

VI. CONCLUSION

This paper addresses the system design of an analog control architecture, for a three-axis underdamped capacitive MEMS accelerometer having a common proof mass for all-three axis, that allows its cointegration in the same low-pressure cavity with a Coriolis vibratory gyroscope. The analog control of the proof mass is implemented using a new electrostatic damping sequence, which improves the damping efficiency over the state of the art approach (successive damping) in terms of settling time (three times smaller for a sampling time of $24 \mu s$). The overall system achieves a sensitivity of $13 mV/g$

for a power consumption of 0.48 mW for the three axes using a 1.6V power supply voltage without requiring any charge pump technique to drive the MEMS electrodes.

In addition, to check the closed loop stability which depends on both the loop gain value and the sampling frequency, a new method to model accurately the system based on multirate signal processing approaches has been analyzed and developed. It also allows to determine the best

tradeoff between settling-time and sampling frequency. The proposed analysis hence points clearly out that this method limitation is directly related to the correlation between the measured data and the applied feedback damping force. As expected, the slower the system, the poorer the damping efficiency.

	[7]	[8]	[1]	[2]	[3]	[12]	This work
Topology	PD	PID	3 th order $\Sigma\Delta$	4 th order $\Sigma\Delta$	5 th order $\Sigma\Delta$	PI	D
Power supply/Power consumption (one-axis)	3.6 V /3.6 mW	5 V /58 mW	7 V /23 mW	5 V /13 mW	± 9 V and 3.3 V /12 mW	15 V and 3 V /174 mW	1.6V / 0.2mW(1axis) 0.48mW(3 – axis)
Noise floor (Bandwidth)	$2\mu g/\sqrt{Hz}$ (200 Hz)	$1\mu g/\sqrt{Hz}$ (1.2 kHz)	$0.2\mu g/\sqrt{Hz}$ (300 Hz)	$150\mu g/\sqrt{Hz}$ (100 Hz)	$7.1\mu g/\sqrt{Hz}$ (300 Hz)	$22.3\mu g/\sqrt{Hz}$ (150 Hz)	$200\mu g/\sqrt{Hz}$ (200 Hz)
Surface (one-axis)	6.6 mm ²	0.5 mm ²	7.8 mm ²	0.9 mm ²	9.7 mm ²	11.75 mm ²	1 mm ² (3 – axis)
Input range	$\pm 1.15g$	$\pm 1.2g$	$\pm 1.2g$	$\pm 2g$	$\pm 11g$	$\pm 50g$	$\pm 8g$

Table 1. Comparison of previous closed loop accelerometers with this work

REFERENCES

- [1] H. Xu, X. Liu, L. Yin "A Closed-Loop $\Sigma\Delta$ Interface for a High-Q Micromechanical Capacitive Accelerometer With 200 ng/ \sqrt{Hz} Input Noise Density" *IEEE Journal of Solid-State Circuits*, vol. 50, issue 9, pp. 2101-2112, 56-468, Sept. 2015.
- [2] J. Petkov, B. Boser "A Fourth-Order $\Sigma\Delta$ Interface for Micromachined Inertial Sensors" *IEEE Journal of Solid-State Circuits*, vol. 40, issue 8, pp. 1602 – 1609, Aug. 2005.
- [3] M. Pastre, M. Kayal, H. Schmid, A. Huber, P. Zwahlen, A.-M. Nguyen, Y. Dong, "A 300Hz 19b DR capacitive accelerometer based on a versatile front end in a 5thorder $\Delta\Sigma$ loop" *Proceedings of 35th European Solid-State Circuits Conference (ESSCIRC)*, pp. 288–291, Sep. 2009.
- [4] M. Kraft, C.P. Lewis, T.G. Hesketh, "Closed-loop silicon accelerometers" *Circuits, Devices and Systems, IEEE Proceedings*, vol. 145, issue 5, 1998.
- [5] Fang Chen, Weizheng Yuan, Honglong Chang, I. Zeimpekis, M. Kraft "Low noise vacuum MEMS closed-loop accelerometer using sixth-order multi-feedback loops and local resonator sigma delta modulator" *2014 IEEE 27th International conference on Micro Electro Mechanical systems (MEMS)*, Jan. 2014.
- [6] Honglin Xu, Xiaowei Liu, Liang Yin "A closed loop $\Sigma\Delta$ Interface for a High Q Microelectromechanical Capacitive Accelerometer with 200 ng/ \sqrt{Hz} Input Noise Density" *IEEE Journal of Solid-State Circuits*, vol. 50, issue 9, Sept. 2015.
- [7] M. Yucetas, M. Pulkkinen, A. Kalanti, J. Salomaa "A high-Resolution Accelerometer with electrostatic Damping and Improved Supply Sensitivity" *IEEE Journal of Solid-State Circuits*, vol. 47, issue 7, July 2012.
- [8] Z. Ye, H. Yang, T. Yin, G. Huang "High-Performance Closed-Loop Interface Circuit for high-Q Capacitive Microaccelerometers" *IEEE Sensors Journal*, vol. 13, issue 5, May 2013.
- [9] M. Paavola, M. Kamarainen, J.A.M. Jarvinen, M. Saukoski, M. Laiho, and K.A. I. Halonen "A micropower Interface ASIC for a Capacitive 3-axis Micro-accelerometer" *IEEE Journal of Solid-State Circuits*, vol. 42, no. 12, December 2007.
- [10] M.A. Lemkin, M.A. Ortiz, N. Wongkomet, B.E. Boser, J.H. Smith "A 3-axis surface Micromachined $\Delta\Sigma$ Accelerometer" *IEEE International Solid-State Circuits Conference*, 43rd ISSCC, p. 202-203, Feb. 1997.
- [11] M. De Matteis, A. Pezzota, M. Sabatini, M. Grassi, M. Croce, P. Malcovati, A. Baschiroto "A 0.13 μm -CMOS 90 μW 51dB-SNR Continuous-Time Accelerometer Front-End with 10b SAR-ADC" *IEEE Sensors*, Nov.2015.
- [12] M. Zhao, Z. Chen, Y. Yang, Y. Niu, G. Chen, W. Lu, Y. Zhang "A low-noise closed-loop interface for high-G capacitive micro-accelerometer" *IEEE International Symposium on Circuits and Systems (ISCAS)*, May 2016.
- [13] Z. Tingting, L. Haojiong, H. Jingqing, Z. Meng, H. Lichen, Z. Yacong, L.

Wengao, C. Zhongjian "An s-z Domain Transformation Method for the Readout Circuit Design of Closed-Loop Micromechanical Capacitive Accelerometer" *IEEE International Conference on Electron Devices and Solid State Circuit (EDSSC)* Dec. 2012.

- [14] Marten Derk van der Laan "Signal Sampling Techniques for Data Acquisition in Process Control" Ph.D. Thesis <http://www.rug.nl/research/portal/files/3266743/thesis.pdf!null>
- [15] G.F. Franklin, J.R. Ragazzini "Sampled Data Control Systems" , McGrawHill Inc.Processing, vol. 55, no. 5, May 2007.
- [16] D. Schwingshackl, G. Kubin "Polyphase Representation of Multirate Nonlinear Filters and Its Applications" *IEEE Transactions on Signal Processing*, vol. 55, no. 5, May 2007.



Lavinia E. Ciotirca received the M.Sc. degree in Integrated Circuits Design and the Ph.D. degree in Micro and Nano Systems, both from the National Polytechnique Institute of Toulouse, Toulouse, France in 2013 and 2017, respectively. In 2017, she joined NXP Semiconductors Toulouse, France, as Analog – Mixed IC Design Engineer where she is currently working on system

and circuit design of inertial MEMS sensors for both Consumer and Automotive applications.



Olivier Bernal (M'03) received the M.Sc. degree in electrical engineering and the Ph.D. degree from the Institut National Polytechnique de Toulouse, Toulouse, France, in 2003 and 2006, respectively.

In 2006, he joined the Institute of Microelectronics, Singapore, as a Senior Research Engineer, where he worked on low-voltage and low-power analog circuits for biomedical applications. In 2009, he joined the Laboratory of Optoelectronics and Embedded Systems of the CNRS-LAAS and the National Polytechnic Institute of Toulouse, where is now an Assistant Professor. His main research interests are in the design of low-voltage, low-power analog circuit design for optoelectronics and space applications.



Jérôme Enjalbert was born in France, in 1974, and received the M. Sc. Degree in Integrated Circuit Design from the Institut National Polytechnique de Toulouse, Toulouse, France, in 1997. He joined Freescale Semiconductor, formerly Motorola SPS, in 1998, where he held several positions in IC design, first as Analog

Design Engineer for Power Management and Audio systems for Wireless applications, and since 2009 as Circuit and System Design Engineer for Motion Sensors. Today at NXP, he focuses on the design of advanced MEMS based accelerometers integrating Stiction-Recovery and Non-Physical-Stimulus test capabilities.

Jérôme Enjalbert is the author of more than 10 patents in the fields of Power Management, Audio and Inertial Sensors.



Thierry Cassagnes was born in France, in 1968, and received the degree of Engineer in Microelectronics from the Institut National des Sciences Appliquées de Toulouse, France, in 1991.

He joined Freescale Semiconductor, formerly Motorola SPS, in 1994, where he held several positions, both in France and in

the USA, as a Senior Analog Design Engineer involved in the design of Circuits and Systems in the fields of Wireless, Automotive and Motion Sensor applications.

Today at NXP, he mainly focuses on the design of MEMS based gyroscopes and accelerometers for both Consumer and Automotive applications.



Hélène Tap was born in 1973. She received the Ph.D. degree in microelectronics-microsystems from the Laboratoire d'Analyse et d'Architecture des Systèmes, French Centre National de la Recherche Scientifique, Toulouse, France, in 1999. She is currently a Professor with the Electronics, Electrical Engineering, Computer Science, Hydraulics and Telecommunications

Engineering School, National Polytechnic Institute, Toulouse University, Toulouse, with the LAAS in the Optoelectronics for Embedded Systems Group. She is mainly working on analog embedded integrated circuits.



Hugues Beaulaton was born in 1977. He received the B.Eng. degree in electrical and electronic engineering from Nottingham Trent University, UK, and the M.S. degrees in wireless communication systems and signal processing from the University of Bristol, UK, in 2000.

From 2001 to 2006, he has been system and digital designer specialized in frequency synthesis and homodyne transceivers circuits design at Motorola and Freescale. Then from 2007 to 2009 specialized in the high-power amplifiers algorithms for efficiency enhancement. Since 2010 he is working for inertial sensor (accelerometers and gyroscopes) for automotive and IoT markets at NXP.

Mr. Beaulaton is the author of more than 10 patents in the fields of radio-communications and inertial sensors.



Serdar Şahin received the M.Sc. degree in electronics and control engineering from the Institut National de Sciences Appliquées de Toulouse, Toulouse, France, in 2015. Currently he is pursuing a Ph.D. degree in digital communications at Institut National Polytechnique de Toulouse with CIFRE funding from Thales Communications & Security.

His main research interests are in digital signal processing algorithms, with a focus on PHY-layer digital receivers and cooperative communications.