



HAL
open science

Application of Whitney Elements in Current Density Reconstruction of Electric Arc Current Density in Low-voltage Circuit Breakers

Jinlong Dong, Luca Di Rienzo, Olivier Chadebec, J. Wa

► **To cite this version:**

Jinlong Dong, Luca Di Rienzo, Olivier Chadebec, J. Wa. Application of Whitney Elements in Current Density Reconstruction of Electric Arc Current Density in Low-voltage Circuit Breakers. 15th International Workshop on Optimization and Inverse Problems in Electromagnetism (OIPE'2018), 2018, Hall in Tirol, Austria. hal-02331201

HAL Id: hal-02331201

<https://hal.science/hal-02331201v1>

Submitted on 8 Dec 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Application of Whitney Elements in Current Density Reconstruction of Electric Arcs in Low-voltage Circuit Breakers

Jinlong DONG^{* **}, Luca Di RIENZO^{**}, Olivier CHADEBEC^{***} and Jianhua WANG^{*}

^{*} State Key Lab of Electrical Insulation and Power Equipment, Xi'an Jiaotong University, Xi'an 710049, China

E-mail: djl.1989@stu.xjtu.edu.cn, jhwang@mail.xjtu.edu.cn

^{**}Dipartimento di Elettronica, Informazione e Bioingegneria, Politecnico di Milano, Piazza L. da Vinci, Milan 20133, Italy

E-mail: luca.dirienzo@polimi.it

^{***}G2Elab, CNRS, Université Grenoble Alpes, F-38000 Grenoble, France

E-mail: olivier.chadebec@g2elab.grenoble-inp.fr

Abstract. This paper presents the formulation of the inverse problem of current density reconstruction in low-voltage circuit breakers. Considering the free-divergence condition for the current density, the inverse problem can be solved in Whitney space W^2 with the divergence condition as a constraint or solved in Whitney space W^1 where the free-divergence condition naturally holds. Tikhonov regularization is used to address the ill-posedness of the inverse problem.

Keywords: Electric arc, magnetostatics, Tikhonov regularization, Whitney elements.

INTRODUCTION

Current interruption in traditional circuit breakers is characterized by electric arcs. Current density distribution in electric arcs is an essential parameter that determines the distribution of heat flux and temperature, the erosion ratio of electrodes, and the interaction of arcs with surroundings. A better knowledge of it helps to understand the complex physical behaviour of arc plasmas. However, no practical non-intrusive methods can be found to get the current density distribution. This work focuses on a non-invasive diagnostic technique able to reconstruct the arc current density from its magnetic field by solving a magnetostatic inverse problem. A key point for this approach is how to guarantee that the divergence of the reconstructed current is zero. To this scope, we use Whitney elements in the formulation of the inverse problem.

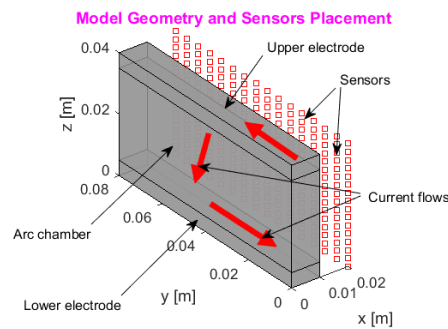


Figure 1: Model geometry and setup of the magnetic sensor array.

FORWARD AND INVERSE PROBLEM FORMULATIONS

A simplified arc chamber with two parallel electrodes is considered, as in Fig 1 [1]. A planar sensor array is used to perform the magnetic measurements. We assume magnetostatic conditions over the whole domain Ω , with no ferromagnetic regions included. The shape function spaces are defined using Whitney elements, where W^0 , W^1 , W^2 , and W^3 are the nodal, edge, face, and volume function spaces, respectively [2]. Representing the current density \mathbf{J} in W^2 , the forward problem reads $[B_m] = [L][I]$, where $[B_m]$ is the vector of magnetic measurements, $[I]$

is the vector of degrees of freedom in W^2 , $[L]$ is the matrix of discrete Biot-Savart operator whose elements corresponding to the i -th sensor and j -th face function w_{f_j} are given by

$$(1) \quad [L]_{ij} = \frac{\mu_0}{4\pi} \int_{\Omega} \frac{\mathbf{w}_{f_j}(\mathbf{r}_s) \times (\mathbf{r}_i - \mathbf{r}_s)}{|\mathbf{r}_i - \mathbf{r}_s|^3} d\Omega,$$

where \mathbf{r}_i is the position of i -th sensor, and \mathbf{r}_s is the integration point.

In a magneto-quasi-static approximation, current density is divergence free, i.e., $\text{div } \mathbf{J} = 0$, or in the matrix form $[D][I] = \mathbf{0}$, where $[D]$ is the faces-to-volumes incidence matrix. To address the ill-posedness of the inverse problem, we use the Tikhonov regularization to get a least-squares solution by solving for $[I]$ with the free-divergence condition as a constraint

$$(2) \quad \min_{[I]} \left\{ \|[L][I] - [B_m]\|_2^2 + \lambda^2 \|[I]\|_2^2 \right\}, \quad \text{s.t. } [D][I] = \mathbf{0}.$$

Alternatively, we can introduce the current vector potential \mathbf{T} with $\mathbf{J} = \text{curl } \mathbf{T}$, where \mathbf{T} can be appropriately represented in W^1 . We denote the vector of degrees of freedom in W^1 as $[u]$ for \mathbf{T} , so that $[I] = [C][u]$, where $[C]$ is the edges-to-faces incidence matrix. We solve for $[u]$ where the free-divergence condition naturally holds

$$(3) \quad \min_{[u]} \left\{ \|[L][C][u] - [B_m]\|_2^2 + \lambda^2 \|[u]\|_2^2 \right\}.$$

RESULTS AND CONCLUSIONS

The proposed approaches are numerically tested with 256 simulated magnetic field values of a 16-by-16 sensor array. The forward problem is solved with φ - A formulation using a commercial FEM software [3] avoiding the inverse crime. As can be noted in Fig. 2, both proposed approaches give rise to a good appropriate reconstruction.

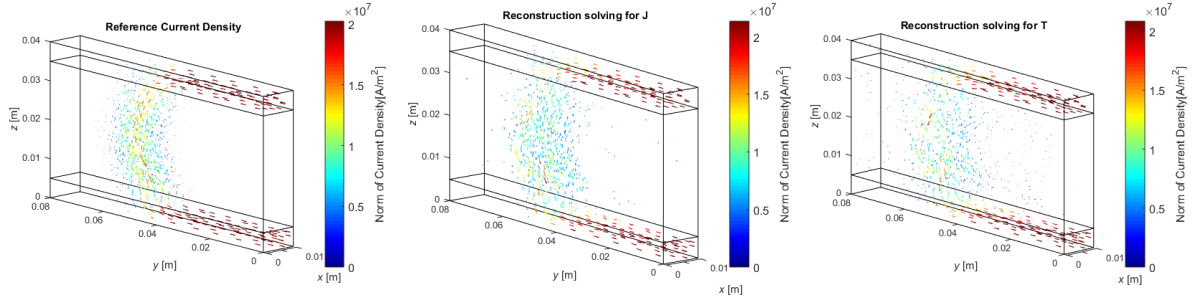


Figure 2: Numerical results: reference current density (left), reconstruction of \mathbf{J} by solving for $[I]$ (middle), and \mathbf{J} by solving for $[u]$ (right).

ACKNOWLEDGEMENT

This work was supported by the National Natural Science Foundation of China under Grant 51477129 and the China Scholarship Council under Grant 201706280142.

REFERENCES

- [1] J. Dong, G. Zhang, Y. Geng, and J. Wang. Influence of magnetic measurement modelling on the solution of magnetostatic inverse problems applied to current distribution reconstruction in switching air arcs. *IEEE Trans. Mag.*, vol 54, 2018, pp. 1–4.
- [2] A. Bossavit. Whitney forms: a class of finite elements for three-dimensional computations in electromagnetism. *IEE Proc. A-Phys. Sci., Meas. Instrum., Manage. Edu.-Rev.*, vol. 135, 1988, pp. 493–500.
- [3] AC/DC module user's guide, v. 5.3, COMSOL, Inc, www.comsol.com.