



HAL
open science

Influence of sedimentary layering on tsunami generation

Denys Dutykh, Frédéric Dias

► **To cite this version:**

Denys Dutykh, Frédéric Dias. Influence of sedimentary layering on tsunami generation. 2008. hal-00288696v2

HAL Id: hal-00288696

<https://hal.science/hal-00288696v2>

Preprint submitted on 22 Jun 2008 (v2), last revised 16 Jul 2009 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Influence of sedimentary layering on tsunami generation

Denys Dutykh^a

^a*CMLA, ENS Cachan, CNRS, PRES UniverSud, 61 Av. President Wilson, F-94230 Cachan, FRANCE*

Frédéric Dias^{b,*}

^b*CMLA, ENS Cachan, CNRS, PRES UniverSud, 61 Av. President Wilson, F-94230 Cachan, FRANCE*

Abstract

The present article is devoted to the influence of sediment layers on the process of tsunami generation. The main scope here is to demonstrate and especially quantify the effect of sedimentation on seabed vertical displacements due to an underwater earthquake. The fault is modelled as a Volterra-type dislocation in an elastic half-space. The elastodynamics equations are integrated with a finite element method. A comparison between two cases is performed. The first one corresponds to the classical situation of an elastic homogeneous and isotropic half-space, which is traditionally used for the generation of tsunamis. The second test case takes into account the presence of a sediment layer separating the oceanic column from the hard rock. Some important differences are revealed. We conjecture that wave amplitudes in the generation region may be amplified by sedimentary deposits. The mechanism of amplification is studied through careful numerical simulations.

Key words: tsunami generation, dislocations, sediments, fault modelling

1 Introduction

The primary application of this study is that of tsunami generation by the deformation of the sea bottom following an underwater earthquake. We do

* Corresponding author.

Email addresses: `Denys.Dutykh@cmla.ens-cachan.fr` (Denys Dutykh),
`Frederic.Dias@cmla.ens-cachan.fr` (Frédéric Dias).

not explicitly compute the water waves induced in the ocean layer above the generation region. The coupling between solid and water motions was already performed in our previous work [DD08] and can be done again if necessary. Here we are mainly interested in the extreme amplitudes of the seabed displacements during the first minutes of a tsunamigenic earthquake. Recall that the free surface motion roughly follows these displacements. There are two fundamental reasons for this. The first one is that the rupture velocity of the seismic source, V , is much larger than the phase velocity of the tsunami, c . In practice, for seismic sources, V is on the order of 3 km/s, whereas c is typically less than 250 m/s, even for the deepest ocean basins [OS03]. It means that the gravitational forces do not have enough time to change the shape of the free surface during the characteristic time of the seabed motion [BMR72]. The second reason is that water is assumed to be incompressible and shallow. Altogether it means that for our purpose we can restrict our attention to the motion of the ocean bottom. Profiles of the ocean free surface will not be computed in this paper.

The two fundamental reasons mentioned above are often used to justify the passive approach for tsunami generation where the static sea-bed displacement is simply translated to the free surface to generate the initial condition. Our previous investigations [DDK06, DD07, DD08] showed important differences between passive and active generations when the resulting wave is generated by a moving bottom.

We would like to underline that the present study is rather theoretical at this stage. We explore some physical aspects of tsunami excitation, namely the influence of the sedimentary layering. We do not consider historical examples, even though it should be done in the future. Our goal is to present a framework for studying the process of tsunami generation. Recall that ten years ago, Synolakis et al. [SLCY97] were writing: “There is a lack of quantitative information on sediment layers overlying tsunamigenic faults and about how these layers affect directly the generation of tsunamis.” Our study is a small step toward a better understanding of the rôle of sediments.

The influence of sedimentary layering was already mentioned in some studies [Fuk79, Oka88, FWB06]. Let us comment on the various results obtained so far. Both studies [Fuk79] and [Oka88] point out that fracturing through thick sediments produces large displacements in the source region but relatively small displacements in the far field. In the work by Okal [Oka88], the influence of the sediment layer was studied in the framework of normal modes and interesting results were obtained for sources inside as well as outside the layer of sediments. In the present study we perform direct numerical simulations by solving the elastodynamics equations with a finite element method (FEM).

To our knowledge, the most recent numerical study concerning the rôle of

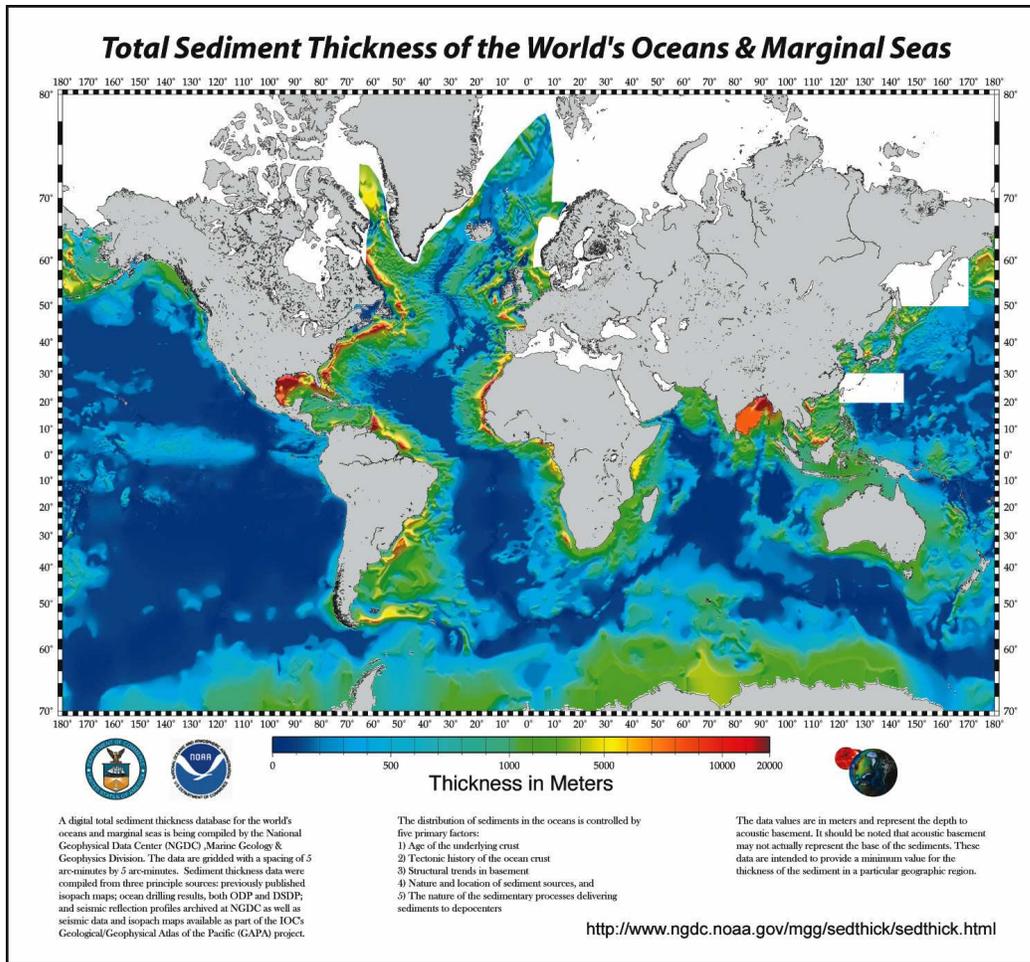


Figure 1. Total sediment thickness of the world’s ocean and marginal seas (source: NOAA).

sedimentation in subduction-zone thrust faults is [FWB06] (see also [SB06] for interesting remarks on sediment layers). The scope of that paper was the long-term evolution of a typical subduction wedge. A quite sophisticated thermo-mechanical modelling of the plate movement with realistic rheology was used. As in our study, the governing equations were solved with a two-dimensional FEM. The authors came to some important conclusions. We would like to quote some of them since there is a connection with our results:

“Our numerical simulations demonstrate that sedimentation stabilizes the underlying wedge, preventing internal deformation beneath the basin. Maximum slip during great-thrust earthquakes tends to occur where sedimentary basins stabilize the overlying wedge. The lack of deformation in these stable regions increases the likelihood of thermal pressurization of the subduction thrust, allows the fault to load faster, and allows greater healing of the fault between rupture events.”

In view of the above results, it is interesting to compare the distribution of

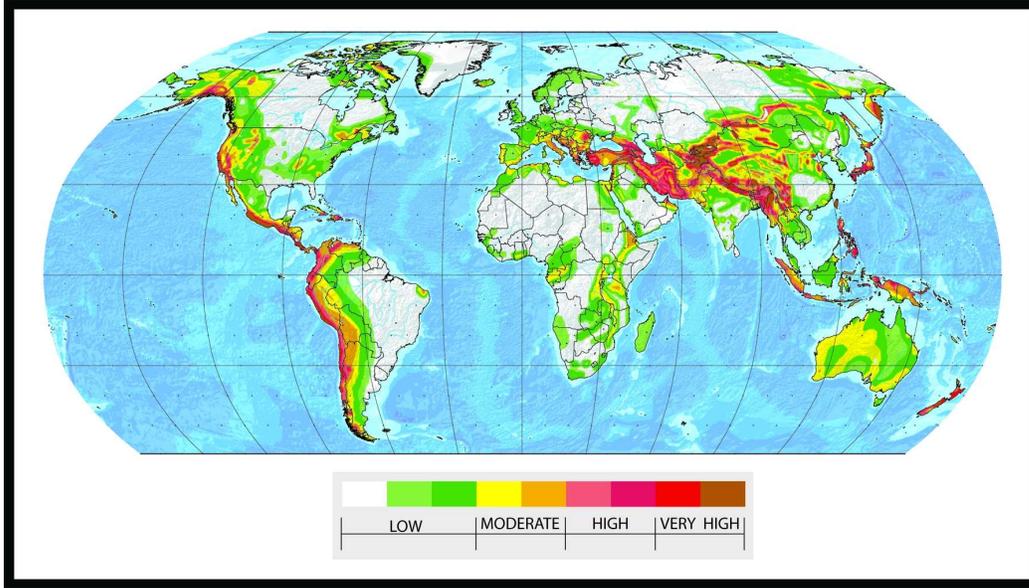


Figure 2. Global seismic hazard map (source: Swiss Seismological Service).

sediment thickness in the world oceans (see Figure 1) with the seismic hazard map (see Figure 2). As one can see on Figure 1, the sediment thickness varies from 0 to 20 km. Important deposits can be found along the Eastern coasts of America and the Western coasts of Africa. Fortunately there is no substantial seismic activity in these regions. But in the Bay of Bengal, and in particular in the Andaman sea, the situation is different. In this part of the world two factors are present simultaneously: an important seismic hazard and thick sediment layers. Unfortunately, we do not have reliable information on sediments thickness in the Mediterranean region. One can find different information in the literature. The estimates go from 25 m [HRR⁺04] to 1500 m or even more [EOS⁺05]. So, it is difficult to draw any conclusions. In this study we try to understand what kind of implications this may have for tsunami generation processes.

The present paper is organised as follows. In Section 2 we briefly describe the simplified mathematical model which represents the Earth crust. In the same section we also give some ideas about the discretisation procedure of the governing equations. Section 3 contains the description of two idealised test cases. Then, some results on the profile of the seafloor are presented. Finally, important conclusions and practical recommendations to tsunami wave modelers are given in Section 4. Some directions for future research are also outlined.

2 Mathematical model and numerical method

In this paper we use the same mathematical model as in our previous study [DD08]. Nevertheless, we give here a brief description of the model and refer to [Dut07, DD08] for more details.

The fault is assumed to lie inside a linear elastic isotropic material. In the next section both homogeneous and inhomogeneous distributions of the Earth crust properties will be considered. The displacement field $\vec{u} = (u, w)(x, z, t)$ satisfies the classical dynamic equations issued from continuum mechanics [AR02]:

$$\nabla \cdot \left(\lambda(\nabla \cdot \vec{u})\underline{\underline{I}} + \mu(\nabla\vec{u} + \nabla^t\vec{u}) \right) = \rho \frac{\partial^2 \vec{u}}{\partial t^2}, \quad (1)$$

where λ , μ are the Lamé coefficients and ρ the material density. As already pointed out, these coefficients can possibly depend on the spatial coordinates (x, z) (x : horizontal, z : vertical). The coefficient μ is the shear modulus. The Lamé coefficients can be expressed in terms of Poisson's ratio ν and Young's modulus E as follows:

$$\lambda = \frac{2\mu\nu}{1-2\nu} = \frac{E\nu}{(1+\nu)(1-2\nu)}, \quad \mu = \frac{E}{2(1+\nu)}.$$

The fault is modeled as a dislocation inside a viscoelastic material. This type of model is widely used for the interpretation of seismic motion. A dislocation is considered as a surface (in three-dimensional problems) or a line (in two-dimensional problems) in a continuous medium where the displacement field is discontinuous. The displacement vector is increased by the amount of the Burgers vector \vec{b} along any contour C enclosing the dislocation surface (or line), i.e.

$$\oint_C d\vec{u} = \vec{b}. \quad (2)$$

We let a dislocation run at speed V along a fault inclined at an angle δ with respect to the horizontal. The rupture starts at the point $x = 0$ and $z = -d$ (it is supposed to be infinitely long in the transverse y -direction), propagates at constant rupture speed V for a finite time L/V in the direction δ and stops at a distance L . Let ζ be a coordinate along the dislocation line. On the fault located in the interval $0 < \zeta < L$, the slip is assumed to be constant. The rise time is assumed to be 0.

2.1 Discretization of the elastodynamics equations

In order to apply the FEM we rewrite the governing equation (1) in the domain Ω in variational form. Let $\underline{\underline{\sigma}} = \lambda(\nabla \cdot \vec{u})\underline{\underline{I}} + \mu(\nabla\vec{u} + \nabla^t\vec{u})$. One has

$$\int_{\Omega} \rho \frac{\partial^2 \vec{u}}{\partial t^2} \cdot \vec{v} \, d\Omega + \int_{\Omega} \underline{\underline{\sigma}}(\vec{u}) : \nabla \vec{v} \, d\Omega = \int_{\Gamma_N} \vec{f} \cdot \vec{v} \, dS, \quad \forall \vec{v} \in \mathcal{V},$$

where \mathcal{V} is the linear closed subspace of $(H^1(\Omega))^2$ and \vec{f} is the loading applied to the Neumann boundary Γ_N . This term is equal to zero in our computations, since the seabed is considered as a free boundary in geophysics.

In order to discretize the time derivative operator we apply a classical second order finite-difference scheme. We underline that the resulting method is fully implicit and has the advantage of being free of any CFL-type condition. In such problems implicit schemes become advantageous since the velocity of propagation of seismic waves is of the order of 3 – 4 km/s. After discretizing in time, one obtains the following variational form:

$$\int_{\Omega} \rho \frac{\vec{u}^{(n+1)} - 2\vec{u}^{(n)} + \vec{u}^{(n-1)}}{\Delta t^2} \cdot \vec{v} \, d\Omega + \int_{\Omega} \underline{\underline{\sigma}}(\vec{u}^{(n+1)}) : \nabla \vec{v} \, d\Omega = \int_{\Gamma_N} \vec{f} \cdot \vec{v} \, dS,$$

where the superscript denotes the time step number, e.g. $\vec{u}^{(n)} = \vec{u}(\vec{x}, t_n)$. Then, we apply the usual $\mathbb{P}2$ finite-element discretization procedure. For the numerical computations, we used the freely available code FreeFem++ [HPHO].

Let us say a few words about the boundary conditions and the treatment of the dislocation in the program. As said already, the seabed is assumed to be a free surface:

$$\underline{\underline{\sigma}} \cdot \vec{n} = \vec{f} = \vec{0}, \quad z = 0.$$

The other boundaries are assumed to be fixed or in other words, we apply Dirichlet type boundary conditions $\vec{u} = \vec{0}$. The authors are aware of the reflective properties of this type of boundary conditions. But we take a computational domain which is sufficiently large, so that the seismic waves do not reach the boundaries during the simulation time. This approach is not computationally expensive since we use adaptive mesh algorithms [HPHO] and in the regions far from the fault, elements sizes are considerably bigger than in the fault vicinity. A typical mesh used in simulations is plotted on Figure 3.

Now, let us discuss the implementation of the dislocation. Across the fault, the displacement field is discontinuous and satisfies the following relation:

$$\vec{u}^+(\vec{x}, t) - \vec{u}^-(\vec{x}, t) = \vec{b}(\vec{x}, t), \quad (3)$$

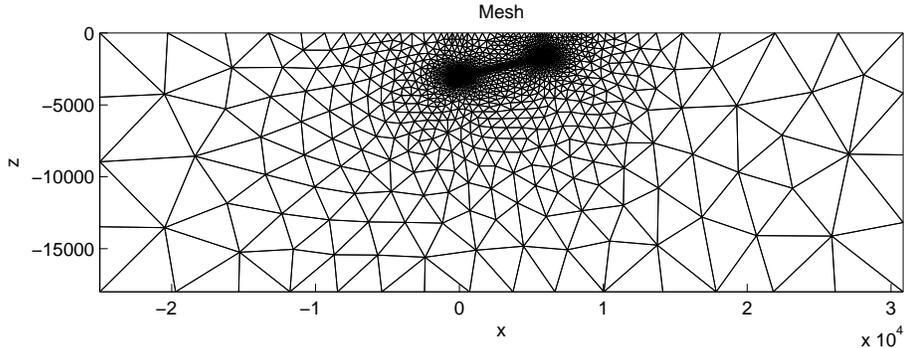


Figure 3. Typical mesh used in the numerical computations. The length scale is in meters.

where the signs \pm denote the upper and lower boundary of the dislocation surface, respectively. In order to satisfy the condition (3) we apply the following boundary conditions on the fault surface:

$$\vec{u}|_{\vec{x} \in \Gamma^+} = \frac{\vec{b}}{2}, \quad \vec{u}|_{\vec{x} \in \Gamma^-} = -\frac{\vec{b}}{2}.$$

Remark: Due to the presence of huge hydrostatic pressures in the crust, the two sides of the fault cannot detach physically. In any case this situation does not occur in nature. Mathematically it means that the Burgers vector \vec{b} is tangent to the dislocation surface at each point.

3 Numerical results

The numerical method described in the previous section was validated in our previous study [DD08] by comparing numerical results with analytical results. In the present work we compare vertical displacements at the ocean bottom in two different situations. The first test case corresponds to the traditional modelling procedure where the Earth crust is assumed to be a homogeneous elastic material. It is schematically depicted on Figure 4. For example, the well known Okada solution¹ [Oka85], which is still widely used to construct

¹ Let us make a little historical remark on the credit attributed to this result. The original paper by Okada was published in 1985. In the Russian literature this solution was already known in 1978, after the publication of results by Gusiakov

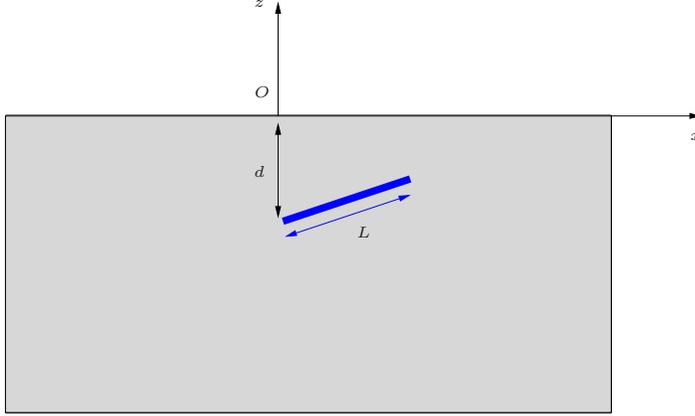


Figure 4. Test case with a homogeneous medium.

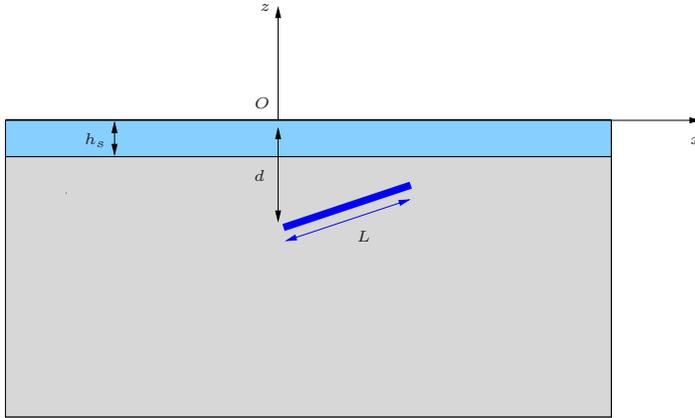


Figure 5. Test case with a sediment layer in between the sea bottom and the Earth crust.

initial conditions for various tsunami propagation codes, is based on these assumptions.

In the second test case, we add a sediment layer of thickness h_s on top of the previous configuration. This situation is depicted on Figure 5. Let us provide some comments on the model for sediments chosen in this study. In fact, what we call sediments here is an elastic layer which has the mechanical properties of sand according to [MF81, Mei94]. It means that porosity and the two-phase nature of this medium are neglected. They should probably be investigated in the future.

Let us now discuss the results. First we present static solutions corresponding to the test cases described above. Two solutions are plotted on Figure 6. In this case we take a sediment layer thickness h_s equal to 600 m. In all figures in this section we plot the vertical displacement at the free surface of the Earth crust

[Gus78]. Some particular cases of Okada solution were known even earlier [MS71, FB76].

parameter	value
Fault depth, d	4000 m
Dip angle, δ	13°
Fault length, L	2000 m
Slip along the fault, b	10 m
Fault propagation velocity, V	2500 m/s

Table 1
Values of fault parameters used in this study.

parameter	value for sand	value for granite
Shear modulus μ , Pa	2×10^8	30×10^9
Poisson's ratio	0.3	0.27
Shear wave velocity $\sqrt{\mu/\rho}$, m/s	330	3230

Table 2
Values of mechanical parameters for sand and granite.

(or at the seabed, in other words). The values of the other parameters used in the computations are given in Tables 1 and 2. As the reader can see, there is no significant difference between the two solutions. In other words, sediments do not influence the static deformations due to a dislocation source. Physically, we can understand this situation, since in the static case the sand layer is just raised up by the deformed granite.

There is another rather mathematical explanation. In fact, the steady Lamé equations² do not depend on Young's modulus but only on Poisson's ratio. Not surprisingly the Okada solution has the same property since the analytical expressions contain the Lamé coefficients in the combination $\frac{\lambda}{\lambda+\mu}$, which depends only on Poisson's ratio ν . One can see in Table 2 that Poisson's ratio ν is almost the same for sand and granite. That is why the sediment layer does not have a strong effect on the steady solution.

Now, let us consider the dynamics. The results are presented on Figures 7–9. In these computations we take the same thickness of the sand layer as in the static case ($h_s = 600$ m). It can be seen on Figure 7 that the deformation in the homogeneous case starts earlier. This is to be expected since the shear wave velocity in the sand is almost ten times slower than in the granite. Later, the deformation in the inhomogeneous case starts to evolve. It is surprising that it produces much bigger displacements as can be observed on Figure 8. In other words, taking into account the sediments increases considerably the seabed

² We assume that we neglect volume forces as well. So, the system of governing equations is homogeneous.


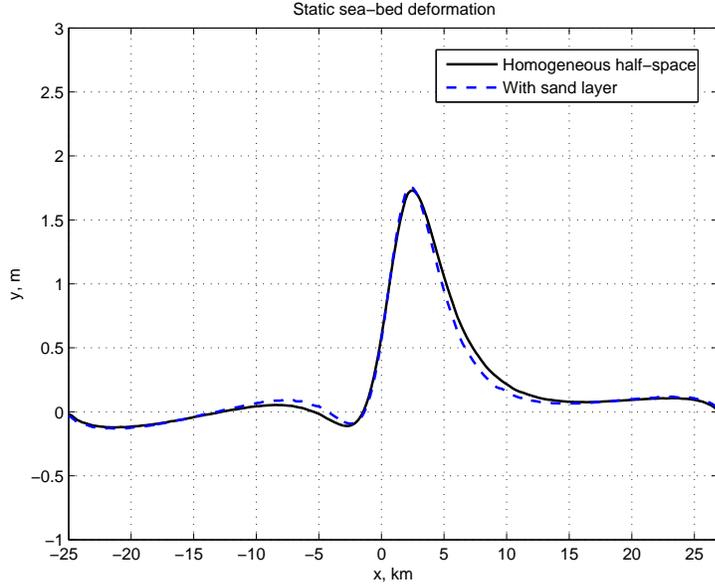


Figure 6. Volterra dislocation source. Static solutions with (dashed line) and without (solid line) sediments. The thickness of the sediment layer is $h_s = 600$ m.

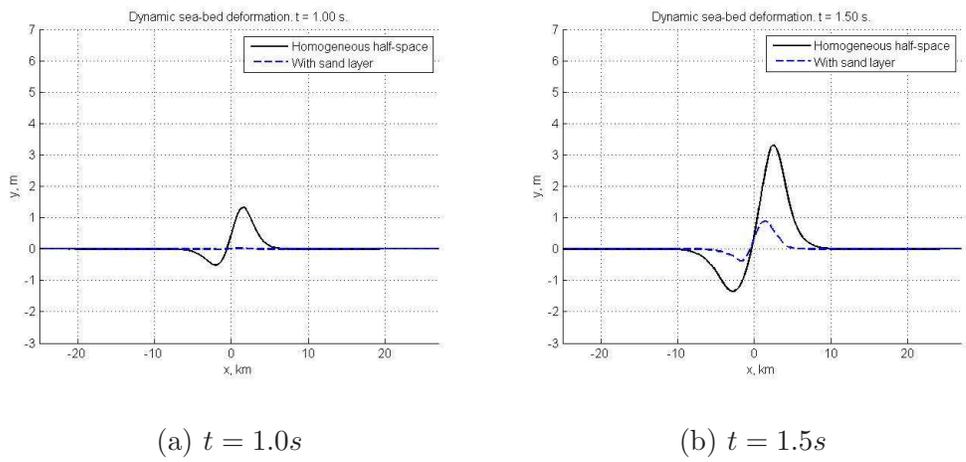


(a) $t = 1.0s$

(b) $t = 1.5s$


Figure 7. Dynamic sea-bed displacements at the beginning of the rupture process. The thickness of the sediment layer is $h_s = 600$ m.

deformations. When time evolves, both solutions eventually reach comparable amplitudes (see Figure 9).

We performed other computations where the sediment layer thickness was reduced to 150 m. Results are presented on Figures 10–11. In this case, both solutions (homogeneous and inhomogeneous) evolve together and are almost indistinguishable up to graphical accuracy. These results suggest to study the dependence of the vertical displacement amplitude on the sediment layer thickness.

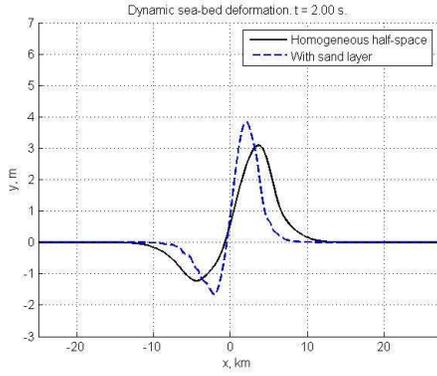


(a) $t = 2.0s$

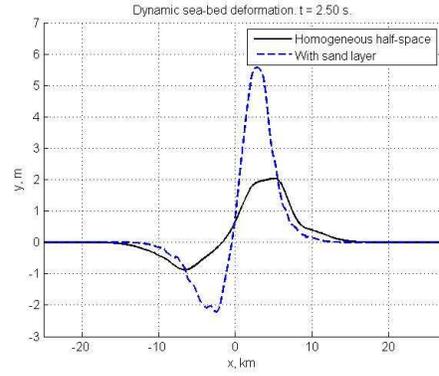


(b) $t = 2.5s$

Figure 8. Dynamic sea-bed displacements. The solution, which takes into account the presence of the sediments, produces much bigger vertical displacements. The thickness of the sediment layer is $h_s = 600$ m.

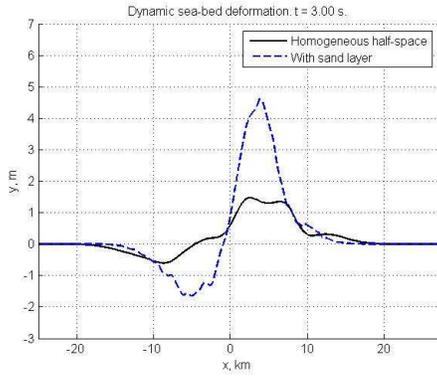

(a) $t = 3.0s$

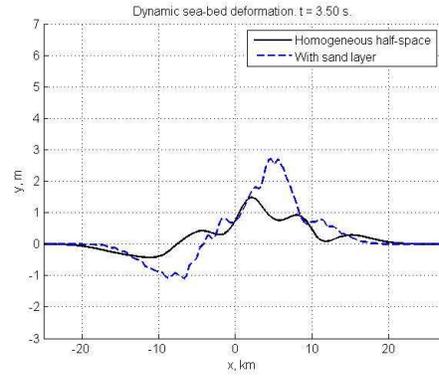


(b) $t = 3.5s$

Figure 9. Dynamic sea-bed displacements at the end of the simulation. The thickness of the sediment layer is $h_s = 600$ m.


3.1 Sediment amplification factor

In order to quantify the influence of sediments on the vertical seabed displacements, we introduce a new quantity \mathcal{S}_a that will be called the *sediment amplification factor*. We give first the formula for \mathcal{S}_a and then explain our definition.

Definition 1 Let us denote by $v_0(x, t)$ and $v_s(x, t)$ the vertical displacements at the free surface in a homogeneous half-space and at the top of the sedi-

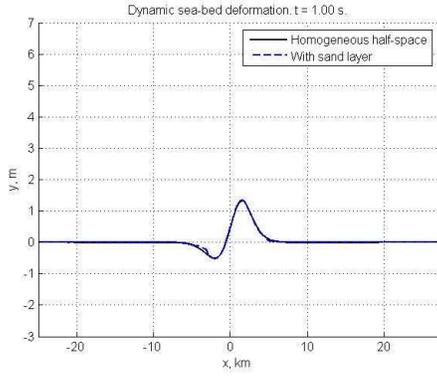


(a) $t = 1.0s$

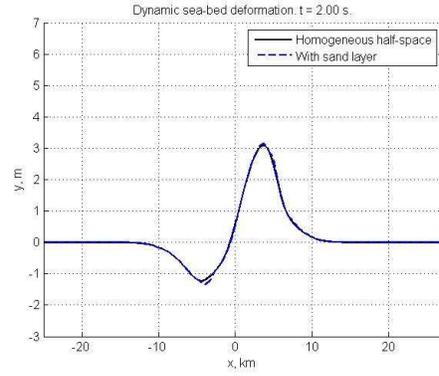


(b) $t = 2.0s$

Figure 10. Dynamic sea-bed displacements at the beginning. The thickness of the sediment layer is $h_s = 150$ m.

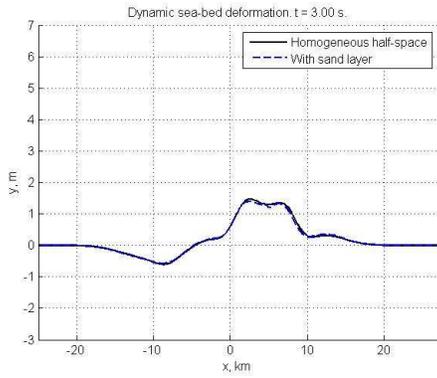

(a) $t = 3.0s$

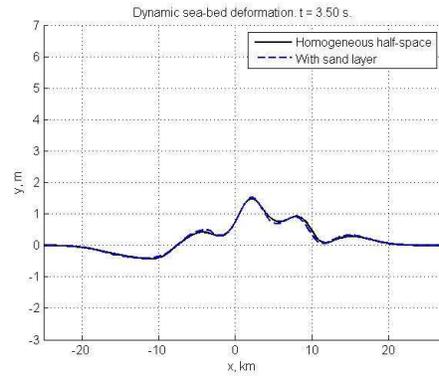

(b) $t = 3.5s$

Figure 11. Dynamic sea-bed displacements. End of the process. The thickness of the sediment layer is $h_s = 150$ m.

ment layer respectively³. Then, the sediment amplification factor is defined as follows:

$$\mathcal{S}_a = \frac{\max_{(x,t)} |v_s(x,t)|}{\max_{(x,t)} |v_0(x,t)|} - 1.$$

Let us provide some explanations. First of all, it is clear that we compare the values of two extreme amplitudes. The maximum is taken in both space

³ In the idealized situation of our test cases, it means that we evaluate the vertical displacements at $z = 0$.

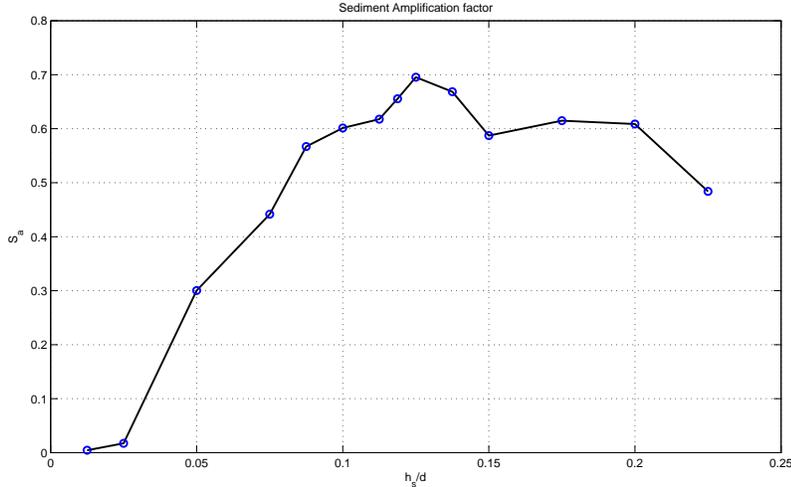


Figure 12. Dependence of the sediment amplification factor S_a on the sand layer relative depth h_s/d .

and time, since both processes are not synchronised in time⁴. Finally, we subtract one because we want the amplification factor to be equal to zero when sediments are absent.

Once this quantity S_a is defined, we want to perform some kind of parametric study. Here we are mainly interested in the dependence on the sediment layer thickness. But, it is better to choose a dimensionless quantity. In this problem there are three lengths: the fault length L , the fault depth d and the sediment layer thickness h_s . It is natural to choose the ratio h_s/d as dimensionless parameter.

We performed a lot of computations for different values of h_s/d and obtained the curve shown on Figure 12. It leads to several comments. On the left, the curve starts from zero and it is expected since the sediment layer disappears at this extremity. Thus, its amplification is equal to zero as well. It is interesting that the amplification factor has a maximum in the vicinity of $h_s/d = 0.12$. It means that there exists an optimal configuration when the sediment layer has its strongest effect. When we gradually increase the dimensionless parameter h_s/d past the maximum, the amplification decreases. In the limit, one has to be careful as $h_s/d \rightarrow \infty$. Indeed one approaches an elastic half-space completely filled with sediment and dislocation theory may be inappropriate, especially if the material is loose.

⁴ We saw on Figures 7–9 that the homogeneous solution evolves faster since sediments slow down the properties of elastic waves propagation.

4 Conclusions and perspectives

In the present paper we investigated the influence of sedimentary layering on displacements due to an earthquake. We showed that there is practically no effect in the case of static deformation. This is to be expected in the framework of our model. Both curves can be superimposed up to graphical accuracy. On the other hand, dynamics makes a big difference. Our computations show that the vertical displacement amplitude can be amplified by factor up to 1.7. We have to point out that there exists some kind of “optimal” sediment layer thickness, which provides the biggest amplification factor. Of course, this optimal value depends on various mechanical parameters. It can be estimated in each specific situation by similar numerical techniques.

There is another predictable effect of the sediment layer. It slows down considerably the velocity of elastic and Rayleigh waves propagation. In our simulations it is reflected by the fact that the maximum amplitude is attained much later than in the homogeneous case.

We introduced a new quantity \mathcal{S}_a , that we called *sediment amplification factor*. This dimensionless quantity measures the relative increase of the vertical displacement amplitude with respect to the homogeneous half-space solution. The dependence of this quantity \mathcal{S}_a on the dimensionless thickness of the sediment layer was studied. We showed that there exists an optimal ratio $h_s/d \approx 0.125$ between sediment thickness and depth of the event which provides the biggest amplification factor $\mathcal{S}_a \approx 0.7$.

It is of interest to see how these results apply to the 2004 Indian Ocean Earthquake, which produced a megatsunami with local runup greater than 30 m at some locations [SK06]. According to Figure 1, we can estimate the sediment thickness h_s in the generation region to be about 3 km. In [LKA⁺05, NSS⁺05], the centroid depth d was taken 25 km for all fault subdivisions. If we compute the ratio of these parameters, we obtain $h_s/d = 0.12$. This value approximatively corresponds to the value (see Figure 12) which provides the maximal sediment amplification factor. The natural question is: is it a coincidence? In view of recent results [FWB06], the answer is probably “not”.

The overall conclusion of this study is that one may have to revise the initial conditions used in some tsunami simulations. More precisely one has to take care of situations where the generation region contains sediment deposits. Most likely it was the case of the Boxing Day Tsunami of 2004 [SB06]. Several researchers had to take unphysically large values of the slip along the fault⁵ in order to generate a significant tsunami wave (see for example [IAK⁺07]). If one takes sediments into account, this value can be reduced while producing

⁵ In terms of dislocations, it means the absolute value of the Burgers vector.

the same wave amplitude.

We finally outline some directions for future research in this field. First of all, the application of these techniques to real world events requires, of course, 3D computations, even if we do not think that it will change qualitatively our results. On the other hand, the fracturing through the sediments should be further investigated since it was conjectured to provide much bigger amplification factor [Fuk79, Oka88]. At the same time, the question of the influence of sediment porosity has not been addressed in the present study and is left for future investigations. We have the feeling that porosity may enhance sea-bed deformations in the near field but it should be checked by thorough computations.

Acknowledgment

The authors would like to thank the instigator of this work, Professor Costas Synolakis, for indicating new research directions. Special thanks go to Professor Emile Okal for very helpful discussions and valuable suggestions.

The second author acknowledges the support from the EU project TRANSFER (Tsunami Risk ANd Strategies For the European Region) of the sixth Framework Programme under contract no. 037058.

References

- [AR02] K. Aki and P.G. Richards. *Quantitative Seismology*. University Science Books, 2002.
- [BMR72] A. Ben-Menahem and M. Rosenman. Amplitude patterns of tsunami waves from submarine earthquakes. *J. Geophys. Res.*, 77:3097–3128, 1972.
- [DD07] D. Dutykh and F. Dias. Water waves generated by a moving bottom. In Anjan Kundu, editor, *Tsunami and Nonlinear waves*. Springer Verlag (Geo Sc.), 2007.
- [DD08] D. Dutykh and F. Dias. Tsunami generation by dynamic displacement of sea bed due to dip-slip faulting. *Mathematics and Computers in Simulation*, Accepted, 2008.
- [DDK06] D. Dutykh, F. Dias, and Y. Kervella. Linear theory of wave generation by a moving bottom. *C. R. Acad. Sci. Paris, Ser. I*, 343:499–504, 2006.
- [Dut07] D. Dutykh. *Mathematical modelling of tsunami waves*. PhD thesis, École Normale Supérieure de Cachan, 2007.

- [EOS⁺05] M. Ergun, S. Okay, C. Sari, E.Z. Oral, M. Ash, J. Hall, and H. Miller. Gravity anomalies of the Cyprus Arc and their tectonic implications. *Marine Geology*, 221:349–358, 2005.
- [FB76] L. B. Freund and D. M. Barnett. A two-dimensional analysis of surface deformation due to dip-slip faulting. *Bull. Seism. Soc. Am.*, 66:667–675, 1976.
- [Fuk79] Y. Fukao. Tsunami earthquakes and subduction processes near deep-sea trenches. *J. Geophys. Res.*, 84:2303–2314, 1979.
- [FWB06] C.W. Fuller, S.D. Willett, and M.T. Brandon. Formation of forearc basins and their influence on subduction zone earthquakes. *Geology*, 34:65–68, 2006.
- [Gus78] V.K. Gusiakov. *Ill-posed problems of mathematical physics and interpretation of geophysical data*, chapter Static displacement on the surface of an elastic space (in Russian), pages 23–51. VC SOAN SSSR, 1978.
- [HPHO] F. Hecht, O. Pironneau, A. Le Hyaric, and K. Ohtsuka. *FreeFem++*. Laboratoire JL Lions, University of Paris VI, France.
- [HRR⁺04] B.A.A. Hoogakker, R.G. Rothwell, E.J. Rohling, M. Paterne, D.A.V. Stow, J.O. Herrle, and T. Clayton. Variations in terrigenous dilution in western Mediterranean Sea pelagic sediments in response to climate change during the last glacial cycle. *Marine Geology*, 211:21–43, 2004.
- [IAK⁺07] M. Ioualalen, J. Asavanant, N. Kaewbanjak, S.T. Grilli, J.T. Kirby, and P. Watts. Modeling the 26 december 2004 Indian Ocean tsunami: Case study of impact in Thailand. *Journal of Geophysical Research*, 112:C07024, 2007.
- [LKA⁺05] T. Lay, H. Kanamori, C. J. Ammon, M. Nettles, S. N. Ward, R. C. Aster, S. L. Beck, S. L. Bilek, M. R. Brudzinski, R. Butler, H. R. DeShon, G. Ekstrom, K. Satake, and S. Sipkin. The great Sumatra-Andaman earthquake of 26 December 2004. *Science*, 308:1127–1133, 2005.
- [Mei94] C.C. Mei. *The applied dynamics of ocean surface waves*. World Scientific, 1994.
- [MF81] C. C. Mei and M.A. Foda. Wave-induced responses in a fluid-filled poro-elastic solid with a free surface — a boundary layer theory. *Geophysical Journal International*, 66(3):597–631, 1981.
- [MS71] L. Mansinha and D. E. Smylie. The displacement fields of inclined faults. *Bull. Seism. Soc. Am.*, 61:1433–1440, 1971.
- [NSS⁺05] S. Neetu, I. Suresh, R. Shankar, D. Shankar, S.S.C. Shenoi, S.R. Shetye, D. Sundar, and B. Nagarajan. Comment on “The Great Sumatra-Andaman Earthquake of 26 December 2004”. *Science*, 310:1431a–1431b, 2005.
- [Oka85] Y. Okada. Surface deformation due to shear and tensile faults in a half-space. *Bull. Seism. Soc. Am.*, 75:1135–1154, 1985.
- [Oka88] E. Okal. Seismic parameters controlling far-field tsunami ampli-

- tudes: A review. *Natural Hazards*, 1:67–96, 1988.
- [OS03] E.A. Okal and C.E. Synolakis. A theoretical comparison of tsunamis from dislocations and landslides. *Pure and Applied Geophysics*, 160:2177–2188, 2003.
- [SB06] C.E. Synolakis and E.N. Bernard. Tsunami science before and beyond Boxing Day 2004. *Phil. Trans. R. Soc. A*, 364:2231–2265, 2006.
- [SK06] C.E. Synolakis and L. Kong. Runup measurements of the December 2004 Indian ocean tsunami. *Earthquake Spectra*, 22:S67–S91, 2006.
- [SLCY97] C. Synolakis, P.L.-F. Liu, G. F. Carrier, and H. Yeh. Tsunamigenic seafloor deformations. *Science*, 278:598–600, 1997.