



**HAL**  
open science

## Poincaré section analysis of an experimental frequency intermittency in an open cavity flow

François Lusseyran, Luc R. Pastur, Thierry Faure, Christophe Letellier

### ► To cite this version:

François Lusseyran, Luc R. Pastur, Thierry Faure, Christophe Letellier. Poincaré section analysis of an experimental frequency intermittency in an open cavity flow. 22nd International Congress of Theoretical and Applied Mechanics, Aug 2008, Adelaide, Australia. pp.ID 11329. hal-00327120

**HAL Id: hal-00327120**

**<https://hal.science/hal-00327120v1>**

Submitted on 7 Oct 2008

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## POINCARÉ SECTION ANALYSIS OF AN EXPERIMENTAL FREQUENCY INTERMITTENCY IN AN OPEN CAVITY FLOW

François Lusseyran<sup>1</sup>, Luc Pastur<sup>1,2</sup>, Thierry Faure<sup>1,3</sup>, & Christophe Letellier<sup>4</sup>

<sup>1</sup>LIMSI-CNRS, BP 133, F-91403 Orsay cedex, France

<sup>2</sup>Université Paris Sud XI, F-91405 Orsay Cedex, France

<sup>3</sup>Université Pierre et Marie Curie, 75252 Paris Cedex 05, France,

<sup>4</sup>CORIA UMR 6614 — Université de Rouen, BP 12, F-76801 Saint-Etienne du Rouvray cedex, France

**Summary** Open flows over a cavity present, even at medium Reynolds number, sustained oscillations resulting from a complex feedback process [1]. Previous works have revealed a mode-switching phenomenon which remains to be characterized from a dynamical point of view. In the configuration here investigated, the intermittency between the two dominant modes is characterized using a symbolic dynamics based approach. The first step of the procedure is to reconstruct the phase space from the time series measured by the Laser Doppler Velocimetry (LDV) technique, using the principal components. We show that the quite high dimensionality of the reconstructed space ( $d < 10$ ), can be overcome by using a Poincaré section of the 2D projection of the phase portrait. The key step consists of a partition of the Poincaré section (the set of intersections of the trajectory in the reconstructed phase space with a transverse plane). The two modes are thus labeled 0 and 1, respectively. The partition is based on an angular map, itself based on a first-return map to the Poincaré section. This partition allows, without any arbitrary thresholding (as spectral based modes separation method needs), a very precise quantification of all oscillating events.

### FLOW DESCRIPTION AND EXPERIMENTAL CONTEXT

The system under study consists in a cavity of length  $L = 10$  cm. The height of the cavity is such as the aspect ratio  $R = \frac{L}{H}$  is equal to 2. The width of the cavity is 30 cm (Fig. 1). The air flow is produced by a centrifugal fan located at the inlet of the settling chamber. The incoming boundary layer is laminar and stationary. The reference velocity is the external velocity  $U_e = 2.09 \text{ m.s}^{-1}$ , corresponding to Reynolds number  $Re_L = \frac{U_e L}{\nu} \approx 14\,000$ . The whole analysis is performed using a velocity time series recorded, at the cavity downstream, by a Laser Doppler Velocimeter ( $N = 840\,000$  points at the mean sampling rate  $f_s = 1530 \text{ Hz}$ ). The two dominant frequency modes ( $f_0 = 23.2 \text{ Hz}$  and  $f_1 = 31.0 \text{ Hz}$ ) present an intermittency visible on the spectrogram (Fig. 2).

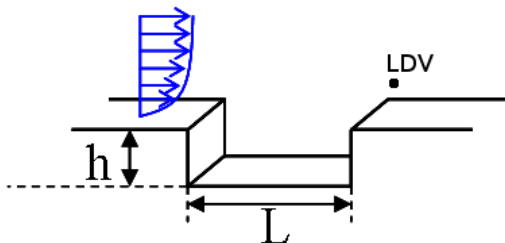


Figure 1. Flow past the open cavity

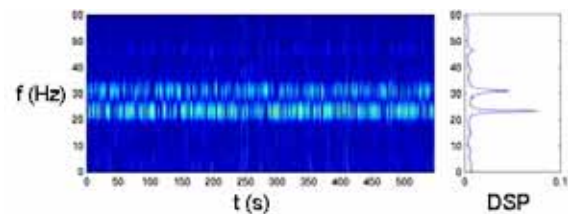



Figure 2. Spectrogram and normalized amplitude spectral density

### METHODOLOGY OF SYMBOLIC SEQUENCE STATISTICAL ANALYSIS


Hereafter we investigate the intermittency between these dominant modes using an approach based on the symbolic non-linear dynamics. So doing we strive towards a double goal:

- the separation in the signal of the time events associated with one or the other frequency. We have explored, in previous works [2], spectral based modes separation methods (Hilbert and wavelet transforms, spectrogram,...). All these spectral methods are limited at least by the  $\Delta f \cdot \Delta t$  uncertainty, which makes it difficult to catch the short events close to one period.
- the physical understanding of the non-linear modes coupling.

Three steps of signal transformations lead to the exact location of each event, inside the time series, corresponding to either the frequencies  $f_0$  and  $f_1$  or to the events associated with the transitions between the two modes. This spotting of indices in the time series allows a lot of statistical analysis (Fig. 6) and even of orbits characterizations. The first step of the procedure consists in a reconstruction of the phase space from the time series measured, using the principal components (Fig. 3). We show that the quite high dimensionality of the reconstructed space ( $d < 10$ ), can be overcome by using a Poincaré section of the 2D projection of the phase portrait (Fig. 4). The second step consists of a partition of the Poincaré

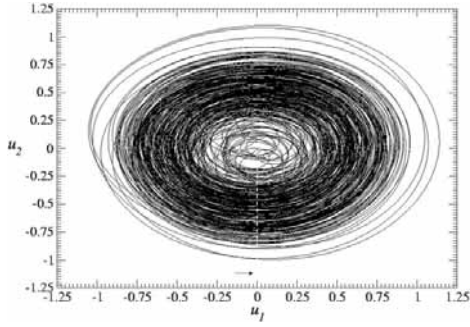


**Figure 3.** Phase portrait spanned by the first two principal components reconstructed from the measurements of the vertical component of the velocity.

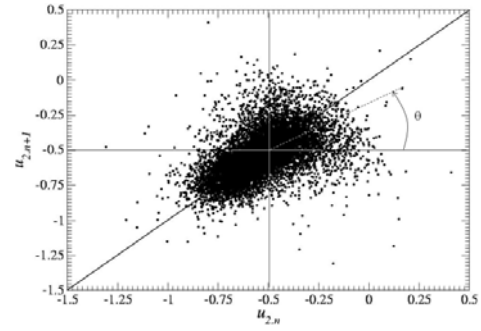


**Figure 4.** First-return map to a Poincaré section of the phase portrait. The Poincaré section is defined by  $u_1 = 0$  and  $\dot{u}_1 > 0$ .


section (the set of intersections of the trajectory in the reconstructed phase space with a transverse plane). The two modes are thus labelled 0 and 1, respectively. The partition is based on an angular map (Fig. 5), itself based on a first-return map of the Poincaré section [3]. Then for the third step, all the existent linking sequence of mode 0 and 1, are coded using ‘words’ of 8 digits. As example,  $\Sigma_{65} = 0011\ 1111$  codes the event: 2 periods of mode 0 followed by 6 periods of mode 1.

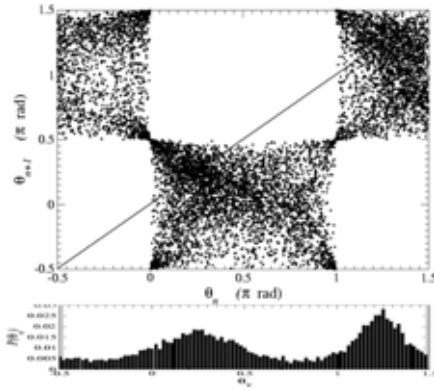

**Figure 5.** Angular map built on the first-return map.

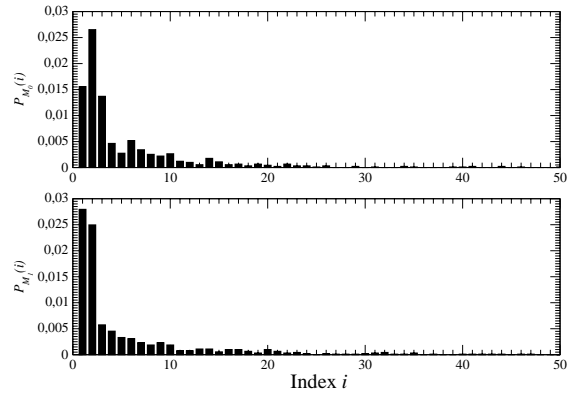

**Figure 6.** Probabilities of realization of mode 0 (top) and mode 1 (bottom), vs. the life length of the mode

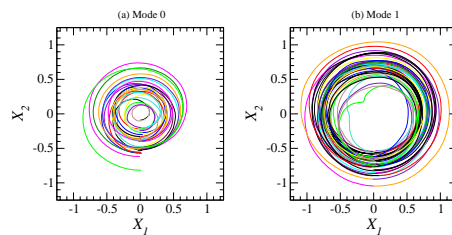

**Figure 7.** Plane projection of typical trajectories associated with the two different modes.

## CONCLUSIONS

We have shown that the short one-mode standing events are more numerous than the long one, but long lengths still significantly contributes to the dynamics. This very fast switching between modes is hidden to the spectral analysis. The statistics on the symbolic sequences indicates that the underlying dynamics is not a white noise, neither a deterministic system characterized by a complete symbolic dynamics. It is rather a dynamics resulting from the superposition of a deterministic components and a stochastic process. A remarkable fact is that each dynamical orbit generating the resulting signal can be separately observed and studied (Fig. 7).

## References

- [1] D. Rockwell & E. Naudascher, *Annual Review of Fluid Mechanics*, **11**, 67–94, 1979.
- [2] J. Godelle & C. Letellier, *Physical Review E*, **62** (6), 7973–7981, 2000.
- [3] L.R. Pastur, F. Lusseyran, T.M. Faure, Y. Fraigneau, R. Pethieu & P. Debesse, *Experiments in Fluids*, DOI: 10.1007/s00348-007-0419-7