



HAL
open science

A convex approach to super-resolution and regularization of lines in images

Kévin Polisano, Marianne Clausel, Valérie Perrier, Laurent Condat

► **To cite this version:**

Kévin Polisano, Marianne Clausel, Valérie Perrier, Laurent Condat. A convex approach to super-resolution and regularization of lines in images. *Curves & Surfaces*, Jun 2018, Arcachon, France. hal-03420326

HAL Id: hal-03420326

<https://hal.science/hal-03420326>

Submitted on 9 Nov 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

A CONVEX APPROACH TO SUPER-RESOLUTION AND REGULARIZATION OF LINES IN IMAGES


KÉVIN POLISANO, MARIANNE CLAUSEL, VALÉRIE PERRIER AND LAURENT CONDAT

contact mail : kevin.polisano@univ-grenoble-alpes.fr



OBJECTIVES

We present a new convex formulation for the problem of recovering lines in degraded images. Following the recent paradigm of super-resolution, we formulate a dedicated atomic norm penalty and solve this optimization problem by a primal-dual algorithm. Then, a spectral estimation method recovers the line parameters, with subpixel accuracy.

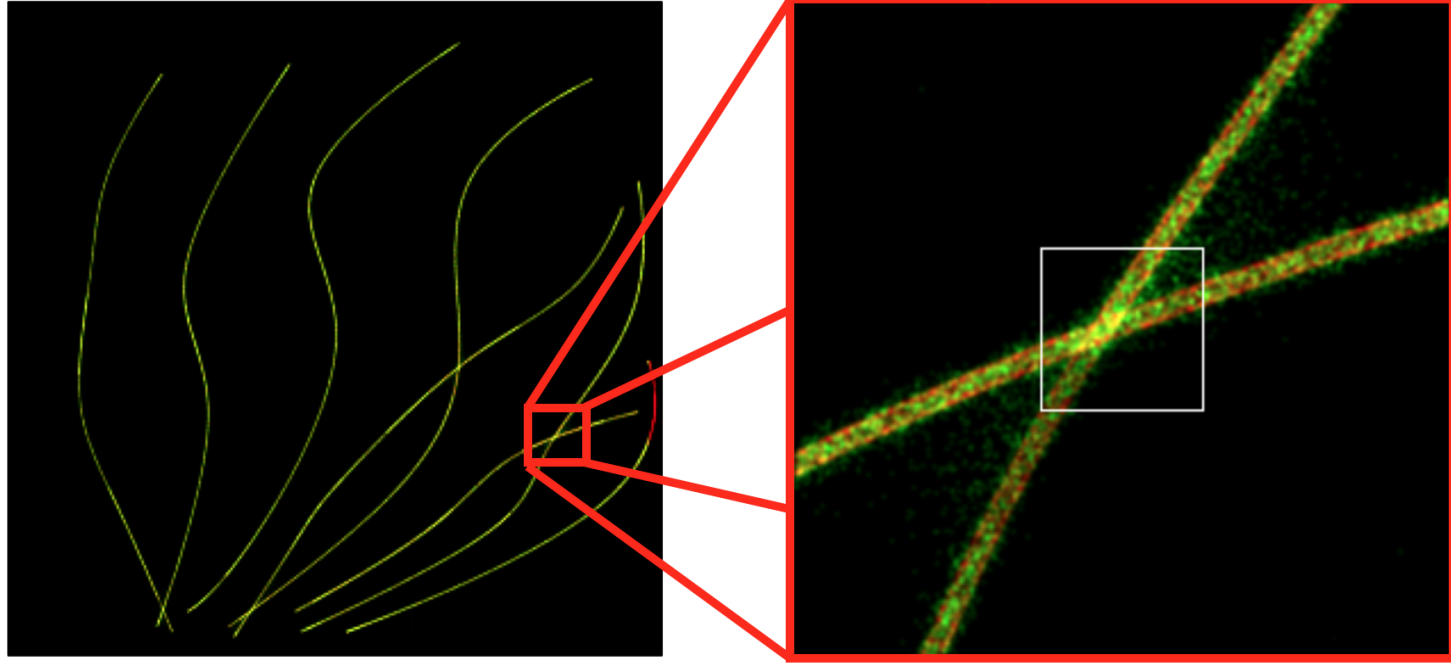

ATOMIC NORM FRAMEWORK

Let $z \in \mathbb{C}^N$ be a vector represented as a linear positive finite combination of sampled complex exponentials $[a(f, \phi)]_i = e^{j(2\pi f_i + \phi)}$, that is

$$z = \sum_{k=1}^K c_k a(f_k, \phi_k),$$

whose parameters f_k and ϕ_k are continuously indexed in a dictionary of atoms:

$$\mathcal{A} = \{a(f, \phi) \in \mathbb{C}^N, f \in [0, 1], \phi \in [0, 2\pi)\}.$$

The atomic norm, which enforces sparsity with respect to the set \mathcal{A} , is defined as

$$\|z\|_{\mathcal{A}} = \inf_{c'_k > 0, f'_k, \phi'_k} \left\{ \sum_k c'_k : z = \sum_k c'_k a(f'_k, \phi'_k) \right\}.$$

Theorem 1 [Caratheodory]. Let $z = (z_n)_{n=-N+1}^{N-1}$ be a vector with Hermitian symmetry $z_{-n} = z_n^*$. z is a positive combination of $K \leq N$ atoms $a(f_k, 0)$ if and only if $\mathbf{T}_N(z_+) \succeq 0$ and of rank K , where $z_+ = (z_0, \dots, z_{N-1})$ and \mathbf{T}_N is the Toeplitz operator

$$\mathbf{T}_N(z_+) = \begin{pmatrix} z_0 & z_1^* & \cdots & z_{N-1}^* \\ z_1 & z_0 & \cdots & z_{N-2}^* \\ \vdots & \vdots & \ddots & \vdots \\ z_{N-1} & z_{N-2} & \cdots & z_0 \end{pmatrix}.$$

Moreover, this decomposition is unique, if $K < N$.

Proposition 1. The atomic norm $\|z\|_{\mathcal{A}}$ can be characterized by this semidefinite program SDP(z):

$$\|z\|_{\mathcal{A}} = \min_{q \in \mathbb{C}^N} \left\{ q_0 : \mathbf{T}'_N(z, q) = \begin{pmatrix} \mathbf{T}_N(q) & z \\ z^* & q_0 \end{pmatrix} \succeq 0 \right\}.$$

PRIMAL-DUAL ALGORITHM

Let $\tau > 0$ and $\sigma > 0$ such that $\frac{1}{\tau} - \sigma \|\mathbf{L}\|^2 > \frac{\beta}{2}$.

Input: The blurred and noisy data image y

Output: \tilde{x} solution of the optimization problem (1)

- 1: Initialize all primal and dual variables to zero
- 2: **for** $n = 1$ **to** Number of iterations **do**
- 3: $\mathbf{X}_{n+1} = \text{prox}_{\tau G}(\mathbf{X}_n - \tau \nabla F(\mathbf{X}_n) - \tau \sum_{i=1}^Q \mathbf{L}_i^* \xi_{i,n})$
- 4: **for** $i = 0$ **to** $Q - 1$ **do**
- 5: $\xi_{i,n+1} = \text{prox}_{\sigma H_i^*}(\xi_{i,n} + \sigma \mathbf{L}_i(2\mathbf{X}_{n+1} - \mathbf{X}_n))$
- 6: **end for**
- 7: **end for**

REFERENCES

- [1] K. Polisano *et al.*, Convex super-resolution detection of lines in images, IEEE EUSIPCO, 2016.
- [2] K. Polisano *et al.*, A convex approach to super-resolution and regularization of lines in images, preprint, 2018.

SUPER-RESOLUTION AND REGULARIZATION OF LINES



The Model. A sum of K perfect lines of infinite length, with angle $\theta_k \in (-\pi/2, \pi/2]$, amplitude $\alpha_k > 0$ and offset $\eta_k \in \mathbb{R}$, is defined as the distribution

$$x^\sharp(t_1, t_2) = \sum_{k=1}^K \alpha_k \delta(\cos \theta_k (t_1 - \eta_k) + \sin \theta_k t_2).$$

The blurred image b^\sharp of size $W \times H$ is obtained by the convolution of x^\sharp with a separated blur function ϕ , following by a sampling with unit step Δ :

$$b^\sharp[n_1, n_2] = (x^\sharp * \phi)(n_1, n_2).$$

We denote by $\hat{x}^\sharp = \mathcal{F}_1 x^\sharp$ (resp. \hat{b}^\sharp) the horizontal Fourier transform of x^\sharp (resp. b^\sharp), whose expression

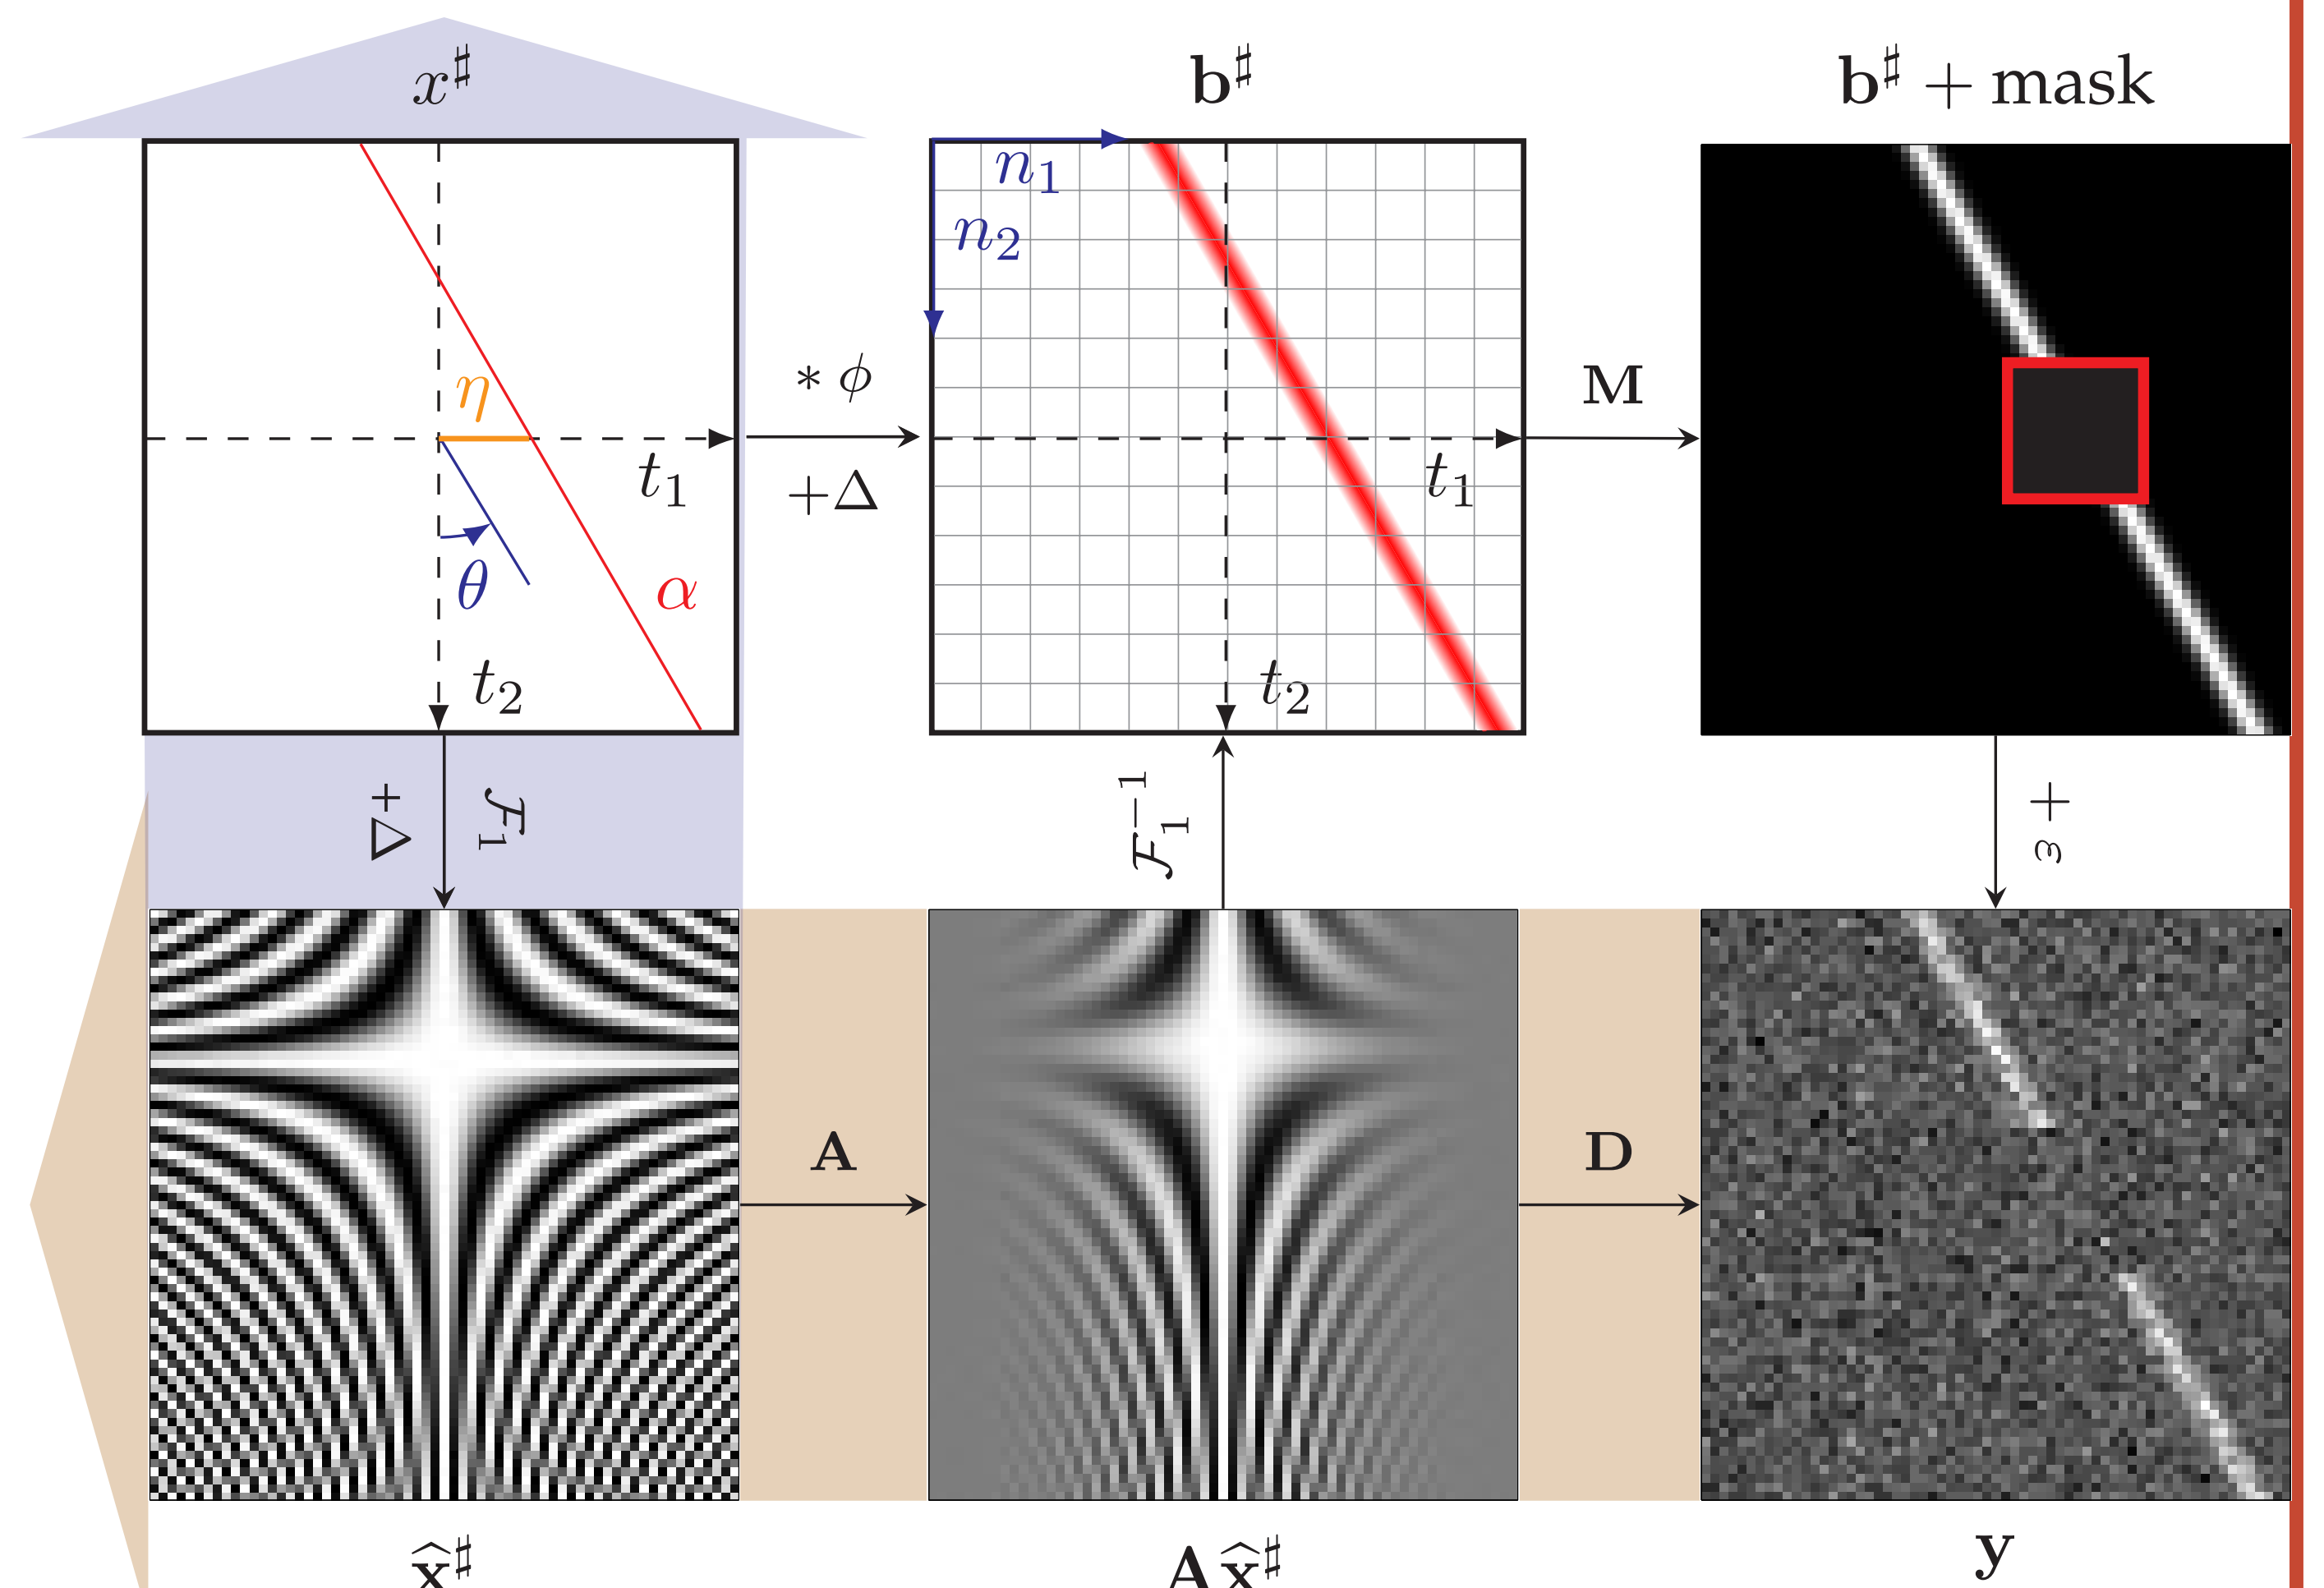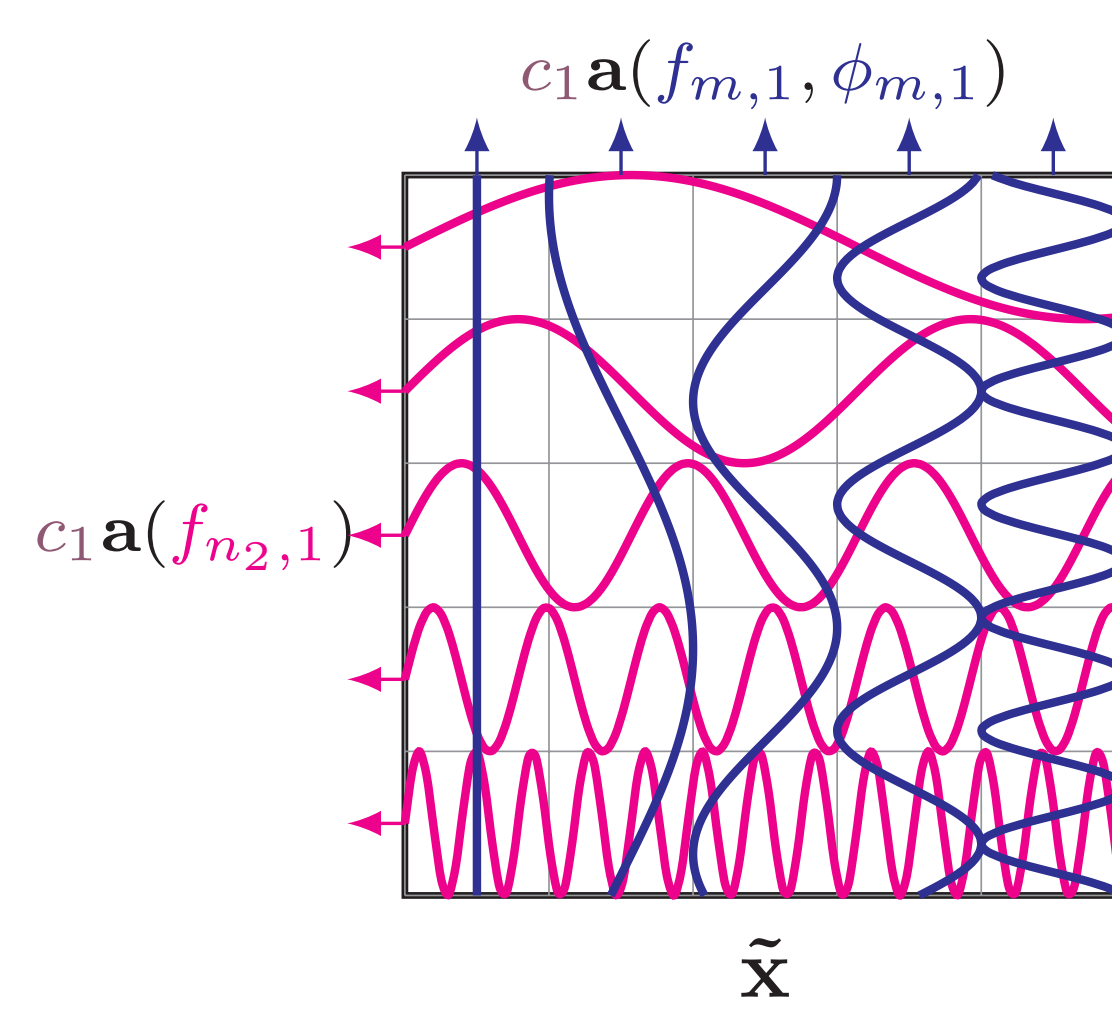

$$\tilde{x} \in \arg \min_{\tilde{x}, q \in \mathcal{X} \times \mathcal{Q}} \frac{1}{2} \|\mathbf{H}\tilde{x} - y\|_{\mathbb{F}}^2$$

$$\begin{cases} \forall n_2 = 0, \dots, H-1 \\ \forall m = 0, \dots, M \\ \hat{x}[0, n_2] = \hat{x}[0, 0] \leq c \\ \mathbf{q}[m, 0] \leq c \\ \mathbf{T}'_{H_S}(\hat{x}[m, :], \mathbf{q}[m, :]) \succeq 0 \\ \mathbf{T}_{M+1}(\hat{x}[:, n_2]) \succeq 0 \end{cases}$$

$$\bullet \mathbf{l}_{n_2}^\sharp = \hat{x}^\sharp[:, n_2] = \sum_{k=1}^K c_k a(f_{n_2, k})$$

$$c_k = \frac{\alpha_k}{\cos \theta_k}, \quad f_{n_2, k} = \frac{\tan \theta_k n_2 - \eta_k}{W}.$$

$$\bullet \mathbf{t}_m^\sharp = \hat{x}^\sharp[m, :] = \sum_{k=1}^K c_k a(f_{m, k}, \phi_{m, k})^\top$$

$$f_{m, k} = \frac{\tan \theta_k m}{W}, \quad \phi_{m, k} = -\frac{2\pi \eta_k m}{W}, \quad d_{m, k} = c_k \phi_{m, k}.$$

Lines regularization. Minimizing these atomic norms simultaneously enables to enforce sparsity decomposition on rows and columns of the solution:

- $\|\mathbf{l}_{n_2}^\sharp\|_{\mathcal{A}} = \sum_{k=1}^K c_k = \hat{x}^\sharp[0, n_2]$ (Theorem 1)
- $\|\mathbf{t}_m^\sharp\|_{\mathcal{A}} = \text{SDP}(\mathbf{t}_m^\sharp) \leq \sum_{k=1}^K c_k$ (Proposition 1)

after sampling is the following Hermitian matrix:

$$\hat{x}^\sharp[m, n_2] = \sum_{k=1}^K \frac{\alpha_k}{\cos \theta_k} e^{j2\pi(\tan \theta_k n_2 - \eta_k)m/W},$$

for $m = -M, \dots, M, n_2 = 0, \dots, H, M = (W-1)/2$. In the discrete paradigm, the blur function ϕ with suitable assumptions corresponds in Fourier to a linear operator \mathbf{A} , leading to the inverse problem:

$$\mathbf{A}\hat{x}^\sharp = \hat{b}^\sharp.$$

The observed image y is possibly affected by an inpainting mask \mathbf{M} and some white noise ϵ , that is

$$y = \mathbf{M}\mathcal{F}_1^{-1}\mathbf{A}\hat{x}^\sharp + \epsilon = \mathbf{H}\hat{x}^\sharp + \epsilon.$$

Resolution. The optimization problem is rewritten:

$$\tilde{\mathbf{X}} = \arg \min_{\tilde{\mathbf{X}} \in \mathcal{H}} \left\{ F(\tilde{\mathbf{X}}) + G(\tilde{\mathbf{X}}) + \sum_{i=0}^{Q-1} H_i \circ L_i(\tilde{\mathbf{X}}) \right\}, \quad (1)$$

with $F(\tilde{\mathbf{X}}) = \frac{1}{2} \|\mathbf{H}\tilde{\mathbf{X}} - y\|_{\mathbb{F}}^2$, $\tilde{\mathbf{X}} = (\hat{x}, \mathbf{q})$, ∇F a β -Lipschitz gradient, a proximable indicator $G = \iota_{\mathcal{B}}$ where \mathcal{B} are the two first boundary constraints, and $Q = M + 1 + H$ linear composite terms, where $H_i = \iota_{\mathcal{C}}$ with \mathcal{C} the cone of semidefinite positive matrices and $L_i \in \{\mathbf{L}_m^{(1)}, \mathbf{L}_{n_2}^{(2)}\}$, $\mathbf{L}_m^{(1)}(\tilde{\mathbf{X}}) = \mathbf{T}'_{H_S}(\hat{x}[m, :], \mathbf{q}[m, :])$ and $\mathbf{L}_{n_2}^{(2)}(\tilde{\mathbf{X}}) = \mathbf{T}_{M+1}(\hat{x}[:, n_2])$. \mathbf{L} denotes the concatenation of the L_i operators in the next algorithm.

SPECTRAL ESTIMATION BY A PRONY-LIKE METHOD

Let be $d_k \in \mathbb{C}$, $f_k \in [-1/2, 1/2)$, $\zeta_k = e^{j2\pi f_k}$ and

$$z_i = \sum_{k=1}^K d_k (e^{j2\pi f_k})^i, \quad \forall i = 0, \dots, N-1.$$

The **annihilating polynomial filter** is defined by:

$$H(\zeta) = \prod_{l=1}^K (\zeta - \zeta_l) = \sum_{l=0}^K h_l \zeta^{K-l} \text{ with } h_0 = 1,$$

$$\sum_{l=0}^K h_l z_{r-l} = \sum_{k=1}^K d_k \zeta_k^{r-K} \underbrace{\left(\sum_{l=0}^K h_l \zeta_k^{K-l} \right)}_{H(\zeta_k)=0} = 0.$$

$$\mathbf{P}_K(z)\mathbf{h} = \begin{pmatrix} z_K & \cdots & z_0 \\ \vdots & \ddots & \vdots \\ z_{N-1} & \cdots & z_{N-K-1} \end{pmatrix} \begin{pmatrix} h_0 \\ \vdots \\ h_K \end{pmatrix} = \begin{pmatrix} 0 \\ \vdots \\ 0 \end{pmatrix}$$

- 1 From $\mathbf{P}_K(z)$, compute \mathbf{h} by a SVD. Form H whose roots give access to the frequencies f_k .
- 2 Since $z = \mathbf{U}\mathbf{d}$ with $\mathbf{U} = (a(f_1), \dots, a(f_K))$, find amplitudes by LS: $\mathbf{d} = (\mathbf{U}^H \mathbf{U})^{-1} \mathbf{U}^H z$.

Procedure for retrieving the line parameters

- 1 For each column $\tilde{x}[m, :]$ compute $\{\tilde{f}_{m,k}\}_k$ by 1
- 2 For each column $\tilde{x}[m, :]$ compute $\{\tilde{d}_{m,k}\}_k$ by 2
- 3 $\{f_{m,k}\}_m = \{\frac{\tan \theta_k m}{W}\}_m$ lin. regression $\rightarrow \{\tilde{\theta}_k\}$
- 4 $\tilde{\alpha}_{m,k} = |\tilde{d}_{m,k}| \cos(\tilde{\theta}_k) \rightarrow \{\tilde{\alpha}_k\}_k = \mathbb{E}\{\{\tilde{\alpha}_{m,k}\}_m\}$
- 5 $d_{m,k}/|d_{m,k}| = (e^{-j2\pi \frac{\eta_k}{W}})^m \rightarrow \{\tilde{\eta}_k\}_k$ by 1

This procedure enables to super-resolve the line parameters from the solution \tilde{x} of the problem (1).

