



**HAL**  
open science

## Qualification protocol for hysteresis model of magnetic materials in static and dynamic modes. Application in design software

Thaï-Phuong Do, Fabien Sixdenier, Laurent Morel, Eric Morin, Laurent Gerbaud, Frédéric Wurtz

### ► To cite this version:

Thaï-Phuong Do, Fabien Sixdenier, Laurent Morel, Eric Morin, Laurent Gerbaud, et al.. Qualification protocol for hysteresis model of magnetic materials in static and dynamic modes. Application in design software. 19th Soft Magnetic Materials Conference, Sep 2009, Turin, Italy. hal-00403901

**HAL Id: hal-00403901**

**<https://hal.science/hal-00403901v1>**

Submitted on 13 Jul 2009

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Qualification protocol for hysteresis model of magnetic materials in static and dynamic modes. Application in design software.

T.P DO<sup>a,b,c</sup>, F.SIXDENIER<sup>a</sup>, L.MOREL<sup>a</sup>, E.MORIN<sup>b</sup>, L.GERBAUD<sup>c</sup>, F.WURTZ<sup>c</sup>

<sup>a</sup> Ampère Laboratory, Lyon, France

<sup>b</sup> Schneider Electric Industries SAS, France

<sup>c</sup> Grenoble Electrical Engineering Laboratory G2ELab, Grenoble, France

The magnetic material modeling plays an important role in the electromagnetism simulation, especially the losses computation. However, it is a complex problem because of the material hysteretic characteristics.

This paper proposes a characterization step to be applied in soft magnetic materials modeling that allow modeling them in both static and dynamic function. The model used here is called global model [1]. Its main advantage is that it takes into account the global aspect of material hysteresis (static and dynamic) characteristics, represented by the equation:

$$H_{exc} = H_{stat}(B) + \gamma \frac{dB}{dt} \quad (1)$$

with  $H_{exc}$  the excitation field,  $H_{stat}$  virtual field, this correspond the static mode and  $\gamma$  a coefficient depending of the electrical and magnetic properties ( resistivity, permeability, etc.) of the material.

The term  $H_{stat}$  can be modelled by different static models. One analytical, quick and quite simply is the chemical model [2] give good results on some FeSi GO. In this model, different microscopic movements in magnetic material as wall rotation, displacement, etc. are traduced by the equations that are analogical with chemical reaction equations:

$$J' = J'_0 \cdot \tanh [(\beta/2 \cdot \gamma) \cdot \ln (\exp (H \cdot \gamma) + b) - \beta \cdot H_c / 2] \quad (2)$$

$$k_1 \cdot sh(k_2(\theta - \pi/2)) + h' \cdot \sin(\theta) - p_1 = 0 \quad (3)$$

$$B(H)_{statique} = J'(H) + J''(H) + \mu_0 H \quad (4)$$

In the same process, other models can be implemented. By an analysis of many of the existing models, some appropriate ones can be evaluated and validated with user criterion on induction field response and losses calculus. The idea is to bring a material model library for user, in function of his application.

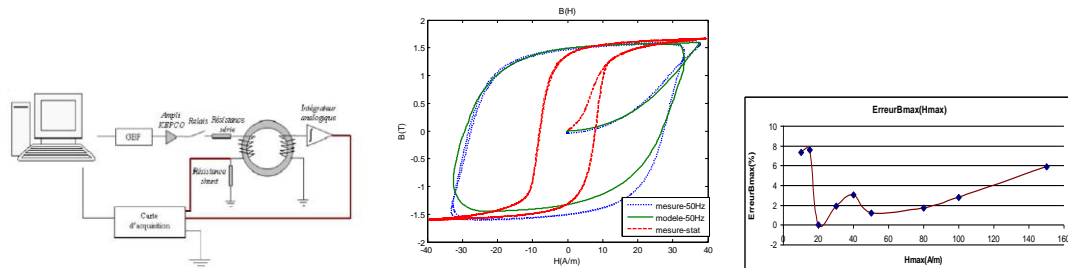


Figure 1: Left: test bed. Center: Hysteresis loops in static and dynamic test. Right: comparison between simulation and experimental results with relative error in B max

- [1] Raulet MA, Sixdenier F, Guinand B, et al., "Limits and rules of use of a dynamic flux tube model", COMPEL, Vol. 27 Issue: 1, p. 256-265, 2008
- [2] A. Nourine, G.Meunier, A. Lebouc, "A New Hysteresis Model Generation— Application to the Transverse Axis of GO SiFe Sheet », IEEE Transactions on Magnetics, vol.37, No.5, September 2001