



**HAL**  
open science

## AC losses calculation in superconducting solenoids: comparison of H-formulation with T-A formulation

Jiawen Wang, Francesco Grilli, Yinshun Wang

► **To cite this version:**

Jiawen Wang, Francesco Grilli, Yinshun Wang. AC losses calculation in superconducting solenoids: comparison of H-formulation with T-A formulation. 8th International Workshop on Numerical Modelling of High Temperature Superconductors (HTS 2022), Kévin Berger (Université de Lorraine - GREEN), Jun 2022, Nancy, France. hal-03791510

**HAL Id: hal-03791510**

**<https://hal.science/hal-03791510v1>**

Submitted on 15 Dec 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# AC losses calculation in superconducting solenoids: comparison of **H**-formulation with **T-A** formulation

Jiawen Wang

<sup>1</sup>State Key Lab. of New Energy Renewable Power System  
North China Electric Power University  
102206 Beijing, China

<sup>2</sup>Institute for Technical Physics  
Karlsruhe Institute of Technology  
76131 Karlsruhe, Germany  
15831275227@163.com

Francesco Grilli

Institute for Technical Physics  
Karlsruhe Institute of Technology  
76131 Karlsruhe, Germany  
francesco.grilli@kit.edu

Yinshun Wang

State Key Lab. of New Energy Renewable Power System  
North China Electric Power University  
102206 Beijing, China  
yswang@ncepu.edu.cn

**Abstract**—The finite-element method (FEM) model based on **H**-formulation has been widely applied for estimating the AC losses of high temperature superconducting (HTS) coils made of REBCO coated conductors. The **T-A** formulation has emerged as a computationally more efficient alternative for modeling HTS coils of 2D. However, due to the use of the infinitely thin-strip approximation for the superconducting layer of REBCO tapes, it cannot take into account the currents induced by the magnetic field component parallel to the wide face of the tapes. This field component is significant in solenoidal coils, particularly in their central part. In this contribution, we compare the AC losses of superconducting solenoids made of REBCO tapes, calculated with the **H** and **T-A** formulations, with the aim of evaluating the computational speed and the accuracy of both formulations.

**Keywords**—AC losses, HTS solenoid, **H**-formulation, **T-A** formulation

## I. INTRODUCTION

In recent years, high temperature superconducting (HTS) tapes have been widely used in scientific research and other fields due to their high current-carrying capacity and good in-field behavior [1]-[2]. The application RE-Ba-Cu-O (REBCO, RE is rare earth) of second-generation (2G) HTS material is promising in electrical engineering and high field applications [3]-[4]. Superconducting solenoids are a geometry of interest for applications such as superconducting motors, superconducting transformers and superconducting magnetic energy storage (SMES) [5]-[7]. The prediction of their electromagnetic behavior and AC losses is of high importance for the design and protection of HTS devices.

Numerous computational approaches have been proposed over the last two decades [8]-[10]. Among them, the **H**-formulation has been widely used due to its ease of implementation and reasonable computational efficiency [11]. However, when it comes to dealing with large-scale applications, the **H**-formulation has too long computation times. Comparatively, the **T-A** formulation proposed by Zhang *et al.* [12] shows much faster calculation speed (at least for 2D problems) thanks to the approximation of the superconducting layer as an infinitely thin strip. However, this approximation has an important limitation: it cannot

consider the penetration of the magnetic field component parallel to the wide face of the superconducting layer. In certain geometries, such as solenoids, this component can play an important role. Therefore, it is important to assess the impact of such an approximation. For this purpose, the AC losses of a superconducting solenoid are calculated and compared with the results obtained with the **H**-formulation. The **H**-formulation simulates the entire cross-section of the superconducting layer, takes into account all the relevant magnetic field components, and can be used as reference.

## II. GEOMETRY OF SUPERCONDUCTING SOLENOID

### A. Configuration of Superconducting Solenoid

A one-layer superconducting solenoid is simulated. Fig. 1 shows the schematic view of the superconducting solenoid and the definition of the main parameters. The *gap* is the distance between two wires,  $r_1$  is the distance from coil to central axis,  $W_{\text{tape}}$  and  $d_{\text{tape}}$  are the width and length of the tapes that make up the superconducting solenoid, respectively. The outer boundary is far larger than  $r_1$ , thus the air region radius is set 10 times of the outer radius. The values of main parameters are shown in Table I.

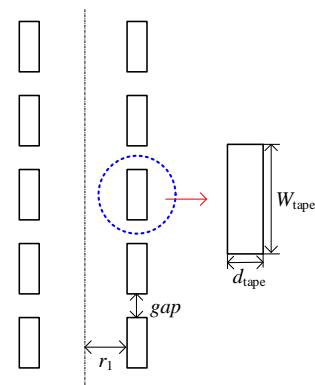


Fig. 1. Schematic view of superconducting solenoid

TABLE I. MAIN PARAMETERS OF SUPERCONDUCTING SOLENOID

Parameters	Value
$r_1$	150/mm
<i>gap</i>	1/mm
$W_{\text{tape}}$	4/mm

Parameters	Value
$d_{\text{tape}}$	1/ $\mu\text{m}$

### B. Numerical Models

The  $\mathbf{H}$ -formulation is used to perform the 2D axisymmetric model of superconducting solenoid and calculate the magnetic field [13]. The model solves Faraday's equation written in terms of the magnetic field

$$\mu_0\mu_r \frac{\partial \mathbf{H}}{\partial t} + \nabla \times (\nabla \times \rho \mathbf{H}) = 0 \quad (1)$$

where  $\rho$  is the resistivity,  $\mu_0$  is the vacuum permeability,  $\mu_r$  is the relative permeability of the corresponding material.

The  $\mathbf{T}$ - $\mathbf{A}$  formulation calculates magnetic field using the magnetic vector potential  $\mathbf{A}$  to calculate the magnetic field everywhere, and the current potential  $\mathbf{T}$  to calculate the current density in the superconductor. Faraday's equation is written as [15],

$$\nabla \times (\rho \nabla \times \mathbf{T}) = - \frac{\partial (\nabla \times \mathbf{A})}{\partial t} \quad (2)$$

When the calculation of magnetic field is finished, the AC losses are calculated by integrating the  $J \cdot E$  over the superconducting region and averaging it over a cycle. It should be noted that the first quarter of the sinusoidal cycle must be avoided, because it is not representative of the AC regime due to the occurring transient. Therefore, the cyclic AC losses can be computed on the second half of the first cycle as Eq. (3) [16],

$$Q = 2 \int_{1/2f}^{1/f} \int_{\Omega} \mathbf{J} \cdot E d\Omega dt \quad (3)$$

where  $f$  is the frequency of the AC source and  $\Omega$  is the superconducting region.

### III. AC LOSS

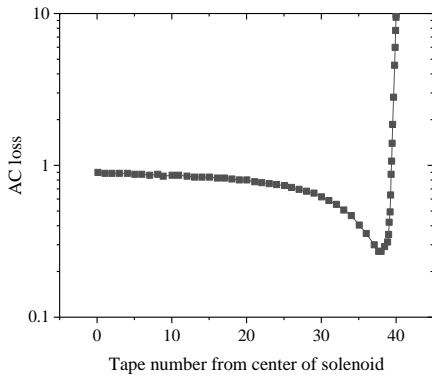


Fig. 2. Estimation of AC-losses in individual turns of the solenoid. Data replotted from [17]

The estimated losses of the individual tapes are presented in Fig. 2, which is replotted from reference [17]. The tapes at the top and the bottom of the coil (right part of the plot) present the highest AC losses, due to the field component perpendicular to the flat face of the tape. The tapes in the center of the solenoid have very similar and low loss values. This is because the field is very uniform and directed essentially parallel to their flat face. Despite their low

individual loss value, these tapes may contribute significantly to the total losses of the solenoid, due to their large number. Therefore, it is important to determine their (low) loss value accurately and understand if the dissipation is caused by the field component parallel or perpendicular to the tape. This can be done by comparing the results of the  $\mathbf{H}$  and  $\mathbf{T}$ - $\mathbf{A}$  formulations, since the latter can only account for the losses caused by the perpendicular field component.

### REFERENCES

- [1] H. W. Weijers, W. D. Markiewicz, A. V. Gavrilin, A. J. Voran, Y. L. Viouchkov, and S. R. Gundlach, *et al.*, "Progress in the development and construction of a 32-T superconducting magnet," *IEEE Trans. Appl. Supercond.*, vol. 26, June 2016, Art. no. 4300807.
- [2] D. Park, J. Bascunan, P. C. Michael, J. Lee, S. Hahn, and Y. Iwasa, "Construction and test results of coils 2 and 3 of a 3-nested-coil 800-MHz REBCO insert for the MIT 1.3-GHz LTS/HTS NMR magnet," *IEEE Trans. Appl. Supercond.*, vol. 28, April 2018, Art. no. 4300205.
- [3] W. D. Markiewicz, "Design of a superconducting 32 T magnet with REBCO high field coils," *IEEE Trans. Appl. Supercond.*, vol. 22, November, 2012, Art. no. 4300704.
- [4] J. Sheng, M. Hu, W. Li, X. Wang, and Z. Jin, "Concept design of a portable superconducting transformer based on conductors in tube cables," *IEEE Trans. Appl. Supercond.*, vol. 31, 2021, Art. no. 5500605.
- [5] P. J. Masson, and C. A. Luongo, "High power density superconducting motor for all-electric aircraft propulsion," *IEEE Trans. Appl. Supercond.*, vol. 15, pp: 2226-2229, June. 2005.
- [6] J. Sheng, M. Hu, W. Li, X. Wang, and Z. Jin, "Concept design of a portable superconducting transformer based on conductors in tube cables," *IEEE Trans. Appl. Supercond.*, vol. 31, July 2021, Art. no. 5500605.
- [7] A. Pan, L. Macdonald, H. Baiej, and P. Cooper, "Theoretical consideration of superconducting coils for compact superconducting magnetic energy storage systems," *IEEE Trans. Appl. Supercond.*, vol. 26, April 2016, Art. no. 5700905.
- [8] E. B. Juarez, V. Zermeno, F. Trill, and F. Grilli, "Real-time simulation of large-scale HTS systems: multi-scale and homogeneous models using  $\mathbf{T}$ - $\mathbf{A}$  formulation," *Supercond. Sci. Technol.*, vol. 32, April 2019: 065003.
- [9] B. Shen, F. Grilli, and T. A. Coombs, "Review of the AC loss computation for HTS using  $\mathbf{H}$  formulation," *Supercond. Sci. Technol.*, vol. 33, February 2020: 033002.
- [10] A. Arsenaault, B. Alves, and F. Sirois, "COMSOL implementation of the  $\mathbf{H}$ - $\phi$  formulation with thin cuts for modeling superconductors with transport currents," *IEEE Trans. Appl. Supercond.*, vol. 31, September 2021, Art. no. 6900109.
- [11] B. Shen, F. Grilli, and T. A. Coombs, "Overview of  $\mathbf{H}$ -formulation: a versatile tool for modelling electromagnetics in high-temperature superconductor applications," *IEEE Access*, vol. 8, pp. 100403-100414, May 2020.
- [12] H. Zhang, M. Zhang, and W. Yuan, "An efficient 3D finite element method model based on the  $\mathbf{T}$ - $\mathbf{A}$  formulation for superconducting coated conductors," *Supercond. Sci. Technol.*, vol. 30, December 2016: 024005.
- [13] A. Stenvall, V. Lahtinen, and M. Lyly, "An  $\mathbf{H}$ -formulation-based three-dimensional hysteresis loss modelling tool in a simulation including time varying applied field and transport current: the fundamental problem and its solution," *Supercond. Sci. Technol.*, vol. 27, August 2014, Art. no. 104004.
- [14] Z. Wang, Y. Tang, L. Ren, J. Li, Y. Xu, and Y. Liao, *et al.*, "AC loss analysis of a hybrid HTS magnet for SMES based on  $\mathbf{H}$ -formulation," *IEEE Trans. Appl. Supercond.*, vol. 27, June 2017, Art. no. 4701005.
- [15] F. Grilli, E. Pardo, A. Morandi, V. Zermeno, R. Brambilla, and T. Benkel, *et al.*, "Electromagnetic modeling of superconductors with commercial software: possibilities with two vector potential-based formulations," *IEEE Trans. Appl. Supercond.*, vol. 31, January 2020, Art. no. 5900109.
- [16] B. Shen, F. Grilli, and T. A. Coombs, "Review of the AC loss computation for HTS using  $\mathbf{H}$  formulation," *Supercond. Sci. Technol.*, vol. 33, February 2020: 033002.

- [17] C. Schacherer, A. Bauer, S. Elschner, W. Goldacker, H. P. Kraemer, and A. Kudymow, *et al.*, "Smartcoil-concept of a full scale demonstrator of a shielded core type superconducting fault current limiter," IEEE Trans. Appl. Supercond., vol. 27, December 2016, Art. no. 5600305.