



HAL
open science

BEM-FEM formulation based on magnetic vector and scalar potentials for eddy current problems

Quang-Anh Phan, Gérard Meunier, Olivier Chadebec, Jean-Michel Guichon,
Bertrand Bannwarth

► **To cite this version:**

Quang-Anh Phan, Gérard Meunier, Olivier Chadebec, Jean-Michel Guichon, Bertrand Bannwarth. BEM-FEM formulation based on magnetic vector and scalar potentials for eddy current problems. 2019 19th International Symposium on Electromagnetic Fields in Mechatronics, Electrical and Electronic Engineering (ISEF), Aug 2019, Nancy, France. 10.1109/ISEF45929.2019.9096899. hal-03823350

HAL Id: hal-03823350

<https://hal.science/hal-03823350v1>

Submitted on 20 Oct 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

BEM-FEM formulation based on magnetic vector and scalar potentials for eddy current problems

Quang-Anh Phan, Gerard Meunier, Olivier Chadebec, Jean-Michel Guichon, Bertrand Bannwarth
 University Grenoble Alpes, CNRS, Grenoble INP, G2Elab, 38000 Grenoble, France
 Email: quang-anh.phan@g2elab.grenoble-inp.fr

Abstract—The hybrid boundary element - finite element method (BEM-FEM) has been developed for several decades and has shown many advantages since air media has not to be meshed. In this paper, a new BEM-FEM formulation is presented. It is based on the modified magnetic vector potential \mathbf{A}^* as unknown in active regions and on the reduced magnetic scalar potential φ as unknown in the air media. The formulation and its numerical validation is proposed in this paper.

Index Terms—eddy currents, quasi-static, finite element method, boundary element method

I. INTRODUCTION

We address the problem of eddy-currents computation under the quasi-static assumption. In the BEM-FEM approach, FEM method is applied to the material domains and the BEM method is applied to the free domain. In the literature, FEM equations are based on vector quantities such as the magnetic field \mathbf{H} , the electric field \mathbf{E} or the magnetic potential \mathbf{A} , while BEM equations are mainly based on magnetic [1], [2], [3] or electric [5] scalar quantities. BEM equations for the free domains can also be based on the quantities \mathbf{E} or \mathbf{H} like proposed in [4] and [6]. These two last formulations are suitable for solving multiply connected regions problems. In the next section, we present a new BEM-FEM formulation based on \mathbf{A}^* and φ . A key point of the formulation is that it does not need a costly matrix inversion like it is often encountered in the literacy.

II. $\mathbf{A}^* - \varphi$ BEM-FEM HYBRID FORMULATION

Let us consider a simply connected region Ω bounded by the Γ , characterised by a permeability μ and a conductivity σ . The excitation magnetic field is created by a coil located outside Ω and denoted \mathbf{H}_{ex} . From Maxwell's equations under eddy current assumption and the relation $\mathbf{E} = -j\omega\mathbf{A}^*$, we have equation for \mathbf{A}^* in the Ω region:

$$\nabla \times \nabla \times \mathbf{A}^* + j\omega\mu\sigma\mathbf{A}^* = 0 \quad (1)$$

Applying the Galerkin's method to equation above with the projection function being the edge shape functions \mathbf{w} . After some vector algebras, we get:

$$\int_{\Omega} (\nabla \times \mathbf{w}) \cdot (\nabla \times \mathbf{A}^*) d\Omega + \int_{\Gamma} \mathbf{w} \cdot (\mathbf{n} \times (\nabla \times \mathbf{A}^*)) d\Gamma + j\omega\mu\sigma \int_{\Omega} \mathbf{w} \cdot \mathbf{A}^* d\Omega = 0 \quad (2)$$

The magnetic field in the air can be expressed as:

$$\mathbf{H}_{air} = \mathbf{H}_{ex} - \nabla\varphi \quad (3)$$

\mathbf{H}_{air} is a solenoidal field, so the magnetic scalar potential is governed by the Laplace equation $\Delta\varphi = 0$. Applying Green's identity, we have the following integral equation:

$$h\varphi = \int_{\Gamma} (\mathbf{n} \cdot \nabla\varphi) G d\Gamma - \int_{\Gamma} \varphi (\mathbf{n} \cdot \nabla G) d\Gamma \quad (4)$$

where $h = 0.5$ if the target point is a regular point of the border Γ and $G = \frac{1}{r}$ is the Green's function with r is the distance between integration and observation point. The boundary conditions of magnetic field allow us to link the surface quantities \mathbf{A}^* and φ as follows:

$$\mathbf{n} \times (\nabla \times \mathbf{A}^*) = \mu(\mathbf{n} \times \mathbf{H}_{ex} - \mathbf{n} \times \nabla\varphi) \quad (5)$$

$$\mathbf{n} \cdot \nabla\varphi = \mathbf{n} \cdot \mathbf{H}_{ex} - \frac{1}{\mu_0} \mathbf{n} \cdot (\nabla \times \mathbf{A}^*) \quad (6)$$

Let us replace (5), (6) in (2), (4) respectively and then perform one more algebra to separate φ from the gradient operator:

$$\int_{\Gamma} \mathbf{w} \cdot (\mathbf{n} \times \nabla\varphi) d\Gamma = \int_{\Gamma} \mathbf{n} \cdot (\nabla \times \mathbf{w}) \varphi d\Gamma \quad (7)$$

Finally, a set of coupled integral equations is obtained:

$$\begin{aligned} - \int_{\Gamma} \mathbf{w} \cdot (\mathbf{n} \times \mathbf{H}_{ex}) d\Gamma &= \frac{1}{\mu} \int_{\Omega} (\nabla \times \mathbf{w}) \cdot (\nabla \times \mathbf{A}^*) d\Omega \\ &+ j\omega\sigma \int_{\Omega} \mathbf{w} \cdot \mathbf{A}^* d\Omega - \int_{\Gamma} \mathbf{n} \cdot (\nabla \times \mathbf{w}) \varphi d\Gamma \end{aligned} \quad (8)$$

$$\begin{aligned} \int_{\Gamma} \mathbf{n} \cdot \mathbf{H}_{ex} G d\Gamma &= h\varphi + \frac{1}{\mu_0} \int_{\Gamma} \mathbf{n} \cdot (\nabla \times \mathbf{A}^*) G d\Gamma \\ &+ \int_{\Gamma} \varphi (\mathbf{n} \cdot \nabla G) d\Gamma \end{aligned} \quad (9)$$

III. NUMERICAL IMPLEMENTATION

The 0-degree interpolation functions are chosen for scalar potential φ while the vector potential \mathbf{A}^* is interpolated by using edge shape functions \mathbf{w} :

$$\mathbf{A}^* = \sum_i \mathbf{w}_i A_i^* \quad (10)$$

where A_i^* is the circulation of magnetic potential \mathbf{A}^* along the edge e_i :

$$A_i^* = \int_{e_i} \mathbf{A}^* \cdot d\mathbf{l} \quad (11)$$

Equation (8) is written in matrix form:

$$[M] \{A^*\} + [B] \{\varphi\} = \{Q\} \quad (12)$$

The term $\mathbf{n} \cdot (\nabla \times \mathbf{A}^*)$ in (9) is the magnetic flux density, denoted ϕ . Assuming that ϕ is uniform on each facet element of the discretized surface Γ , it can be written as:

$$\phi = \sum_i \Phi_i \frac{1}{s_i} \quad (13)$$

where Φ_i is the magnetic flux flowing through the facet element number i with the area s_i of border Γ . By applying discretization according to the Galerkin's approach, (9) is written in matrix form as follows:

$$[T] \{\Phi\} + [H] \{\varphi\} = [T] \{S\} \quad (14)$$

The matrices in (12), (14) are not detailed in this abstract. Let us now establish a relationship between Φ and A^* . For the facet number i , we have:

$$\Phi_i = \int_{\Gamma_i} (\nabla \times \mathbf{A}^*) \cdot \mathbf{n} d\Gamma = \oint_{C_i} \mathbf{A}^* d\mathbf{l} \quad (15)$$

Equations (11) and (15) enable the written of a matrix relation linking Φ to A^* .

$$\{\Phi\} = [C] \{A^*\} \quad (16)$$

where $[C]$ is an incidence matrix that links the magnetic flux on each mesh element to the edge unknown values A^* . Equation (14) becomes:

$$[T] [C] \{A^*\} + [H] \{\varphi\} = [T] \{S\} \quad (17)$$

Our final equation system includes (12) and (17).

IV. VALIDATION

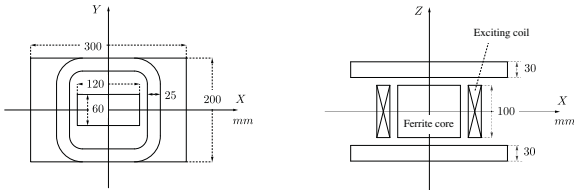


Fig. 1. The model proposed by IEEJ.

In order to validate the proposed formulation, the test case proposed by IEE of Japan [4] is considered (Fig. 1). The conductivity of both aluminum plates is $3.215E7(S/m)$. The ferrite magnetic region has a relative permeability of 3000. The excitation coil is fed by an alternating current $1000A$, $50Hz$. The mesh is composed of 27860 hexahedron for the material regions. Another simulation was performed by pure FEM method with an adapted mesh. A comparisons of current

density computed on two different lines on the border Γ by our formulation and by FE method is shown in Fig. 2. The Joule losses can be calculated from the current density in Ω or from surface quantities \mathbf{A}^* and φ . The relative error with respect to the result obtained by the FEM method is about 0.36%.

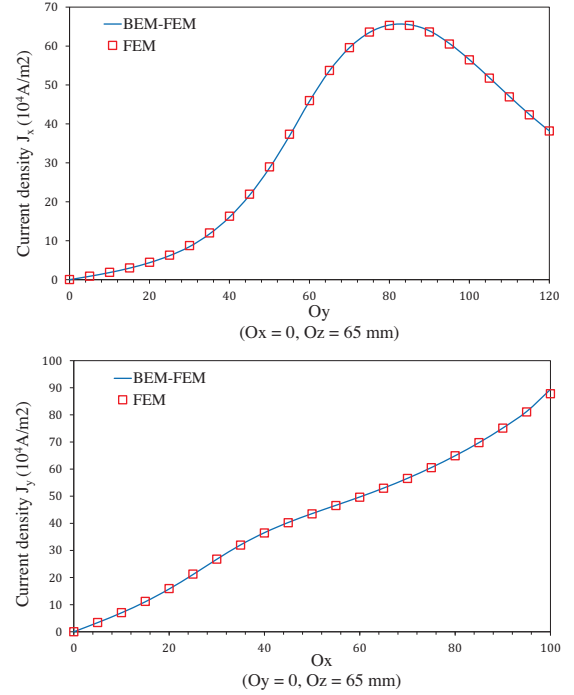


Fig. 2. Comparisons of current density on border.

V. CONCLUSIONS

In this paper, we have presented a new hybrid model using the modified vector potential \mathbf{A}^* and the reduced scalar potential φ . The results calculated by proposed formulation through standard tests shown good agreement with the results obtained by FEM method.

REFERENCES

- [1] M. E. Royak, I. M. Stupakov and N. S. Kondratyeva, "Coupled vector FEM and scalar BEM formulation for eddy current problems," 2016 13th International Scientific-Technical Conference on Actual Problems of Electronics Instrument Engineering (APEIE), Novosibirsk, 2016, pp. 330-335.
- [2] I. D. Mayergoyz, M. V. K. Chari, and A. Konrad, Boundary Galerkins method for three-dimensional finite element electromagnetic field computation, IEEE Trans. Magn., 1983.
- [3] Z. Ren, F. Bouillault, A. Razek and J. C. Verite, "Comparison of different boundary integral formulations when coupled with finite elements in three dimensions," in IEE Proceedings A - Physical Science, Measurement and Instrumentation, Management and Education - Reviews, vol. 135, no. 8, pp. 501-507, November 1988
- [4] S. Wakao and T. Onuki, Electromagnetic Field Computations by the Hybrid FE-BE Method using Edge Elements, IEEE Trans. Magn., 1993.
- [5] F. Matsuoka and A. Kameari, Calculation of three dimensional eddy current by FEM-BEM coupling method, 1988.
- [6] Z. Ren, F. Bouillault, A. Razek, A. Bossavit, and J. C. Verite, A new hybrid model using electric field formulation for 3-d eddy current problems, IEEE Trans. Magn., 1990.