



HAL
open science

Impact of landmark parametrization on monocular EKF-SLAM with points and lines

Joan Solà, Teresa Vidal-Calleja, Javier Civera, Jose Maria Martinez-Monti

► **To cite this version:**

Joan Solà, Teresa Vidal-Calleja, Javier Civera, Jose Maria Martinez-Monti. Impact of landmark parametrization on monocular EKF-SLAM with points and lines. 2010. hal-00451778v3

HAL Id: hal-00451778

<https://hal.science/hal-00451778v3>

Preprint submitted on 1 Jan 2011 (v3), last revised 17 Sep 2011 (v4)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Impact of landmark parametrization on monocular EKF-SLAM with points and lines

Joan Solà · Teresa Vidal-Calleja · Javier Civera ·
J. M. M. Montiel

the date of receipt and acceptance should be inserted later

Abstract This paper explores the impact that landmark parametrization has in the performance of monocular, EKF-based, 6-DOF simultaneous localization and mapping (SLAM) in the context of undelayed landmark initialization. The work proposes a unified framework for points and lines that is independent of the parametrization used. Three parametrizations for points and five for straight lines are accurately described, emphasizing their similarities and differences.

Monocular undelayed initialization challenges EKF because of the combination of non-linearity with large uncertainty associated to the non-measured DOF. In this regard, the goal of a good landmark parametrization is to improve the system's linearity as much as possible, improving the filter consistency, and thus achieving robust and more accurate localization and mapping. The paper highlights and justifies the keys for satisfactory operation: inverse-distance parameters and landmark anchoring. It also defines a generalized linearity index suited for the EKF, and uses it to compute and compare the degrees of linearity of each parametrization. Finally, all parametrizations are benchmarked employing analytical and statistical tools, with simulations and real imagery data, using the standard and the robocentric EKF-SLAM formulations.

1 Introduction

Monocular simultaneous localization and mapping (SLAM) is the problem of concurrently estimating in real time the structure of the surrounding world (the *map*) while getting *localized* in it, using a single projective camera as the only exteroceptive sensor. Monocular SLAM gained popularity back in 2003 thanks to the first full real-time implementation by

J. Solà

1. CNRS; LAAS; 7 avenue du Colonel Roche, F-31077 Toulouse, France, jsola@laas.fr
Université de Toulouse; UPS, INSA, INP, ISAE; LAAS-CNRS : F-31077 Toulouse, France.
2. Ictineu Submarins SL, Barcelona, Catalonia, jsola@ictineu.net.

T. Vidal-Calleja

University of Sydney, ACFR, Australia. t.vidal@acfr.usyd.edu.au

J. Civera and J. M. M. Montiel

I3A, Universidad de Zaragoza, Spain. {josemari, jcivera}@unizar.es

Davison (2003), based on Smith and Cheeseman’s (1987) original solution to SLAM which employs an extended Kalman filter (EKF) as the central estimator. Davison’s technique elegantly solved a great number of problems, but there still remained one that occupied researchers on visual SLAM for some years (Chiuso et al, 2002; Bailey, 2003; Kwok and Dissanayake, 2003; Lemaire et al, 2005): the problem of landmark initialization. Monocular EKF-SLAM reached maturity with the advent of undelayed landmark initialization techniques (ULI, explained in more detail in the next section), a need of partial initialization firstly stated by Solà et al (2005), with a preliminary solution based on an exponentially distributed multi-hypothesized depth parametrization, which was inspired on a previous work by Kwok and Dissanayake (2004). The problem was successfully solved for the first time with the inverse-depth landmark parametrization (IDP) by Montiel et al (2006), which has become very popular. More recently, Marzorati et al (2008) and Haner and Heyden (2010) have presented new parametrizations for which the authors claim better performances than IDP. Solà (2010) presented a comparative study of three point parametrizations.

A smaller number of works incorporate line landmarks or *segments* to the EKF-SLAM framework. Gee and Mayol (2006), Smith et al (2006) and Lemaire and Lacroix (2007) used delayed techniques for initialization. Solà et al (2009b) reports the only ULI solution for infinite lines we are aware of, which uses the Plücker line. Edgelets (very short line fragments associated to a 3D point) were introduced by Eade and Drummond (2006a), also in an undelayed manner, using IDP as the supporting point type.

Over all, the methods here cited have many points in common. They have also differences in parts of the algorithm other than landmark parametrization, rendering the comparisons of little or at least relative relevance. Moreover, differences also in the evaluation methods and the heterogeneity of the experimental setups prevent us to extract definitive conclusions. In this work, we fix the algorithmic aspects of the problem and center our attention to the effect that landmark parametrization has, by its own right, on monocular EKF-SLAM performance. For this, the paper retakes the problem from a unified perspective that considers points and lines alike (edgelets are not covered), and presents and analyzes a compendium of eight different parametrizations, among which five are innovative to the best of our knowledge.

1.1 Undelayed landmark initialization (ULI)

Landmark initialization in monocular SLAM is difficult because, due to the projective nature of the sensor, the measurements are rank-deficient and the observation functions are not invertible. This means that a full 3D estimate of the landmarks just discovered is not available for mapping. Early approaches (Davison, 2003; Bailey, 2003; Lemaire et al, 2005) took advantage of the sensor motion to achieve fully 3D estimates before actually initializing the landmarks. This family of methods introduces a *delay* until the sensor motion has gained enough parallax for triangulation, during which the landmarks, not yet mapped, cannot provide any information for localization. To overcome this, *undelayed landmark initialization* (ULI, also known as *partial initialization*, Solà et al, 2005) incorporates these partially measured landmarks at the first observation, that is, before all of their degrees of freedom (DOF) are determined (or *sufficiently estimated*). In bearings-only systems (*e.g.* a monocular camera, see Fig. 1), ULI allows landmarks showing low parallax (those that are at remote distances or close to the motion direction of the camera) to contribute to SLAM from the first observation, providing precious bearing information that helps constraining the camera orientation. This allows us to exploit the full field of view of the camera up to

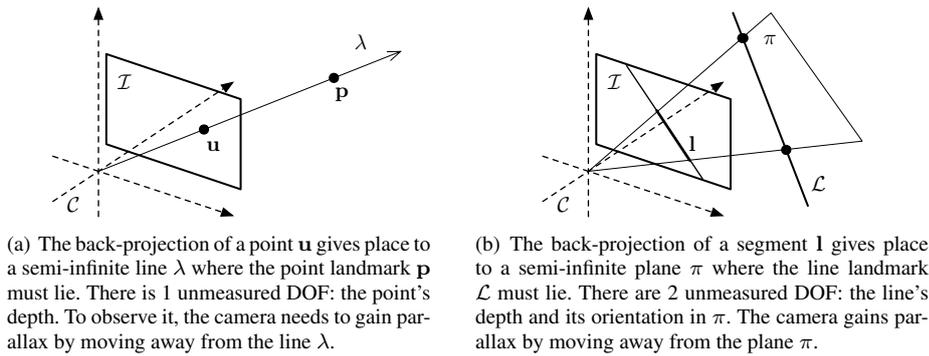


Fig. 1 The problem of undelayed initialization. Back-projection of detected features in a monocular image at their first observation. The unmeasured DOF's have infinite uncertainty and need to be properly modeled by Gaussian shapes, and manipulated using reasonably linear functions.

the infinity range, regardless of the sensor trajectory, which results in accurate localization with very low angular drifts.

For example, when turning a corner in a corridor, a visual SLAM system with ULI can immediately initialize a point or two at the other end of the corridor, which have just become visible and will most likely remain visible during the whole traversal of the corridor. During this time, the triangulation conditions for these landmarks are bad, as they experience no significant increase in parallax. Without ULI, these landmarks must be ignored with the consequence of the robot accumulating angular errors that after a few meters may become the primary source of filter failure due to inconsistency. Thanks to ULI, observing these landmarks serves to constrain the camera orientation, meaning that the robot can reach the end of the corridor without accumulating angular drift. We encourage the reader to consult (Solà et al, 2005; Civera et al, 2008; Solà et al, 2008) for discussions on delayed/undelayed initializations and their importance in monocular SLAM, and (Bailey et al, 2006; Huang and Dissanayake, 2007; Huang et al, 2008) for insights on the sources of inconsistency in EKF-SLAM.

ULI is an interesting challenge in EKF because the filter needs to cope with naturally non-linear equations and huge uncertainty levels associated with the non-measured DOF (Fig. 1). The best solutions accepted so far require some degree of over-parametrization of the landmarks' states. Two aspects have been identified as being beneficial (Civera et al, 2008; Solà et al, 2009b): first, the enormous (potentially infinite) uncertainty must be represented by a single and well-defined (*i.e.*, bounded) Gaussian. Second, the observation functions must be reasonably linear inside all this uncertainty range. These two severe requirements can be elegantly fulfilled by using parametrizations incorporating the non-observable DOFs proportionally to inverse-distance, as it is done with *e.g.* IDP (Civera et al, 2008), homogeneous points (Marzorati et al, 2008) and Plücker lines (Solà et al, 2009b). This is because, on one hand, a bounded Gaussian in inverse-distance including the origin of coordinates naturally maps into an unbounded uncertainty region including the infinity, and on the other hand, the inverse-distance is key in projective geometry and the projection equations exploiting it become quasi-linear precisely with respect to these highly uncertain DOF.

A third aspect that has proved positive is landmark anchoring. Although not explicitly stated, anchoring was already used in the delayed method of Davison (2003), and later in

IDP. Recently, it has been explicitly evaluated by Solà (2010), who compares three different point parametrizations. Anchoring allows the landmark uncertainty to be referenced to a point close-by (the *anchor*), which is chosen to be the optical center at initialization time. This allows the system to get rid of many linearization errors accumulated since the start of the map, and to consider instead mainly the local motion since the initialization of each particular landmark. More complex anchoring uses the whole camera pose (position and orientation), achieving a higher degree of decoupling between global and local motions (Gee and Mayol, 2006; Gee et al, 2008). These last schemes use shared anchoring to keep the map size small, and thus require that the landmarks be initialized in groups.

1.2 Points and straight lines

The problems of points and infinite straight lines are surprisingly similar, and one of the aims of this paper is to make this similarity evident.

For points, Fig. 1(a), ULI means that landmarks must be initialized so that the uncertainty in distance – the only non-measurable DOF – covers all the visual ray up to infinity.

For infinite straight lines, Fig. 1(b), ULI requires the initial uncertainty to cover 2 non-measurable DOF: distance up to infinity, and all possible orientations.

Bounded lines or *segments* present additional difficulties. Unlike points, lines can be partially occluded, and the edge detectors in use return therefore unstable endpoints. This means that the endpoints of a 3D segment cannot be established from single observations, and that they are generally not re-observable. For these (and other possible) reasons, it is common practice to employ the stochastic map to estimate just the infinite lines supporting the segments, and to keep track of the segment’s endpoints separately. In this paper, we focus mainly on the estimation of infinite lines supporting arbitrarily long segments (not edgelets), and only general guidelines are given about the management of the segments’ endpoints.

1.3 Alternative approaches to monocular SLAM

There exist a significant amount of research investigating the possibilities of using estimation techniques other than EKF. We find IDP used in Bayesian frameworks such as Fast-SLAM2.0 (Eade and Drummond, 2006b) and the unscented Kalman filter (UKF, Sunderhauf et al, 2007; Holmes et al, 2008). More modern methods are based on smoothing, using sparse bundle adjustment (SBA) (Klein and Murray, 2007; Konolige and Agrawal, 2008), which is at this moment the technique that shows the clearest future perspectives because of its better accuracy and scalability (Strasdat et al, 2010). SBA has also been successfully used with edgelets (Klein and Murray, 2008). These works are often motivated by the inconsistency and computational burden issues associated with EKF-SLAM. However, EKF-SLAM (or other similar approaches based on filtering and Gaussians such as UKF- or EIF-SLAM) is still widely used by major robotics and vision laboratories and is at the core of other localization, mapping or modeling systems, with points (Paz et al, 2008; Civera, 2009) (with performances comparable to those of SBA), lines (Gee and Mayol, 2006), and even introducing planes (Gee et al, 2008). Apart from the fact that EKF-SLAM is the implementation with the longest tradition, two technical reasons in our opinion keep it alive: its (relative) simplicity of implementation, and the fact that large maps are usually being built by means of small sub-maps, thus circumventing most of the EKF drawbacks.

1.4 Linearity and EKF consistency

The consistency issues of EKF-SLAM are well known and have been the subject of numerous studies in the last years. [Castellanos et al \(2004\)](#) showed that inconsistency appears even before the computational burden of the problem becomes prohibitive, and proposed in ([Castellanos et al, 2007](#)) robocentric SLAM where the local operation of the filter results in significant linearity improvements. A more concise study of inconsistency is given by [Bailey et al \(2006\)](#), where the normalized estimation error squared (NEES) is averaged over a number of conditionally independent Monte Carlo runs and used to evaluate consistency. This work shows that using ground-truth Jacobians guarantees filter consistency, and thus that inconsistency comes from the unavoidable errors produced when linearizing the system. More theoretically sound insights have been provided by a remarkable work by [Huang et al \(2008\)](#), where it is shown that, using the authors words, “the observable subspace of the linearized system is of higher dimension than that of the actual, non-linear one, leading to covariance reductions in directions of the state where no information is available, which is a primary cause of inconsistency”.

All the studies mentioned above assume 2D implementations using range-and-bearing sensing and Euclidean point parametrizations, exactly as they appear in the original EKF-SLAM solution. Our case of study differs from them in four aspects. The first one is 3D operation (*i.e.*, 6 DOF motion). The second one is that we are dealing with monocular observations, which convey rank-deficient information about the landmark locations. The third aspect, which is a consequence of the previous one, is that landmark parametrization can no longer be the trivial, minimal, Euclidean one, but something more or less complicated and redundant that seeks an improvement of linearity. The fourth and last aspect is that we also incorporate lines.

Our aim with this paper, however, is not a theoretical mathematical analysis (in the style especially of ([Huang et al, 2008](#))) but a performance comparison that visualizes the impact that landmark parametrization has on linearity, estimation error and filter consistency. We show how inconsistency comes from covariance over-estimation rather than error magnitude, which confirms Huang’s conclusions.

Because inconsistency has its roots in non-linearity, we correlate our evaluation with measurements of the degree of linearity of each parametrization. We define for this purpose a linearity index that on one hand is pertinent to EKF (*i.e.*, it accounts for non-linearity *and* uncertainty), and on the other hand it defines its metric in the measurement space and therefore allows us to compare parametrizations having state representations of different sizes and natures.

The choice of the classical EKF engine for SLAM is not casual: as a well-known algorithm, it serves the purpose of a standard workbench through which to evaluate performance differences that have their roots in non-linearity. As an interesting counterpoint, we additionally show with large scale experiments that algorithms robuster to non-linearity such as robocentric EKF-SLAM also benefit from the linearity improvements of the landmark parametrizations proposed in this article.

1.5 Contributions

We provide several contributions:

1. A compendium of eight landmark parametrizations for ULI, three for points and five for lines, where five of them are innovative to the best of our knowledge.

2. A unified methodology to tackle all eight parametrizations. This is achieved through a unified discourse that we use to emphasize the two keys to satisfactory ULI, namely landmark anchoring and inverse-distance behavior.
3. An analytical measure of linearity of multi-dimensional functions that takes into account the time-varying support of probability.
4. A statistical evaluation of root mean squared (RMS) errors and normalized estimation error squared (NEES) consistency, based on Monte-Carlo simulation runs.
5. A benchmark with real outdoors imagery of the point parametrizations on a robo-centric SLAM implementation, showing that our proposed solutions achieve error levels typical of state-of-the-art SLAM based on non-linear optimization.

1.6 Outline

This paper is organized as follows. In Section 2 we describe three parametrizations for points and give details on the necessary algebra to support them. In Section 3 we repeat the process with five types of infinite lines. Section 4 describes the initialization and updating procedures. Section 5 describes the methods we use for linearity and consistency evaluation, with simulation results in Section 6. Further results with real images are presented in Section 7. The paper continues with a discussion in Section 8 and the conclusions in Section 9. A final appendix gives accessory details on segments endpoints management.

2 Parametrizations for 3D points

This section presents some parametrizations for 3D points, with their projection and back-projection operations needed for EKF-SLAM initialization and updates. We start with *Euclidean points* (EP, not suited for ULI) just as a matter of completeness and to introduce some notation. The discourse evolves through *homogeneous points* (HP), *anchored homogeneous points* (AHP), and *inverse-distance points* (IDP), which we refer to here as *anchored modified-polar points* (AMPP) for reasons that will be explained soon.

2.1 Euclidean points (EP)

A *Euclidean point* \mathbf{p} (EP, Fig. 2(a)) is trivially coded with three Cartesian coordinates

$$\mathcal{L}_{EP} = \mathbf{p} = [x \ y \ z]^\top \in \mathbb{R}^3.$$

Transformation to camera frame and perspective (pin-hole) projection are performed with the well-known expression

$$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top(\mathbf{p} - \mathbf{T}) \in \mathbb{P}^2, \quad (1)$$

which we use to introduce some notation. Underlined fonts $\underline{\bullet}$ indicate homogeneous coordinates in projective spaces \mathbb{P}^n ; \mathbf{K} is the intrinsic matrix,

$$\mathbf{K} \triangleq \begin{bmatrix} \alpha_u & 0 & u_0 \\ 0 & \alpha_v & v_0 \\ 0 & 0 & 1 \end{bmatrix}; \quad (2)$$

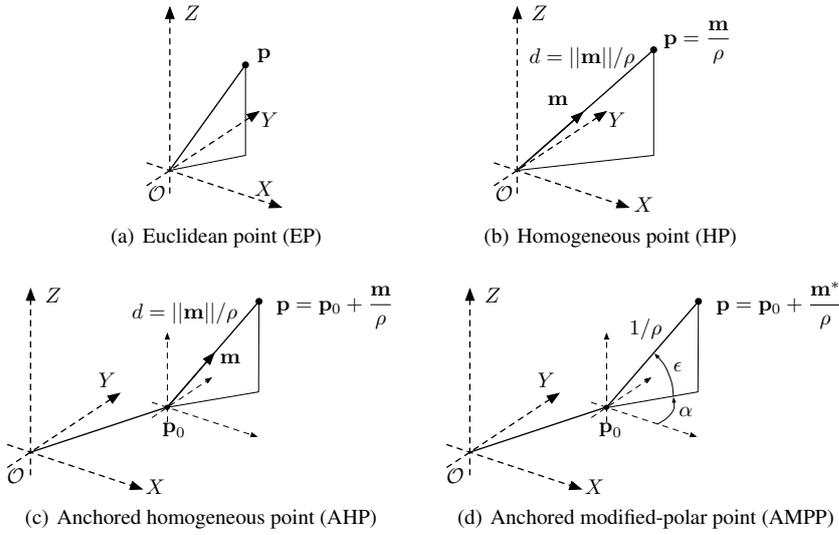


Fig. 2 Point parametrizations. (a) EP is minimal but not suited for ULI. (b,c) HP and AHP do not require \mathbf{m} to be a unit vector. (d) In AMPP the observed ray is coded by two angles: the derived direction vector is unitary and hence ρ is exactly inverse-distance. The anchor point \mathbf{p}_0 in AHP and AMPP corresponds to the optical center at initialization time.

$\mathbf{R} = \mathbf{R}(\mathbf{Q})$ and \mathbf{T} are the rotation matrix and the translation vector defining the camera frame \mathbf{C} , which is coded by the vector $\mathbf{C} = (\mathbf{T}, \mathbf{Q})$, \mathbf{Q} being an orientation representation of our choice suitable for EKF filtering (we use normalized quaternions).

Euclidean points lead to severely non-linear observation functions in bearings-only systems and are not suited for undelayed initialization, as it has been extensively demonstrated, (Chiuso et al, 2002; Bailey, 2003; Davison, 2003; Kwok and Dissanayake, 2004; Eade and Drummond, 2006b; Solà et al, 2008) and most particularly (Solà et al, 2005; Civera et al, 2008). In brief, the problem of ULI with EP can be explained as follows. In EKF, the requirements of function linearity must hold inside the whole uncertainty region of the input variable. Because in Euclidean parametrizations the uncertainty region of partially observed landmarks is unbounded (it reaches the infinity in parameter space), the observation functions' linearity should hold for a whole unbounded interval, and this is impossible.

2.2 Homogeneous points (HP)

A *homogeneous point* (HP, Fig. 2(b)) is coded by a 4-vector in projective space \mathbb{P}^3 . It is composed of a 3D vector \mathbf{m} and a scalar ρ , usually referred to as the *homogeneous part*,

$$\mathcal{L}_{HP} = \underline{\mathbf{p}} = \begin{bmatrix} \mathbf{m} \\ \rho \end{bmatrix} = [m_x \ m_y \ m_z \ \rho]^\top \in \mathbb{P}^3 \subset \mathbb{R}^4. \quad (3)$$

A HP refers to the following EP:

$$\mathbf{p} = \mathbf{m}/\rho. \quad (4)$$

Remark 1 (Inverse-distance): When the point is expressed in the camera frame, the scalar ρ depends linearly with the inverse of the distance d from the optical center to the 3D point,

$$\rho = \|\mathbf{m}\|/d. \quad (5)$$

The unbounded distance uncertainty, which spans from a minimal distance d_{min} to infinity, is transformed into a bounded interval in $\rho \in (0, \|\mathbf{m}\|/d_{min}]$ in parameter space. This is of central importance as this is precisely the factor that will allow us to use such parametrization for ULI (see Section 4.2 for further justification and details). The same concept of inverse-distance is found in all the parametrizations described here (except of course EP), even the ones for lines.

Homogeneous points have the additional interesting property of presenting a bi-linear frame-transformation equation:

$$\underline{\mathbf{p}} = \mathbf{H}\underline{\mathbf{p}}^C \triangleq \begin{bmatrix} \mathbf{R} & \mathbf{T} \\ 0 & 1 \end{bmatrix} \underline{\mathbf{p}}^C, \quad (6)$$

where the super-index \bullet^C indicates the local frame C where the point is referenced to, and \mathbf{H} is the homogeneous motion matrix specifying this frame.

Homogeneous points project into perspective cameras according to the bilinear expression

$$\underline{\mathbf{u}} = \mathbf{P}\underline{\mathbf{p}} = \mathbf{K}\mathbf{P}_0\mathbf{H}^{-1}\underline{\mathbf{p}}, \quad (7)$$

with $\mathbf{P} \triangleq \mathbf{K}\mathbf{P}_0\mathbf{H}^{-1}$, and where \mathbf{P}_0 is the canonical projection matrix

$$\mathbf{P}_0 \triangleq \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}.$$

This can be expressed in terms of \mathbf{T} , \mathbf{R} , \mathbf{m} and ρ ,

$$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top (\mathbf{m} - \mathbf{T}\rho) \in \mathbb{P}^2, \quad (8)$$

which is proportional to ρ . Notice that when the point is expressed in camera frame, $\underline{\mathbf{p}}^C = (\mathbf{m}^C, \rho^C)$, only the non-homogeneous part \mathbf{m}^C appears in the projection expression,

$$\underline{\mathbf{u}} = \mathbf{K} \cdot \mathbf{m}^C, \quad (9)$$

meaning that 1 DOF, the point's range intrinsically contained in ρ^C , is not measurable.

On back-projection, the observed part \mathbf{m}^C in camera frame is obtained by just inverting (9),

$$\mathbf{m}^C = \mathbf{K}^{-1}\underline{\mathbf{u}}. \quad (10)$$

The non-observed part ρ^C cannot be obtained from any data in the system, and must be provided as prior (see Section 4.2 about defining the priors). Overall, the back-projection and frame-transformation composition necessary for landmark initialization is performed with

$$\mathcal{L}_{HP} = \underline{\mathbf{p}} = \begin{bmatrix} \mathbf{m} \\ \rho \end{bmatrix} = \mathbf{H} \begin{bmatrix} \mathbf{K}^{-1}\underline{\mathbf{u}} \\ \rho^C \end{bmatrix} = \begin{bmatrix} \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_1 + \mathbf{T}\rho^C \\ \rho^C \end{bmatrix}, \quad (11)$$

where ρ^C depends inversely with the distance d^C to the camera, via $\rho^C = \|\mathbf{K}^{-1}\underline{\mathbf{u}}\|/d^C$. Once transformed to the global frame with \mathbf{H} , this meaning of ρ^C is lost and ρ becomes the inverse-distance to the global origin \mathcal{O} .

Remark 2 (Inverse-distance and frame transformation): In HP, the inverse distance to the camera becomes after frame transformation (6) an inverse distance to the origin of coordinates. This, when the camera is far from the origin, perverts in some way the desired geometry of the system. However, due to the bilinear character of the transformation, this effect is small and allows us to use HP to implement ULI. The other term of this bilinearity is the motion matrix \mathbf{H} . While \mathbf{H} is accurately estimated, *i.e.*, after small camera motions, bilinearity can be considered quasi-linearity and the system is expected to work. When \mathbf{H} is no longer accurate, *i.e.*, after large camera motions, the system is prone to failure. See also Remark 3.

2.3 Anchored homogeneous points (AHP)

We add an anchor to the HP parametrization to improve linearity, as it is done in the well-known inverse-depth parametrization (IDP, Civera et al, 2008), which we will see later. Anchoring the HP means referencing it to a point \mathbf{p}_0 in 3D space different from the origin (Fig. 2(c)). The *anchor point* \mathbf{p}_0 is chosen to be the optical center at initialization time. This leads to the *anchored homogeneous point* (AHP, Fig. 2(c)), parametrized with the 7-vector

$$\mathcal{L}_{AHP} = \begin{bmatrix} \mathbf{p}_0 \\ \mathbf{m} \\ \rho \end{bmatrix} = [x_0 \ y_0 \ z_0 \ m_x \ m_y \ m_z \ \rho]^\top \in \mathbb{R}^7. \quad (12)$$

An AHP refers to the following EP:

$$\mathbf{p} = \mathbf{p}_0 + \mathbf{m}/\rho. \quad (13)$$

Transformation to camera frame and projection resume to

$$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top (\mathbf{m} - (\mathbf{T} - \mathbf{p}_0)\rho) \in \mathbb{P}^2. \quad (14)$$

Remark 3 (Landmark anchoring): Anchoring the landmarks at the optical center at initialization time has the effect of decoupling the uncertainty of the term multiplying the most uncertain parameter, the inverse-distance ρ . This term was \mathbf{T} in HP and has become $(\mathbf{T} - \mathbf{p}_0)$ in AHP – see (8) and (14). It is easily seen that the uncertainty of $(\mathbf{T} - \mathbf{p}_0)$ is small after initialization, while the current camera pose \mathbf{T} is not far from the anchor \mathbf{p}_0 and their cross-correlation is significant. See Remark 2 for the unanchored case, and Section 5.1 for the impact that uncertainty has on the degree of linearity seen by EKF.

The back-projection and transformation composition is done with

$$\mathcal{L}_{AHP} = \begin{bmatrix} \mathbf{p}_0 \\ \mathbf{m} \\ \rho \end{bmatrix} = \begin{bmatrix} \mathbf{T} \\ \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}} \\ \rho^C \end{bmatrix}, \quad (15)$$

where ρ^C must be provided as prior; its proportionality to inverse-distance is given by $\rho^C = \|\mathbf{K}^{-1}\underline{\mathbf{u}}\|/d$.

2.4 Anchored modified-polar points (AMPP)

We lighten the previous AHP from 7 to 6 parameters by encoding the direction vector \mathbf{m} with just elevation and azimuth angles (ε, α) of the observed optical ray joining \mathbf{p}_0 to \mathbf{p} . When these angles are appended with the inverse of the distance $\rho = 1/d$, the result is a 3D point in modified-polar coordinates, $(\varepsilon, \alpha, 1/d)$. Adding the anchor \mathbf{p}_0 leads to the *anchored modified-polar point* (AMPP, Fig. 2(d)), coded by the 6-vector

$$\mathcal{L}_{AMPP} = \begin{bmatrix} \mathbf{p}_0 \\ (\varepsilon, \alpha) \\ \rho \end{bmatrix} = [x_0 \ y_0 \ z_0 \ \varepsilon \ \alpha \ \rho]^\top \in \mathbb{R}^6. \quad (16)$$

Remark 4 (Inverse-depth points): In this article we refer to the originally named “inverse depth points” (IDP) in (Civera et al, 2008) as *anchored modified-polar points* (AMPP). There is absolutely no difference between IDP and AMPP, and the name change is justified by two facts: on one hand, our name better explains the nature of the parametrization as it recalls the previously existing “modified polar coordinates” term (Aidala and Hammel, 1983, and possibly earlier). On the other hand, all our parametrizations share the concept of inverse-depth (or inverse-distance), rendering the term “IDP” ambiguous and non-informative.

An AMPP refers to the following EP:

$$\mathbf{p} = \mathbf{p}_0 + \mathbf{m}^*(\varepsilon, \alpha)/\rho, \quad (17)$$

where $\mathbf{m}^*(\varepsilon, \alpha)$ is a unit vector in the direction of (ε, α) ,

$$\mathbf{m}^*(\varepsilon, \alpha) = \begin{bmatrix} \cos(\varepsilon) \cos(\alpha) \\ \cos(\varepsilon) \sin(\alpha) \\ \sin(\varepsilon) \end{bmatrix}. \quad (18)$$

Transformation to camera frame and pin-hole projection to the homogeneous plane are combined to give

$$\mathbf{u} = \mathbf{K}\mathbf{R}^\top (\mathbf{m}^*(\varepsilon, \alpha) - (\mathbf{T} - \mathbf{p}_0)\rho). \quad (19)$$

The back-projection and transformation composition is performed with

$$\mathcal{L}_{AMPP} = \begin{bmatrix} \mathbf{p}_0 \\ (\varepsilon, \alpha) \\ \rho \end{bmatrix} = \begin{bmatrix} \mathbf{T} \\ \mu^*(\mathbf{R}\mathbf{K}^{-1}\mathbf{u}) \\ \rho^C \end{bmatrix}, \quad (20)$$

where $\mu^*(\mathbf{m})$ gives elevation and azimuth angles (ε, α) of a director vector $\mathbf{m} = (m_x, m_y, m_z)$,

$$\begin{bmatrix} \varepsilon \\ \alpha \end{bmatrix} = \mu^*(m_x, m_y, m_z) = \begin{bmatrix} \arctan(m_z/\sqrt{m_x^2 + m_y^2}) \\ \arctan(m_y/m_x) \end{bmatrix}. \quad (21)$$

The parameter ρ^C is now exactly the inverse-distance $1/d$ because \mathbf{m}^* is unitary. ρ^C must be provided as prior.

3 Parametrizations for infinite straight 3D lines

This section mimics the structure of Section 2, now for the case of infinite straight lines. We remark the numerous parallelisms that can be established among them, and also between points and lines. We start with a quite exhaustive introduction to the *Plücker line* (PL), which behaves surprisingly similar to HP, and where the concept of inverse-distance is associated to a 3D vector instead of a scalar. The discourse evolves through the *anchored Plücker line* (APL), the *homogeneous-points line* (HPL), the *anchored homogeneous-points line* (AHPL), and the *anchored modified-polar-points line* (AMPPL).

3.1 Plucker lines (PL)

This sub-section devoted to the Plücker line is long. We decided to include all this material because, for the sake of providing a coherent picture, it is important to highlight many interesting connections between homogeneous points (HP) and Plücker lines (PL), notably the existence of bilinear transformation and projection equations reproducing the structure of those of HP, and the inverse-distance behavior of the homogeneous part of the Plücker vector. These connections clearly arise with the adoption of a discourse that retraces the one we used for HP. They allow us to propose the Plücker line as an interesting starting candidate for undelayed initialization of lines in monocular EKF-SLAM. Most of the material here can be found in (Solà et al, 2009b).

3.1.1 The Plücker coordinates

A line in \mathbb{P}^3 can be defined from two points $\underline{\mathbf{a}}$ and $\underline{\mathbf{b}}$ of the line by the *Plücker matrix*,

$$\mathbf{L} = \underline{\mathbf{b}} \cdot \underline{\mathbf{a}}^\top - \underline{\mathbf{a}} \cdot \underline{\mathbf{b}}^\top \in \mathbb{R}^{4 \times 4}, \quad (22)$$

with $\underline{\mathbf{a}} = (\mathbf{a}, a) \in \mathbb{P}^3$ and the same for $\underline{\mathbf{b}}$. This is a 4×4 skew-symmetric matrix (with 12 off-diagonal entries $l_{ij} = -l_{ji}$) subject to the *Plücker constraint*,

$$\det(\mathbf{L}) = 0. \quad (23)$$

The Plücker matrix is independent of the two selected points of the line (more exactly, any two points of the same line give place to a matrix $\mathbf{L}' \sim \mathbf{L}$, *i.e.*, equivalent up to scale).

This line is coded as a homogeneous 6-vector $\mathcal{L}_{PL} \in \mathbb{P}^5$ with the so called *Plücker coordinates*. These coordinates are any linearly-independent selection of the entries $\pm l_{ij}$, and have been defined in the literature in a number of different ways, some of them more fortunate (intuitive, easy to understand or manipulate) than others. In order to make the similarities with HP visible, it is handy to choose the representation suggested by Bartoli and Sturm (2001), that we will name here the *Plücker line* (PL, Fig. 3(a)),

$$\mathcal{L}_{PL} = \begin{bmatrix} \mathbf{n} \\ \mathbf{v} \end{bmatrix} = [n_x \ n_y \ n_z \ v_x \ v_y \ v_z]^\top \in \mathbb{P}^5 \subset \mathbb{R}^6, \quad (24)$$

which corresponds to writing the Plücker matrix \mathbf{L} as

$$\mathbf{L} = \begin{bmatrix} [\mathbf{n}]_{\times} & \mathbf{v} \\ -\mathbf{v}^\top & 0 \end{bmatrix}, \quad \mathbf{n}, \mathbf{v} \in \mathbb{R}^3, \quad (25)$$

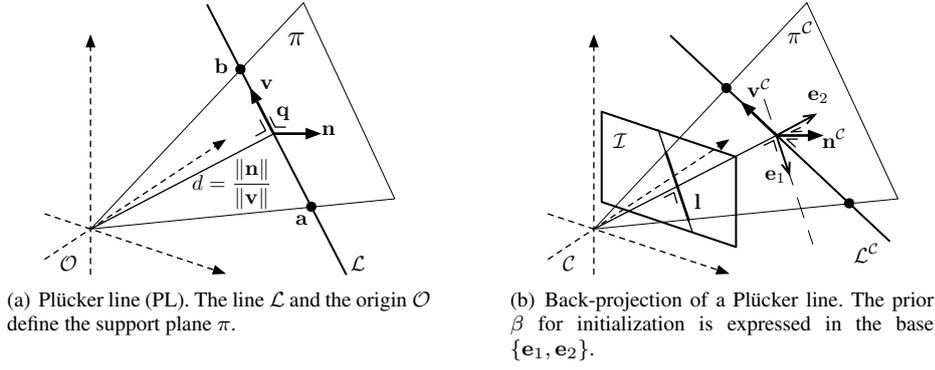


Fig. 3 Geometrical interpretations of the Plücker line, with back-projection details. The 3-vector \mathbf{v} is not observable at initialization time. Its initial covariance, however, must be defined in the plane π^c by means of a 2D Gaussian prior β . See Fig. 10 for further details.

with $[\mathbf{n}]_{\times}$ the skew-symmetric matrix associated with the cross-product (i.e., $[\mathbf{n}]_{\times} \mathbf{m} \equiv \mathbf{n} \times \mathbf{m}$),

$$[\mathbf{n}]_{\times} \triangleq \begin{bmatrix} 0 & -n_z & n_y \\ n_z & 0 & -n_x \\ -n_y & n_x & 0 \end{bmatrix}. \quad (26)$$

This choice and the definition (22) allow us to write

$$\mathbf{n} = \mathbf{a} \times \mathbf{b} \quad (27)$$

$$\mathbf{v} = a\mathbf{b} - b\mathbf{a}, \quad (28)$$

with which the Plücker constraint becomes the orthogonality condition $\mathbf{n}^{\top} \mathbf{v} = 0$.

The Plücker coordinates, when defined as in (27–28), admit a comprehensible geometrical interpretation (in the Euclidean sense, Fig. 3(a)):

- The vector \mathbf{n} is a vector normal to the plane π containing the line \mathcal{L}_{PL} (hence the points \mathbf{a} and \mathbf{b}) and the origin \mathcal{O} .
- The vector \mathbf{v} is a director vector of the line, oriented from \mathbf{a} to \mathbf{b} .
- The ratio $\|\mathbf{n}\|/\|\mathbf{v}\|$ is the Euclidean orthogonal distance d from the line \mathcal{L} to the origin \mathcal{O} .
- The Plücker constraint trivially says that $\mathbf{n} \perp \mathbf{v}$.
- The point of the line closest to the origin is given by $\mathbf{q} = (\mathbf{v} \times \mathbf{n})/\|\mathbf{v}\|^2 \in \mathbb{R}^3$ or $\underline{\mathbf{q}} = (\mathbf{v} \times \mathbf{n}, \mathbf{v}^{\top} \mathbf{v}) \in \mathbb{P}^3$.

Remark 5 (Plücker and inverse-distance): The third property above, saying $d = \|\mathbf{n}\|/\|\mathbf{v}\|$, is crucial for undelayed initialization in SLAM, notably because of the inverse-distance behavior of the sub-vector \mathbf{v} . This is not possible with the Euclidean Plücker coordinates $\mathcal{L}_{\mathbb{E}} = (\mathbf{n}, \mathbf{u})$ in (Lemaire and Lacroix, 2007) because its director vector \mathbf{u} is normalized, i.e., $\|\mathbf{u}\| = 1$ and hence $d = \|\mathbf{n}\|$. Instead of normalizing \mathbf{v} (or \mathbf{u}), it would have been more interesting to normalize \mathbf{n} , yielding an exact inverse-distance $\|\mathbf{v}\| = 1/d$; although no normalization is really necessary: as we will see in this paper, just proportionality to inverse-distance is enough for achieving ULI. See also Remark 6.

3.1.2 Frame transformations and projection

It is easy to see, via (6) and (22), that the Plücker matrix is transformed according to

$$\mathbf{L} = \mathbf{H} \cdot \mathbf{L}^C \cdot \mathbf{H}^\top .$$

This expression is linear in the components of \mathbf{L}^C and therefore a linear expression exists for its vector counterpart \mathcal{L}_{PL} . Having defined $\mathcal{L}_{PL} = (\mathbf{n}, \mathbf{v})$, the expression of the transformation is amazingly simple (Bartoli and Sturm, 2001):

$$\mathcal{L}_{PL} = \mathcal{H} \cdot \mathcal{L}_{PL}^C \triangleq \begin{bmatrix} \mathbf{R} & [\mathbf{T}]_\times \mathbf{R} \\ 0 & \mathbf{R} \end{bmatrix} \cdot \mathcal{L}_{PL}^C . \quad (29)$$

The inverse transformation is performed with

$$\mathcal{L}_{PL}^C = \mathcal{H}^{-1} \cdot \mathcal{L}_{PL} = \begin{bmatrix} \mathbf{R}^\top & -\mathbf{R}^\top [\mathbf{T}]_\times \\ \mathbf{0} & \mathbf{R}^\top \end{bmatrix} \cdot \mathcal{L}_{PL} . \quad (30)$$

Similarly, the Plücker matrix is projected into a pin-hole camera according to

$$[\mathbf{l}]_\times = \mathbf{P} \cdot \mathbf{L} \cdot \mathbf{P}^\top ,$$

which is again linear in \mathbf{L} (see (26) for the meaning of $[\mathbf{l}]_\times$). The corresponding linear expression for the projected line in homogeneous coordinates, $\mathbf{l} \in \mathbb{P}^2$, is also very simple:

$$\mathbf{l} = \mathcal{P} \cdot \mathcal{L}_{PL} = \mathcal{K} \cdot \mathcal{P}_0 \cdot \mathcal{H}^{-1} \cdot \mathcal{L}_{PL} , \quad (31)$$

with intrinsic and canonical projection Plücker matrices

$$\mathcal{K} = \begin{bmatrix} \alpha_v & 0 & 0 \\ 0 & \alpha_u & 0 \\ -\alpha_v u_0 & -\alpha_u v_0 & \alpha_u \alpha_v \end{bmatrix} , \quad \mathcal{P}_0 = \begin{bmatrix} 100000 \\ 010000 \\ 001000 \end{bmatrix} .$$

The whole transformation and projection process (31) can be expressed in terms of \mathbf{T} , \mathbf{R} , \mathbf{n} and \mathbf{v} ,

$$\mathbf{l} = \mathcal{K} \cdot \mathbf{R}^\top \cdot (\mathbf{n} - \mathbf{T} \times \mathbf{v}) . \quad (32)$$

Notice that when the line is expressed in camera frame, $\mathcal{L}_{PL}^C = (\mathbf{n}^C, \mathbf{v}^C)$, only the plane's normal \mathbf{n}^C appears in the projection expression,

$$\mathbf{l} = \mathcal{K} \cdot \mathbf{n}^C , \quad (33)$$

meaning that 2 DOF, the line's range and orientation contained in \mathbf{v}^C , are not measurable.

We can now fully observe the revealing parallelisms between PL and HP by comparing equations (29) with (6), (31) with (7), (32) with (8) and (33) with (9). Roughly speaking, the vector \mathbf{n} in PL plays the role of \mathbf{m} in HP, and \mathbf{v} plays the role of ρ . We will exploit this fact to achieve ULI operation.

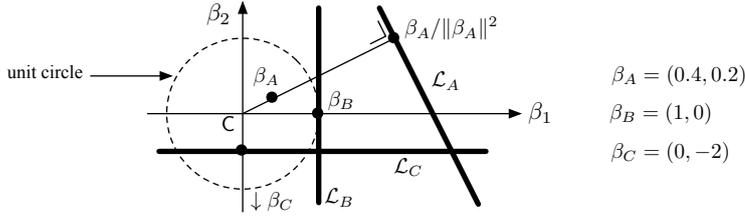


Fig. 4 Different lines in the representation plane π in camera frame C , as a function of β . The circle is of unit radius. Given β , the line is such that its closest point to C is $\beta/\|\beta\|^2$. The line is orthogonal to the vector β .

3.1.3 Pin-hole back-projection

A segment l detected in an image \mathcal{I} uniquely determines the plane π^C containing the 3D line and the optical center (Fig. 3(b)). The plane's normal in camera frame, \mathbf{n}^C , constitutes the measured part; it is obtained by simply inverting (33),

$$\mathbf{n}^C = \mathcal{K}^{-1} \cdot \mathbf{l}. \quad (34)$$

The director vector \mathbf{v}^C is meant to lie on the plane π^C and has therefore only 2 DOF, which are not measured. We need to isolate them to be able to provide the necessary Gaussian prior for initialization. For this, we consider \mathbf{v}^C to be generated by a linear combination of the vectors of an orthogonal base $\mathbf{E} = [\mathbf{e}_1, \mathbf{e}_2]$ of the plane π^C , *i.e.*,

$$\mathbf{v}^C = \beta_1 \cdot \mathbf{e}_1 + \beta_2 \cdot \mathbf{e}_2, \quad \beta_1, \beta_2 \in \mathbb{R},$$

with $\{\mathbf{e}_1, \mathbf{e}_2, \mathbf{n}^C\}$ mutually orthogonal. Doing $\beta = (\beta_1, \beta_2) \in \mathbb{R}^2$ we get the matrix form

$$\mathbf{v}^C = \mathbf{E} \cdot \beta, \quad (35)$$

and $\mathbf{v}^C \in \pi^C$ for any value of β . The base \mathbf{E} spans the null space of \mathbf{n}^C , thus the Plücker constraint $\mathbf{n} \perp \mathbf{v}$ is satisfied by construction.

For convenience, we arbitrarily build the base \mathbf{E} so that $\|\beta\|$ is exactly inverse-distance and \mathbf{e}_1 is parallel to the image plane. This yields

$$\mathbf{e}_1 = \frac{[n_2^C \ -n_1^C \ 0]^T}{\sqrt{(n_1^C)^2 + (n_2^C)^2}} \cdot \|\mathbf{n}^C\| \quad \text{and} \quad \mathbf{e}_2 = \frac{\mathbf{n}^C \times \mathbf{e}_1}{\|\mathbf{n}^C\|}. \quad (36)$$

With this base choice the vector β admits the following geometrical interpretation (Fig. 4):

- $\beta = (\beta_1, 0)$ is a line parallel to \mathbf{l} , thus to the image plane, passing over the point $D = (1/\beta_1, 0)$.
- $\beta = (0, \beta_2)$ is a line perpendicular to \mathbf{l} (but generally not to the image plane), passing over the point $D = (0, 1/\beta_2)$.
- $\beta = (\beta_1, \beta_2)$ is a line in the direction of $(\beta_2, -\beta_1)$ passing over the point $D = \beta/\|\beta\|^2$ which is the point of the line closest to the optical center.
- $d = 1/\|\beta\|$ is the orthogonal Euclidean distance from the line to the optical center C .

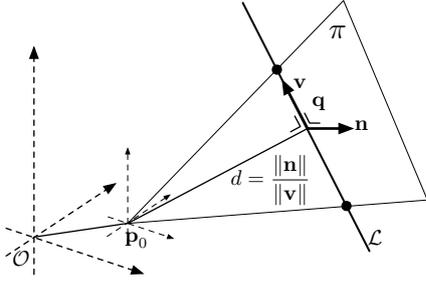


Fig. 5 Anchored Plücker line (APL).

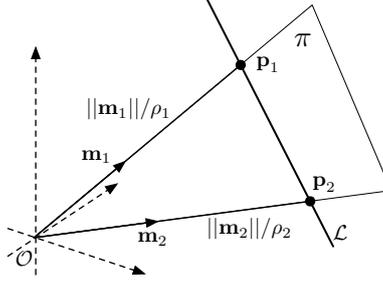


Fig. 6 Homogeneous-points line (HPL) defined with two HP that support it.

Remark 6 (Role of β): The planar β -space is well-suited for defining our Gaussian prior. When $\beta \rightarrow (0, 0)$, the line tends to infinity. Its orientation is given by the relative strength of β_1 with respect to β_2 , and it easily covers the full circumference. The value $\|\beta\|$ is the inverse of the Euclidean distance from the line to the origin. When assigning a prior *pdf* to β at initialization time (see Fig. 10 in Section 4 on initializing the *pdf* of β), this will be properly mapped to the 3D space as a planar *pdf* on the plane π^C . The support of high probability of this *pdf* covers from a specified minimal distance to infinity.

Summarizing, back-projection and transformation are performed with

$$\mathcal{L}_{PL} = \mathcal{H} \begin{bmatrix} \mathcal{K}^{-1}\mathbf{1} \\ \mathbf{E}\beta \end{bmatrix} = \begin{bmatrix} \mathbf{R}\mathcal{K}^{-1}\mathbf{1} + \mathbf{T} \times \mathbf{R}\mathbf{E}\beta \\ \mathbf{R}\mathbf{E}\beta \end{bmatrix}, \quad (37)$$

where β must be provided as prior.

3.2 Anchored Plücker lines (APL)

As we did with points, we add an anchor to the Plücker parametrization to improve linearity. The *anchored Plücker line* (APL, Fig. 5) is then the 9-vector:

$$\mathcal{L}_{APL} = \begin{bmatrix} \mathbf{p}_0 \\ \mathbf{n} \\ \mathbf{v} \end{bmatrix} = [x_0 \ y_0 \ z_0, n_x \ n_y \ n_z, v_x \ v_y \ v_z]^T \in \mathbb{R}^9. \quad (38)$$

Transformation and projection are accomplished by transforming the line to the camera frame, un-anchoring it, and projecting it into the pin-hole camera. This can be done in one single expression with:

$$\mathbf{l} = \mathcal{K} \cdot \mathbf{R}^T \cdot (\mathbf{n} + (\mathbf{p}_0 - \mathbf{T}) \times \mathbf{v}) \in \mathbb{P}^2, \quad (39)$$

in which we notice:

- The linear character with respect to \mathbf{n} .
- For accurate estimates of $(\mathbf{T} - \mathbf{p}_0)$, which is true for observations shortly after initialization, the linear character also with respect to the non-observed \mathbf{v} , which additionally exhibits inverse-distance behavior.

Back-projection and transformation resume to

$$\mathcal{L}_{APL} = \begin{bmatrix} \mathbf{T} \\ \mathbf{R}\mathcal{K}^{-1}\mathbf{l} \\ \mathbf{R}\mathbf{E}\beta \end{bmatrix}, \quad (40)$$

where β must be provided as prior.

3.3 Homogeneous-points lines (HPL)

This and the following parametrizations are based on the fact that a line in 3D space can be represented by two points supporting it. We will use the point parametrizations explored in Section 2 to build lines, in the hope that this will preserve most of the properties of the formers.

A *homogeneous-points line* (HPL, Fig. 6) is coded by two HP that support it:

$$\mathcal{L}_{HPL} = \begin{bmatrix} \mathbf{m}_1 \\ \rho_1 \\ \mathbf{m}_2 \\ \rho_2 \end{bmatrix} = [m_{1x} \ m_{1y} \ m_{1z} \ \rho_1 \ m_{2x} \ m_{2y} \ m_{2z} \ \rho_2]^\top \in \mathbb{R}^8. \quad (41)$$

Transformation and pin-hole projection require the projection of the two support points, *i.e.*, for $i \in \{1, 2\}$,

$$\mathbf{u}_i = \mathbf{K}\mathbf{R}^\top (\mathbf{m}(\varepsilon_i, \alpha_i) - \mathbf{T}\rho_i).$$

This expression (which is obviously equal to HP's (8)) may be practical to design appropriate updating algorithms as it contains information about the segment's support points in the image. However, for the sake of comparing HPL against other line parametrizations, we join the two projected points into a homogeneous 2D line,

$$\mathbf{l} = \mathbf{u}_1 \times \mathbf{u}_2. \quad (42)$$

This yields after a few arrangements¹

$$\mathbf{l} = \mathcal{K}\mathbf{R}^\top \left((\mathbf{m}_1 \times \mathbf{m}_2) - \mathbf{T} \times (\rho_1 \mathbf{m}_2 - \rho_2 \mathbf{m}_1) \right). \quad (43)$$

This last expression is important in the sense that it allows us to observe the parallelisms between parametrizations. Comparing HPL (43) against PL (32), and remembering equations (27–28) defining the Plücker sub-vectors, we observe that:

- The product $\mathbf{m}_1 \times \mathbf{m}_2$ is a vector orthogonal to the plane π , and it can be identified with the PL sub-vector \mathbf{n} .
- The term $(\rho_1 \mathbf{m}_2 - \rho_2 \mathbf{m}_1)$ is a vector joining the two support points of the line. It is therefore its director vector and can be identified with the PL sub-vector \mathbf{v} .
- With these two identifications, equations (32) and (43) coincide (using (27–28) this coincidence can be easily proved to hold exactly).

Back-projection and transformation should be trivial from the one used for HP. See Table 1 in page 18 for details.

¹ To prove (43) we use the distributive property of the cross-product, the identity $(\mathbf{M}\mathbf{a}) \times (\mathbf{M}\mathbf{b}) = \det(\mathbf{M})\mathbf{M}^{-\top}(\mathbf{a} \times \mathbf{b})$, the fact that regular and Plücker intrinsic matrices are related by $\mathcal{K} \propto \mathbf{K}^{-\top}$, and remind that $\mathbf{l} \in \mathbb{P}^2$ and is therefore equivalent under proportionality transforms.

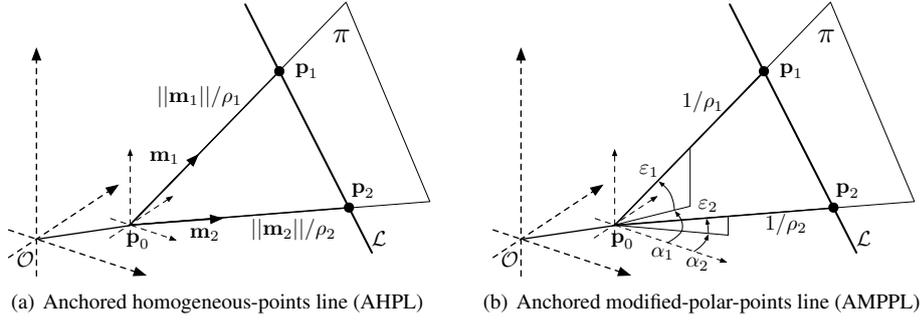


Fig. 7 Anchored point-supported lines. The lines are defined by two support points like the ones in Section 2. The anchor is common to both points.

3.4 Anchored homogeneous-points lines (AHPL)

The *anchored homogeneous-points line* (AHPL, Fig. 7(a)) can be built either by adding an anchor to the HPL or by joining two AHP with a shared anchor:

$$\mathcal{L}_{AHPL} = \begin{bmatrix} \mathbf{p}_0 \\ \mathbf{m}_1 \\ \rho_1 \\ \mathbf{m}_2 \\ \rho_2 \end{bmatrix} = [x_0 \ y_0 \ z_0 \ m_{1x} \ m_{1y} \ m_{1z} \ \rho_1 \ m_{2x} \ m_{2y} \ m_{2z} \ \rho_2]^\top \in \mathbb{R}^{11}. \quad (44)$$

Transformation and pin-hole projection require the projection of the two support points \mathbf{u}_1 and \mathbf{u}_2 , which are joined into a homogeneous line, $\mathbf{l} = \mathbf{u}_1 \times \mathbf{u}_2$. As before, this can be rearranged as

$$\mathbf{l} = \mathcal{K}\mathbf{R}^\top \left((\mathbf{m}_1 \times \mathbf{m}_2) - (\mathbf{T} - \mathbf{p}_0) \times (\rho_1 \mathbf{m}_2 - \rho_2 \mathbf{m}_1) \right), \quad (45)$$

where the same parallelisms that we highlighted between PL and HPL can now be observed between APL and AHPL: equations (39) and (45) are equivalent after identifying $(\mathbf{m}_1 \times \mathbf{m}_2)$ with \mathbf{n} and $(\rho_1 \mathbf{m}_2 - \rho_2 \mathbf{m}_1)$ with \mathbf{v} .

See Table 1 in page 18 for the back-projection and transformation equation.

3.5 Anchored modified-polar-points lines (AMPPL)

The *anchored modified-polar-points line* (AMPPL, Fig. 7(b)) is coded by two AMPP that support it, which share a common anchor:

$$\mathcal{L}_{AMPPL} = \begin{bmatrix} \mathbf{p}_0 \\ (\varepsilon_1, \alpha_1) \\ \rho_1 \\ (\varepsilon_2, \alpha_2) \\ \rho_2 \end{bmatrix} = [x_0 \ y_0 \ z_0 \ \varepsilon_1 \ \alpha_1 \ \rho_1 \ \varepsilon_2 \ \alpha_2 \ \rho_2]^\top \in \mathbb{R}^9. \quad (46)$$

Table 1 Summary of landmark parametrizations with their main manipulations

Lmk (size)	back-proj. + transf. $\underline{g}()$	transformation + projection $\underline{h}()$
EP (3)	$\mathbf{p} = t\mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}} + \mathbf{T}$	$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top(\mathbf{p} - \mathbf{T})$
HP (4)	$\begin{pmatrix} \mathbf{m} \\ \rho \end{pmatrix} = \begin{pmatrix} \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_1 + \mathbf{T}\rho^c \\ \rho^c \end{pmatrix}$	$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top(\mathbf{m} - \mathbf{T}\rho)$
AHP (7)	$\begin{pmatrix} \mathbf{p}_0 \\ \mathbf{m} \\ \rho \end{pmatrix} = \begin{pmatrix} \mathbf{T} \\ \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}} \\ \rho^c \end{pmatrix}$	$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top(\mathbf{m} - (\mathbf{T} - \mathbf{p}_0)\rho)$
AMP (6)	$\begin{pmatrix} \mathbf{p}_0 \\ (\varepsilon, \alpha) \\ \rho \end{pmatrix} = \begin{pmatrix} \mathbf{T} \\ \mu^*(\mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}) \\ \rho^c \end{pmatrix}$	$\underline{\mathbf{u}} = \mathbf{K}\mathbf{R}^\top(\mathbf{m}^* - (\mathbf{T} - \mathbf{p}_0)\rho)$
PL (6)	$\begin{pmatrix} \mathbf{n} \\ \mathbf{v} \end{pmatrix} = \begin{pmatrix} \mathbf{R}\mathcal{K}^{-1}\mathbf{l} + \mathbf{T} \times \mathbf{R}\mathbf{E}\beta \\ \mathbf{R}\mathbf{E}\beta \end{pmatrix}$	$\mathbf{l} = \mathcal{K}\mathbf{R}^\top(\mathbf{n} - \mathbf{T} \times \mathbf{v})$
APL (9)	$\begin{pmatrix} \mathbf{p}_0 \\ \mathbf{n} \\ \mathbf{v} \end{pmatrix} = \begin{pmatrix} \mathbf{T} \\ \mathbf{R}\mathcal{K}^{-1}\mathbf{l} \\ \mathbf{R}\mathbf{E}\beta \end{pmatrix}$	$\mathbf{l} = \mathcal{K}\mathbf{R}^\top(\mathbf{n} - (\mathbf{T} - \mathbf{p}_0) \times \mathbf{v})$
HPL (8)	$\begin{pmatrix} \mathbf{m}_1 \\ \rho_1 \\ \mathbf{m}_2 \\ \rho_2 \end{pmatrix} = \begin{pmatrix} \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_1 + \mathbf{T}\rho_1^c \\ \rho_1^c \\ \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_2 + \mathbf{T}\rho_2^c \\ \rho_2^c \end{pmatrix}$	$\mathbf{l} = \mathcal{K}\mathbf{R}^\top((\mathbf{m}_1 \times \mathbf{m}_2) - \mathbf{T} \times (\mathbf{m}_2\rho_1 - \mathbf{m}_1\rho_2))$
AHPL (11)	$\begin{pmatrix} \mathbf{p}_0 \\ \mathbf{m}_1 \\ \rho_1 \\ \mathbf{m}_2 \\ \rho_2 \end{pmatrix} = \begin{pmatrix} \mathbf{T} \\ \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_1 \\ \rho_1^c \\ \mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_2 \\ \rho_2^c \end{pmatrix}$	$\mathcal{K}\mathbf{R}^\top((\mathbf{m}_1 \times \mathbf{m}_2) - (\mathbf{T} - \mathbf{p}_0) \times (\mathbf{m}_2\rho_1 - \mathbf{m}_1\rho_2))$
AMPPL (9)	$\begin{pmatrix} \mathbf{p}_0 \\ (\varepsilon_1, \alpha_1) \\ \rho_1 \\ (\varepsilon_2, \alpha_2) \\ \rho_2 \end{pmatrix} = \begin{pmatrix} \mathbf{T} \\ \mu^*(\mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_1) \\ \rho_1^c \\ \mu^*(\mathbf{R}\mathbf{K}^{-1}\underline{\mathbf{u}}_2) \\ \rho_2^c \end{pmatrix}$	$\mathcal{K}\mathbf{R}^\top((\mathbf{m}_1^* \times \mathbf{m}_2^*) - (\mathbf{T} - \mathbf{p}_0) \times (\mathbf{m}_2^*\rho_1 - \mathbf{m}_1^*\rho_2))$

Transformation and projection resume to

$$\mathbf{l} = \mathcal{K}\mathbf{R}^\top\left((\mathbf{m}_1^* \times \mathbf{m}_2^*) - (\mathbf{T} - \mathbf{p}_0) \times (\rho_1\mathbf{m}_2^* - \rho_2\mathbf{m}_1^*)\right), \quad (47)$$

where we used the shortcut $\mathbf{m}_i^* \triangleq \mathbf{m}^*(\varepsilon_i, \alpha_i)$, which corresponds to the trigonometric transform (18).

See Table 1 in page 18 for the back-projection and transformation equation.

3.6 Final comment - points and lines

We summarize in Table 1 all points and lines parametrizations with their main manipulation expressions. On completion of their descriptions we have seen many parallelisms that should help building a coherent picture of a number of parametrizations suited for undelayed initialization in monocular EKF-SLAM. These relations are represented in Fig. 8. We have

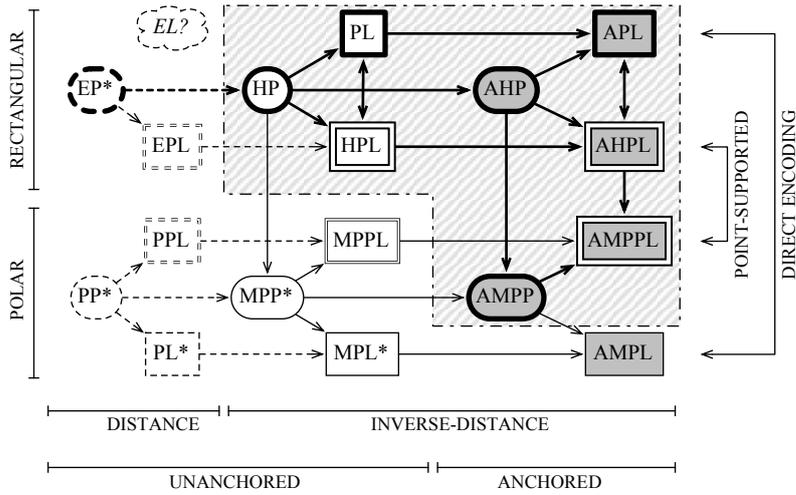


Fig. 8 Links between all proposed parametrizations and more. Round boxes are points; square boxes are lines. Single-stroke square boxes are directly-coded lines. Double-stroke square boxes are point-supported lines. Gray boxes are anchored parametrizations. Arrows indicate the links that we established within the discourse. The dashed area encloses all parametrizations benchmarked in this paper. Some other possible parametrizations, in thin line, have not been studied here (there are some repeated acronyms): polar point (PP, *i.e.*, $[\varepsilon, \alpha, d]$), modified-polar point (MPP, $[\varepsilon, \alpha, \rho]$); the point-supported lines: Euclidean-points line (EPL, $[x_1, y_1, z_1, x_2, y_2, z_2]$), polar-points line (PPL, $[\varepsilon_1, \alpha_1, d_1, \varepsilon_2, \alpha_2, d_2]$), and modified-polar-points line (MPPL); and the directly-coded lines: polar line (PL, $[\phi, \varepsilon, \alpha, d]$), modified-polar line (MPL, $[\phi, \varepsilon, \alpha, \rho]$), and anchored modified-polar line (AMPL). There is no such thing as a directly-coded Euclidean line (EL). Elements in dashed boxes do not benefit from the inverse-distance property and are not suited for undelayed initialization. Minimal parametrizations are marked with an asterisk.

seen anchored and un-anchored representations. We have seen the surprising similarities between homogeneous points and Plücker lines. We have highlighted the parallelisms between point-supported and Plücker-based lines. We have finally situated the modified-polar parametrizations as lightened versions of homogeneous entities. The figure shows further parametrizations that fall out of our interest – refer to the figure’s caption for further justification.

4 Landmark initialization and updates

Undelayed landmark initialization with partial measurements mimics the algorithm for full measurements and incorporates the non-measured magnitudes as Gaussian priors. We first detail the way we express physical measurements on the image plane, and the way to define the non-measured priors. We finally proceed with details on the initialization and updating procedures related to the EKF machinery. For the initialization and updates of the segments endpoints, out of the Kalman filter, please refer to App. A. (For details on camera motion models, refer to *e.g.* (Davison, 2003, for constant velocity), (Solà, 2007, for odometry) or (Piniés et al, 2007, for inertial aiding).)

4.1 2D measurements in the image plane

The previous discourse assumed homogeneous parametrizations of points and lines in the projective image plane \mathbb{P}^2 . We detail here how to obtain them from real point and line measurements defined in the Euclidean pixels image. Unfortunately, going from homogeneous space to Euclidean can only be made at the price of some linearity loss. We decoupled the two stages of projection to the homogeneous plane and transformation to Euclidean because only projection depends on the landmark parametrization. Transformation to Euclidean only depends on the generic type of landmark, that is, if it is a point or a line.

Points: A 2D point is measured as two Cartesian coordinates in pixel space, and modeled as a Gaussian variable. Please note that the numeric value of the measurement corresponds to the mean value $\bar{\mathbf{u}}$ of the distribution:

$$\mathbf{u} = \begin{bmatrix} u \\ v \end{bmatrix} \sim \mathcal{N}\{\bar{\mathbf{u}}, \mathbf{U}\}. \quad (48)$$

Its homogeneous counterpart is built with

$$\underline{\mathbf{u}} = \begin{bmatrix} \mathbf{u} \\ 1 \end{bmatrix} \sim \mathcal{N}\{\underline{\bar{\mathbf{u}}}, \underline{\mathbf{U}}\} = \mathcal{N}\left\{ \begin{bmatrix} \bar{\mathbf{u}} \\ 1 \end{bmatrix}, \begin{bmatrix} \mathbf{U} & \mathbf{0} \\ \mathbf{0} & 0 \end{bmatrix} \right\}. \quad (49)$$

Lines: A bounded 2D segment is measured as a 4-vector stacking its two endpoints:

$$\mathbf{s} = \begin{bmatrix} \mathbf{u}_1 \\ \mathbf{u}_2 \end{bmatrix} \sim \mathcal{N}\{\bar{\mathbf{s}}, \mathbf{S}\} = \mathcal{N}\left\{ \begin{bmatrix} \bar{\mathbf{u}}_1 \\ \bar{\mathbf{u}}_2 \end{bmatrix}, \begin{bmatrix} \mathbf{U} & \mathbf{0} \\ \mathbf{0} & \mathbf{U} \end{bmatrix} \right\}. \quad (50)$$

The segments homogeneous endpoints $\underline{\mathbf{u}}_i$, used for initialization of point-supported lines, are built like the regular points (Eq. (49)). The homogeneous line, used for initialization of Plücker lines, is built with (42), yielding a *pdf* $\mathcal{N}\{\bar{\mathbf{L}}, \mathbf{L}\}$ with

$$\bar{\mathbf{L}} = \underline{\bar{\mathbf{u}}}_1 \times \underline{\bar{\mathbf{u}}}_2 \quad (51)$$

$$\mathbf{L} = [\underline{\bar{\mathbf{u}}}_1]_{\times} \underline{\mathbf{U}} [\underline{\bar{\mathbf{u}}}_1]_{\times}^{\top} + [\underline{\bar{\mathbf{u}}}_2]_{\times} \underline{\mathbf{U}} [\underline{\bar{\mathbf{u}}}_2]_{\times}^{\top}. \quad (52)$$

4.2 Defining the non-measured Gaussian priors

Two basic rules apply to the definition of the prior, be it $\rho^{\mathbf{C}}$ for points or $\beta^{\mathbf{C}}$ for Plücker lines: the origin must be well inside the 2σ support of the *pdf*, and the minimum considered distance d_{min} must (approximately) match the upper 2σ bound. For points and point-supported lines, this resumes to (see Fig. 9)

$$\bar{\rho} - n\sigma_{\rho} = 0, \quad 0 \leq n < 2 \quad (53)$$

$$\bar{\rho} + 2\sigma_{\rho} = 1/d_{min}. \quad (54)$$

A good practice is to choose $n = 1$, although this choice is not critical as it will be revealed by the benchmarking. With $n = 1$ we obtain

$$\bar{\rho} = 1/3d_{min}, \quad \sigma_{\rho} = 1/3d_{min}. \quad (55)$$

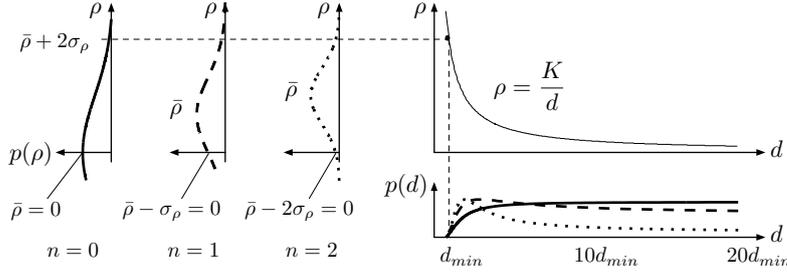


Fig. 9 Inverse-distance pdf. A Gaussian $p(\rho) = \mathcal{N}(\rho - \bar{\rho}, \sigma_\rho^2)$ is defined in inverse-distance (vertical axes). We have ample choice: in one extreme (solid, $n = 0$) we may define it so that $\bar{\rho} = 0$; the other extreme (dotted, $n = 2$) takes $\bar{\rho} - 2\sigma_\rho = 0$. In all cases, we have $(\bar{\rho} + 2\sigma_\rho) = K/d_{min}$. They result in pdfs in distance (bottom) that cover from a minimal distance d_{min} to infinity. K is just a proportionality constant, e.g. $K = 1$ for AMPP, and $K = \|\mathbf{K}^{-1}\mathbf{u}\|$ for AHP and HP. We can also normalize $\mathbf{K}^{-1}\mathbf{u}$ at initialization time and take $K = 1$, in which case ρ is exactly equal to inverse-distance.

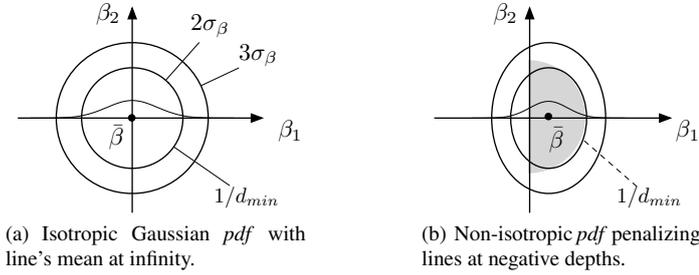


Fig. 10 Defining a prior $\beta \sim \mathcal{N}\{\bar{\beta}; \mathbf{B}\}$ for PL and APL. (a) The isotropic Gaussian with $\bar{\beta} = (0, 0)$ and $\mathbf{B} = \sigma_\beta^2 \mathbf{I}$ contains all possible lines at a minimum distance of d_{min} : it has central symmetry, it includes the origin which represents the line at infinity, and $1/d_{min}$ is at 2σ . For reference, a Gaussian shape is superimposed on the horizontal axis to evaluate the probability values at 2σ and 3σ . (b) An interesting alternative that penalizes lines at the back of the camera is to approximate just the right-hand half of the pdf in (a) (here shadowed) by a new Gaussian. A good fit is obtained with $\bar{\beta} = (1/3d_{min}, 0)$ and an anisotropic covariance $\mathbf{B} = \text{diag}(\sigma_{\beta_1}^2, \sigma_{\beta_2}^2)$ with $\sigma_{\beta_1} = 1/3d_{min}$ and $\sigma_{\beta_2} = 1/2d_{min}$.

For point-supported lines HPL, AHPL and AMPPL, we just need to stack two stochastically independent ρ^C priors, *i.e.*, if we note such prior with $\mathbf{t}^C \sim \mathcal{N}\{\bar{\mathbf{t}}; \mathbf{T}\}$, we have

$$\bar{\mathbf{t}} = \begin{bmatrix} \bar{\rho} \\ \bar{\rho} \end{bmatrix}, \quad \mathbf{T} = \begin{bmatrix} \sigma_\rho^2 & 0 \\ 0 & \sigma_\rho^2 \end{bmatrix}. \quad (56)$$

Defining the 2D Gaussian prior $\beta \sim \mathcal{N}\{\bar{\beta}; \mathbf{B}\}$ for Plücker lines PL and APL is a bit trickier, as it is difficult to express the conditions as straightforward equations like (53) and (54). We prefer to refer the reader directly to the explanations of Fig. 10. For all the implementations presented in this paper we use the solution in Fig. 10(b),

$$\bar{\beta} = \begin{bmatrix} 1/3d_{min} \\ 0 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} (1/3d_{min})^2 & 0 \\ 0 & (1/2d_{min})^2 \end{bmatrix}. \quad (57)$$

4.3 Landmark initialization

The ULI algorithm valid for all parametrizations is detailed below.

1. Identify the mapped magnitudes $\mathbf{x} \sim \mathcal{N}\{\bar{\mathbf{x}}, \mathbf{P}\}$, where

$$\mathbf{x} = \begin{bmatrix} \mathbf{C} \\ \mathbf{M} \end{bmatrix}, \quad \bar{\mathbf{x}} = \begin{bmatrix} \bar{\mathbf{C}} \\ \bar{\mathbf{M}} \end{bmatrix}, \quad \mathbf{P} = \begin{bmatrix} \mathbf{P}_{\text{CC}} & \mathbf{P}_{\text{CM}} \\ \mathbf{P}_{\text{MC}} & \mathbf{P}_{\text{MM}} \end{bmatrix},$$

with $\mathbf{C} = (\mathbf{T}, \mathbf{Q})$ the camera frame and $\mathbf{M} = (\mathcal{L}_1, \dots, \mathcal{L}_N)$ the set of mapped landmarks (points, lines or a mixture of them).

2. Identify the measurement $\mathbf{z} \sim \mathcal{N}\{\bar{\mathbf{z}}, \mathbf{R}\}$ (Section 4.1, \mathbf{z} is either \mathbf{u} or \mathbf{s}).
3. Define a Gaussian prior $\pi \sim \mathcal{N}\{\bar{\pi}; \mathbf{\Pi}\}$ for the non-measured DOFs (Section 4.2; π is either $\rho^{\mathbf{C}}$, $\mathbf{t}^{\mathbf{C}}$ or $\beta^{\mathbf{C}}$).
4. Back-project the Gaussian measurement; get landmark mean and Jacobians

$$\bar{\mathcal{L}} = g(\bar{\mathbf{C}}, \bar{\mathbf{z}}, \bar{\pi})$$

$$\mathbf{G}_{\mathbf{C}} = \left. \frac{dg}{d\bar{\mathbf{C}}} \right|_{\bar{\mathbf{C}}, \bar{\mathbf{z}}, \bar{\pi}}, \quad \mathbf{G}_{\mathbf{z}} = \left. \frac{dg}{d\bar{\mathbf{z}}} \right|_{\bar{\mathbf{C}}, \bar{\mathbf{z}}, \bar{\pi}}, \quad \mathbf{G}_{\pi} = \left. \frac{dg}{d\bar{\pi}} \right|_{\bar{\mathbf{C}}, \bar{\mathbf{z}}, \bar{\pi}}$$

with $g()$ the composition of the measurement-to-homogeneous transforms (Section 4.1) with the back-projection and transformation function (functions $\underline{g}()$ in Table 1).

5. Compute landmark co- and cross-variances

$$\mathbf{P}_{\mathcal{L}\mathcal{L}} = \mathbf{G}_{\mathbf{C}}\mathbf{P}_{\text{CC}}\mathbf{G}_{\mathbf{C}}^{\top} + \mathbf{G}_{\mathbf{z}}\mathbf{R}\mathbf{G}_{\mathbf{z}}^{\top} + \mathbf{G}_{\pi}\mathbf{\Pi}\mathbf{G}_{\pi}^{\top}$$

$$\mathbf{P}_{\mathcal{L}\mathbf{x}} = \mathbf{G}_{\mathbf{C}}\mathbf{P}_{\text{Cx}} = \mathbf{G}_{\mathbf{C}}[\mathbf{P}_{\text{CC}} \ \mathbf{P}_{\text{CM}}].$$

6. Augment the SLAM map

$$\bar{\mathbf{x}} \leftarrow \begin{bmatrix} \bar{\mathbf{x}} \\ \bar{\mathcal{L}} \end{bmatrix}, \quad \mathbf{P} \leftarrow \begin{bmatrix} \mathbf{P} & \mathbf{P}_{\mathcal{L}\mathbf{x}}^{\top} \\ \mathbf{P}_{\mathcal{L}\mathbf{x}} & \mathbf{P}_{\mathcal{L}\mathcal{L}} \end{bmatrix}.$$

4.4 Landmark updates

4.4.1 Point updates

The complete observation function $h()$ is the composition of the ones in Table 1 with the homogeneous-to-Euclidean transform

$$\mathbf{z} = h2e(\underline{\mathbf{u}}) = \begin{bmatrix} u_1/u_3 \\ u_2/u_3 \end{bmatrix} \in \mathbb{R}^2. \quad (58)$$

The complete observation function is therefore $h(\mathbf{x}) = h2e(\underline{h}(\mathbf{x}))$. Point updates follow the standard EKF-SLAM formulation,

$$\text{Innovation mean: } \mathbf{y} = \mathbf{z} - h(\bar{\mathbf{x}}) \quad (= \mathbf{z} - h(\bar{\mathbf{C}}, \bar{\mathcal{L}})) \quad (59)$$

$$\text{Innovation covariance: } \mathbf{Y} = \mathbf{R} + \mathbf{H} \cdot \mathbf{P} \cdot \mathbf{H}^{\top} \quad (60)$$

$$\text{Kalman gain: } \mathbf{K} = \mathbf{P} \cdot \mathbf{H}^{\top} \cdot \mathbf{Y}^{-1} \quad (61)$$

$$\text{State update: } \bar{\mathbf{x}} \leftarrow \bar{\mathbf{x}} + \mathbf{K} \cdot \mathbf{y} \quad (62)$$

$$\text{Covariance update: } \mathbf{P} \leftarrow \mathbf{P} - \mathbf{K} \cdot \mathbf{H} \cdot \mathbf{P} \quad (= \mathbf{P} - \mathbf{K} \cdot \mathbf{Y} \cdot \mathbf{K}^{\top}), \quad (63)$$

with $\mathbf{R} = \mathbf{U}$ the measurement noise covariance (see (48)), and the Jacobian $\mathbf{H} = \left. \frac{\partial h}{\partial \mathbf{x}} \right|_{\bar{\mathbf{x}}}$.

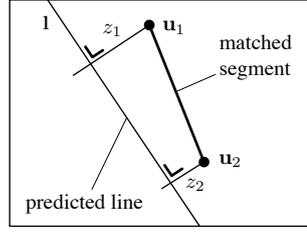


Fig. 11 Plücker line observation update. Direct measurement of the two signed orthogonal distances from the detected endpoints to the expected (or predicted) line.

4.4.2 Line updates

It is convenient to represent the matched segment by its two endpoints, $\mathbf{s} = (\mathbf{u}_1, \mathbf{u}_2) \in \mathbb{R}^4$. Due to the aperture problem, only the measurement components that are orthogonal to the expected line projection can be used for correction. Therefore, we define the predicted measurement as a 2-vector containing the signed orthogonal distances from the endpoints \mathbf{u}_i to the expected line $\bar{\mathbf{l}} = \underline{h}(\bar{\mathbf{C}}, \bar{\mathbf{x}})$ (Fig. 11). This leads to the measurement function

$$\mathbf{z} = \begin{bmatrix} z_1 \\ z_2 \end{bmatrix} = \begin{bmatrix} \bar{\mathbf{l}}^\top \cdot \mathbf{u}_1 / \sqrt{l_1^2 + l_2^2} \\ \bar{\mathbf{l}}^\top \cdot \mathbf{u}_2 / \sqrt{l_1^2 + l_2^2} \end{bmatrix} \in \mathbb{R}^2, \quad (64)$$

which is in pixels units. If we name this function $h_1(\mathbf{l}, \mathbf{s})$, the full observation function is its composition with the projection functions in Table 1,

$$\mathbf{z} = h(\mathbf{x}, \mathbf{s}) = h_1(\underline{h}(\mathbf{x}), \mathbf{s}). \quad (65)$$

The measured value of these distances is zero (the distance from the detected points to a line joining them is zero!), and we just need to consider a covariance $\mathbf{R} = \mathbf{U} \in \mathbb{R}^2$ (see (48)) representing the pixel noise in just two of the four dimensions². This yields an innovation $\mathbf{y} = 0 - h(\bar{\mathbf{x}}, \mathbf{s})$ with covariance $\mathbf{Y} = \mathbf{R} + \mathbf{H} \cdot \mathbf{P} \cdot \mathbf{H}^\top$. The rest of the EKF update is as before.

4.4.3 Improving the update of multiple landmarks per frame

It is convenient to bufferize all observations and perform a unique update per frame with all the information. This means considering a unique observation vector $\mathbf{z}^\top = [z_1^\top, \dots, z_n^\top]$ in (59), with n the number of successful observations in the current frame. The result is more stable and, thanks to the sparsity of the problem, the algorithm runs much faster.

4.4.4 A first comment about the Plücker constraint

When dealing with Plücker lines PL or APL we do not apply any kind of correction to enforce the Plücker constraint. We ensured its satisfaction during landmark initialization, with the specification of the initial covariance in the β -plane, Section 3.1.3, and its validity at any later time is only approximately guaranteed through cross-correlations. Although this

² The expression $\mathbf{R} = \mathbf{U}$ is only valid if the pixel noise is defined isotropic via $\mathbf{U} = \sigma^2 \mathbf{I}_2$, which is most generally the case. Otherwise we need to compute $\mathbf{R} = \mathbf{H}_s \mathbf{S} \mathbf{H}_s^\top$ with \mathbf{H}_s the Jacobian of (64) with respect to the measured segment \mathbf{s} . In fact, \mathbf{H}_s is such that if $\mathbf{S} = \text{diag}(\mathbf{U}, \mathbf{U}) = \sigma^2 \mathbf{I}_4$ then $\mathbf{R} = \mathbf{U} = \sigma^2 \mathbf{I}_2$.

is of course not the optimal way to proceed, we decided to leave the method as parallel as possible with the others presented here, so that we can impute the differences in performance exclusively to landmark parametrization – thus not to algorithmic aspects. Refer to Section 8.2 for further discussion.

4.5 Landmark re-parametrization

Landmark over-parametrization, which we have defended for EKF performance so far, is expensive and should only be used when justified. Landmarks should be reparametrized to their minimal forms after convergence, that is, when the observation functions of these minimal forms (the *destination* forms) are judged linear enough.

For points, the natural choice is to reparametrize to EP. The reparametrization is triggered by the linearity test described in Civera et al (2008), which is very cheap to compute and can be easily adapted to HP, AHP and AMPP.

For lines, and because of the need of endpoints, it may be convenient to choose a non-minimal two-points representation $\mathcal{L} = (\mathbf{p}_1, \mathbf{p}_2)$ (EPL, see Fig. 8), with 6 parameters. In this case we can use the test for points in Civera et al (2008), which must hold for both support points. We can also use any of the minimal representations, which are of size 4 (see also Fig. 8). Tests for these other line representations might be defined from the linearity indices described in the next section, although they are not conceived for speed. A compromise that would probably lead to satisfactory operation is to use the test for EPL, which is simple and does indicate that the line has already converged, and then reparametrize to any other form of our convenience. We have not explored these last possibilities.

5 Linearity and performance evaluation tools

We present here the analytical and statistical tools used in this article to evaluate the performances of all parametrizations.

5.1 Analytical measure of linearity

The EKF requires high degrees of linearity in the measurement and dynamic model equations. Defining an analytic measure of linearity allowing us to compare the degrees of linearity of the observation functions for different parametrizations is therefore of clear importance. In (Civera et al, 2008), an analytic linearity index was proposed based on the variation in the first derivative of the function inside the 95% probability interval of the most uncertain state variable: the inverse-distance parameter. This measure is restricted, thanks to the particular symmetries of the problem, to just 1 DOF, and it is difficult to generalize to our amalgam of parametrizations. Very related to this work, the trace of the Hessian of the measurement model is proposed in (Eade and Drummond, 2007) as a measure of the degree of linearity in several nodes of a multi-map SLAM. This second measure has the drawback of not incorporating the dimensions of the uncertainty region.

In EKF, linearity must always be evaluated with respect to the extension of the probability concentration region of the input variable, which is specified by the covariances matrix. We introduce an analytical linearity index for multiple-input/multiple-output (MIMO) functions which accounts for this probability region. As a desirable additional quality, the

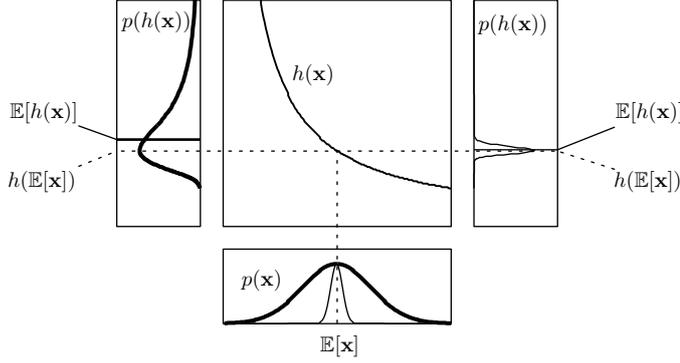


Fig. 12 Propagation error of the Gaussian mean due to non-linearity. For a given non-linear function $h(\cdot)$, the propagation error $\epsilon = \mathbb{E}[h(\mathbf{x})] - h(\mathbb{E}[\mathbf{x}])$ is large for Gaussians with large variance (*thick line, left*) and unnoticeable for narrow Gaussians (*thin line, right*).

proposed index is defined in the measurement space and therefore allows us to compare parametrizations having different state sizes, and even to compare the degree of linearity of points against lines. As in (Eade and Drummond, 2007), it involves the computation of the Hessian which concentrates the local degree of non-linearity of a function.

We are interested in the complete observation functions $\mathbf{z} = h(\mathbf{x})$, *i.e.*, the composition of the transformation and pinhole projection functions, $\underline{h}(\cdot)$ in Table 1, with the appropriate measurement functions, (58) for points and (64) for lines. For concision, we define the state $\mathbf{x} = (\mathcal{C}, \mathcal{L})$, *i.e.*, only the pair camera-landmark under consideration, whose estimate in the map is a Gaussian $\mathcal{N}\{\bar{\mathbf{x}}, \mathbf{P}\}$. We denote the measurement and state dimensions with $m = \dim(\mathbf{z})$ and $n = \dim(\mathbf{x})$. In our case we have a fixed $m = 2$, and a variable $10 \leq n \leq 18$ depending on the selected parametrization.

Our linearity index is based on the error in the filter innovation $\mathbf{y} = \mathbf{z} - h(\bar{\mathbf{x}})$ due to linearization. For any measurement \mathbf{z} , this error corresponds to the propagation error through $h(\cdot)$ of the state's mean (Fig. 12), given by

$$\epsilon \triangleq \mathbb{E}[h(\mathbf{x})] - h(\mathbb{E}[\mathbf{x}]) \in \mathbb{R}^m, \quad (66)$$

where $\mathbb{E}[\bullet]$ is the expectation operator, *i.e.*, $\bar{\mathbf{x}} \equiv \mathbb{E}[\mathbf{x}]$. This error is a magnitude expressed in the measurement space. To obtain a computable approximation of ϵ we use the Taylor-Young expansion for multi-variate functions applied to each component i of $h(\mathbf{x})$,

$$h_i(\mathbf{x}) = h_i(\bar{\mathbf{x}}) + \sum_{j=1}^n J_{ij} \Delta x_j + \sum_{j=1}^n \sum_{k=1}^n \frac{1}{2} H_{ijk} \Delta x_j \Delta x_k + o(\|\Delta \mathbf{x}\|^2), \quad (67)$$

where $\Delta \mathbf{x} \triangleq \mathbf{x} - \bar{\mathbf{x}}$, Δx_j are the components of $\Delta \mathbf{x}$, h_i are the components of $h(\cdot)$, $J_{ij} \triangleq \frac{\partial h_i}{\partial x_j}(\bar{\mathbf{x}})$ are the components of the $m \times n$ Jacobian matrix, and $H_{ijk} \triangleq \frac{\partial^2 h_i}{\partial x_j \partial x_k}(\bar{\mathbf{x}})$ are the components of the $m \times n \times n$ Hessian tensor. Inserting (67) into (66) and ignoring $o(\|\Delta \mathbf{x}\|^2)$

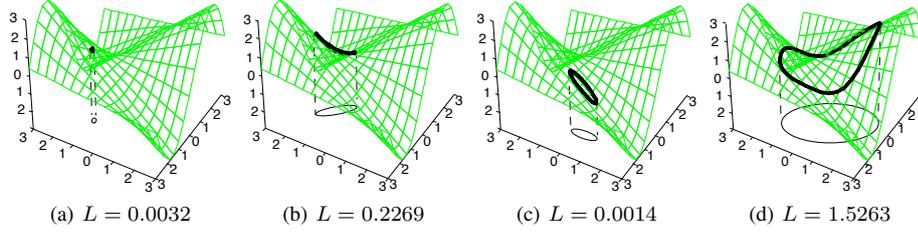


Fig. 13 Linearity index L of the MISO function $z = h(x, y) = x \cdot \sin(y)$ for different probability regions. We illustrate the projection (*thick black*) of the 2-sigma elliptical bound of the probability region (*thin black*) onto the surface $\mathcal{S} = \{(x, y, z) / z = h(x, y)\}$ (*mesh*). The more elliptic the projected shape, the more linear is the function and smaller the index L . (a) A tiny probability region gives good linearity and a very small index. (b) A large probability region usually obliges the ellipse to bend over the surface, meaning high non-linearity and resulting in a large index. (c) If such a large ellipse falls on a planar region of the surface, the index drops to show good linearity. (d) An extreme case of very high non-linearity.

yields the first-order approximation

$$\begin{aligned} \epsilon_i &\approx \mathbb{E} \left[h_i(\mathbb{E}[\mathbf{x}]) + \sum_{j=1}^n J_{ij} \Delta x_j + \sum_{j=1}^n \sum_{k=1}^n \frac{1}{2} H_{ijk} \Delta x_j \Delta x_k \right] - h_i(\mathbb{E}[\mathbf{x}]) \\ &= \sum_{j=1}^n J_{ij} \mathbb{E}[\Delta x_j] + \sum_{j=1}^n \sum_{k=1}^n \frac{1}{2} H_{ijk} \mathbb{E}[\Delta x_j \Delta x_k]. \end{aligned} \quad (68)$$

Having $\mathbb{E}[\Delta \mathbf{x}] = 0$ and knowing that the covariance of \mathbf{x} is a $n \times n$ matrix given by $\mathbf{P} \triangleq \mathbb{E}[\Delta \mathbf{x} \Delta \mathbf{x}^T]$, with components $P_{jk} \triangleq \mathbb{E}[\Delta x_j \Delta x_k]$, we obtain

$$\epsilon = \begin{bmatrix} \epsilon_1 \\ \vdots \\ \epsilon_m \end{bmatrix}, \quad \epsilon_i \approx \frac{1}{2} \sum_{j=1}^n \sum_{k=1}^n H_{ijk} P_{jk}. \quad (69)$$

Finally, taking the norm yields the scalar index

$$L = \|\epsilon\|_2 \in \mathbb{R}^+. \quad (70)$$

The m -dimensional vector ϵ can be interpreted as the bias introduced by a non-linear measurement equation in the EKF innovation. Its norm, the proposed index L , is zero for functions showing a linear behavior inside the probability region, and positively increasing as the validity of this hypothesis vanishes.

As an example, we illustrate in Fig. 13 the fitness of this index for a 2-input, 1-output function. Observe that the function is always the same but the evaluation region changes position (the evaluation point $\bar{\mathbf{x}}$) and dimensions (the covariance \mathbf{P}), greatly affecting the linearity index.

5.2 Monte Carlo RMS errors and consistency evaluation

For practical reasons and because the full SLAM state vector is of varying size, we restrict the error and consistency analyses to the state variables representing the robot (or camera)

pose C , knowing that consistent localization indicates consistent mapping ([Huang and Dissanayake, 2007](#)). We systematically transform mean and covariances matrix of the pose to a minimal representation (the orientation is transformed to the Euler angles) to avoid singularities in the covariance.

5.2.1 RMSE evaluation

We evaluate the root mean square error (RMSE) of each component of the camera pose,

$$\epsilon_{i,k} = \sqrt{\frac{1}{N} \sum_{j=1}^N (C_{i,k} - \hat{C}_{i,k}^j)^2}, \quad (71)$$

where $C_{i,k}$ is the i -th component (x , y , z , roll ϕ , pitch θ and yaw ψ) of the camera pose at time k , and $\hat{C}_{i,k}^j$ is its estimate's mean corresponding to the j -th among N Monte Carlo runs.

For visualization purposes, these errors are compared against the estimation error given by the filter. We take its average over all the Monte Carlo runs,

$$\bar{\sigma}_{i,k} = \frac{1}{N} \sum_{j=1}^N \sqrt{P_{ii,k}^j}, \quad (72)$$

where $P_{ii,k}^j$ is the i -th diagonal component of the estimated covariances matrix of the camera pose, for run j and at time k . The RMSE plots in the Results section will show the true error $\epsilon_{i,k}$ against the 2-sigma bound given by $2\bar{\sigma}_{i,k}$.

5.2.2 Average NEES evaluation

We use the normalized estimation error squared (NEES) for evaluating consistency. We follow strictly ([Bailey et al, 2006](#)), which is in turn based on ([Bar-Shalom et al, 2001](#), pp. 234–235). The averaged NEES value is defined,

$$\eta_k \triangleq \frac{1}{N} \sum_{j=1}^N (C_k - \hat{C}_k^j)^\top \mathbf{P}_k^{j-1} (C_k - \hat{C}_k^j), \quad (73)$$

where C_k is the camera pose at time k and $\{\hat{C}_k^j, \mathbf{P}_k^j\}$ is its Gaussian estimate corresponding to the j -th among N Monte Carlo runs. For 6 DOF and 25 runs, the upper and lower bounds of the double-sided 95% probability concentration region are given by:

$$\begin{aligned} \bar{\eta} &= \chi_{(25 \times 6)}^2(1 - 0.975)/25 = 7.432 \\ \underline{\eta} &= \chi_{(25 \times 6)}^2(1 - 0.025)/25 = 4.719. \end{aligned}$$

If $\eta_k < \underline{\eta}$ for some significant amount of time (more than 2.5% of the time), the filter is conservative. If $\eta_k > \bar{\eta}$ (also by more than 2.5%), the filter is optimistic and therefore inconsistent.

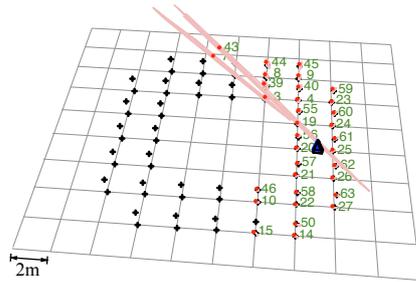


Fig. 14 Simulated 3D environment for benchmarking point parametrizations.

6 Simulation results

6.1 Software and SLAM algorithm

We have made available the software used for simulations (Solà et al, 2009a). It consists in a 6 DOF EKF-SLAM system written in MATLAB®, with simulation and 3D graphics capabilities.

The algorithm is organized as an active-search-based EKF-SLAM (see Davison et al, 2007, for the active search), which allows us to optimize information gain with a limited number of updates per frame. At each frame, we perform updates to the 10 most informative landmarks. We also attempt to initialize one landmark per frame. Unstable and inconsistent landmarks are deleted from the map to avoid map overpopulation and corruption. Data association errors are not simulated and therefore data association is perfect.

6.2 Evaluation of point parametrizations

We benchmark HP, AHP and AMPP using the same simulated scenario, the same software and the same seeds for the random generator. We start with a description of the simulation conditions, then proceed with the results of the (analytical) linearity and (statistical) error and consistency analyses.

6.2.1 Simulated scenario

We simulate a robot performing a circular trajectory in an area of $12\text{ m} \times 12\text{ m}$ populated with 72 landmarks forming a cloister (Fig. 14). The robot receives noisy control inputs which are used for the prediction stage of the EKF, fixing the scale factor. One noisy image per control step is gathered with a single camera heading forward. Three sets of parameters have been used for the tests (see Table 2). In the first set, the robot makes two turns to the cloister (800 frames are processed). The second set uses smaller odometry increments and perturbations, and the trajectory is limited to one quarter of a turn (200 frames). Set 3 is like Set 2 but with a different inverse-distance prior.

Table 2 Simulation parameters

Concept	Parameters	Set 1	Set 2	Set 3
Img. size		640 × 480 pix		
Focal	(α_u, α_v)	320 pix, $HFOV = 90^\circ$		
Pix. noise	σ_u	1 pix		
Pose step	$(\Delta X, \Delta\psi)$	(8cm, 0.9°)	(4cm, 0.45°)	
Lin. noise	$(\sigma_X, \sigma_Y, \sigma_Z)$	0.5cm	0.25cm	
Ang. noise	$(\sigma_\phi, \sigma_\theta, \sigma_\psi)$	0.05°	0.025°	
ρ^c prior	$(\bar{\rho}, \sigma_\rho)$	(0.01, 0.5) m ⁻¹		(1.0, 1.0) m ⁻¹

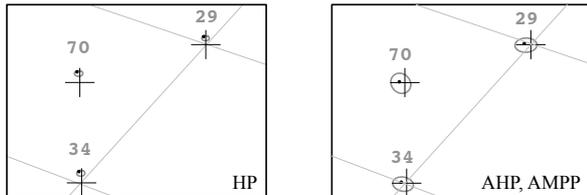


Fig. 15 3D view of some landmark 3σ estimates at the end of the first loop. Inconsistency comes from covariance overestimation rather than mean errors, as can be seen by the too small ellipses in the HP case (*left*). See the accompanying video.

6.2.2 Visual evaluation

We provide the accompanying video `points.mov` showing the three methods running in parallel under the conditions of Set 1. The differences in behavior are not easily visible in the 3D movies, and we need to zoom in to appreciate incorrect operation (Fig. 15).

We see that HP estimates have too small covariances, a clear sign of overconfidence, and therefore inconsistency. This is attributed exclusively to parametrization differences because the information provided to the filter for HP is exactly the same for all methods. Of the 25 HP runs, one diverged, and 35 landmarks had to be deleted due to inconsistent observations (22 of which during the divergent run).

We do not observe any difference between AHP and AMPP. No landmarks were declared inconsistent in any of the 25 runs of AHP and AMPP.

6.2.3 Linearity measures

The linearity index in section 5.1 has been computed for each measured landmark and for the three parametrizations of interest (HP, AHP and AMPP), using the parameters of Set 1. Fig. 16 shows the linearity indices of one particular landmark in order to illustrate the typical behaviour of the index for this experiment. The index starts very high (bad linearity) due to the huge uncertainty region. It decays rapidly and reaches a minimum at about frame 25. After this point it stabilizes to very small values (high linearity).

The index of HP is clearly higher than those of AHP and AMPP, indicating a poorer linearity. The reason, as previously mentioned, is that setting an anchor propagates the camera uncertainty only from the anchor to the current location, while HP propagates a wider uncertainty with respect to a world reference frame.

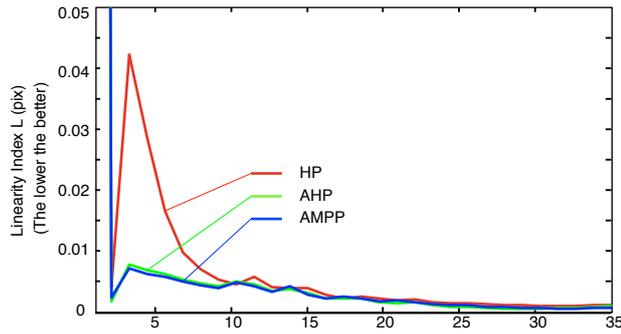


Fig. 16 Linearity index for the three point parametrizations during the first 35 frames of a landmark's life.

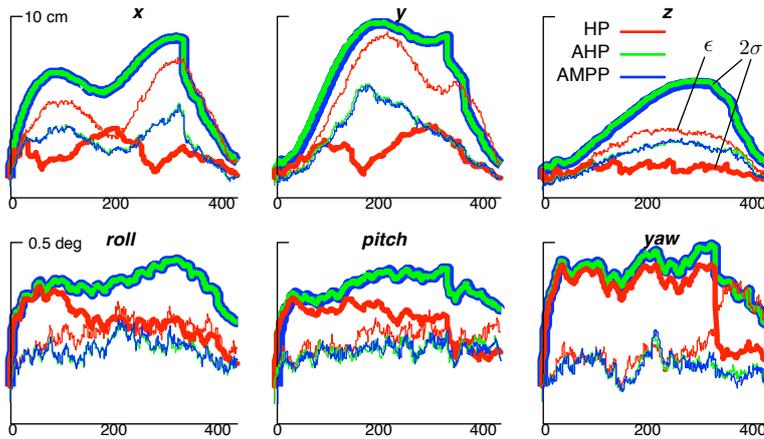


Fig. 17 RMS errors ϵ of the three point parametrizations HP (red), AMPP (green) and AHP (blue), averaged over 25 runs. The 2σ estimated bounds are plotted in thicker line. AHP and AMPP have the largest estimated bound and the lowest error, leading to the best results. See Fig. 18 for the corresponding consistency plots.

It is also worth remarking in this figure the low values of the proposed index, two or three orders of magnitude less than typical image noise or EKF innovations. Although it is true that linearization errors introduce bias in an EKF estimation, our experiments show that the value for this bias is small enough to guarantee a good behaviour of the EKF filtering for local monocular SLAM. The same conclusion can be applied to line-based EKF local SLAM, as the quantitative results for the lines index are similar (see figure Fig. 21).

6.2.4 Error and consistency evaluation

The RMSE and NEES plots in Figs. 17 and 18 (please notice the logarithmic vertical scales in the NEES plots) confirm the results seen for the linearity indices. HP behaves poorly, and there is no significant difference between AHP and AMPP, except for a tiny but appreciable difference in favor of AMPP. Both AHP and AMPP behave consistently, certainly with a slight tendency to inconsistency, until shortly after the first loop closure. During the second turn the filter is inconsistent but it does not seem to degrade too quickly.

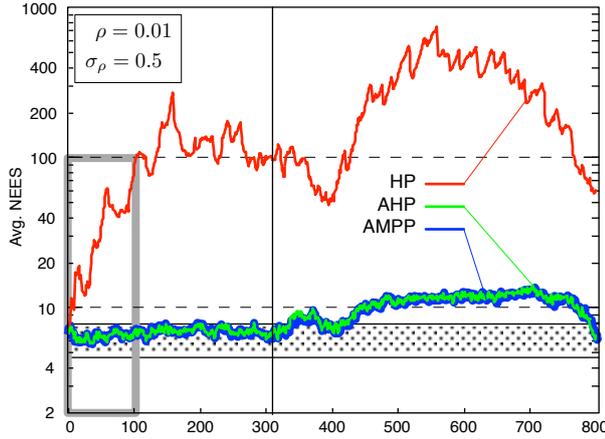


Fig. 18 Consistency of HP (top plot), AMPP (bottom) and AHP (bottom). Average NEES of the 6 DOF vehicle pose $[x, y, z, \phi, \theta, \psi]^T$ over 25 runs for 800 frames (2 turns) and parameters of Set 1. The dotted horizontal band between abscissas $\eta = 4.719$ and $\bar{\eta} = 7.432$ mark the 95% consistency region. The vertical line marks the loop closure at frame 308. The framed area corresponds to the area covered by Fig. 19.

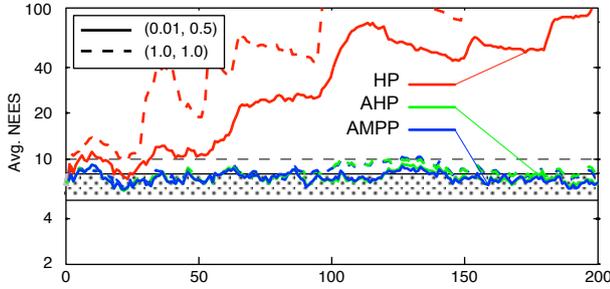


Fig. 19 Consistency of HP, AMPP and AHP. Average NEES over 25 runs for 200 frames (1/4 turn) and 10 initializations in the first frame. *Solid*: parameters of Set 2 with prior $(\bar{\rho}, \sigma_{\rho}) = (0.01, 0.5)$. *Dashed*: parameters of Set 3 with an alternative prior $(\bar{\rho}, \sigma_{\rho}) = (1.0, 1.0)$.

We tuned the algorithms with the second set of parameters in order to improve the conditions for linearity: odometry steps and noise are cut in half, reducing the measurements innovation, and the filter is bootstrapped with 10 landmarks being initialized at the first frame. Here, we focus on the first quarter of the first loop (1/8 of the first run's length) to see the moment when the filters loose consistency. The results in Fig. 19 show no significant improvement with respect to those of Set 1 (these 200 frames correspond to the first 100 frames of Set 1, which have been boxed in Fig. 18): HP is just not good, and AHP and AMPP are again the ones that behave consistently. Interestingly, AHP and AMPP have the same NEES values as the ones observed in the previous test, showing an important robustness against varying operating conditions.

A third test consisted in selecting a different prior for the unmeasurable inverse-distance. The dashed superimposed plots in Fig. 19 show that AMPP and AHP are almost insensitive to large variations of these parameters, while the contrary must be said for HP. It seems, even if for AHP and AMPP the difference is small, that the filter behaves better with landmarks initialized at (or close to) infinity ($\bar{\rho}^C = 0.01\text{m}^{-1}$) than at some close distance ($\bar{\rho}^C = 1\text{m}^{-1}$).

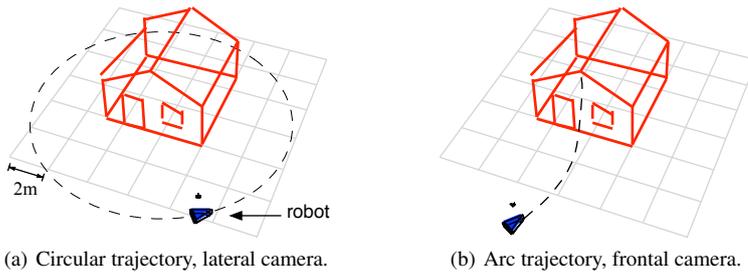


Fig. 20 Simulated 3D environments for benchmarking the 5 line parametrizations. The robot’s trajectory and the house being reconstructed are shown. (a) Circular trajectory, camera looking sideways to the house. (b) Arc trajectory, camera looking forward to the house.

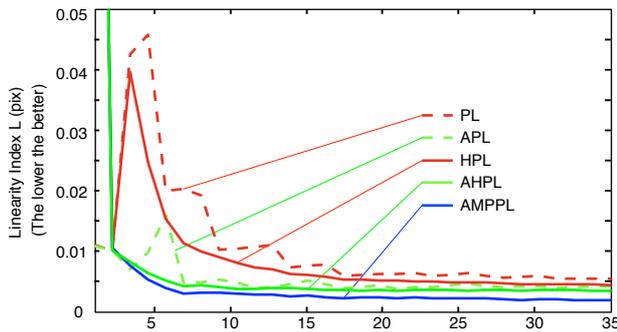


Fig. 21 Linearity index for the five line parametrizations during the first 35 frames of a landmark’s life, showing the superior linearity of anchored point-supported lines.

6.3 Evaluation of line parametrizations

We benchmark PL, APL, HPL, AHPL and AMPPL for linearity, RMS errors and NEES consistency, in two different scenarios.

The first scenario (Fig. 20(a)) consists of a robot making a turn around a wireframe model of a house. 400 frames are processed. The camera is looking sideways to the house and, the house being always visible, there is no loop closure. The simulation parameters are equivalent to the ones we used for points in Set 1.

We provide the accompanying video `lines.mov` showing the five systems running in parallel. At first sight all parametrizations seem to work correctly. As we did with points, we use the analytical and numerical tools to reveal the differences in performance between parametrizations.

The linearity indices are shown in Fig. 21. All indices follow essentially the same pattern as we saw for points. Moreover, their numerical values are similar for points and lines (compare Figs. 16 and 21), suggesting that the index can be used for comparing points against lines. Again, unanchored parametrizations are the ones showing the poorest linearity. APL is better than all unanchored ones but not good enough, probably because the Plücker constraint is only applied at initialization time and not enforced on subsequent updates (see Section 8 for a more detailed discussion).

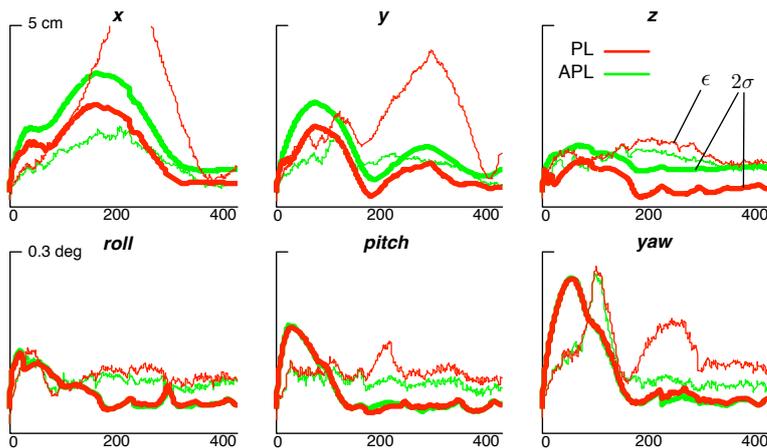


Fig. 22 Averaged RMS errors ϵ of the Plücker-based line parametrizations PL and APL against the 2σ estimated bounds. Anchoring the Plücker line helps improving the estimates, but none of these Plücker parametrizations seem to work correctly. See discussion in Section 8 about the Plücker constraint.

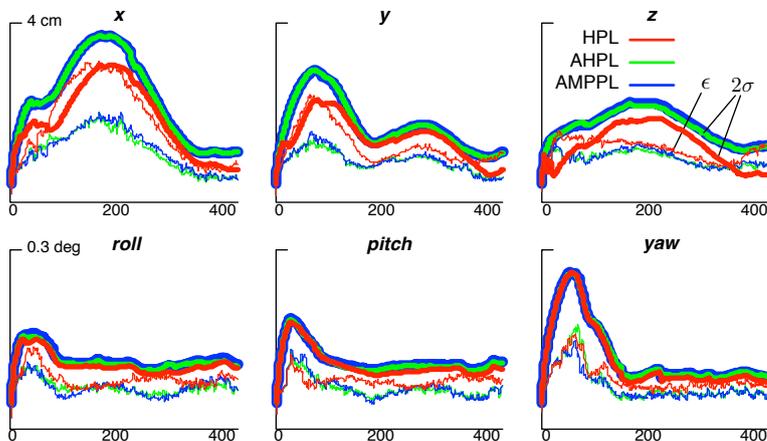


Fig. 23 Averaged RMS errors ϵ of the three point-based line parametrizations HPL, AMPPL and AHPL against the 2σ estimated bounds. Anchoring has produced both a larger 2σ bound and a smaller error ϵ . AMPPL and AHPL behave almost exactly.

The RMSE results are shown in Figs. 22 and 23. The Plücker-based lines behave poorly, especially if not anchored. Among the point-supported lines, anchored parametrizations exhibit both smaller errors and larger error estimates, indicating better consistency. We can say that they inherit the properties of the point parametrizations they are based on.

The NEES results are shown in Fig. 24 – please notice the logarithmic vertical scales. We observe that the only parametrizations that behave consistently are the anchored, point-supported lines AHPL and AMPPL.

The second scenario (Fig. 20(b)) corresponds to a frontal trajectory, a situation that is more challenging for monocular SLAM as the parallax increase is slow and therefore the scene observability is weak. The camera looks forward and the robot performs an arc of a circle towards the house. The sequence is stopped after 100 frames when the robot is actually

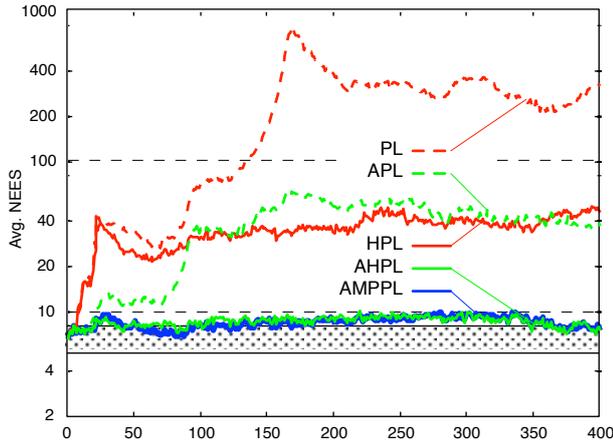


Fig. 24 Consistency of PL, APL, HPL, AHPL and AMPPL. Average NEES over 25 runs for 400 frames (one turn around the house). Plücker-based lines (PL and APL) do not behave consistently, even when anchored. Lines based on homogeneous points (HPL) neither, as expected from the HP behavior. Anchored point-supported lines (AHPL and AMPPL) behave similarly and close to consistency.

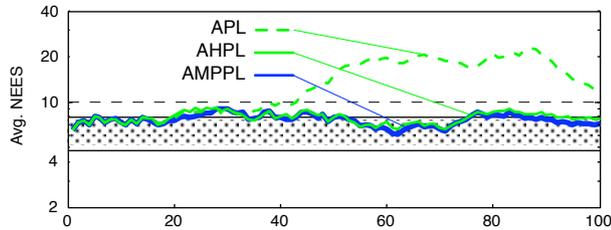


Fig. 25 Average NEES over 25 runs for 100 frames (frontal trajectory). Again, only anchored point-supported lines behave close to consistency.

inside the house and no more segments are in the field of view. In this case we just show the NEES results for the anchored parametrizations (Fig. 25), namely APL, AHPL and AMPPL – the rest are clearly inconsistent. The results are pretty much the same as in the first scenario (compare to the three corresponding plots in Fig. 24), showing an important robustness in face of large variations of the operating conditions.

7 Experimental results

7.1 Robocentric EKF-SLAM with points

An interesting alternative to the algorithm here benchmarked is robocentric SLAM (Castellanos et al, 2007; Marzorati et al, 2008; Civera, 2009). Robocentric SLAM performs the composition of the current frame and the local motion after the landmarks update. This greatly helps reducing linearization errors, improving accuracy and consistency. The transformation affects the full landmarks map, with the consequence of making the robot pose T become the origin at every step, with null covariance, and hence the *robocentric* term. Immediately after, at initialization time, we have that the anchor to generate is $\mathbf{p}_0 = T \equiv \mathbf{0}$,

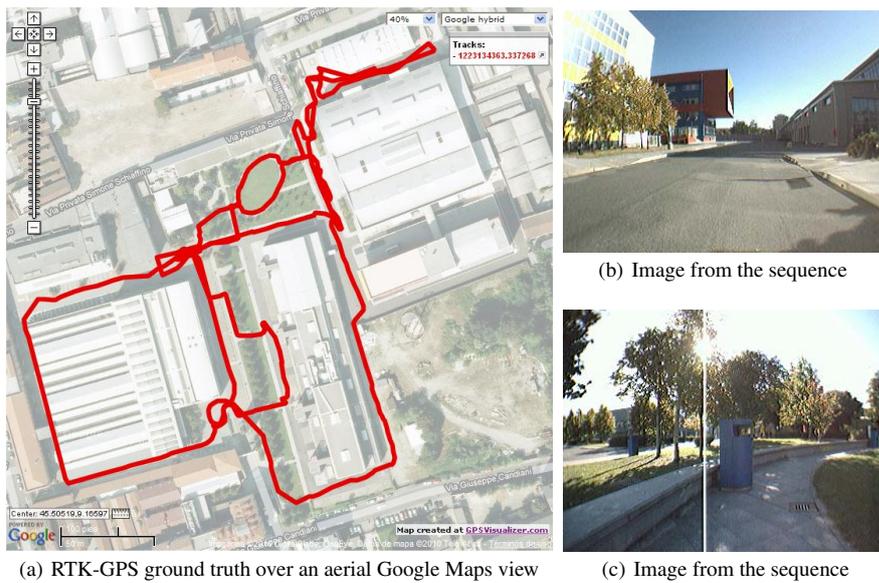


Fig. 26 Bovisa urban image sequence data. (a) Ground truth of the 1.6 km trajectory. (b, c) Two representative images from the sequence.

with null covariance. We can then drop it from the parametrization, obtaining, in *e.g.* the AHP case, simple homogeneous points HP. This combination of HP and robocentric SLAM constitutes exactly the algorithm proposed by [Marzorati et al \(2008\)](#).

We are curious to see if robocentric SLAM can indeed make anchoring unnecessary and achieve lower parametrization costs, or if, on the contrary, it still benefits from the extra degree of linearity that anchoring provides. We have run robocentric SLAM using HP, AHP and AMPP on a sequence of more than 68.000 images taken during an outdoors run of over 1600 m, covering an area of some $250\text{ m} \times 250\text{ m}$ (the Bovisa dataset from Rawseeds ([Bonarini et al, 2006](#); [Ceriani et al, 2009](#))). Figure 26 shows an aerial view of the covered trajectory, along with two representative images of the sequence. The algorithm is set to visual odometry mode, meaning that landmarks exiting the field of view are deleted. This way, one single EKF can be used for the whole run of 1.600 m. This allows us to see how each system behaves in the long run, without having to interpret the effects of other algorithmic solutions necessary for large-area mapping, notably the use of multiple local maps. Furthermore, the algorithm incorporates a 1-point RANSAC outlier rejection step ([Civera et al, 2009](#)) which enables us to consider the matching problem solved. With all these features we can attribute the outcome differences uniquely to landmark parametrization. Three different runs have been made for each parameterization, each one of them initializing and measuring different features of the sequence.

The results in Fig. 27 show that HP performs much worse than AHP and AMPP, agreeing with our previous simulation results. Using HP, the trajectory is off by as much as 200 m (80% of the area dimensions) with respect to RTK-GPS (with centimetric accuracy). AMPP derived 33 m, and AHP only 11 m. These results corroborate the need of the highest degrees of linearity possible. We can draw the same conclusions as in the previous simulations:

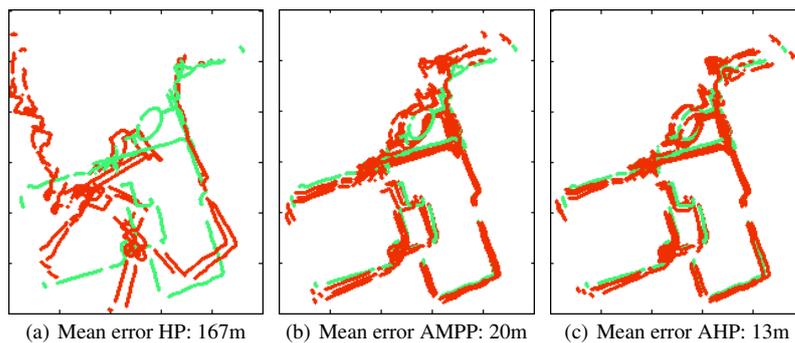


Fig. 27 Robocentric EKF visual odometry (red) against RTK-GPS (green), over an outdoors run of 1.600 m and more than 68.000 images. The figure shows 3 runs for each parameterization. (a) HP shows poor performances, and the estimated trajectory is off by 200 m, as much as 80% of the dimensions of the explored area. (b) AMPP completes the run successfully with a maximum drift of 33m (13.2% of the area dimensions). (c) AHP outperforms AMPP with 11m maximum drift (4.4% of the area dimensions).

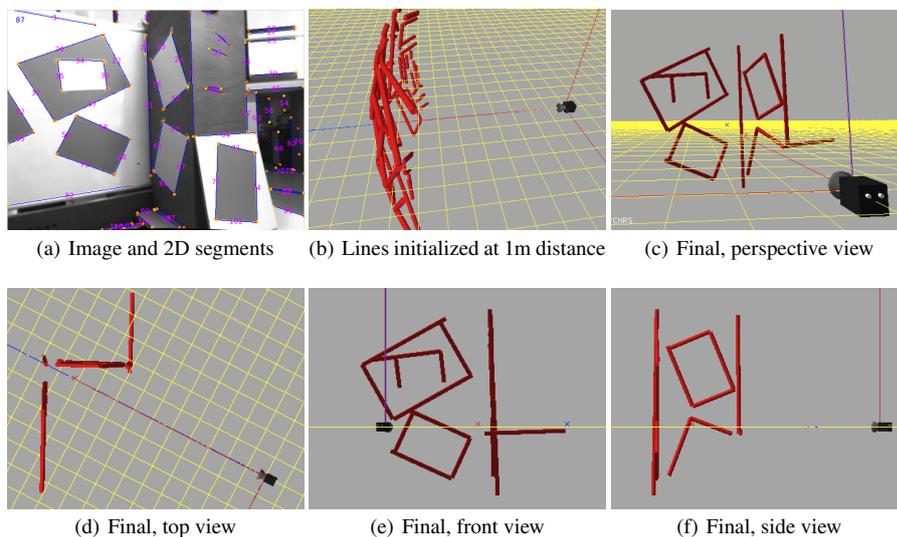


Fig. 28 Monocular EKF-SLAM with ULI of AMPPL segments. (a) A sample image with the tracked 2D segments. (b) The set of initialized lines, all at a distance of 1 m from the camera, corresponding to the selected prior, thus defining a spherical distribution. (c) The final map, from a viewpoint close to the camera (compare with (a)). (d, e, f) Top, front and side views of the final map, showing the correct reconstruction of the scene, with the dihedral planes at precise right angles. The grid in the 3D views has 10 cm steps.

anchoring is the major factor of improvement, and the difference between modified-polar and homogeneous representations can be considered negligible.

Table 3 Reconstruction accuracy of the generated segments maps for PL, APL and AMPPL

Parametrization	distance to plane, 1σ	angle with plane, 1σ	angle between planes
PL	6.95 mm	1.89°	89.34°
APL	6.92 mm	1.97°	89.52°
AMPPL	6.60 mm	0.79°	89.99°

7.2 Classical EKF-SLAM with segments

We have implemented EKF SLAM with real images for the line parametrizations PL, APL and AMPPL, using the segment detector and tracker of [Berger and Lacroix \(2010\)](#). The scene contains a 90° dihedral with several segments on its planes (Fig. 28). The camera, controlled by a robotic arm, performs a 30×30 cm square trajectory perpendicularly to its optical axis. The position increments given by the arm are corrupted and used as odometry inputs to the system, thus providing the metrics for scale observability.

The video `lines_real.mov` shows the three methods running in parallel. A selection of snapshots of the AMPPL run is shown in Fig. 28.

To evaluate the accuracy of the resulting maps we identify the two planes of the dihedral by optimally fitting them on the segments endpoints, and compute two different co-planarity errors. The first one is defined by the standard deviation of the distances from the segments midpoints to their support plane. The second one is defined by the angles between the segments and their support plane. Finally, we report the angle between the two planes. The results are summarized in Table 3. For this experiment, because of algorithmic limitations in the image processing part, all lines are initialized at the first frame, exactly at the origin. As a consequence, we have $\mathbf{p}_0 = 0$ for all landmarks and the effect of anchoring is not visible: PL and APL give practically the same results. We just observe a slight advantage of AMPPL with respect to PL and APL.

8 Elements of discussion

8.1 Redundancy and constraints in the EKF

There exist recurrent discussions on whether estimators should employ minimal state parametrizations or not, and the effects that redundancy and constraints have in EKF estimates. It is not our aim now to provide a detailed analysis of these issues here, but this paper has clearly showed that redundancy can be exploited to our benefit. With a little insight we discover that not all redundancies are the same, neither the constraints, and that they do not always come together. Some ideas to situate these concepts follow.

1. Homogeneous vectors are redundant or *equivalent* under proportionality transforms. This equivalence has continuity in all dimensions of the state space, and thus it imposes no constraint to the filter: the new states resulting from EKF updates are always valid homogeneous vectors.
2. Quaternions are redundant only with respect to symmetry: a quaternion and its negative are equivalent. There is no continuity between the two equivalent instances, and the impossibility of ‘jumping’ along the redundant dimension constitutes a constraint. This is well known: the quaternion is constrained by a unity norm which defines a unit spheroid in \mathbb{R}^4 . In EKF, this constraint can be applied explicitly, via $\mathbf{Q} \leftarrow \mathbf{Q}/\|\mathbf{Q}\|$, its

Jacobian J and the EKF prediction equations, resulting in a *projection* of the covariance onto the hyperplane $\mathcal{S} = \text{null}(J)$ tangent to the unit spheroid. Subsequent EKF updates, constrained to \mathcal{S} , result in quaternions escaping the spheroid and violating the spherical constraint, and thus renormalization is needed. Although not always required, it is possible to avoid the singularity of the covariance by two means. One is to employ a modified normalization Jacobian $J^* = \mathbf{I}_4/\|Q\|$, obtaining just an isotropic scaling of the covariance ellipsoid. We have explored both types of Jacobians with good results and no significant differences. The other way of avoiding the singularity is to apply a relaxed constraint $Q \leftarrow Q/\|Q\| + n$, with n noise, which results in inflating the covariance.

3. Anchored landmarks are redundant in the sense that landmarks with different anchors may be equivalent. There exists a continuity of solutions, in this case not related to proportionality, with no constraints. As we have seen, this redundancy allows us to arbitrarily select the anchor with the most beneficial effects.
4. Plücker lines are defined in the projective space \mathbb{P}^5 and are therefore equivalent under proportionality transformations. This DOF is not constrained. However, they contain a second redundant DOF affected by the Plücker constraint $\mathbf{n} \perp \mathbf{v}$. The Plücker constraint is more delicate because it can only be applied implicitly, via $\mathbf{n}^\top \mathbf{v} = 0$ and the EKF correction equations. This means that the covariance is *intersected with* (not *projected to*) the constraint manifold, with the subsequent risk of collapse. This does have a noticeable impact on the filter and is further discussed in the next section.

8.2 The Plücker constraint

We have seen in Section 3.1 that for a pair (\mathbf{n}, \mathbf{v}) to be a Plücker line the Plücker constraint $\mathbf{n}^\top \mathbf{v} = 0$ is mandatory. We have ensured its satisfaction at initialization time by defining the inverse-distance prior in the β -plane, but we have not enforced it further during landmark updates, for several reasons. One reason is our desire to use a common algorithm for all parametrizations so that the differences in performance can be better interpreted. A second reason is that we did not find a clean and convincing method for enforcing such constraints in the EKF framework. In the linear case, enforcing implicit equality constraints $\mathbf{H}\mathbf{x} = 0$ can be done by performing a KF update with a synthetic measurement $0 = \mathbf{z} = \mathbf{H}\mathbf{x}$ with infinite information. This has the consequence of producing singular covariances matrices. The directions of the state space being affected by this singularity become blocked and no more evolution on them can be expected, creating a lifelong guarantee of the constraint satisfaction. Unfortunately, in EKF the combination of uncertainty and non-linearity prevents non-linear implicit equality constraints $h(\mathbf{x}) = 0$ from being enforced this straightforwardly. This problem has been treated and solved by [Lemaire and Lacroix \(2007\)](#) for the Euclidean Plücker lines (*i.e.*, with normalized director vector) using the smoothly constrained Kalman Filter ([Geeter et al, 1997](#)). The idea is to apply a number of relaxed constraints over time, with an EKF update $0 = h(\mathbf{x}) + n$, where n is a noise vector with a variance decreasing with time, to make the filter gradually converge to a state satisfying the equality constraint. This method is directly applicable to PL and APL. However, it requires several tuning parameters (initial value of n , rate of decay of n , at which times and/or under which conditions to apply it, when to stop) and, as mentioned, we do not feel the solution to be very elegant.

These facts might very well be at the base of the poor consistency results of APL, which otherwise would be expected to perform similarly to its point-counterpart AHP. We have not investigated this hypothesis further, mainly because there exist other strong reasons to prefer point-supported lines over Plücker-based lines, as we discuss in the following section.

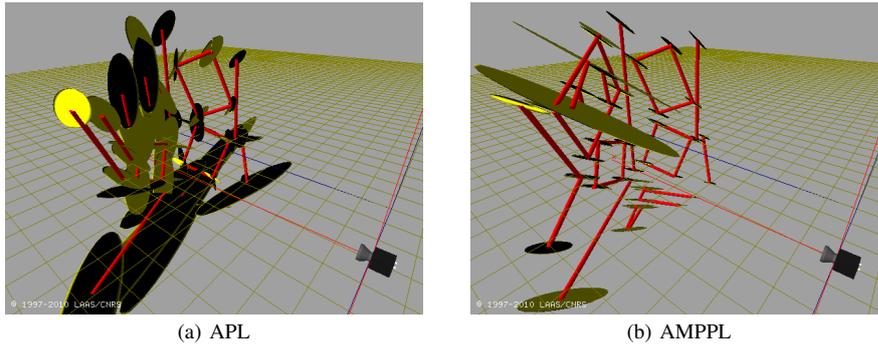


Fig. 29 Endpoints covariance ellipsoids in Plücker-based and point-supported lines, showing the superior representativity of the latter. The snapshots are taken 30 frames after initialization, before the end of the convergence phase. In APL, the ellipsoids are “discs” in the plane defined by the segment and the landmark anchor. In AMPPL, the ellipsoids are “pencils” pointing to the anchor.

8.3 Endpoints management in Plücker-based and point-supported lines

In addition to an accurate estimation of the infinite lines supporting the segments, a proper endpoints management is crucial to produce meaningful maps of segments. The methods for endpoints management require some information to be stored out of the map. We limit this to the two abscissas of the endpoints expressed in a local reference frame of the line (see Appendix A for details on endpoints management).

Plücker-based lines PL and APL condensate all the information of the initial observation in the plane normal, via $\mathbf{n} = \mathbf{m}_1 \times \mathbf{m}_2$, Eq. (27), and all other information on the endpoints’ initial view is lost. This constitutes an important drawback: the local line origin (point \mathbf{q} , Fig. 3), where the abscissas are referenced to, moves with the line’s orientation, which is initially unobserved and therefore undergoes large variations during the convergence phase. Fig. 29(a) shows that not even the cross-correlations in the covariances matrix are able to account for this information. In other words, the endpoints cannot be assumed to remain stable from one frame to the next one. Because choosing an alternative local origin for the line with better properties does not seem to be trivial, the only reasonable strategy for managing endpoints is to reset them at each frame using the current observation, potentially losing information about the segment extension observed in previous frames.

On the contrary, anchored point-supported line parametrizations AHPL and AMPPL have the ability to respect the initial view of the two endpoints via the anchor \mathbf{p}_0 and the director vectors $(\mathbf{m}_1, \mathbf{m}_2)$, as it can be observed in Fig. 29(b). This information is part of the state and is available even after large updates thanks to the role that cross-correlations play in the EKF update.

Because of the higher representativeness of anchored point-supported lines, and because of the absence of constraints to be guaranteed, we consider anchored point-supported lines preferable to Plücker-based lines for undelayed monocular SLAM. The additional cost over APL is null for AMPPL (size 9 in both cases) and marginal for AHPL (size 11 instead of 9), and needs to be paid only during the convergence phase. After convergence, the line can be reparametrized to more economic forms (see Section 4.5 on landmark re-parametrization).

9 Conclusions

This paper was initially conceived as a compendium of landmark parametrizations for monocular SLAM. Our very first aim was to show that all these methods are very intimately related, as we have exposed amply. As the work evolved, we realized that the material and insights provided should also be a good basis for establishing good practices for boarding a more general problematic, that is, the problem of accurately estimating high-dimensional dynamic systems of non-linear nature and huge uncertainty levels with the use of relatively simple analytic tools such as the EKF.

We summarize here the main concepts and results presented in this work:

1. Undelayed landmark initialization (ULI) is fundamental in the sense that it is the way we can make use of all the geometrical information provided by the landmarks: from the first observation, up to the infinity range, and independently of the sensor trajectory.
2. Implementing ULI within EKF is difficult because of the combination of non-linearity and unbounded uncertainty regions.
 - Linearity and Gaussianness are the two keys to satisfactory EKF operation. Astute transformations and redundancy in the parametric descriptions of the system produce analytic expressions and probability densities that are well adapted to the estimator in use.
 - Inverse-distance behavior of the non-measurable parameters is the key that makes undelayed initialization of landmarks possible when they are perceived from projective sensors. Inverse-distance transforms unbounded regions reaching the infinity into bounded regions including the origin. It also appears explicitly and linearly in the homogeneous coordinates used in projective geometry.
 - Once ULI is achieved, landmark anchoring has shown to be the major actor in further improving linearity to reach satisfactory levels. Anchoring produces a term in the bilinear expression of the frame transformation (the term which multiplies precisely the non-measured parameters) with an uncertainty corresponding only to the local motion since initialization. This results in observation equations that are quasi-linear with respect to these non-measured parameters, which are the most uncertain and hence the most sensitive to non-linearity.
 - Manipulations on the measurable parameters, such as the use of rectangular or polar coordinates for the director vectors, have shown to produce no remarkable effects. This is because, being these parameters measured with good accuracy, their degree of uncertainty is small and the functions in which they appear are regarded by EKF as being linear. However, when these small effects are integrated over very long runs, they may become significant.
3. A great number of parametrizations can be regarded as a sequence of small modifications of ones with respect to the others (Fig. 8). We have traversed a family of eight parametrizations and established quasi-trivial links between them. We have shown that estimating points and lines is fundamentally the same problem and admits fundamentally the same solutions. Estimating other parametric entities such as conic sections, splines or planes should also be feasible as long as we can take good advantage of the principles exposed here.
4. Measuring non-linearity for high-dimensional MIMO functions is an interesting but difficult task, especially if we want the measure to be useful for comparing parametrizations of different dimensionality.

- We defined a linearity index that incorporates the local knowledge of the uncertainty region, which is well suited for EKF usage.
 - The index is expressed in the measurement space, which is common to all parametrizations and allows us to compare them with each other.
5. Visual inspection, linearity analysis, RMS errors and NEES consistency, all give a coherent picture of the performance of each parametrization.
 6. Using intrinsically robust algorithms such as robocentric SLAM has not altered the relative performances of the parametrizations. This result seems to corroborate that some parametrizations are indeed better than others, regardless of the algorithm in use. It would be interesting to see if this also applies to recursive optimizers such as SBA, and in such case if the improvements (*e.g.* fewer optimizer iterations) are sufficient to compensate for the extra amount of computational power (*e.g.* more operations per iteration) that would be required.

A Segment endpoints management

The segment's endpoints in 3D space are maintained out of the filter via two abscissas (t_1, t_2) defined in the local 1D reference frame of the line.

- In Plücker-based lines (Fig. 30(a)) the local frame is defined by a single axis with the origin at the point $\mathbf{q} = \mathbf{p}_0 + (\mathbf{v} \times \mathbf{n}) / \|\mathbf{v}\|^2$, the closest to the anchor, and the director vector $\mathbf{u} = \mathbf{v} / \|\mathbf{v}\|^2$ providing the unit length (we make the norm of \mathbf{u} proportional to distance to improve its projective behavior). Each endpoint \mathbf{p}_i is specified by an abscissa t_i such that

$$\mathbf{p}_i = \mathbf{q} + t_i \mathbf{v} / \|\mathbf{v}\|^2 = \mathbf{p}_0 + \frac{\mathbf{v} \times \mathbf{n} + t_i \mathbf{v}}{\|\mathbf{v}\|^2}. \quad (74)$$

- In point-supported lines (Fig. 30(b)) the endpoints are defined with respect to the support points $\mathbf{q}_i = \mathbf{p}_0 + \mathbf{m}_i / \rho_i$. The origin is at \mathbf{q}_1 and the unit length defined by $\mathbf{q}_2 - \mathbf{q}_1$, leading to the endpoints

$$\mathbf{p}_i = (1 - t_i) \mathbf{q}_1 + t_i \mathbf{q}_2 = \mathbf{p}_0 + (1 - t_i) \mathbf{m}_1 / \rho_1 + t_i \mathbf{m}_2 / \rho_2. \quad (75)$$

The initial abscissas are defined trivially with $(t_1, t_2) = (0, 1)$.

Before updating, we need to back-project the currently observed endpoints onto the 3D line. This is done by triangulating the 3D line with the optical rays of the two currently observed 2D endpoints. To avoid aberrant results it is advised to update each abscissa only if the triangulation angle between the ray and the line is greater than a certain value (we use 15°). The result is a couple of candidate abscissas (t'_1, t'_2) that are assigned to (t_1, t_2) depending on the the following rules:

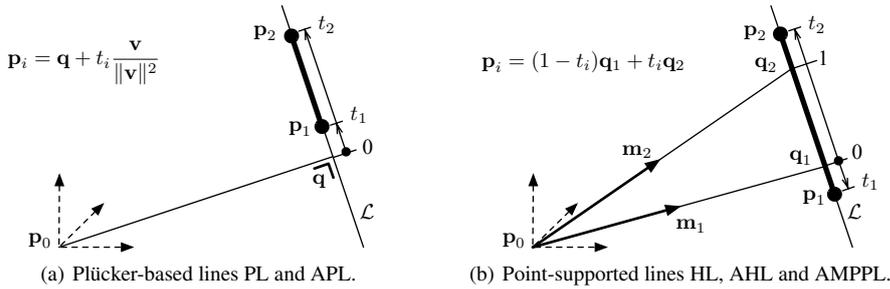


Fig. 30 Segment endpoints in the local ordinate frame of Plücker-based and point-supported lines.

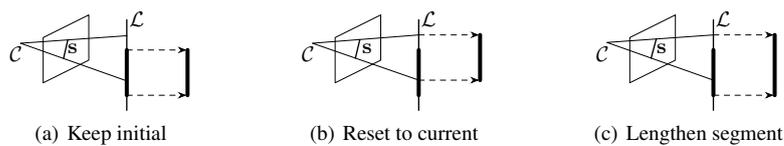


Fig. 31 The three general strategies for updating 3D segment endpoints. (a) Endpoints are defined at initialization time and never updated. (b) Endpoints are systematically updated according to the current observation. (c) Endpoints are updated only if this lengthens the 3D segment.

- During convergence the abscissas are either not updated (Fig. 31(a), used for AHPL and AMPPL), thus reflecting the initial observation, or systematically updated (Fig. 31(b), used for PL, APL and HPL), simply reflecting the last observation.
- Once the line has converged, an extending-only policy is applied (Fig. 31(c)): the abscissa is updated only if this lengthens the 3D segment. It is to note that a converged line is ready for reparametrization to any minimal (or at least more economical) form.

References

- Aidala V, Hammel S (1983) Utilization of modified polar coordinates for bearings-only tracking. *IEEE Transactions on Automatic Control* 28(3):283–294
- Bailey T (2003) Constrained initialisation for bearing-only SLAM. In: *Int. Conf. on Robotics and Automation*, vol 2, pp 1966–1971
- Bailey T, Nieto J, Guivant J, Stevens M, Nebot E (2006) Consistency of the EKF-SLAM algorithm. In: *IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*, Beijing, China, pp 3562–3568
- Bar-Shalom Y, Li XR, Kirubarajan T (2001) *Estimation with applications to tracking and navigation*. John Wiley and Sons
- Bartoli A, Sturm P (2001) The 3D line motion matrix and alignment of line reconstructions. In: *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, vol 1, pp 287–292
- Berger C, Lacroix S (2010) DSeg: Détection directe de segments dans une image. In: *Reconnaissance des Formes et Intelligence Artificielle*
- Bonarini A, Burgard W, Fontana G, Matteucci M, Sorrenti DG, Tardos JD (2006) RAWSEEDS: Robotics Advancement through Web-publishing of Sensorial and Elaborated Extensive Data Sets. In: *In proceedings of IROS'06 Workshop on Benchmarks in Robotics Research*
- Castellanos JA, Neira J, Tardós JD (2004) Limits to the consistency of the EKF-based SLAM. In: *5th IFAC Symp. on Intelligent Autonomous Vehicles*, Lisboa, PT
- Castellanos JA, Martinez-Cantin R, Tardós JD, Neira J (2007) Robocentric map joining: improving the consistency of EKF-SLAM. In: *Robotics and Autonomous Systems*, vol 55, pp 21–29
- Ceriani S, Fontana G, Giusti A, Marzorati D, Matteucci M, Migliore D, Rizzi D, Sorrenti DG, Taddei P (2009) Rawseeds ground truth collection systems for indoor self-localization and mapping. *Autonomous Robots* 27(4):353–371
- Chiuso A, Favaro P, Jin H, Soatto S (2002) Structure from motion causally integrated over time. In: *IEEE Trans. on Pattern Analysis and Machine Intelligence*, vol 24, pp 523–535
- Civera J (2009) *Real-time EKF-Based Structure from Motion*. PhD thesis, Universidad de Zaragoza
- Civera J, Davison AJ, Montiel JMM (2008) Inverse depth parametrization for monocular SLAM. *IEEE Trans on Robotics* 24(5)
- Civera J, Grasa OG, Davison AJ, Montiel JMM (2009) 1-point RANSAC for EKF-based structure from motion. In: *IEEE/RSJ Int. Conf. on Intelligent Robots and Systems*
- Davison AJ (2003) Real-time simultaneous localisation and mapping with a single camera. In: *Int. Conf. on Computer Vision*, Nice, vol 2, pp 1403–1410
- Davison AJ, Reid ID, Molton ND, Stasse O (2007) MonoSLAM: Real-time single camera SLAM. *Trans on Pattern Analysis and Machine Intelligence* 29(6):1052–1067
- Eade E, Drummond T (2006a) Edge landmarks in monocular SLAM. In: *British Machine Vision Conf.*, Edinburgh, Scotland
- Eade E, Drummond T (2006b) Scalable monocular SLAM. *IEEE Int Conf on Computer Vision and Pattern Recognition* 1:469–476, DOI <http://doi.ieeecomputersociety.org/10.1109/CVPR.2006.263>

- Eade E, Drummond T (2007) Monocular SLAM as a graph of coalesced observations. In: IEEE Int. Conf. on Computer Vision
- Gee AP, Mayol W (2006) Real-time model-based SLAM using line segments. In: LNCS proceedings of the 2nd International Symposium on Visual Computing
- Gee AP, Chekhlov D, Calway A, Mayol-Cuevas W (2008) Discovering higher level structure in visual SLAM. In: IEEE Trans. on Robotics special issue on Visual SLAM, vol 24, pp 980–990
- Geeter JD, Brussel HV, Schutter JD, Decréton M (1997) A smoothly constrained Kalman filter. In: IEEE Trans. on Pattern Analysis and Machine Intelligence, vol 19, pp 1171–1177
- Haner S, Heyden A (2010) On-line structure and motion estimation based on a novel parameterized extended Kalman filter. In: Int. Conf. on Pattern Recognition, Istanbul, Turkey
- Holmes SA, Klein G, Murray DW (2008) A square root UKF for visual monoSLAM. In: IEEE Int. Conf. on Robotics and Automation, Pasadena
- Huang G, Mourikis A, Roumeliotis S (2008) Analysis and improvement of the consistency of extended Kalman filter based SLAM. In: IEEE Int. Conf. on Robotics and Automation, pp 473–479
- Huang S, Dissanayake G (2007) Convergence and consistency analysis for extended Kalman filter based SLAM. In: IEEE Transactions on Robotics, vol 23, pp 1036–1049
- Klein G, Murray D (2007) Parallel tracking and mapping for small AR workspaces. In: Proceedings of the 2007 6th IEEE and ACM International Symposium on Mixed and Augmented Reality, IEEE Computer Society, pp 1–10
- Klein G, Murray D (2008) Improving the agility of keyframe-based SLAM. In: 10th European Conference on Computer Vision, Marseille, pp 802–815
- Konolige K, Agrawal M (2008) FrameSLAM: From bundle adjustment to real-time visual mapping. IEEE Trans on Robotics 24(5):1066–1077
- Kwok NM, Dissanayake G (2003) Bearing-only SLAM in indoor environments using a modified particle filter. In: Australasian Conf. on Robotics and Automation (ACRA), Brisbane, Australia
- Kwok NM, Dissanayake G (2004) An efficient multiple hypothesis filter for bearing-only SLAM. In: IEEE/RSJ Int. Conf. on Intelligent Robots and Systems, Sendai, Japan
- Lemaire T, Lacroix S (2007) Monocular-vision based SLAM using line segments. In: IEEE Int. Conf. on Robotics and Automation, Rome, Italy, pp 2791–2796
- Lemaire T, Lacroix S, Solà J (2005) A practical 3D bearing only SLAM algorithm. In: IEEE/RSJ Int. Conf. on Intelligent Robots and Systems, Edmonton, Canada
- Marzorati D, Matteucci M, Migliore D, Sorrenti DG (2008) Monocular SLAM with inverse scaling parametrization. In: Proc. of the British Machine Vision Conference, Leeds
- Montiel JMM, Civera J, Davison AJ (2006) Unified inverse depth parametrization for monocular SLAM. In: Robotics: Science and Systems, Philadelphia, USA
- Paz LM, Piniés P, Tardós JD, Neira J (2008) Large scale 6DOF SLAM with stereo-in-hand. IEEE Trans on Robotics 24(5)
- Piniés P, Lupton T, Sukkarieh S, Tardós JD (2007) Inertial aiding of inverse depth SLAM using a monocular camera. In: Int. Conf. on Robotics and Automation
- Smith P, Reid I, Davison AJ (2006) Real-time monocular SLAM with straight lines. In: British Machine Vision Conf., vol 1, pp 17–26
- Smith R, Cheeseman P (1987) On the representation and estimation of spatial uncertainty. Int Journal of Robotics Research 5(4):56–68
- Solà J (2007) Towards visual localization, mapping and moving objects tracking by a mobile robot: a geometric and probabilistic approach. PhD thesis, Institut National Polytechnique de Toulouse
- Solà J (2010) Consistency of the monocular EKF-SLAM algorithm for 3 different landmark parametrizations. In: IEEE Int. Conf. on Robotics and Automation, Anckorage, USA
- Solà J, Monin A, Devy M, Lemaire T (2005) Undelayed initialization in bearing only SLAM. In: IEEE/RSJ Int. Conf. on Intelligent Robots and Systems, Edmonton, Canada, pp 2499–2504
- Solà J, Monin A, Devy M, Vidal-Calleja T (2008) Fusing monocular information in multi-camera SLAM. IEEE Trans on Robotics 24(5):958–968
- Solà J, Marquez D, Codol JM, Vidal-Calleja T (2009a) An EKF-SLAM toolbox for MATLAB. URL <http://homepages.laas.fr/jsola/JoanSola/eng/toolbox.html>
- Solà J, Vidal-Calleja T, Devy M (2009b) Undelayed initialization of line segments in monocular SLAM. In: IEEE/RSJ Int. Conf. on Intelligent Robots and Systems, Saint Louis, USA, pp 1553–1558
- Strasdat H, Montiel JMM, Davison AJ (2010) Real-time monocular SLAM: Why filter? In: Int. Conf. on Robotics and Automation, Anckorage, USA
- Sunderhauf N, Lange S, Protzel P (2007) Using the unscented kalman filter in mono-SLAM with inverse depth parametrization for autonomous airship control. In: IEEE Int. Workshop on Safety, Security and Rescue Robotics, Rome