



HAL
open science

Electrical behavior of vertical Schottky diodes on GaN homoepitaxy

M Dagher, Camille Sonnevile, Georges Bremond, Dominique Planson, Yvon Cordier, Helge Haas, M R Iretki, Julien Buckley, V Maurya, M Charles, et al.

► **To cite this version:**

M Dagher, Camille Sonnevile, Georges Bremond, Dominique Planson, Yvon Cordier, et al.. Electrical behavior of vertical Schottky diodes on GaN homoepitaxy. IWN 2022 - International Workshop on Nitride Semiconductors, Oct 2022, Berlin, Germany. hal-03854620

HAL Id: hal-03854620

<https://hal.science/hal-03854620v1>

Submitted on 15 Nov 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Electrical behavior of vertical Schottky diodes on GaN homoepitaxy

M. Dagher¹, C. Sonnevile², G. Brémond¹, D. Planson², Y. Cordier³, H. Haas⁴, M.R. Iretki⁴, J. Buckley⁴, V. Maurya⁴, M. Charles⁴ and J.M. Bluet^{1*}

¹Univ. Lyon, Institut des Nanotechnologies de Lyon (INL), CNRS, INSA de Lyon, F-69621 Villeurbanne, France.

²Univ. Lyon, INSA Lyon, Univ. Claude Bernard Lyon 1, Ecole Centrale Lyon, CNRS, Ampère, 69621, Villeurbanne, France

³Université Côte d'Azur, CNRS, CRHEA, F-06560 Valbonne, France

⁴University of Grenoble-Alpes, CEA, LETI, Minatec Campus, F-38054 Grenoble, France

*email: jean-marie.bluet@insa-lyon.fr

Lateral power devices using GaN/Si structures are already undergoing industrial development. Nevertheless, high breakdown voltage (>1 kV) for these devices would imply large area (gate–drain or anode–cathode important spacing) detrimental for current density per chip [1]. Consequently, in order to address higher power applications approaching the theoretical limits of GaN in the 1kV-10kV range, vertical power devices (diodes, MOSFETs) are necessary. Toward this end, as a first step, we fabricated simple Schottky diodes on GaN/GaN substrates to allow material characterization to be performed. The epitaxial layers were grown by MOCVD in a Close Coupled Showerhead system at T=1020°C on a freestanding GaN substrate provided by Saint-Gobain Lumilog. The structure consists of a 5 μm thick film doped by silicon with an average doping level N_d-N_a extracted from CV measurement of $8.7 \times 10^{15} \text{ cm}^{-3}$ grown on top of a 0.1 μm n+ GaN buffer layer doped at $4 \times 10^{18} \text{ cm}^{-3}$. The 2 μm mesa structures were realized by Cl₂ ICP-RIE etching. The front Schottky contact is composed of Pt/Au which overlaps the fluorine implanted regions to reduce peak electric fields. For further electric-field reduction, field-plates are formed on top of an SiN/SiO₂ insulator stack. The backside Ohmic contact is Ti/Al/Ni/Au. Current - Voltage measurements as function of the temperature in the range 80 K – 480 K were performed for fine characterization of the Schottky contact. As the ideality factor (n) and barrier height (ϕ_B) variations with temperature did not follow a thermionic model, barrier height fluctuations were considered, as proposed first by Werner [2]. Using this model, we have extracted, in the temperature range 280 K - 480 K, an average barrier height ($\overline{\phi_B}$) of 1.31 eV with a relatively large standard deviation (σ) of 0.15 eV. The n(T) variation was also analyzed in order to extract the field sensibility of (i) the mean barrier height variation ($\rho_2 = -0.1$) and (ii) the barrier height standard deviation ($\rho_3 = -15 \text{ mV}$). The corrected Richardson plot using $\overline{\phi_B}$ and σ values is linear and gives a Richardson constant of $31.5 \text{ A.cm}^{-2}.\text{K}^{-2}$. This is close to the commonly used value of $26.4 \text{ A.cm}^{-2}.\text{K}^{-2}$ calculated using electron effective mass [3] showing coherence in the analysis by Werner's model. The inhomogeneities in barrier height observed may arise from different origins such as interface roughness, atomic steps, grain boundaries in the metal, melting of different metal phase at the interface, extended defects (dislocations) or point defects in the active layer and may cause long-term reliability problems. For a deeper understanding of their origin, we will present results from material characterization techniques such as DLTS (deep level transient spectroscopy) and micro-Raman spectroscopy mapping of the epitaxial layers.

References

- [1] T. Oka, Jap. J. of Appl. Phys. **58**, SB0805 (2019)
- [2] J. Werner and H. Güttler, J. Appl. Phys. **69**[3], 1522 (1991).
- [3] W. Knap et al., Solid State Comm. **99**[3], 195 (1996).

Acknowledgement: This work is part of the VertiGaN project supported by the labex GANEXT.

Supplementary information

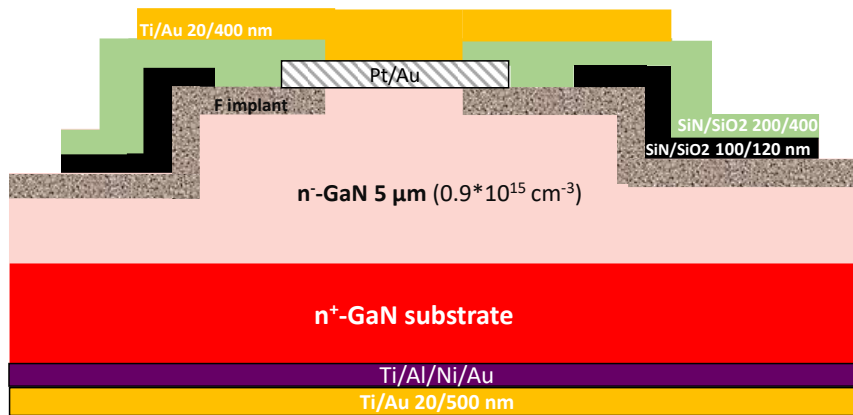


Figure 1: Schematic cross section of the vertical Schottky diodes.

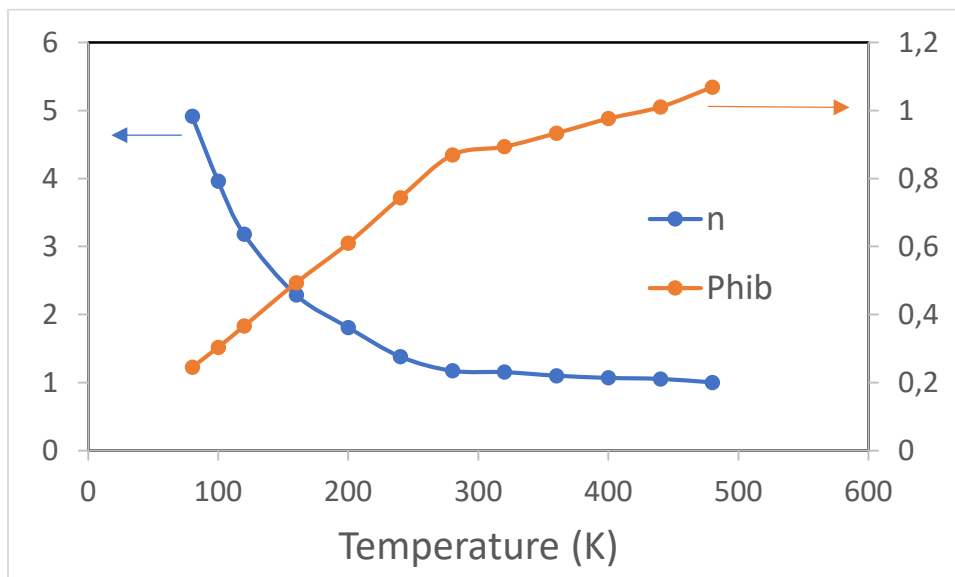


Figure 2: Ideality factor and barrier height variation with temperature. Barrier height scale is in eV.