



HAL
open science

High Precision Machining of a Displacement Sensor for Helicoidal Motions

Zeina Elrawashdeh, Philippe Revel, Christine Prella, Frédéric Lamarque

► **To cite this version:**

Zeina Elrawashdeh, Philippe Revel, Christine Prella, Frédéric Lamarque. High Precision Machining of a Displacement Sensor for Helicoidal Motions. *International Journal of Precision Engineering and Manufacturing*, 2023, 24, pp.409-422. 10.1007/s12541-022-00759-3 . hal-03926570

HAL Id: hal-03926570

<https://hal.science/hal-03926570>

Submitted on 2 Feb 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License



High Precision Machining of a Displacement Sensor for Helicoidal Motions

Zeina Elrawashdeh^{1,2} · Philippe Revel³ · Christine Prelle³ · Frédéric Lamarque³

Received: 28 December 2020 / Revised: 29 October 2022 / Accepted: 7 December 2022
© The Author(s), under exclusive licence to Korean Society for Precision Engineering 2022

Abstract

This research study presents the design and the high precision manufacture procedure of a fiber-optic displacement sensor. It is composed of two fiber-optic probes associated with a structure of a cones' grating. The sensor is characterized by its ability to measure the linear displacement for an axis performing a helicoidal motion. This motion has been demonstrated on a high precision lathe; where the spindle provided the rotational motion, associated to a translational motion on the linear stage. This allowed to obtain the two simultaneous motions. The displacement of the translational stage is measured by the sensor in real time. Firstly, a highly precise geometric model of the reflector part for the sensor was developed. This model provided a specific geometry for the cones-assembled grating, which has been precisely manufactured. The geometric parameters and the surface characteristics of each step in the fabricated grating were both identified in situ on the lathe. The agreement between simulation and experimental results is excellent. The performances of the fiber-optic displacement sensor were identified in-situ on the lathe. The analysis of the voltage output signals from the two fiber-optic probes is used to measure the grating displacement. The unbalanced rotation due to non-centered axes was also characterized. The sensor provided a micrometric resolution, on a measurement range of more than one centimeter.

Keywords High precision · Diamond tool machining · Fiber-optic · Sensor · Resolution · Measurement range

Abbreviations

Geometric parameters

C	The zone due to fabrication constraints (transition zone between two successive steps) (μm)
h_{max}	The step height (μm)
h_{pmax}	The grating segment without orthogonal projection (μm)
l	The useful length (μm)
l_{max}	The total length (μm)
ε	The angle ($^\circ$)
γ	The angle at the bottom of the step ($^\circ$)

Operational parameters

V_t	Translational velocity (mm/s)
V_r	Rotational velocity (rev./s)

1 Introduction

Nowadays, the needs of high precision machining operations, with high accuracy in terms of geometry and surface roughness, are becoming essential in the production industry. Precision machining is found in a variety of sectors, including electronics, aircraft, and healthcare. Precision engineering is, as well, unavoidable for industrial automation, which takes into account, various sensing and control techniques [1]. In-line sensing techniques are now the ones widely spread, as they allow to take instantaneous measurements in the process line, using a probe. On-machine measurements are required for fast and accurate defect inspection in manufacturing systems without reducing production rates; the study presented by Santoso et. al. [2] illustrates the design and the development of a compact focus variation microscopy sensor that can be integrated into various types of machine tools, the sensor proved an accuracy of $2 \mu\text{m}$, along

✉ Zeina Elrawashdeh
zeina.elrawashdeh@utbm.fr; zeina.elrawashdeh@icam.fr

¹ ICAM, Grand Paris Sud, 77127 Lieusaint, France

² ICB UMR CNRS 6303, Université Bourgogne Franche-Comté, UTBM, 90010 Belfort, France

³ Université de Technologie de Compiègne, 60200 Compiègne, France

with a measurement noise of $0.4\ \mu\text{m}$, an on-machine sensor measures the position and tilt of a workpiece in the machine tool before machining and measures the machining results for comparison with the design. The research paper illustrated in [3], presents an on-machine measurement device based on a chromatic confocal sensor, it is characterized by its ability to inspect workpiece surfaces with large slopes and depths. There have recently been several developments in the field of on-machine optical measuring instruments [4–8]. Those studies proved high precision in terms of resolution and repeatability for in situ measurements.

In addition, non-contact type sensors have been necessary in different types of measurement systems; as the contact-type ones take long time to measure, because the sensor must move toward the workpiece slowly, which might lead to the risk of scratching the surface of the workpiece.

Optical sensors have been largely developed as a non-contact type sensors on machine tools, thanks to their several advantages, such as: high sensitivity, good reproducibility, real time measurements, strong anti-interference ability and wide detection range [9]. The study presented in [10], illustrates a measurement set-up consisting of a non-contact single-sensor system and a signal processing algorithm for measuring the vibrational behavior inside of a CNC milling machine with a known force, it enables *in-situ* vibration measurements with a resolution below $230\ \mu\text{m}$ and a displacement uncertainty down to $40\ \text{nm}$. Another study presented by Zhou et. al. [11], proposes a method to monitor the machining depth during the electrochemical machining process using an optical fiber, The fiber was inserted and fixed coaxially in the center of the tool electrode with its axis perpendicular to the surface of the workpiece, and an Fabry–Perot cavity formed between the fiber tip and the workpiece was used to monitor the machining depth. By analyzing the reflected spectrum, the inter-electrode gap was calculated. The sensing mechanism was discussed in depth, and two different methods to obtain the interelectrode gap was introduced. One of the methods has a theoretical precision of $4.45\ \text{nm}$, but a time-consuming spectrum alignment process is required. Another method can use a simple program but has a lower theoretical precision of $2.16\ \mu\text{m}$, and a precision of $11.05\ \mu\text{m}$ during the experiment. The research study presented by Takushima et al. [12] proposed a multi-directional laser displacement sensor using a scanning exposure method, it detects, and averages reflected light from many positions onto a workpiece, during the exposure time of an image sensor, the accuracy is at $\pm 1\ \mu\text{m}$.

Reduction of machining error enables higher dimensions accuracy in Computerized Numerical Control (CNC) machines, where the positioning error results in a contour error on the machined part. The paper presented by Abir et. al. [13] presented the development of a virtual metrology frame technique to achieve high dynamic performance, as

though the machine has a separate stiff metrology frame, by measuring machine frame displacement using an acceleration sensor. There are some recent studies in the literature, in which the helical shape configuration has been considered; the paper presented by He et. al. [14], demonstrates the curvature and force measurement of a hyper elastic soft manipulator with helically embedded stretchable fiber-optic Bragg grating; the unique helically configuration prevents sensor dislocation, supports stretchability and facilitates the detection of various movements of the soft manipulator.

The current research study aims to develop a displacement sensor with high performances, in terms of its corresponding measurement range and the resolution. The sensor is characterized by its miniature size, as well as its ability to perform online measurements on rotating axes; such as spindles in machining operations, with sub-micrometric resolution on millimetric ranges. The sensor is composed of two fiber-optic probes associated with a cones' assembled grating. The grating has been manufactured on a high precision lathe along with a single crystal diamond tool on aluminium alloy, which allowed to obtain the desired geometry for the grating.

Optical sensors based on fibers are the ones used in this study, because of several advantages, such as small size, hard environment tolerance, impact of electromagnetic fields, flexibility and the structural simplicity [15, 16].

The state of art revealed high performances for linear displacement fiber-optic sensors associated only to the translational motion, from where appears the importance of the current sensor, characterized by its ability to measure the linear displacement associated to rotating elements.

The following paragraph presents the measurement principle of the sensor and its reflector part, in addition to the adopted machining process. Finally the study presents the experimental validation of the measurement principle of the sensor in-situ on a high precision lathe.

2 Measurement Principle

This part presents the adopted strategy for the design and the high-precision fabrication method of the sensor. This sensor consists of two fiber-optic probes associated to a 3-dimensional reflective grating of aluminium alloy. The following paragraph introduces the sensor principle.

2.1 Sensor Principle

The optical fiber used in this study consists of an electronic system, of fiber-optic probes (assembly of one central emission fiber and four reception fibers placed in periphery, the overall fibers are placed in the same support), along with a mirror reflecting the light. The electronic system consists

of a light transmitter, a light emitting diode (LED), which sends light in a wavelength of about 670 nm, with a numerical aperture of 0.17, this numerical aperture of the LED is defined as the sine of the half aperture angle “u” ($u = 10^\circ$) of the light emitting diode. The second component of the electronic system is the photodiode (Ph.D.), having an active detection zone of 1 mm diameter. These two components are integrated into a synchronous detection making it independent of the ambient luminous intensity, which could influence the measures.

The five optical fibers are multimode step index in polymethyl (PMMA) and are assembled in a steel ferrule, having a diameter of 2 mm (OMRON Company [1]).

In the fiber-optic probe, the emission fiber is placed at the center, it has a diameter of $(486 \pm 5) \mu\text{m}$ and a numerical aperture of 0.46; each of the four reception fibers has a diameter of $(240 \pm 5) \mu\text{m}$, with a numerical aperture identical to that of the emission fiber. In the first study, the reflector has been a flat surface as shown in the following Fig. 1.

The functionality principle of the sensor is based on light injection into an emission fiber, which illuminates the planar mirror in motion, relatively to the fiber-optic sensor, then to the detection of the reflected light.

This injected light is guided by the emission fiber to the extremity of the probe, situated in front of the mirror. The emerging light of the probe is reflected by the mirror in translational motion, for which, the flatness of the surface is

equal to $\lambda/10$ ($\lambda \in [400 \text{ nm}; 700 \text{ nm}]$). A part of the reflected light is injected in the four reception fibers, then guided to the photodiode, which collects this light and then transforms it to an electric current. Having a perpendicular translation of the mirror axis with respect to the surface of the fiber-optic probe, the quantity of the collected light changes, and that provides a variation of the output voltage (Fig. 2a, b).

Figure 2b shows the response curve of the sensor, as it is seen, this curve is formed of four zones. The first zone (zone 1) is the dead zone, where the sensor detects nothing, the mirror is still very close to the probe, and along with a separation of several dozens of micrometers between the emission fiber and the reception fibers, the reflected light of the mirror does not reach the reception fibers. The second zone (zone 2), corresponds to the zone where the sensor starts to detect the reflected light, but, the sensitivity is still very low. The third zone (zone 3) is the most important zone for linear displacements, as it has a high sensitivity with the best resolution; this high sensitivity is only available on a small range, approximately $200 \mu\text{m}$, for a linearity criterion of 1% on the full scale voltage output [0;10 V]. The last zone is zone 4, which illustrates a voltage drop of the sensor output, and that happens when the mirror moves away from the probe, because the reflected light does not totally reach the reception fibers of the probe. So, it is always preferred to work in zone 3, as it is a linear zone along with a high sensitivity [8]. However the measurement range of that zone,

Fig. 1 Measurement principle of the fiber optic sensor [17]

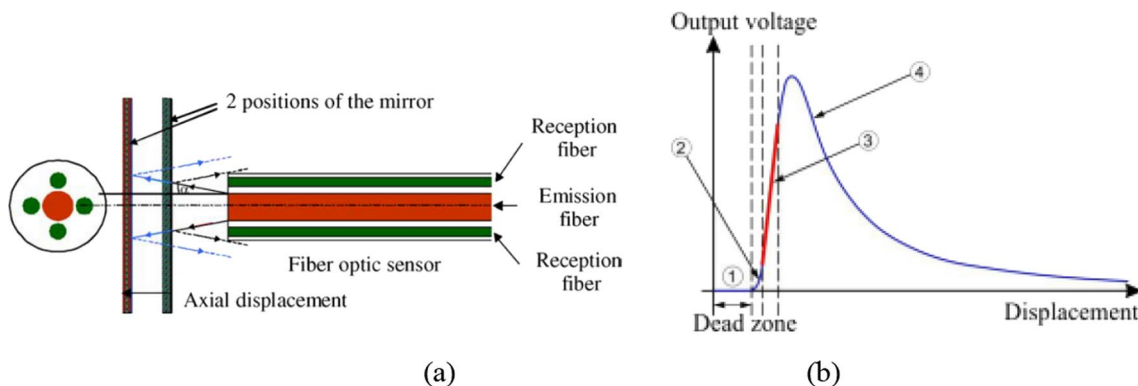
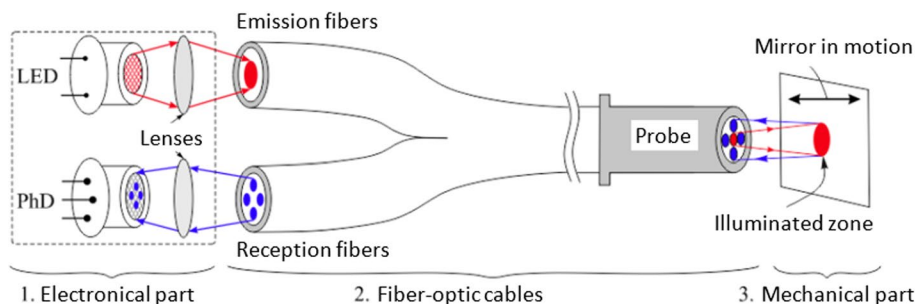


Fig. 2 The optical fiber displacement sensor

Fig. 3 Schematic diagrams for the displacement directions [18]


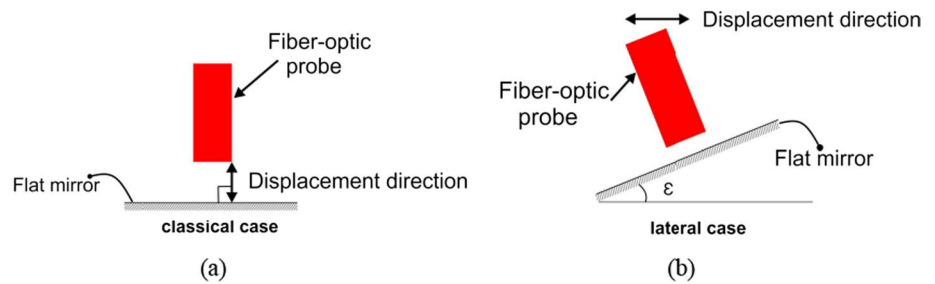


Fig. 4 Grating and emission fiber parameters [19]

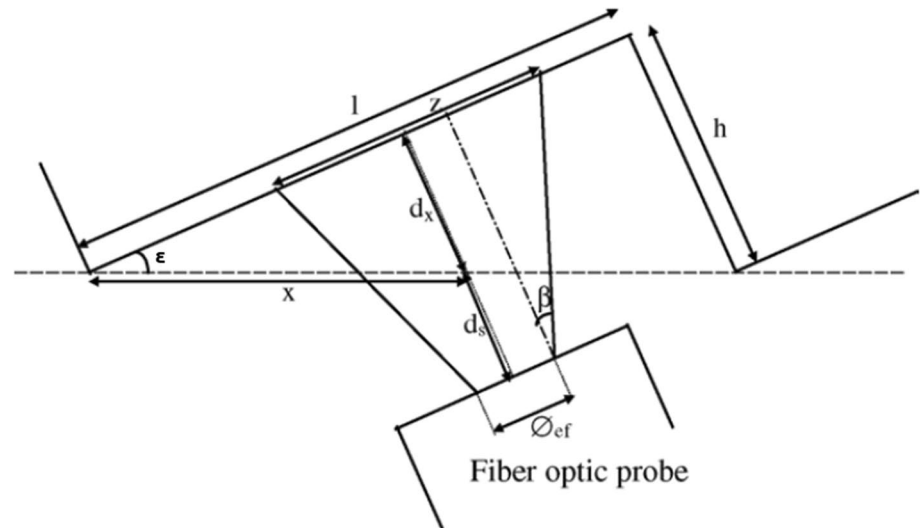

for the axial displacement is limited to 200 μm , which is not suitable for applications requiring large strokes. For that reason, and in order to increase this low measurement range, the displacement direction of the flat mirror should be different from the normal vector orientation of its surface resulting in a lateral displacement direction with an angle, defined in this study as ϵ , this new configuration has provided an inclined step with this defined angle (Fig. 3).

In this configuration of the inclined step, the classical axial measurement range (MR_{axial}) will increase by a factor of $(\sin \epsilon)^{-1}$, giving a new lateral measurement range ($\text{MR}_{\text{lateral}}$) following this equation:

$$\text{MR}_{\text{lateral}} = \left(\frac{\text{MR}_{\text{axial}}}{\sin \epsilon} \right) \quad (1)$$

At the same time, the lateral displacement configuration modifies the values of the sensor sensitivity (S_{axial}) and its resolution (R_{axial}), as a function of $\sin \epsilon$, which is explained in the following equations:

$$S_{\text{lateral}} = S_{\text{axial}} \times \sin \epsilon \quad (2)$$

$$S_{\text{lateral}} = S_{\text{axial}} \times \sin \epsilon \quad (3)$$

Table 1 Geometric model parameters

Symbol	Quantity
Φ_{ef} (μm)	Emission fiber diameter
Φ (μm)	Probe diameter
β	Emission fiber numerical aperture
d (μm)	Distance between probe head & grating
d_x (μm)	Distance: $x \cdot \sin \epsilon$
d_s (μm)	Security distance
ϵ ($^\circ$)	Grating angle
x (μm)	Lateral position
l (μm)	Step length
h (μm)	Step height
z (μm)	Illuminated zone diameter

This inclined step, has certain geometric parameters in addition to the angle ϵ , the following figure illustrates the inclined step, in addition to its corresponding geometric parameters (Fig. 4):

The following table illustrates the signification of each parameter (Table 1).

The sensor performances are influenced by the geometric parameters of the grating. The geometric model

considers the optimization of the sensor resolution R_ϵ (the resolution has to be as minimum as possible).

$$R_\epsilon = \frac{R}{\sin \epsilon} \tag{4}$$

where (R) is the limit of resolution of the sensor in the common use.

It can be deduced that ϵ has to be large in order to decrease the sensor limit of resolution, we can also observe that:

$$\tan \epsilon = \frac{h}{l} \tag{5}$$

So, the choice of the step length and height influence the value of the sensor limit of resolution and measurement range.

This previous measurement configuration described in the previous figure cannot provide millimetric ranges with resolution in the order of tens of nanometers. To increase the range to several millimeters by preserving a good resolution, the inclined mirror configuration was duplicated;

this duplication leads to a grating of successive flat mirrors. In the case of a grating of flat mirrors, two fiber-optic probes are used to avoid the transition between two consecutive steps (Fig. 5) [16, 20].

The objective of this work is the linear displacement measurement for a rotating axis, such as a spindle, over an extended range (minimum 10 mm), without being disturbed by the rotational motion. For that reason, the sensor reflective grating has to have a 3D shape in order to provide a valid measurement even if the sensor rotates along its axis of symmetry. The schematic diagram of this grating associated to the fiber-optic probes is shown in the following Fig. 6.

2.2 The Design of the Cones-Assembled Grating

The reflector part of the sensor is a group of successive cones of certain properties and performances [9]. For that reason, a new design was developed to analyze the sensor response to curved reflectors. The research papers illustrated in [21, 22] present a full study of that model; for which, the response curve of the sensor at a fixed radius of curvature (R_c), was obtained.

Fig. 5 Long range sensor principle

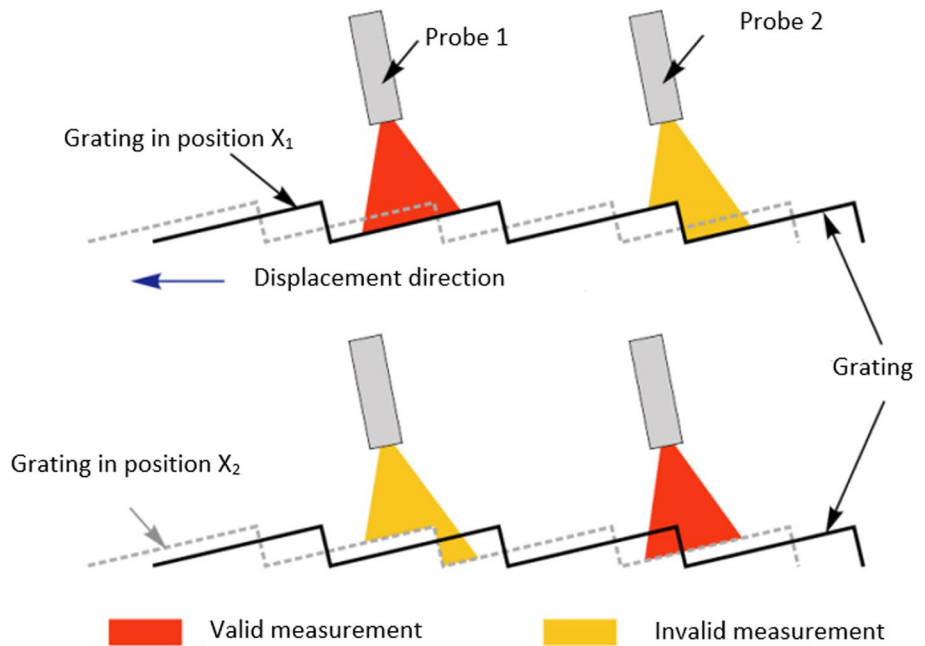


Fig. 6 Schematic diagram of the cones' assembled grating associated to the fiber-optic probes [19]

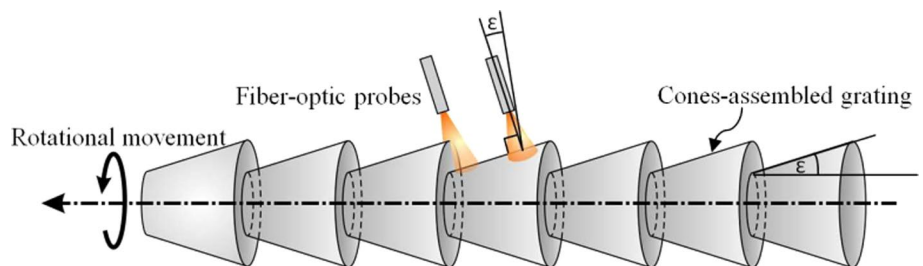


Table 2 Geometric model results

Symbol	definition
\varnothing (μm)	The probe diameter
R_c (mm)	The radius of curvature
M	The tangential point
\vec{n}_M	The normal vector to tangent
d_0 (mm)	The initial distance between the reflector and the probe
α ($^\circ$)	The incidence angle
δ ($^\circ$)	The angle between \vec{n}_M and the symmetrical axis of the probe
e (μm)	The spacing between the emission fiber and the reception fiber
Δ (μm)	The spacing between the normal vector of the flat surface and the reflected beam from the curved surface intercepted by the sensor

In the two previous studies mentioned in [21, 22], the influence of the curved reflector on the sensor performances was modelled. The surface of the reflector grating is convex. The property of having a convex reflector will modify the sensor performances as compared to the previous sensor with a flat mirror. Different geometric parameters were considered, in order to observe the influence of the convex surface on the sensor performances. These parameters are shown in Table 2 and Fig. 7.

The flat mirror configuration was used as a reference, it was found out that the higher the radius of curvature is, better will be the normalised light intensity detected in the linear part of the curve, and in consequence, better will be the performance of the sensor. The following figure presents the results of different radii of curvature (R_c) as a function of the displacement (d_0).

The geometric model previously described has been validated experimentally by fabricating two pieces of cylinders with different diameters: piece (A) with small diameters (40, 30, 20, 10 mm) and piece (B) with large diameters (55, 50, 40, 35 mm). These two pieces have been fabricated with a single crystal diamond tool on a high precision turning machine. For each cylinder in the two pieces, the calibration curve of the sensor has been obtained by moving the sensor away from the cylinder reflecting surface. The linear sensitivity has been calculated for each curve with a linearity criterion of 1%. The following figure illustrates the experimental set-up used, it consists of the two reflecting pieces together with a fiber-optic probe (Figs. 8, 9).

The experimental sensitivities have been compared to the theoretical sensitivities (zone 3 of Fig. 2), in order to test the validity of the geometric model (Fig. 10).

A diameter of 50 mm has been chosen to fabricate the cones' assembled grating, in order to guarantee a good performance of the sensor. A first conical grating prototype has been fabricated and characterized geometrically.

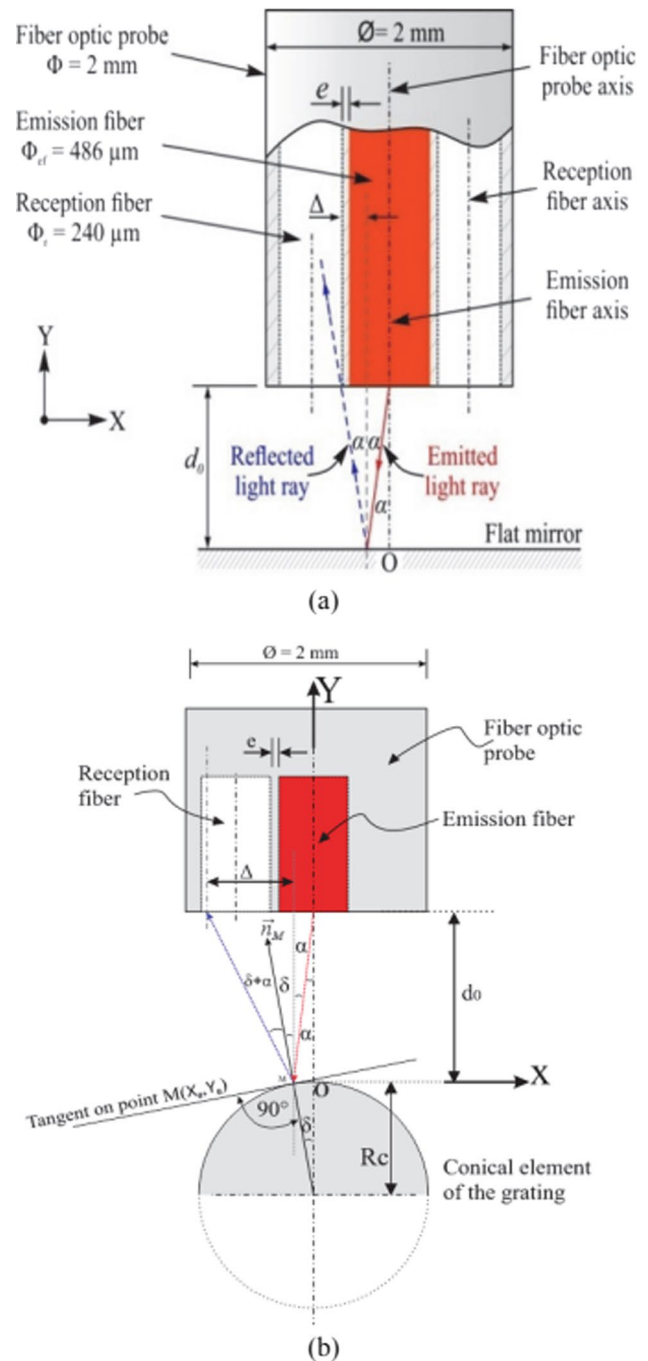


Fig. 7 Schematic diagram of the reflected light model **a** flat mirror, **b** convex mirror [22]

After that, the long-range displacement operation with the conical grating was simulated with a second geometric design.

The geometric model of the cones-assembled grating provided the geometric parameters necessary for a proper functionality for the sensor.

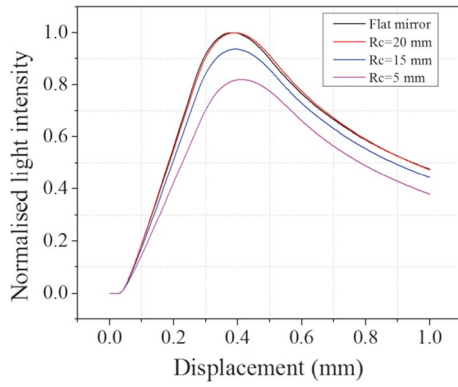


Fig. 8 Response curve for several radii of curvature [21]



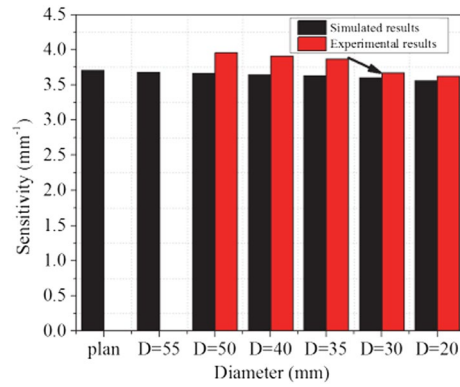


Fig. 10 Influence of the diameter of the reflective convex surface on the sensor sensitivity [22]

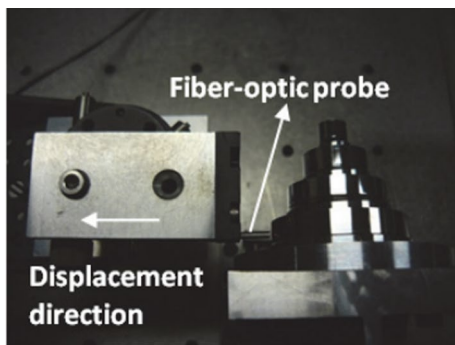

(A): small diameter piece

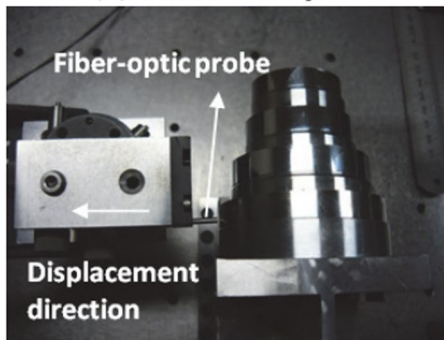

(B): large diameter piece

Fig. 9 Experimental setup : a Piece (A), b Piece (B) [21]

The following figure illustrates the geometric design for one step of the cones-assembled grating.

The previously described design provided an optimal value for each parameter, as shown in Table 3.

For this model, the angle γ was fixed at 130° . This angle should be higher than 90° , in contrary to the grating developed in the previous study, for which the angle was fixed at 90° (Fig. 4), and this is due to the tool footprint on the surface of the grating, which is suitable for the fabrication process.

Table 3 Geometric model results

Geometric parameter	Numerical value
l (μm)	1478
C (μm)	100
l_{max} (μm)	1578.1
h_{max} (μm)	119
$h_{p_{\text{max}}}$ (μm)	155.34
ϵ ($^\circ$)	4.60
γ ($^\circ$)	130

The values of the parameter l and h_{max} were respectively $1478.1 \mu\text{m}$ and $119 \mu\text{m}$. The angle ϵ and the segment $h_{p_{\text{max}}}$ are deduced geometrically as shown in the following equations:

$$\epsilon = \text{atan}\left(\frac{h_{\text{max}}}{l}\right) \tag{5}$$

$$h_{p_{\text{max}}} = h_{\text{max}} / (\cos(\gamma - 90^\circ)) \tag{6}$$

As explained previously, the geometric parameters influence the sensor resolution regarding the resolution, the measurement range and the sensitivity.

The cones-assembled grating has high requirements, regarding the precision of the geometric dimensions and the necessity of very low surface roughness. For those reasons, the grating has been manufactured with a high precision machine and a single crystal diamond tool [12, 13].

2.3 Machining Process

The following paragraph illustrates the fabrication procedure, which had been carried out using a high-precision lathe and a single crystal diamond tool on aluminium alloy (Fig. 11).

Fig. 11 Geometric parameters of one step in the cones' assembled grating

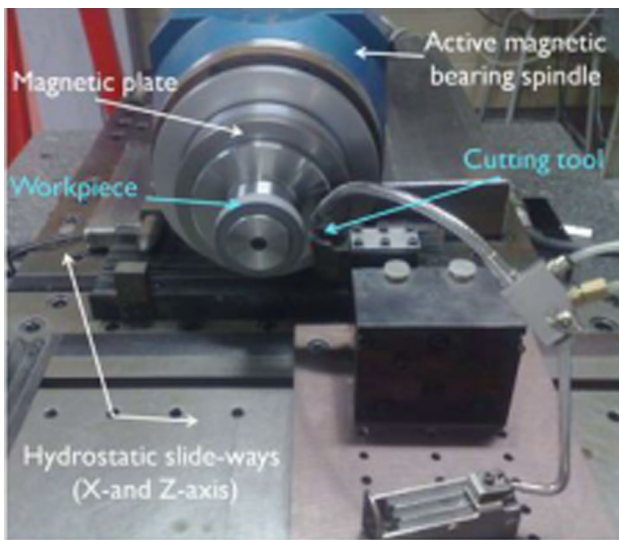
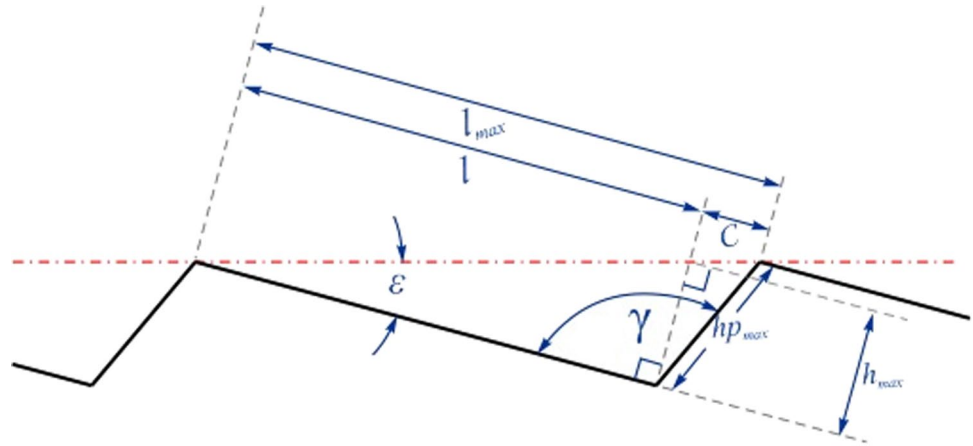


Fig. 12 Focus on the high precision lathe used in this study [22]

2.3.1 Characteristics of the High Precision Lathe and the Machining Tool

The sensor sensitivity and resolution are improved by a high reflectivity factor ($R > 95\%$) of the grating, which depends on a low roughness ($R_a < 10$ nm) and also of the flatness of each step in the grating. Besides, to ensure the highest linearity of the sensor, the flatness has to be in the order of magnitude of $\frac{\lambda}{10}$ (optical quality), where λ is the wavelength of the optical source. Finally, the length and the height of each step must be highly reproducible and very close to the geometric values provided by the geometrical model in order to ensure an accurate value of the angle ϵ . For those reasons, a high precision lathe was chosen, thanks to its adaptability to 3D axis-symmetrical pieces (Fig. 12).

This high precision machine is a prototype lathe, designed by Snecma™ Motor, as shown in Fig. 5. The two slideways (X-and Z-axis) are guided by hydrostatic-bearings offering

high damping and high stiffness; fixed on a massive granite block (1.5 tonnes), which rests on four self-leveling pneumatic isolators. The straightness of both slides is better than $0.3 \mu\text{m}$ over a displacement of 100 mm. The rotating spindle is fixed on the Z-axis, along with magnetic bearings [12].

Despite the high performances of the lathe, some defaults have been identified and measured. These residual defaults are due to a small misalignment between the spindle axis of rotation and the Z-axis, on which the spindle is fixed, as well as a small perpendicularity misalignment between the X-axis and the Z-axis. As a consequence, when a cylinder is fabricated, it will have a slight conical effect; with an increasing diameter, apart from the spindle side, the measured angle of this cone is approximately 0.014° . These defaults have been taken into account during the machining process and in the measurement of the geometrical parameters of the fabricated grating.

To get a cylinder with the smallest conical effect, this conical default should be compensated in the following manner: For 10 mm displacement of the Z-axis, $2.5 \mu\text{m}$ of the X-axis should be shifted. This compensation has been considered while manufacturing the cones-assembled grating.

To obtain a polished-mirror characteristic for the cones-assembled grating (a nanometric roughness), a single-crystal diamond tool, with a small radius of curvature ($R = 100 \mu\text{m}$), was used [23], as well as an aluminum alloy 2017 to fabricate the cones-assembled grating.

2.3.2 The Machining Technique

To get high surface qualities for the reflector part of the sensor, the depth cut has to be less than $10 \mu\text{m}$ [22]. The manufacturing technique has two main stages: During the initial phase, the surface of the raw cylinder was dressed and turned. Lubrication with spray was added, which facilitates the cut process, and allows getting high surface roughness.

The second stage is the fabrication of the cones-assembled grating on the cylinder. This phase is done in two

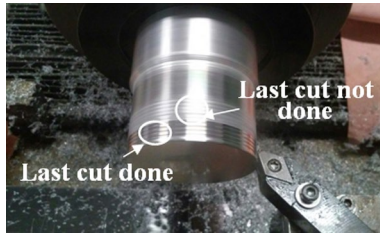


Fig. 13 Manufacturing of the cones' assembled grating


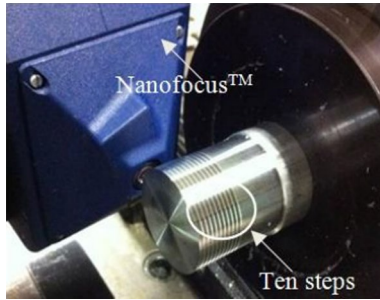


Fig. 14 Geometric characteristics

Fig. 15 Profile of the measured steps after fabrication

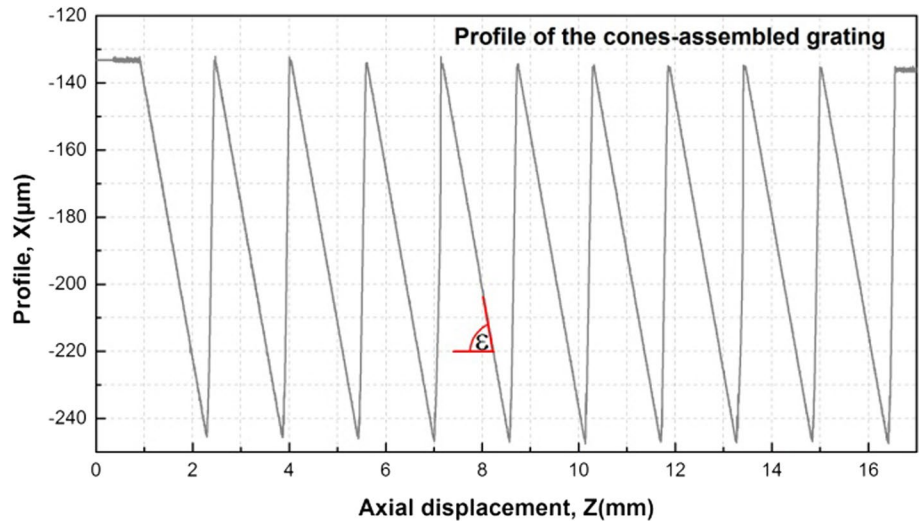

steps: firstly, every conical step has been fabricated with seven successive cuts, then, a finishing cut (8th cut) was done to get the corresponding shape of the cones-assembled grating. For each cone, two consecutive trajectories were programmed as previously explained in [19]. The depth of the six first cuts was fixed to 18 μm while it was 10 μm for the seventh.

Figure 13 shows the cones-assembled grating. The eighth cut allowed having a polished-mirror surface for the first five steps, whereas the last five steps which have not yet had the eighth cut are not reflective.

The high precision fabrication technique allowed getting the geometric parameters, obtained from the theoretical design. Then, it has been characterized geometrically using the Nanofocus™ μscan optical profilometer (Fig. 14). The steps profile was measured (Fig. 15) and compared with the theoretical dimensions (Table 4).

It is observed from these results, that the measured values are close to the theoretical ones; the percentage error for the step length is 0.02%, concerning the step height, the failure is 3.11%, and for the angle ε the error is 2.17%.

The surface characteristics for the cones-assembled grating were identified using an interferometric microscope, which gave a roughness value of (51.4 ± 2.7) nm and an average arithmetic roughness (rms) of (63 ± 3.7) nm, which is suitable for high surface reflectivity. Figure 16 illustrates the surface characteristics for the first grating step ($R_a = 53$ nm, arithmetic roughness (rms) = 71 nm).

3 Results and Discussion

The following section illustrates the experimental validation of the sensor principle, for which the objective is to measure

Table 4 Comparison between the theoretical values and the measured values for the geometric parameters of the cones-assembled grating

	Total length (μm)	Step height (μm)	ε (°)
Simulation	1578.1	119.0	4.60
Measurement	1578.5 ± 2.8	115.3 ± 1.2	4.5 ± 0.1

the linear displacement for a rotating spindle on a range of several millimeters with a sub-micrometric resolution.

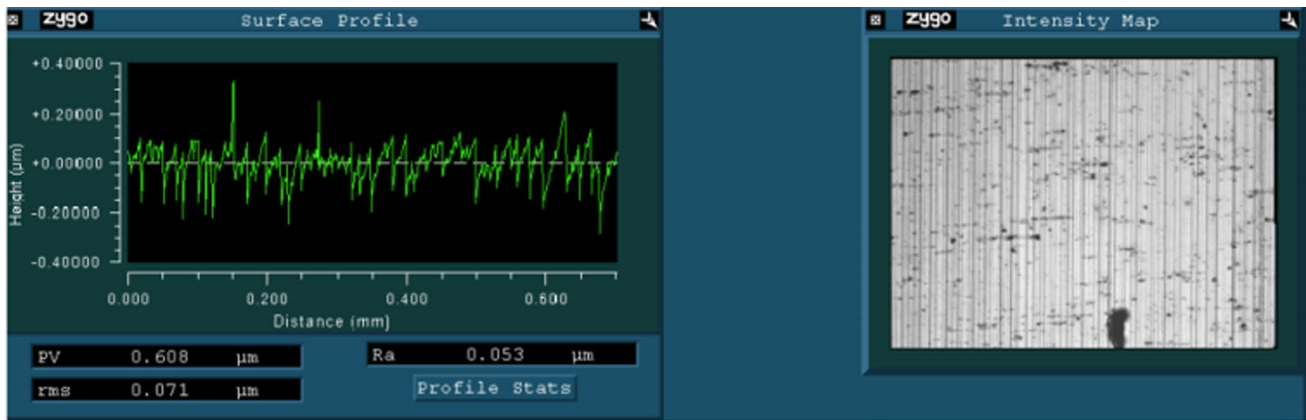


Fig. 16 Surface characteristics

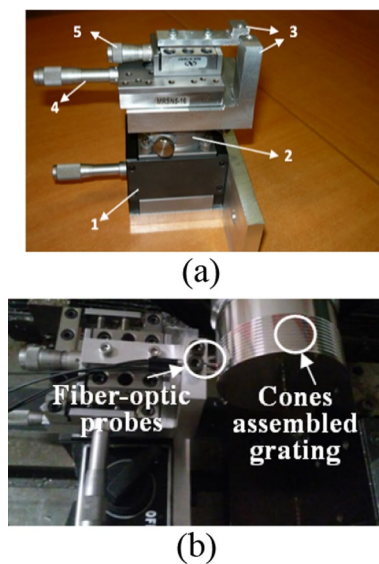


Fig. 17 Experimental set-up

3.1 Experimental Set-up

The functionality of the optical fiber has to be validated. Firstly, the unbalanced rotation phenomenon has been characterized, by analyzing the sensor signals at different velocities, then the sensor performances have been evaluated, by taking into account its measurement range, the corresponding resolution, and also the overlap between the two fiber-optic probe signals.

An experimental set-up was designed and fixed in front of the cones-assembled grating (Fig. 17a). The set-up is composed of two manual linear stages (4 and 5), one manual rotation stage (2) and one height adjustment linear stage (1). Each fiber-optic probe is fixed on a linear stage (3), perpendicularly to the cones surface, so that the displacement sensitivity is optimal (Fig. 10b).

To verify the functionality of the fiber-optic sensor, the conical grating was kept on the rotating axis of the machine, with the objective to produce a helicoidal motion, without introducing new positional errors. The grating displacement was done using the Z-axis of the lathe; the rotation was generated using the spindle.

3.2 Unbalanced Rotation Characterization

The unbalanced rotation phenomenon due to off-centered axes (the rotation axis of the conical grating and the axis of rotation of the spindle), has been characterized with one fiber-optic probe. This phenomenon was observed by varying the velocity of the grating. The following signals have been obtained with V_t ranged from 0.1 mm/s to 0.5 mm/s, while V_r has been fixed at 1 rev./s (Fig. 18). The graph in red stands for $V_t=0.1$ mm/s, whereas the one in black stands for $V_t=0.5$ mm/s.

As seen from the previous figure, there are periodic peaks in each signal. These peaks are due to the unbalanced rotation of the spindle; they have a period of 1 s (linked to $V_r=1$ rev./s). By increasing the translational speed, the number of the peaks decreases. The reason is that at high translational velocities, the time needed for the spindle to make one complete turn is higher than the time required to cross the linear part of the voltage variation.

So, to avoid the unbalanced rotation phenomenon, high velocities should be applied.

3.3 Long Range Displacement Measurement

Firstly, a translational velocity of 0.5 mm/s was applied. The following figure presents an example of the two signals, where an overlap of 30 μ m was measured. The overlap criterion was fixed at a minimum value of 30 μ m as in previous studies. This overlap allowed switching between the signals, and not to generate measures in the non-linear

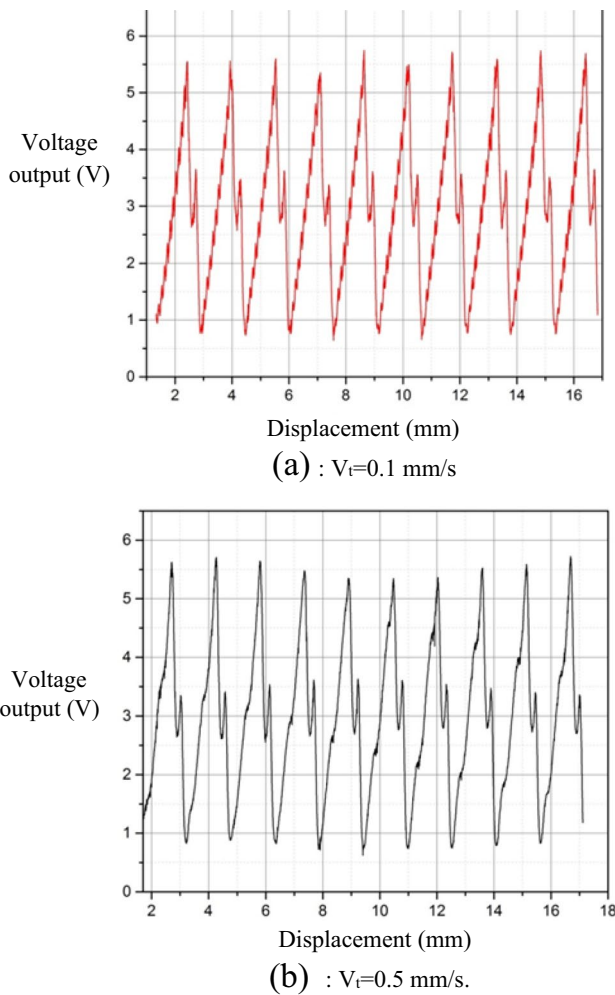


Fig. 18 Voltage output signals of the fiber-optic sensor at two translational velocities

zone; when the probe reaches the extremity end of the curve, and in consequence, to the defined the allowed linearity error, the other probe takes over, the overlap is associated to the linearity criteria, as the two probes should be in functionality points simultaneously (when one probe is at the extremity end of one curve, the other one should be in the linear zone of the second curve), which ensures measurement continuity (Fig. 19).

In a second time, the translational movement was coupled with the movement of the spindle; to determine the optimal translational and rotational velocities applied for the motion, respectively. Figure 20 illustrates the experimental measurement obtained for $V_t=0.2$ mm/s, associated with $V_r=0.5$ rev./s, where the signal has been filtered, by taking the average between every 40 points in the experimental curve.

It is observed that the two signals don't have the same amplitude, due to the slight differences in the intrinsic characteristics of the fiber-optic probes. A maximum linearity

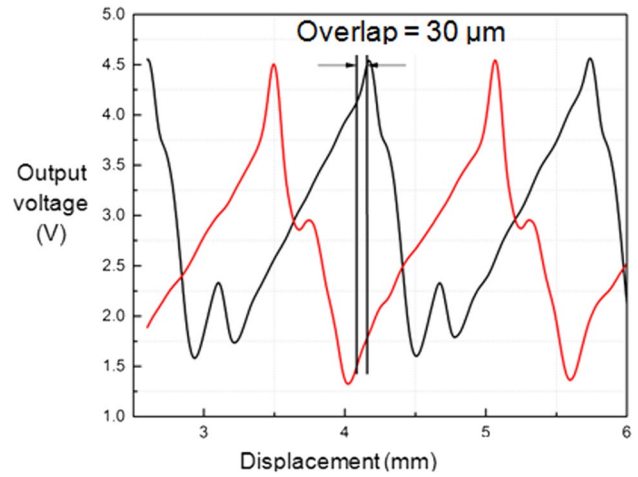


Fig. 19 Measurement of the grating displacement (mm)

error of 5% was needed, to get a sufficient overlap between two successive signals.

The experimental results have been analyzed, by calculating the linear sensitivity and the corresponding measurement range on each conical step. The linear displacement was generated by the high precision lathe, the grating was fixed on the spindle, the Z-slideway was translated at a specified distance, which is the desired displacement, the acquisition had been done via LABVIEW, which gave the output voltage on each step of the grating. The result for the sixth step is provided in the following Fig. 21.

As seen from the previous figure the linear sensitivity obtained from the first probe on the sixth conical step is 2.71 V/mm, the corresponding measurement range is

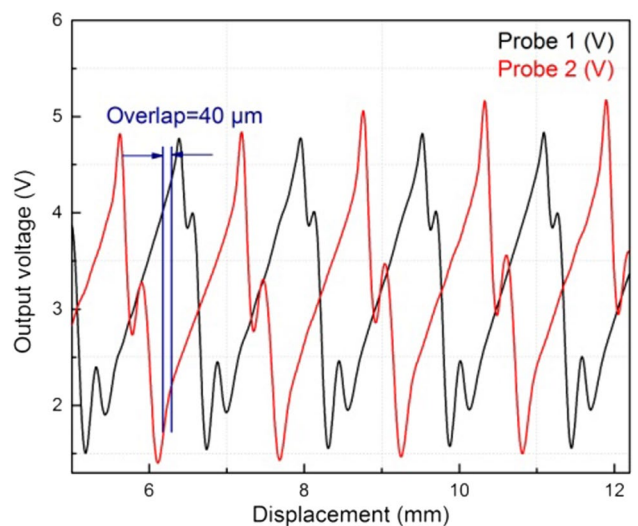


Fig. 20 Signals obtained from the two fiber-optic probes for a coupled motion (translation + rotation)

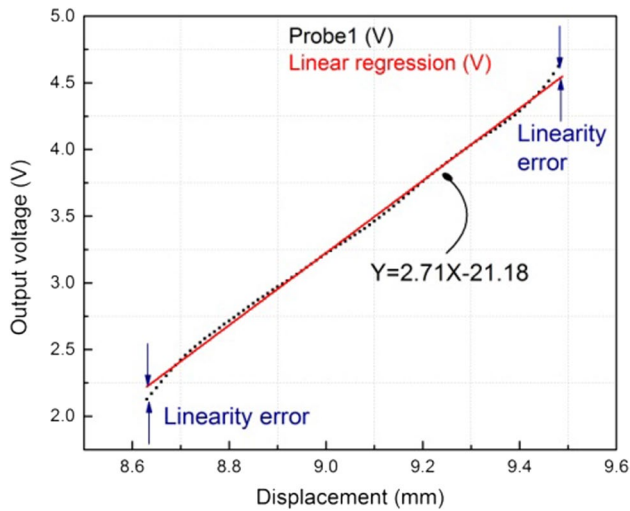


Fig. 21 Signal obtained on the sixth conical step

0.858 mm. The linearity error is at its maximum value on the extremity of the curve (Fig. 22).

As seen from the previous figure, the linearity error on the first extremity of the step is 3.76% and at its maximum value at the other extremity (5%), however, this error is always less at the middle of the step.

Other experimental results have been obtained at different values for the translational and the angular velocities, where the maximum rotational velocity was 20 rev./s. Figure 18 shows the displacement measurement obtained at $V_t=0.05$ mm/s associated with a rotational velocity of 20 rev./s. An overlap of 30 μm was needed to switch between the two fiber-optic probes; this overlap is a function of the translational velocity and the sampling frequency. For a rotational velocity of 20 rev./s, the periodic peaks due to the off-centered axes are attenuated.

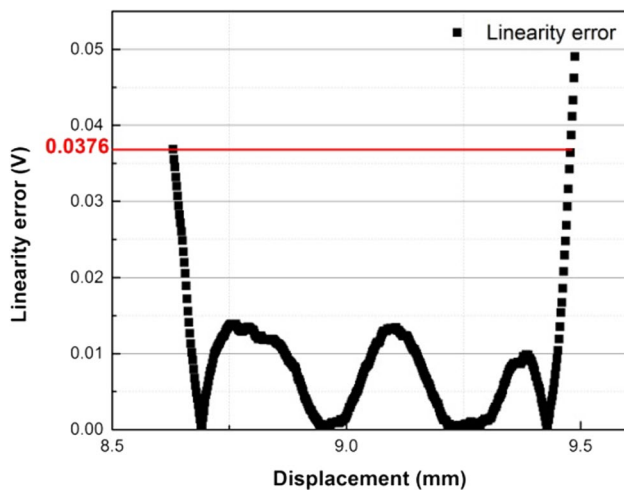


Fig. 22 Linearity error as a function of displacement

The sensor resolution was evaluated in-situ on the lathe: firstly, when the machine was stopped, to determine the electronic noise of the sensor; secondly when the machine was functioning, to assess the influence of the vibrations of the lathe.

The amplitude of the sensor electronic noise (lathe stopped) was (0.3–0.4 μm). Afterward, measurements were made, while the machine was functioning, but its axes remained stationary. Some oscillations of the signal, due to the flow of the oil through the slideways and also due to the numerical control, were registered.

Finally, lateral displacements have been carried out to determine the limit of resolution for the sensor in its lateral configuration use. Lateral displacements and non-axial displacements have been chosen, as the sensor is used in its lateral case because it is the configuration where high measurement ranges are obtained (Fig. 23).

The first displacement of (17 ± 0.002) μm was made by moving the z-axis; it is measured by the sensor (Fig. 24). Taking into account the noise due to the vibrations of the machine it can be seen that the noise is about 10 μm , so the sensor resolution is around 10 μm as it is the minimum value detectable by the sensor.

As seen from the experimental results, the sensor functionality is verified successfully, with needs to improvements regarding the resolution.

4 Conclusion and Perspectives

An optical fiber displacement sensor for helicoidal movements has been designed and fabricated. The reflector part of this sensor is a cones'-assembled grating. Firstly, a geometric model for each step of the grating was done. The

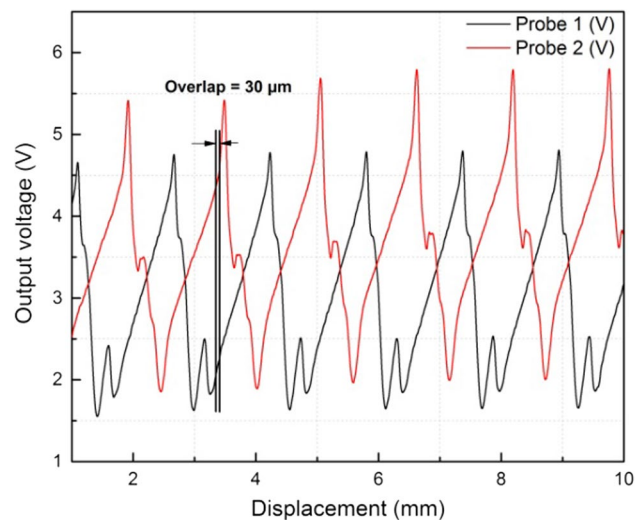


Fig. 23 Signals obtained at ($V_t=0.05$ mm/s and $V_r=20$ rev./s)

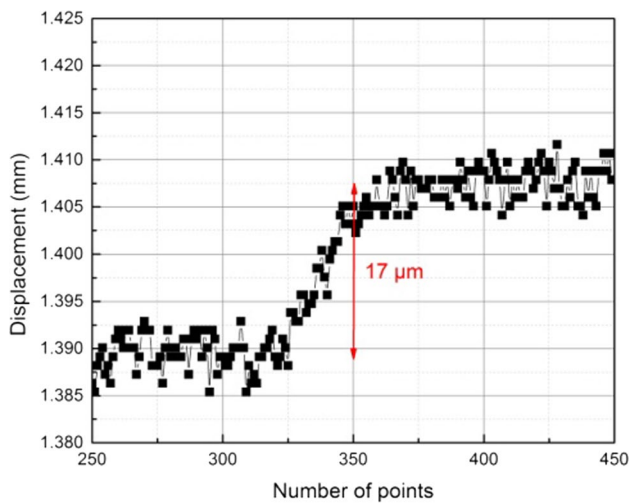


Fig. 24 Resolution measurement

objective of this model was to figure out the optimal performances of the sensor, regarding, its measurement range and the corresponding resolution.

The cones-assembled grating was precisely manufactured, in the objective to get the desired theoretical values of the grating dimensions as well as a low roughness and flatness values for the surface.

The fabricated grating was characterized regarding its geometric parameters and its surface roughness and flatness, where a good agreement was obtained between the theoretical parameters and the measurements.

Finally, the unbalanced rotation phenomenon was characterized by one fiber-optic sensor; this phenomenon leads to having periodic peaks in the voltage output signal of the sensor. This phenomenon is attenuated at high velocities of the cones-assembled grating whereas; at low speeds, the experimental curve has to be filtered. The sensor functionality was verified experimentally, in-situ on the lathe, to simulate a helicoidal motion. As a result, a micrometric resolution limit of 10 μm is approached over a range of 5 mm measured on six cones of the grating.

As seen from the obtained results, the measurement principle has been validated on several millimeters with a micrometric resolution. The sensor can be used in industrial applications for on-line measurements and error motion detection in drilling operations simultaneously; which have not been found elsewhere in the literature.

This study showed a first research phase study, the sensor developed has been tested only on a laboratory fabrication machine, the product has not been tested somewhere else, which proves the validity commercially.

For future work, the sensor resolution has to be improved to a sub-micrometric level, by reducing the electronic noise and the oscillations due to the machine vibrations.

Author contributions FL conceived the study. ZE and CP designed the geometric model. ZE and PR carried out the high precision fabrication procedure. ZE and FL achieved the experimental procedure. ZE, PR and FL did the analysis of the experimental results. ZE drafted the manuscript. All authors read and approved the final manuscript.

References

1. Omron, <http://industrial.omron.fr>.
2. Santoso, T., Syam, W. P., Darukumalli, S., & Leach, R. (2022). Development of a compact focus variation microscopy sensor for on-machine surface topography measurement. *Measurement*, *187*, 110311.
3. Chen, Z., Wang, Z., Ren, M., Zhang, X., Zhu, L., & Jiang, X. (2020). Development of an on-machine measurement system for ultra-precision machine tools using a chromatic confocal sensor. *Precision engineering*, *74*, 232–241.
4. Graves, L. R., Smith, G. A., Apai, D., & Kim, D. W. (2019). Precision optics manufacturing and control for next-generation large telescopes. *Nanomanufacturing and Metrology*, *2*, 65–90.
5. Chen, Y. L., Niu, Z., Matsuura, D., Lee, J. C., Shimizu, Y., Gao, W., Oh, J. S., & Park, C. H. (2017). Implementation and verification of a four-probe motion error measurement system for a large-scale roll lathe used in hybrid manufacturing. *Measurement Science and Technology*, *28*, 105004.
6. Li, D., Cheung, C. F., Ren, M., Whitehouse, D., & Zhao, X. (2015). Disparity pattern-based autostereoscopic 3D metrology system for in situ measurement of microstructured surfaces. *Optics Letters*, *40*, 5271–5274.
7. Zou, X., Zhao, X., Li, G., Li, Z., & Sun, T. (2017). Non-contact on-machine measurement using a chromatic confocal probe for an ultra-precision turning machine. *International Journal of Advanced Manufacturing Technology*, *90*, 2163–2172.
8. Li, D., Jiang, X., Tong, Z., & Blunt, L. (2019). Development and application of interferometric on-machine surface measurement for ultraprecision turning process. *ASME Journal of Manufacturing Science and Engineering*, *14*, 014502.
9. Xie, W.-G., Zhang, Y.-N., Wang, P.-Z., & Wang, J.-Z. (2018). Optical fiber sensors based on fiber ring laser demodulation technology. *Sensors*, *2*, 505.
10. Zhang, H., Anders, D., Loser, M., Ihlenfeldt, S., Czarske, J., & Kuschmierz, R. (2020). Non-contact bi-directional tool tip vibration measurement in CNC milling machines with a single optical sensor. *Mechanical Systems and Signal Processing*, *6*, 106647.
11. Zhou, F., Duan, W., Li, X., Tsai, J.-T., & Jun, M. B. G. (2021). High precision in-situ monitoring of electrochemical machining process using an optical fiber Fabry-Pérot interferometer sensor. *Journal of Manufacturing Process*, *6*, 180–188.
12. Takushima, S., Kawano, H., Takahara, H., & Kurokawa, T. (2018). On-machine multi-directional laser displacement sensor using scanning exposure for high-precision measurements of metal-works. *Precision Engineering*, *51*, 437–444.
13. Abir, J., Longo, S., Morantz, P., & Shore, P. (2017). Virtual metrology frame technique for improving dynamic performance of a small size machine tool. *Precision Engineering*, *48*, 24–31.
14. He, Y., Zhang, X., Zhu, L., Sun, G., Lou, X., & Dong, M. (2019). Curvature and force measurement of soft manipulator based on stretchable helical optic fibre. *Optical Fiber Technology*, *3*, 4478.
15. Khiat, A. (2007). Capteurs à fibres optiques pour la mesure à haute résolution de déplacements linéaires et angulaires sur une grande étendue. Application aux systèmes mécaniques de dimensions réduites, Mémoire de thèse, UTC.

16. Prelle, C., Lamarque, F., & Revel, P. (2006). Reflective optical sensor for long-range and high-resolution displacements. *Sensors and Actuators*, 6, 139–146.
17. Rawashdeh, Z. E., Lamarque, F., Prella, C., & Revel, P. (2012). Influence of the Grating of Cones Shape on the Performances of Fiber-Optic Linear Displacement Sensor. *REM-Mecatronics*, 3, 689.
18. Khat, A., Lamarque, F., Prella, C., Pouille, Ph., Leester-Schadel, M., & Büttgenbach, S. (2010). Two-dimension fiber optic sensor for high-resolution and long range linear measurements. *Sensors and Actuators*, 4, 43–50.
19. Zhu, R., Jing, R., & Cheng, Y. (2017). Simulation and experimental studies of a double-fiber angular displacement sensor. *Optics & Laser Technology*, 3, 168–172.
20. El Rawashdeh, Z., Revel, P., Prella, C., & Lamarque, F. (2016). Fiber-optic sensor for long range displacement measurement of a rotating spindle. Mecatronics rem Compiègne, France.
21. El Rawashdeh, Z., Revel, P., Prella, C., & Lamarque, F. (2015). Cones assembled grating for long range fiber-optic linear displacement sensor. In: 3rd international conference on Photonics, optics and laser technology, Berlin.
22. Gautier, A., Khanfir, H., Revel, P., & Fillit, R. Y. (2008). Polish mirror finish surfaces obtained by high precision turning. *International Journal of Machining and Machinability of Materials*, 4, 133–147.

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Springer Nature or its licensor (e.g. a society or other partner) holds exclusive rights to this article under a publishing agreement with the author(s) or other rightsholder(s); author self-archiving of the accepted manuscript version of this article is solely governed by the terms of such publishing agreement and applicable law.



Zeina Elrawashdeh was born in Jordan in 1986. She received her bachelor degree in 2009 from the University of Jordan, she received her PhD degree from the University of Technology of Compiègne in 2016. She is now assistant professor in the engineering school ICAM, and associate lecturer/researcher in the University of Belfort and Montbéliard, in ICB-COMM laboratory. Her research interest is focused on sensors technologies.



Philippe Revel was born in France, in 1960. He received his DEA degree in mechanical and material engineering from the Technological University of Compiègne in 1986. In 1991, he received his PhD degree in mechanical and material engineering from the Technological University of Compiègne. Since 1992, he is associate professor at the University of Technology of Compiègne. His research interests are focused on the thermo-mechanical behavior of material and high precision machining.

He studies particularly the effect of diamond turning on the integrity of machined surfaces.



Christine Prella was born in France, in 1971. She received her DEA degree in automatic control in 1994 from the Claude Bernard University, Lyon, in France. In 1997, she received her PhD degree in industrial automatic control from the INSA of Lyon, France. She is now associate professor at the University of Technology of Compiègne, France, in the Roberval Laboratory. Her research interests are micromechatronics and control.



Frédéric Lamarque was born in France, in 1971. He received his DEA degree in electronics from the Paris-Sud-Orsay University. In 1998, he received his PhD degree in electronics from the Paris-Sud-Orsay University. He is now associate professor at the University of Technology of Compiègne, France, in the Roberval Laboratory. His research interest is focused on sensors technology.