



**HAL**  
open science

## New Design of RFID TAG Using the Non Uniform Transmission Lines

Mohamed Boussalem, Mohamed Hayouni, Tan-Hoa Vuong, Fethi Choubani,  
Jacques David

► **To cite this version:**

Mohamed Boussalem, Mohamed Hayouni, Tan-Hoa Vuong, Fethi Choubani, Jacques David. New Design of RFID TAG Using the Non Uniform Transmission Lines. Mediterranean Conference on Information and Communication Technologies (MedCT 2015), May 2015, Morocco, Morocco. pp.533-538, 10.1007/978-3-319-30301-7\_56 . hal-03933314

**HAL Id: hal-03933314**

**<https://hal.science/hal-03933314v1>**

Submitted on 20 Jan 2025

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# New Design of RFID TAG Using the Non Uniform Transmission Lines

Mohamed Boussalem, Mohamed Hayouni, Tan-Hoa Vuong,  
Fethi Choubani and Jacques David

**Abstract** The issue of our paper is to expose an original technique to improve the performance of RFID TAG in terms of its geometric dimensions and radiation pattern. This technique exploits the non uniform transmission lines (NUTLs) features to design the passive antenna element on the RFID TAG. We have yet demonstrated that geometric dimensions are reduced and the radiation pattern of the tag was improved by such use of NUTLs. Optimization of the profiles of the different elements of non uniform Lines achieves the appropriate radiation diagram and improves the radiation intensity, consequently.

**Keywords** Nutls · Hill equation · RFID antenna · Radiation intensity · Radiation pattern · Effective angle

## 1 Introduction

To improve the performance of microwave circuits and particularly the passive RFID tags suggested the use of non uniform transmission lines due to their appropriate frequency behaviour [1].

Their fundamental property allows the reduction of the geometric dimensions and improvement of the tag's radiation pattern [2, 3]. The analysis of such structures is achieved by a numerical calculation program based on the work of Hill, which consists of determining the general solution of the propagation distribution equation of the electric and magnetic fields and deducing the accurate model of the transmission line. Therefore, several non uniform transmission lines with various profiles (hyperbolic, linear and exponential) have been analyzed. Their contribution

---

M. Boussalem (✉) · T.-H. Vuong · J. David  
Laboratoire Laplace—INP Toulouse, Rue Charles Camichel, 31071 Toulouse, France  
e-mail: m.boussalem@gmail.com

M. Boussalem · M. Hayouni · F. Choubani  
Innov'Com Lab., SUPCOM-Université de Carthage, Tunis, Tunisia

to improve the pattern and reduce the dimension of passive antenna RFID TAG has been experimentally validated.

## 2 Analysis of NUTLs


The modelling of a non uniform structure passes by determining the explicit expression describing accurately its behaviour and deducing its scattering matrix  $S$ .

The first step is to derive the propagation equations adequately for the non uniform profile. Secondly, we perform mathematical manipulations to transform these equations in the form of a traditional Hill's equation without a first derivative term. Next, the obtained equation is solved using the Floquet theorem, to explicit the general and particular solutions, respectively. Finally, we use these solutions to calculate the different elements of the scattering matrix  $S$  of the lines. More investigations will be carried out to validate this analytic approach and by further developments and experimental prototypes. Results obtained of a simple, exponential and hyperbolic lines optimized to resonate at a fundamental frequency equal to 1 GHz (Figs. 1, 2 and 3) are showed in Table 1.

Actually, the non uniform transmission lines have a frequency behaviour which strictly depends upon their forms and their profiles of non homogeneity. While the transmission structures resonate in a regular multiple of fundamental frequencies, the non uniform lines resonate on frequencies which are different from integer multiples of fundamental.

## 3 Experimental Application of LNUT

Our methodology consists of replacing uniform structures present on the RFDI TAG and its passive antenna, by equivalent non uniform parts. Indeed, classical passive RFID TAGs in microwave are based on elements used as antennas [4]. Usually, these elements are designed like uniform transmission lines.

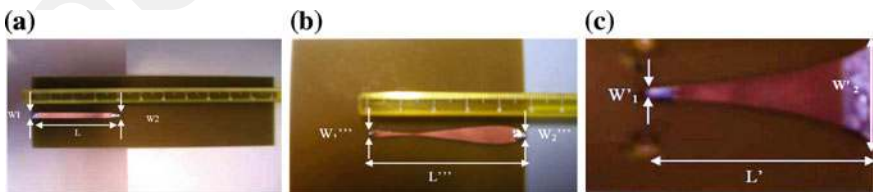

**Fig. 1** **a** Simple  $\lambda/4$  short-circuits line  $W1 = 2.988$  mm,  $W2 = 2.88$  mm and  $L = 3.14$  cm substrate: epoxy 1.52 mm. **b** Non uniform  $\lambda/4$  short-circuits line with linear and hyperbolic profile  $W1''' = 2.988$  mm,  $W2''' = 2.88$  mm and  $L''' = 4.73$  cm Substrate: Epoxy 1.52 mm. **c** Non uniform  $\lambda/4$  short-circuits line with exponential profile,  $W1' = 2.988$  mm,  $W2' = 2.88$  mm and  $L' = 4.73$  cm substrate: epoxy 1.52 mm

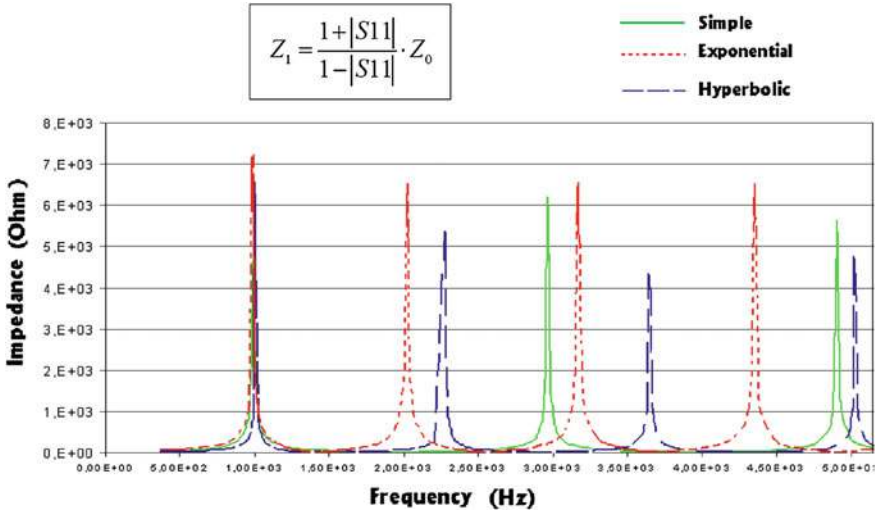


Fig. 2 Impedance of different NUTLs depending on the frequency

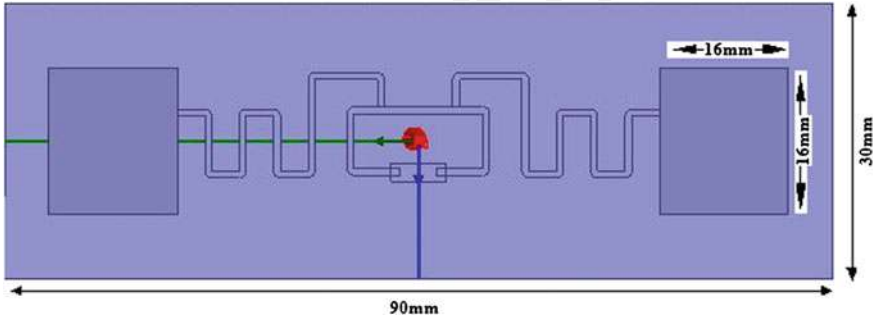


Fig. 3 Passive UHF RFID tag designed with simple lines

Table 1 Resonant frequency of simple and non uniform lines

	Fundamental frequency (GHz)	1st harmonic frequency (GHz)	2nd harmonic frequency (GHz)
Simple line	1	3	5
Exponential profile	0.95	2.14	3.43
Hyperbolic profile	1	2.3	3.6

The purpose of this work is to develop the same printed circuit structure for both types of RFID chips that operate on two separate frequencies, one at 2.45 GHz and the other at 5.8 GHz. With a Substrate: FR4 (Epoxy glass) and Tag Size: 30 × 90 mm.

Figures 4, 6 and 8 perfectly illustrates the value of using “NULTS” in this type of device. We expect RFID chips in our industrial partner to validate our concept and contribution of adjustments according to the results of measurement campaigns (Figs. 5 and 7).

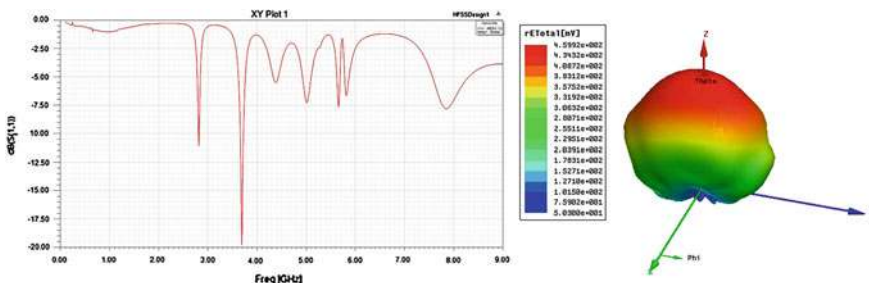


Fig. 4 Operating frequency and radiated pattern of RFID TAG designed with simple lines

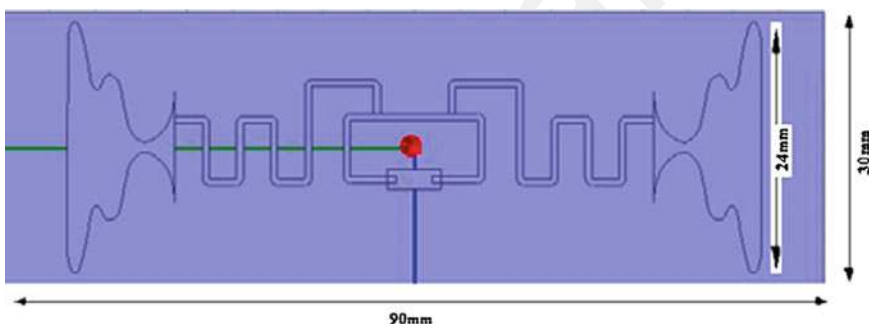


Fig. 5 Passive UHF RFID tag designed with non uniform line LNUT1

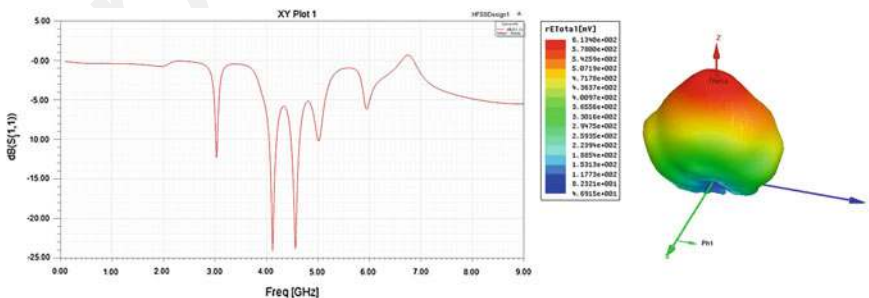


Fig. 6 Operating frequency and radiated pattern of RFID TAG designed with LNUT1

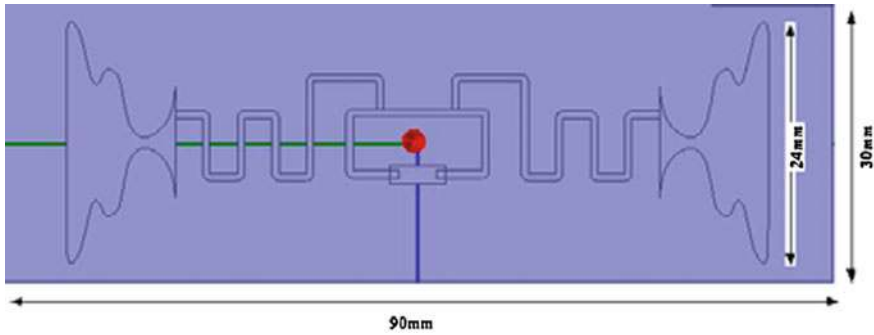


Fig. 7 Passive UHF RFID tag designed with non uniform line NUTL2

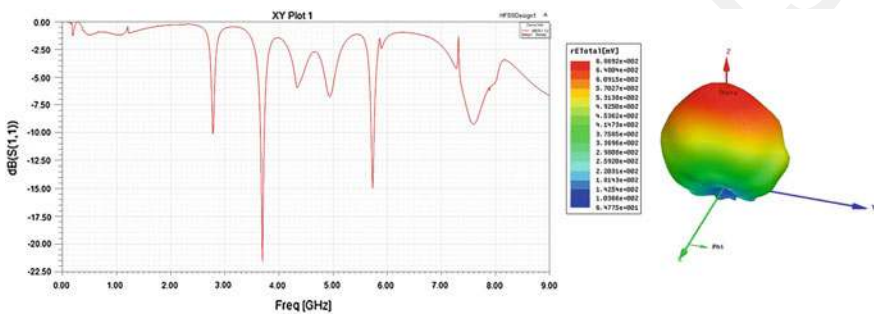


Fig. 8 Operating frequency and radiated pattern of RFID TAG designed with NUTL2

## 4 Conclusion

Analysis of NUTLs using Hill's equation is achieved using an efficient iterative method based on Fouquet's exponents determination. Once voltages and currents are defined over each point along the transmission structure, S parameters and other pertinent parameters can be easily derived.

The NUTLs have a frequency behaviour depending tightly on their geometric profiles. This fundamental property was used for reducing RFID tag dimension and improving its radiation pattern. Non uniform structures have exhibited attractive results and obtained results showed good agreement with experience.

## References

1. Doan, T.N.H., Ghiotto, A., Guillon, L., Vuong, T.P., Castelli, P.T.: Conception et réalisation d'une Antenne pour un Lecteur RFID-PDA. OHD 2007, Valence, France, Sept 2007

2. Cho, C., Choo, H., Park, I.: Design of novel RFID tag antennas for metallic objects. In: IEEE International Symposium on Antennas and Propagation Digest, pp. 3245–3248 (2006)
3. Diugwu, H., Batchelor, J.C.: Analysis of the surface distribution in a dual band planar antenna for passive RFID tag. In: IEEE International Symposium on Antennas and Propagation Digest, pp. 459–462 (2005)
4. Nikitin, P.V., Rao, K.V., Lazar, S.: An overview of near field UHF RFID. In: IEEE International Conference on RFID, pp. 167–173 (2007)
5. Hassan, S.M.S., Sundaram, M., Kang, Y., Howlader, M.K.: Measurement of dielectric properties of materials using transmission/reflection method with material filled transmission lines. In: Proceeding of IEEE IMTC, vol. 1, pp. 72–77, 16, 19 May 2005