



HAL
open science

**Un outil d'analyse/synthèse utilisant la morphologie
mathématique basé en le modèle audio
sinusoïdes+bruit+transitoires**

Gonzalo Romero-García

► **To cite this version:**

Gonzalo Romero-García. Un outil d'analyse/synthèse utilisant la morphologie mathématique basé en le modèle audio sinusoïdes+bruit+transitoires. JJCAAS 2023: Journées Jeunes Chercheurs en Audition, Acoustique musicale et Signal audio, Apr 2023, Paris, France. hal-04073788

HAL Id: hal-04073788

<https://hal.science/hal-04073788v1>

Submitted on 19 May 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.


L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

An Analysis/Synthesis tool using mathematical morphology based on the Sinusoids + Transients + Noise audio model

Gonzalo Romero-García

STMS, Sorbonne Université, IRCAM, CNRS, Ministère de la Culture, Paris, France

Contact: romero@ircam.fr

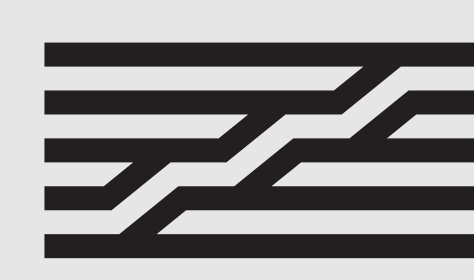

Introduction

What we present: An analysis/synthesis tool based on a Spectral Modeling Synthesis (SMS).

Which model we use: We decompose the sound in three parts:
Sinusoids Transients Noise

How we estimate the parameters: We use Mathematical Morphology (MM) on a STFT spectrogram to retrieve the parameters.


Analysis/Synthesis

Analysis/Synthesis is a process that takes a sound as input and retrieves parameters in order to generate a synthetic approximation of it. This process requires a **Synthesis Model** and **Parameter Estimation Method**.

The diagram below illustrates the steps of the process and the choices involved.

Analysis/Synthesis diagram

Parameter Estimation Method:

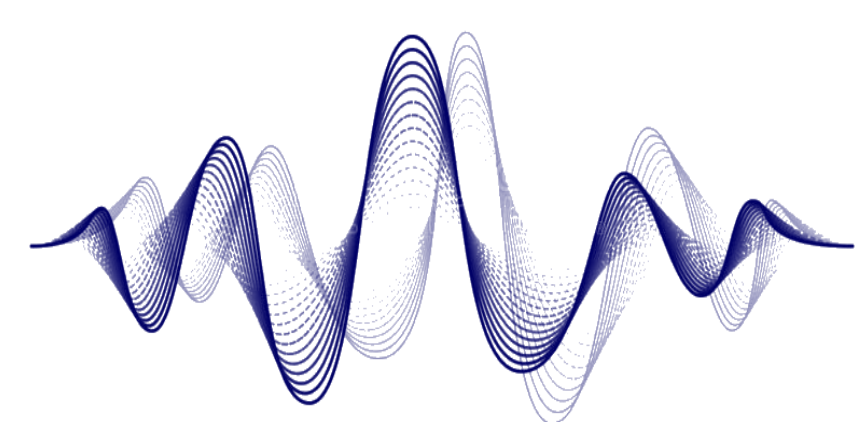


Mathematical Morphology on STFT spectrograms

Parameters

Synthesis Model:



Sinusoids + Transient + Noise

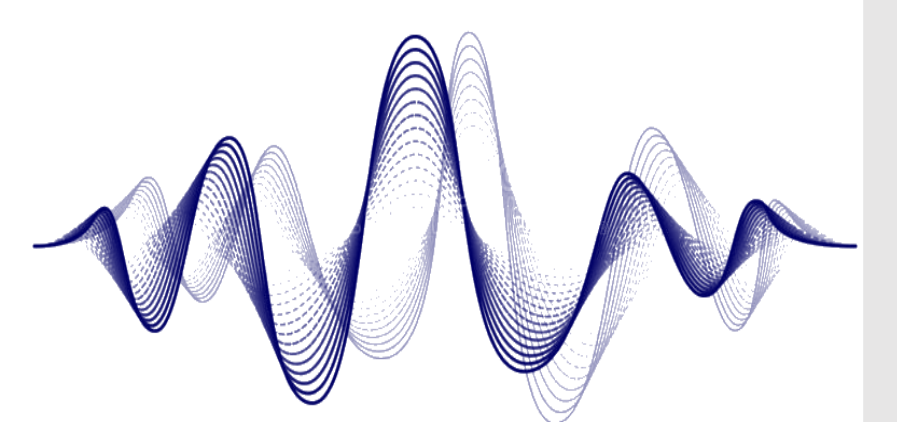

Sinusoids + Transients + Noise model

Sinusoids

The sinusoids component is of the form

$$s(t) = \sum_{n=0}^N a_n(t) \sin(2\pi\Phi_n(t))$$

where

- $\Phi_n(t) = \int_0^t f_n(\tau) d\tau$,
- $a_n(t)$ is the amplitude of the n^{th} sinusoid,
- $f_n(t)$ is the instantaneous frequency of the n^{th} sinusoid.

Transients

The transient component is of the form

$$s(t) = \sum_{n=0}^N s_n(t)$$

where

- $s_n(t) = \text{iCT}[S_n(f)](t)$,
- $S_n(f)$ is the n^{th} modulated sinusoid in the frequency dimension,
- iCT is the **inverse Cosine Transform** defined by $\text{iCT}[X(f)](t) = \int_{-\infty}^{\infty} X(f) \cos(2\pi ft) df$.

Noise

The noise component is of the form

$$s(t) = \text{iSTFT}[W(\tau, \omega) \cdot M(\tau, \omega)](t)$$

where

- iSTFT is the **inverse Short-Time Fourier Transform**,
- $W(\tau, \omega)$ is the STFT of a white noise,
- $M(\tau, \omega)$ is the mask representing a time-varying filter.

Parameter estimation with Mathematical Morphology

