



HAL
open science

Unknown input observer for sampled data system with time-varying sampling

Lucien Etienne, Kokou A.A. Langueh, Laurentiu Hetel

► To cite this version:

Lucien Etienne, Kokou A.A. Langueh, Laurentiu Hetel. Unknown input observer for sampled data system with time-varying sampling. European Control Conference, Jun 2023, Bucharest (RO), Romania. ⟨hal-04140974⟩

HAL Id: hal-04140974

<https://hal.science/hal-04140974v1>

Submitted on 26 Jun 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Unknown input observer for sampled data system with time-varying sampling

L. Etienne*, K. A. A. Languéh*, L. Hetel**

Abstract—This paper addresses the Unknown Input Observer (UIO) design problem for sampled-data Linear Time Invariant systems with time-varying sampling intervals. A discrete-time modeling approach is used. Based on convex optimization techniques, tractable design conditions are proposed and illustrated by numerical examples.

I. INTRODUCTION

In engineering problems, a large number of physical systems are subject to disturbances that can be considered as unknown inputs. A possible solution to take them into account is based on the use of the so-called Unknown Input Observer (UIO) method [1], which was proved to be relevant in a wide variety of applications [4]. In the literature there is a large number of contributions addressing the UIO design problem for LTI systems. For pioneering works we point to [1], [14], [23]. The results addressing the case of sampled-data systems are sparse. For LTI sampled-data systems with constant sampling intervals, by using the exact system integration over the sampling interval, the discrete-time UIO approaches [10], [24] can be used (see also some works in the nonlinear case [3], [25]). Here we consider the UIO synthesis problem for the case of sampled-data systems with time-varying sampling intervals. As soon as digital communication networks are used, sampling interval variations are ubiquitous ([11], [13], [12]). However, to the best of our knowledge, in the case where the sampling interval is time-varying the UIO design problem has not been addressed yet, not even for the case of LTI systems. This is precisely the case that we consider in this paper.

Although the aforementioned problem statement has not been addressed in the literature, it should be noted that some results exist for problem formulations related to ours. Results for state observers for sampled-data systems with time-varying sampling interval can be found in the literature. A hybrid system modeling approach has been used in [8], [7], [2], [9] (see also the results based on continuous-discrete observers in [5], [21]). A time delay method has been proposed in [22]. An approach based on dissipativity and operator models of the sampling interval has been considered in [6]. In this paper a discrete-time modeling approach is used for the UIO design problem for LTI systems with time-varying sampling intervals. We recast the UIO design

problem to one for Linear Parameter Varying (LPV) systems where the sampling interval appears as a scheduling parameter. First generic stability conditions are established for observers that depend on the sampling sequence. Next, numerically tractable design conditions are given based on convex optimization algorithms. From a technical point of view the methods used in this paper are related to the results for the UIO design problem in the case of LPV systems [16], [19], [20], time-delay systems [17], [18] and switched systems [7].

The rest of the paper is organized as follows: Section II is devoted to the formulation of the problem. In Section III, generic stability conditions are proposed based on a compact set of LMIs and numerically tractable conditions for robustness UIO design are specified in Section IV. The simulation results are presented in Section V.

Notation:

- v' denote the transpose of v for either a matrix or a vector.
- $\mathbb{R}_{\geq 0}$ corresponds to the positive real numbers.
- The euclidean norm of $x \in \mathbb{R}^n$ is denoted by $\|x\|$.
- For a symmetric matrix the symbol \star denotes the elements induced by symmetry: $\begin{pmatrix} A & B \\ B' & C \end{pmatrix}$ will be denoted $\begin{pmatrix} A & B \\ \star & C \end{pmatrix}$.
- In the sequel, $\lambda_{\min}(Q)$ (resp $\lambda_{\max}(Q)$) denotes the smallest (resp largest) eigenvalue of a symmetric matrix Q .
- For a square symmetric matrix $P \succ 0$ (resp. $P \prec 0$) means that P is positive definite (resp. negative definite).

II. SYSTEM DEFINITION AND PROBLEM STATEMENT

A. System under consideration

Let us consider a linear time invariant system with unknown input

$$\begin{cases} \dot{x}(t) = A_c x(t) + D_c v_k, \forall t \in [t_k, t_{k+1}), k \in \mathbb{N} \\ y(t) = C x(t_k), \end{cases} \quad (1)$$

with $x(0) = x_0 \in \mathbb{R}^n$. Here $x(t)$ denotes the system state at time t . $(v_k)_{k \in \mathbb{N}}$ is a sequence describing the unknown system inputs. $y(t)$ represent the sampled output of the system. $A_c \in \mathbb{R}^{n \times n}$, $D_c \in \mathbb{R}^{n \times m}$, $C \in \mathbb{R}^{q \times n}$. $(t_k)_{k \in \mathbb{N}}$ denotes the sequence of monotonously increasing sampling instants with $t_0 = 0$. In what follows we will consider a class of sampling sequences $(t_k)_{k \in \mathbb{N}}$ where $t_{k+1} - t_k = h_k$ where h_k is assumed to be known at time t_{k+1} .

*Lucien Etienne and Kokou Anani Agbessi Languéh are with the CERI Systèmes Numérique, IMT-Nord-Europe, 59500 Douai, France, (e-mail: {lucien.etienne, kokou.languéh}@imt-nord.europe.fr)

**Laurentiu Hetel is with Centre de Recherche en Informatique, Signal et Automatique de Lille (CRISTAL, CNRS UMR 9189), Ecole Centrale de Lille, 59650 Villeneuve d'Ascq, France, (e-mail: laurentiu.hetel@ec-lille.fr)

Note that by assumption we consider that the unknown input v_k is constant on $[t_k, t_{k+1})$. This correspond the fact that the unknown input variation can be neglected with respect to the sampling interval. In what follows we consider, a finite set of index $\mathbb{I} \subset \mathbb{N}$. To each index $i \in \mathbb{I}$ we associate a duration τ_i and we assume that the nominal sampling interval h_k takes values in the union of such sets that is,

$$h_k \in \mathcal{T} := \bigcup_{i \in \mathbb{I}} [\underline{\tau}_i, \bar{\tau}_i], \forall k \in \mathbb{N}.$$

The set of sampling sequence under consideration is defined as follows :

$$S(\mathcal{T}) := \{(h_k)_{k \in \mathbb{N}} | h_k \in \mathcal{T}, \forall k \in \mathbb{N}\}.$$

Remark 1: Note that in the case under consideration there is no known input, this assumption is simply for ease of presentation and known input can very easily be integrated in the present work.

B. System remodeling

In this section, we provide a discrete time model of system (1) at sampling times.

Consider the following notations: $x_k = x(t_k)$, $y_k = y(t_k)$, $\forall k \in \mathbb{N}$. For any scalar h , we define the following matrices:

$$\begin{aligned} A(h) &:= e^{A_c h} \\ \Lambda(h) &:= \int_0^h e^{A_c s} ds \\ D(h) &:= \Lambda(h) D_c \end{aligned} \quad (2)$$

In what follows we will recast the original system in continuous time as discrete time LPV system representing the behavior of the system as sampling time.

Lemma 1: Consider notations (2). Then for any scalar h the following relations is satisfied :

$$A(h) = A_c \Lambda(h) + I. \quad (3)$$

Proof: Let us remark that

$$\begin{aligned} A_c \int_0^h e^{A_c s} ds &= \int_0^h A_c e^{A_c s} ds, \\ &= e^{A_c h} - e^{A_c 0}, \\ &= e^{A_c h} - I. \end{aligned}$$

Then using notation (2), $A(h) = A_c \Lambda(h) + I$, that is relation (3) holds. ■

Lemma 2: Consider system (1) and notations (2). At sampling times $(t_k)_{k \in \mathbb{N}} \in S(\mathcal{T})$, the following relation is satisfied

$$\begin{aligned} x_{k+1} &= A(h_k) x_k + D(h_k) v_k \\ y_k &= C x_k, x_0 \in \mathbb{R}^n, \forall k \in \mathbb{N}. \end{aligned} \quad (4)$$

Proof: Integrating (1) between t_k and t_{k+1} and using the notations $t_{k+1} - t_k = h_k$ leads to

$$x(t_{k+1}) = e^{A_c h_k} x(t_k) + \int_{t_k}^{t_{k+1}} e^{A_c(t_{k+1}-\tau)} D_c v_k d\tau.$$

By setting $s = t_{k+1} - \tau$ one has

$$x(t_{k+1}) = e^{A_c h_k} x(t_k) + \int_0^{h_k} e^{A_c s} ds D_c v_k. \quad (5)$$

Using (3) along with notations (2) in (5) one has

$$x(t_{k+1}) = A(h_k) x(t_k) + \Lambda(h_k) D_c v_k,$$

■

Model (5) will be used in order to derive a UIO which is robust with respect time-varying sampling intervals.

C. Observer definition

In this paper we consider a discrete-time UIO of the following form:

$$\begin{cases} z_{k+1} &= L(h_k, h_{k-1}) z_k + P(h_k, h_{k-1}) y_k \\ \hat{x}_k &= z_k + K(h_{k-1}) y_k \end{cases} \quad (6)$$

$k \in \mathbb{N}, k > 0$. For technical reason we will assume that $z_0 = \hat{x}_0 = 0$. Here z_k is the classical auxiliary variable and \hat{x}_k is the estimation of the system state at sampling instants. The matrix functions $L : \mathcal{T} \times \mathcal{T} \rightarrow \mathbb{R}^n \times \mathbb{R}^n$, $P : \mathcal{T} \times \mathcal{T} \rightarrow \mathbb{R}^n \times \mathbb{R}^q$ and $K : \mathcal{T} \rightarrow \mathbb{R}^n \times \mathbb{R}^q$ are the observer gains which are scheduled according to the known values of the nominal sampling times. In a first step we consider that the scheduling functions are given; next we will provide conditions to design these matrix functions.

D. Problem statement

Since both the system under consideration and the observation scheme have been defined, we are ready to state the observation problem to be solved.

Definition. (*Exponential convergence*) A UIO observer (6) for system (5) is said to be *exponentially convergent* uniformly with respect to the set of sampling sequences $S(\mathcal{T})$ with decay rate δ and overshoot M if

$$\forall k \in \mathbb{N}, \|\hat{x}_{k+1} - x_{k+1}\| \leq M \delta^k \|\hat{x}_1 - x_1\|.$$

The goal of this article is to provide exponential convergence conditions for a given observer of the form (6) as well as to provide numerically tractable design methods.

III. GENERIC CONDITIONS

In this section we present generic conditions for assessing the exponential convergence of the observer (6). The results are formalized in the theorem bellow:

Theorem 1: Consider system (1), the sampled-data representation (5), UIO (6) and the set of sampling sequences $S(\mathcal{T})$. Assume that the following set of matrix equality constraints are satisfied

$$\begin{aligned} L(\theta_1, \theta_2) &= (I_n - K(\theta_1)C)A(\theta_1) \\ &+ L(\theta_1, \theta_2)K(\theta_2)C - P(\theta_1, \theta_2)C, \end{aligned} \quad (7)$$

$$(I_n - K(\theta_1)C)D(\theta_1) = 0, \quad (8)$$

for all $\theta_1, \theta_2 \in \mathcal{T}$. Given $\alpha \in (0, 1)$, if there exist a continuous matrix function $\mathcal{P}(\theta)$ such that $\mathcal{P}(\theta) \succ 0, \forall \theta \in \mathcal{T}$ and

$$\begin{pmatrix} \mathcal{P}(\theta_1) & \mathcal{P}(\theta_1)L(\theta_1, \theta_2) \\ \star & (1-\alpha)\mathcal{P}(\theta_2) \end{pmatrix} \succ 0, \forall \theta_1, \theta_2 \in \mathcal{T}, \quad (9)$$

then observer (6) for system (5) is *exponentially convergent* uniformly with respect to the set of sampling sequences $\mathcal{S}(\mathcal{T})$. In addition an upper bound of the decay rate is given by $\sqrt{1-\alpha}$ while the overshoot is upper bounded by

$$\sqrt{\frac{\max_{\theta \in \mathcal{T}} \lambda_{\max}(\mathcal{P}(\theta))}{\min_{\theta \in \mathcal{T}} \lambda_{\min}(\mathcal{P}(\theta))}}.$$

Proof: Let $\varepsilon_k = x_k - \hat{x}_k$ denote the estimation error. Then using (6) :

$$\begin{aligned} \varepsilon_k &= x_k - z_k - K(h_{k-1})Cx_k \\ &= (I_n - K(h_{k-1})C)x_k - z_k, \end{aligned}$$

Using (5) and (6), the dynamics of the observation error is given by

$$\begin{aligned} \varepsilon_{k+1} &= (I_n - K(h_k)C)x_{k+1} - z_{k+1} \\ &= (I_n - K(h_k)C)A(h_k)x_k + \\ &\quad (I_n - K(h_k)C)D(h_k)v_k - L(h_k, h_{k-1})\hat{x}_k \\ &\quad + L(h_k, h_{k-1})K(h_{k-1})Cx_k - P(h_k, h_{k-1})Cx_k. \end{aligned}$$

This can be rearranged in the following way

$$\begin{aligned} \varepsilon_{k+1} &= \left((I_n - K(h_k)C)A(h_k) \right. \\ &\quad \left. + L(h_k, h_{k-1})K(h_{k-1})C - P(h_k, h_{k-1})C \right) x_k \\ &\quad + (I_n - K(h_k)C)D(h_k)v_k - L(h_k, h_{k-1})\hat{x}_k. \end{aligned}$$

Using equality constraint (7) one has

$$\varepsilon_{k+1} = L(h_k, h_{k-1})\varepsilon_k + (I_n - K(h_k)C)D(h_k)v_k.$$

By using (8), the observation error becomes

$$\varepsilon_{k+1} = L(h_k, h_{k-1})\varepsilon_k. \quad (10)$$

Considering a (candidate) Lyapunov function $V : \mathbb{R}^n \times \mathbb{N} \rightarrow \mathbb{R}$, $V(\varepsilon_k, k) = \varepsilon_k \mathcal{P}(h_{k-1})\varepsilon_k$, $\forall k > 0$. At time step $k+1$ one has

$$V(\varepsilon_{k+1}, k+1) = \varepsilon'_{k+1} \mathcal{P}(h_k)\varepsilon_{k+1}.$$

Using (10) the previous relation becomes

$$V(\varepsilon_{k+1}, k+1) = \varepsilon'_k L(h_k, h_{k-1})' \mathcal{P}(h_k) L(h_k, h_{k-1}) \varepsilon_k.$$

Therefore,

$$\begin{aligned} V(\varepsilon_{k+1}, k+1) - (1-\alpha)V(\varepsilon_k, k) \\ = \varepsilon'_k \Psi(h_k, h_{k-1}) \varepsilon_k \end{aligned} \quad (11)$$

with

$$\begin{aligned} \Psi(h_k, h_{k-1}) &= L(h_k, h_{k-1})' \mathcal{P}(h_k) L(h_k, h_{k-1}) \\ &\quad - (1-\alpha)\mathcal{P}(h_{k-1}). \end{aligned}$$

LMI's (9) (by a Shur complement) imply that

$$\Psi(\theta_1, \theta_2) \prec 0, \forall \theta_1, \theta_2 \in \mathcal{T},$$

and therefore from (11) one has

$$V(\varepsilon_{k+1}, k+1) \leq (1-\alpha)V(\varepsilon_k, k), \forall \varepsilon_k, k > 0.$$

Hence $V(\varepsilon_{k+1}, k+1) \leq (1-\alpha)^k V(\varepsilon_1, 1), \forall k > 0$.

Since

$$\min_{\theta \in \mathcal{T}} \lambda_{\min}(\mathcal{P}(\theta)) \|\varepsilon_k\|^2 \leq V(\varepsilon_k, k) \leq \max_{\theta \in \mathcal{T}} \lambda_{\max}(\mathcal{P}(\theta)) \|\varepsilon_k\|^2,$$

$\forall k > 0, \varepsilon_k \in \mathbb{R}^n$, then

$$\|\varepsilon_{k+1}\| \leq \sqrt{\frac{\max_{\theta \in \mathcal{T}} \lambda_{\max}(\mathcal{P}(\theta))}{\min_{\theta \in \mathcal{T}} \lambda_{\min}(\mathcal{P}(\theta))}} \sqrt{(1-\alpha)^k} \|\varepsilon_1\|, \forall k \in \mathbb{N}.$$

■

Remark 2: Theorem 1 provide generic conditions for checking the exponential convergence of a given UIO described in (6). However the conditions have to be verified for an infinite set of parameter $\theta \in \mathcal{T}$. In what follows we will show how such a generic conditions can be turned into numerically tractable conditions.

IV. TRACTABLE CONDITIONS FOR A SPECIFIC CLASS OF SAMPLING

In the following section we will consider a specific class of sampling sequences. More precisely we consider sampling sequences described by a finite number of sampling intervals (i.e. $\forall k \in \mathbb{N}, h_k$ belongs to a finite set \mathcal{T}_f). First tractable conditions for stability of the UIO are provided, next conditions for designing a UIO of the form (6) are given.

Consider $\mathcal{S}(\mathcal{T}_f)$ with

$$\mathcal{T}_f = \bigcup_{i \in \mathbb{I}_f} \{\tau_i\}$$

where $\mathbb{I}_f \subset \mathbb{N}$ a finite set of index. For $i, j \in \mathbb{I}_f$ let us define

$A_i = A(\tau_i)$, $D_i = D(\tau_i)$, $K_i = K(\tau_i)$, $L_{i,j} = L(\tau_i, \tau_j)$, $P_{i,j} = P(\tau_i, \tau_j)$. In this specific case Theorem 1 becomes :

Corollary 1: Consider system (1), the sampled-data representation (5), UIO (6) and the set of sampling sequences $\mathcal{S}(\mathcal{T}_f)$. Assume that the following set of matrix equality constraints are satisfied

$$\forall i, j \in \mathbb{I}_f, L_{i,j} = (I_n - K_i C)A_i + L_{i,j}K_j C - P_{i,j}C \quad (12)$$

$$(I_n - K_i C)D_i = 0. \quad (13)$$

Given $\alpha \in (0, 1)$, if there exist a set of matrices \mathcal{P}_i such that $\mathcal{P}_i \succ 0, \forall i \in \mathbb{I}_f$ and

$$\begin{pmatrix} \mathcal{P}_i & \mathcal{P}_i L_{i,j} \\ \star & (1-\alpha)\mathcal{P}_j \end{pmatrix} \succ 0, \forall i, j \in \mathbb{I}_f. \quad (14)$$

Then observer (6) for system (5) is *exponentially convergent* uniformly with respect to the set of sampling sequences $\mathcal{S}(\mathcal{T}_f)$. In addition an upper bound of the decay rate is given by $\sqrt{1-\alpha}$ while the overshoot is upper bounded by

$$\sqrt{\frac{\max_{i \in \mathbb{I}_f} \lambda_{\max}(\mathcal{P}_i)}{\min_{i \in \mathbb{I}_f} \lambda_{\min}(\mathcal{P}_i)}}.$$

Proof: Corollary 1 is a special case of Theorem 1 where $L(\theta_1, \theta_2) = L_{i,j}$ (resp $P(\theta_1, \theta_2) = P_{i,j}$) when $\theta_1 = \tau_i, \theta_2 = \tau_j$ and $\mathcal{P}(\theta_1) = \mathcal{P}_i$ (resp $K(\theta_1) = K_i$) when $\theta_1 = \tau_i$

■

Remark 3: Note that conditions (12)-(14) represent a tractable set of LMIs for stability analysis when the gain matrices $K_i, L_{i,j}$ and $P_{i,j}$ are given. Here only the matrices \mathcal{P}_i are LMIs variables.

In the following corollary we provide design conditions for a UIO of the form (6) in the specific case where the sampling interval take value in a finite set.

Corollary 2: Given a scalar $\alpha \in (0, 1)$, if there exists positive definite matrices \mathcal{P}_i as well as matrices $\mathcal{S}_i, Q_{ij}, i, j \in \mathbb{I}_f$ of appropriate dimension such that

$$\begin{pmatrix} \mathcal{P}_i & \mathcal{P}_i A_i - \mathcal{S}_i C A_i - Q_{ij} C \\ \star & (1 - \alpha) \mathcal{P}_j \end{pmatrix} \succ 0 \quad (15)$$

$$\mathcal{P}_i D_i - \mathcal{S}_i C D_i = 0, \forall i, j \in \mathbb{I}_f, \quad (16)$$

Then observer (6) with

$$K(\tau_i) = \mathcal{P}_i^{-1} \mathcal{S}_i \quad (17)$$

$$L(\tau_i, \tau_j) = (I_n - K(\tau_i)C)A(\tau_i) - \mathcal{P}_i^{-1} Q_{ij} C \quad (18)$$

$$P(\tau_i, \tau_j) = \mathcal{P}_i^{-1} Q_{ij} - L(\tau_i, \tau_j)K(\tau_j), \forall i, j \in \mathbb{I}_f \quad (19)$$

is *exponentially convergent* uniformly with respect to the set of sampling sequences $\mathcal{S}(\mathcal{T}_f)$. In addition an upper bound of the decay rate is given by $\sqrt{1 - \alpha}$ while the overshoot is upper bounded by $\sqrt{\frac{\max_{i \in \mathbb{I}_f} \lambda_{\max}(\mathcal{P}_i)}{\min_{i \in \mathbb{I}_f} \lambda_{\min}(\mathcal{P}_i)}}$.

Proof: Recall the notations $A_i = A(\tau_i), D_i = D(\tau_i), K_i = K(\tau_i), L_{i,j} = L(\tau_i, \tau_j), P_{i,j} = P(\tau_i, \tau_j)$. Note that using (18), one has

$$\mathcal{P}_i L_{i,j} = \mathcal{P}_i A_i - \mathcal{P}_i K_i C A_i - Q_{ij} C.$$

Hence (15) imply that (9) holds. Similarly, using (17)

$$\mathcal{P}_i D_i - \mathcal{S}_i C D_i = 0 \Leftrightarrow \mathcal{P}_i (D_i - K_i C D_i) = 0$$

Since \mathcal{P}_i is invertible $D_i - K_i C D_i = 0$ so (13) is satisfied. Using (18) and (19) one has

$$L_{i,j} = (I_n - K_i C)A_i + L_{i,j} K_j C - P_{i,j} C.$$

Hence (12) holds. ■

Remark 4: The previous corollary provides simple design conditions for a UIO of the form (6). By formulating the UIO synthesis problem as a specific convex optimization problem (in this case both linear matrices equalities and inequalities) it is possible to directly derive both $L(\cdot, \cdot)$ and $K(\cdot)$ as variables to be computed. Note that no particular assumption is needed concerning the structure of $K(\cdot)$.

V. SIMULATION

In this section we present two illustrative numerical examples.

A. Example 1

We consider the linear model of a two room building [26]. The equivalent RC model is being used with

$$A_c = \begin{pmatrix} -\frac{1}{C_1 R_{12}} & \frac{1}{C_1 R_{12}} \\ \frac{1}{C_2 R_{23}} - \frac{1}{C_2 R_{12}} & -\frac{1}{C_2 R_{12}} \end{pmatrix}, \quad D_c = \begin{pmatrix} \frac{w_1}{C_1} \\ \frac{w_2}{C_2} \end{pmatrix},$$

$$C = \begin{pmatrix} 1 & 0 \end{pmatrix}.$$

In the above matrices C_i is the thermal capacitance of room i in kWh/K . $R_{i,j}$ is the thermal resistance K/kW between room i and room j , $i, j \in \{1, 2\}$ and R_{23} represente the thermal resistance of room 2 and the outside. Subsequently w_j is a weighting factor (e.g., solar aperture) relating the heat input and the heat entering room i . x_i represents the temperature of room i , with $i \in \{1, 2\}$. The unknown input, v , represents the heat induced by the solar irradiance. We consider that the variation of the heat due to solar irradiance is slow with respect to the sampling time (therefore the unknown input is considered constant within a sampling interval). The numerical values used for simulation are based on [15]: $C_1 = 8 * 10^6, C_2 = 10^7, w_1 = 3, w_2 = 3, R_{12} = 4 * 10^{-3}, R_{23} = 4 * 10^{-3}$. The heat due to the solar irradiance, v , has a base a value of 800 Watts and an added oscillation with a magnitude of 100 Watts. The system output is nominally sampled every ten minutes and send to a communication network. However, the communication can be subject to data loss. We consider that we may have up to 11 successive packet dropout. We assume that data packet are time-stamped, therefore h_k can be considered as a known parameter. Communication delays are assumed to be neglectable. Hence h_k is arbitrarily selected in the set $\{6 * 10^2 l, l \in \{1 \dots 12\}\}$.

We apply Corollary 2 with a decay rate $\sqrt{0.1}$ to derive a sampled-data observer (6). By solving the proposed conditions one obtain 144 matrices L_{ij} , 144 matrices P_{ij} and 12 matrices K_i . The observer gains are switched according to the sampling sequence h_k using a lookup table. Figure 1 illustrate the continuous-time evolution of the non measured state x_2 from the initial condition $x_0 = (22 \ 22)'$ as well as the discrete-time observer state \hat{x}_2 from the initial condition $\hat{x}_0 = (22 \ 17.5)'$. The norm of the observation error in discrete-time is given in Figure 2

VI. CONCLUSION

In this work we have studied the design of unknown input observers for linear time invariant systems with sampled output measurements. Both theoretical and tractable conditions have been presented for the synthesis of an unknown input observer under aperiodic sampling. First generic conditions have been derived to verify the convergence of the observer. Then, for a specific class of sampling sequences, it was possible to formulate the generic results as a tractable convex optimization problem. In this case the resulting sufficient conditions lead to a finite set of linear matrix inequalities

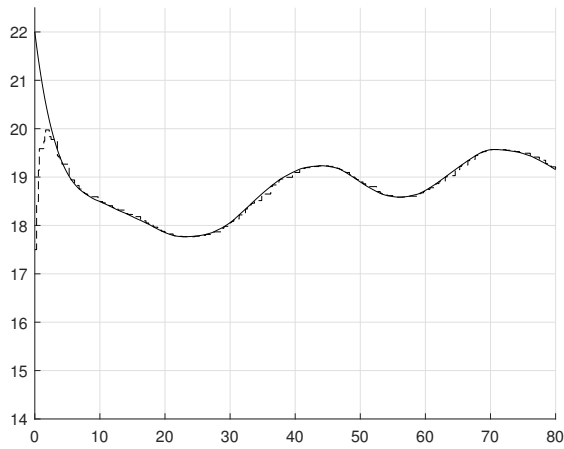


Fig. 1: Non measured state $x_2(t)$ of (plain) and observer state $\hat{x}_{2,k}$ (dashed).

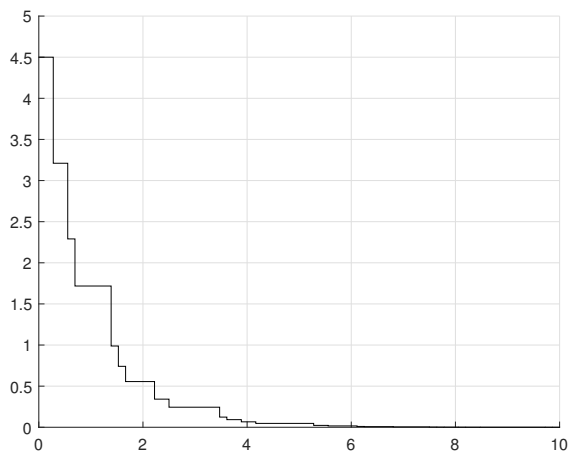


Fig. 2: Norm of the observation error with initial error $(0, 4.5)'$.

which allow to design an observer with prescribed convergence rate. The proposed results are illustrated on a numerical example.

REFERENCES

- [1] G. Basile and G. Marro, "On the observability of linear, time-invariant systems with unknown inputs," in *Journal of Optimization Theory and Applications*, vol. 3, no. 6, 1969, pp. 410–415.
- [2] P. Bernard and R. Sanfelice, "Observer Design for Hybrid Dynamical Systems with Approximately Known Jump Times," 2021, working paper or preprint. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-02187411>
- [3] A. Chakrabarty, S. H. Zak, and S. Sundaram, "State and unknown input observers for discrete-time nonlinear systems," in *2016 IEEE 55th Conference on Decision and Control (CDC)*, 2016, pp. 7111–7116.
- [4] W.-H. Chen, J. Yang, L. Guo, and S. Li, "Disturbance-observer-based control and related methods—an overview," *IEEE Transactions on industrial electronics*, vol. 63, no. 2, pp. 1083–1095, 2015.
- [5] T. N. Dinh, V. Andrieu, M. Nadri, and U. Serres, "Continuous-discrete time observer design for lipschitz systems with sampled measurements," *IEEE Transactions on Automatic Control*, vol. 60, no. 3, pp. 787–792, 2015.

- [6] L. Etienne, L. Hetel, and D. Efimov, "Observer analysis and synthesis for perturbed lipschitz systems under noisy time-varying measurements," *Automatica*, vol. 106, pp. 406–410, 2019.
- [7] L. Etienne, K. Motchon, E. Duviella, and K. Guelton, "Impulsive observer design for switched linear systems with time varying sampling and (a) synchronous switching rules," *IFAC-PapersOnLine*, vol. 53, no. 2, pp. 6434–6439, 2020.
- [8] F. Ferrante, F. Gouaisbaut, R. G. Sanfelice, and S. Tarbouriech, "State estimation of linear systems in the presence of sporadic measurements," *Automatica*, vol. 73, pp. 101–109, 2016.
- [9] F. Ferrante and A. Seuret, "Observer Design for Linear Aperiodic Sampled-Data Systems: A Hybrid Systems Approach," *IEEE Control Systems Letters*, vol. 6, pp. 470–475, 2021.
- [10] F. Hamano and G. Basile, "Unknown-input present-state observability of discrete-time linear systems," *Journal of Optimization Theory and Applications*, vol. 40, no. 2, pp. 293–307, 1983.
- [11] W. M. H. Heemels, A. R. Teel, N. Van de Wouw, and D. Nešić, "Networked control systems with communication constraints: Trade-offs between transmission intervals, delays and performance," *IEEE Transactions on Automatic control*, vol. 55, no. 8, pp. 1781–1796, 2010.
- [12] J. P. Hespanha, P. Naghshtabrizi, and Y. Xu, "A survey of recent results in networked control systems," *Proceedings of the IEEE*, vol. 95, no. 1, pp. 138–162, 2007.
- [13] L. Hetel, C. Fiter, H. Omran, A. Seuret, E. Fridman, J.-P. Richard, and S. I. Niculescu, "Recent developments on the stability of systems with aperiodic sampling: An overview," *Automatica*, vol. 76, pp. 309–335, 2017.
- [14] M. Hou and P. Muller, "Disturbance decoupled observer design: a unified viewpoint," *IEEE Transactions on Automatic Control*, vol. 39, no. 6, pp. 1338–1341, 1994.
- [15] M. Hu and F. Xiao, "Model predictive control of inverter air conditioners responding to real-time electricity prices in smart grids."
- [16] D. Ichalal and S. Mammar, "On Unknown Input Observers for LPV Systems," *IEEE Transactions on Industrial Electronics*, vol. 62, no. 9, pp. 5870–5880, Sep. 2015. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-01187013>
- [17] K. Langueh, G. Zheng, and T. Floquet, "Impulsive fixed-time observer for linear time-delay systems," *Journal of the Franklin Institute*, vol. 355, no. 7, pp. 3354–3366, 2018.
- [18] K. A. A. Langueh, G. Zheng, and T. Floquet, "Topology identification of network systems," in *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, 2017, pp. 5865–5869.
- [19] B. Marx, D. Ichalal, J. Ragot, D. Maquin, and S. Mammar, "Unknown input observer for lpv systems," *Automatica*, vol. 100, pp. 67–74, 2019.
- [20] L. Meyer, "Interval observer for lpv systems with unknown inputs," *IET Control Theory & Applications*, vol. 12, pp. 649–660(11), March 2018.
- [21] T. Raff and F. Allgower, "Observers with impulsive dynamical behavior for linear and nonlinear continuous-time systems," in *2007 46th IEEE Conference on Decision and Control*, 2007, pp. 4287–4292.
- [22] T. Raff, M. Kogel, and F. Allgower, "Observer with sample-and-hold updating for lipschitz nonlinear systems with nonuniformly sampled measurements," in *2008 American control conference*. IEEE, 2008, pp. 5254–5257.
- [23] T. Raff, F. Lachner, and F. Allgower, "A finite time unknown input observer for linear systems," in *2006 14th Mediterranean Conference on Control and Automation*, 2006, pp. 1–5.
- [24] M. E. Valcher, "State observers for discrete-time linear systems with unknown inputs," *Automatic Control, IEEE Transactions on*, vol. 44, pp. 397 – 401, 03 1999.
- [25] Y. Wang, V. Puig, F. Xu, and G. Cembrano, "Zonotopic unknown input observer of discrete-time descriptor systems for state estimation and robust fault detection," *IFAC-PapersOnLine*, vol. 51, no. 24, pp. 307–313, 2018, 10th IFAC Symposium on Fault Detection, Supervision and Safety for Technical Processes SAFEPROCESS 2018.
- [26] Z. Wang, Y. Chen, and Y. Li, "Development of rc model for thermal dynamic analysis of buildings through model structure simplification," *Energy and Buildings*, vol. 195, pp. 51–67, 2019.