



**HAL**  
open science

# Novel mm-Wave Oscillator Based on an Electromagnetic Bandgap Resonator

Enrico Lia, Indra Ghosh, Stephen Hanham, Benjamin Walter, Fuanki Bavedila, Marc Faucher, Andrew Gregory, Leif Jensen, Jan Buchholz, Horst Fischer, et al.

► **To cite this version:**

Enrico Lia, Indra Ghosh, Stephen Hanham, Benjamin Walter, Fuanki Bavedila, et al.. Novel mm-Wave Oscillator Based on an Electromagnetic Bandgap Resonator. IEEE Microwave and Wireless Technology Letters, 2023, 33 (6), pp.863-866. 10.1109/LMWT.2023.3268090 . hal-04189186

**HAL Id: hal-04189186**

**<https://hal.science/hal-04189186v1>**

Submitted on 21 Nov 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Novel mm-Wave Oscillator Based on an Electromagnetic Bandgap Resonator

Lia, Enrico; Ghosh, Indra; Hanham, Stephen M.; Walter, Benjamin; Bavedila, Fuanki; Faucher, Marc; Gregory, Andrew P.; Jensen, Leif; Buchholz, Jan; Fischer, Horst; Altmann, Ulrich; Follmann, Rüdiger

DOI:  
[10.1109/LMWT.2023.3268090](https://doi.org/10.1109/LMWT.2023.3268090)

License:  
Creative Commons: Attribution (CC BY)

*Document Version*  
Peer reviewed version

*Citation for published version (Harvard):*  
Lia, E, Ghosh, I, Hanham, SM, Walter, B, Bavedila, F, Faucher, M, Gregory, AP, Jensen, L, Buchholz, J, Fischer, H, Altmann, U & Follmann, R 2023, 'Novel mm-Wave Oscillator Based on an Electromagnetic Bandgap Resonator', *IEEE Microwave and Wireless Technology Letters*. <https://doi.org/10.1109/LMWT.2023.3268090>

[Link to publication on Research at Birmingham portal](#)

### General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

### Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

# Novel mm-Wave Oscillator Based on an Electromagnetic Bandgap Resonator

Enrico Lia, Indra Ghosh, Stephen M. Hanham, Benjamin Walter, Fuanki Bavedila, Marc Faucher, Andrew P. Gregory, Leif Jensen, Jan Buchholz, Horst Fischer, Ulrich Altmann, and Rüdiger Follmann

**Abstract**—This paper introduces a novel millimeter-wave oscillator concept based on an electromagnetic bandgap (EBG) resonator (also called a photonic crystal resonator). To realize an ultra-low phase noise MMIC oscillator, an EBG resonator is developed by introducing a periodic structure into an ultra-high resistivity silicon wafer to create an electromagnetic bandgap which confines a localized resonant mode with a reduced mode dielectric filling factor of 47%. The measured results of the resonator demonstrate an unloaded Q-factor of 108,300 can be achieved at 45 GHz. Measured oscillator phase noise levels of  $-91.5$ ,  $-121.5$  and  $-133$  dBc/Hz are obtained at offset frequencies of 1, 10 and 100 kHz, respectively.

**Index Terms**— dielectric materials, dielectric resonator, microwave oscillators, MMICs, photonic crystals.

## I. INTRODUCTION

Nowadays, reference oscillators based on quartz resonators are limited in frequency of operation to a few hundred megahertz. Deriving gigahertz range signals from such a reference requires frequency multiplication or frequency synthesis. However, the multiplication process increases the phase noise of the output signal according to  $20\log_{10}$  of the multiplication factor, as well as increasing the complexity of the circuit. In this sense, it is advantageous to have a LO signal generated directly at the fundamental frequency in the millimeter (mm-) wave band. This requires, however, a high quality (Q-) factor resonator operating preferably at several gigahertz. Traditional passive resonators employing metal cavities have their Q-factor limited by the resistive losses in the metal. Alternatively, oscillators operating directly at the fundamental frequency based on ceramic resonators offer average phase noise and are normally not available above 25 GHz.

This Manuscript received 7 March 2023; revised 11 April 2023; accepted XXX. Date of publication XXX; date of current version XXX.

For the purpose of open access, the author(s) has applied a Creative Commons Attribution (CC BY) license to any Accepted Manuscript version arising.

This article was presented at the IEEE MTT-S International Microwave Symposium (IMS 2023), San Diego, CA, USA, June 11–16, 2023. The work was supported by the European Space Agency under contract 4000130082/20/NL/HK and the U.K. Engineering and Physical Science Research Council (EPSRC) under contract EP/V001655/1. (Corresponding author: Enrico Lia).

Enrico Lia is with the European Space Agency, ESA-ESTEC, The Netherlands (email: enrico.lia@ext.esa.int).

Indra Ghosh, Jan Buchholz, Horst Fischer, Ulrich Altmann, and Rüdiger Follmann are with IMST GmbH, Germany (email: indra.ghosh@imst.de; jan.buchholz@imst.de; horst.fischer@imst.de; ulrich.altmann@imst.de; ruediger.follmann@imst.de).

Dielectric resonators made of low dielectric loss and high resistivity materials are an interesting alternative to overcoming the problem of limited resonator Q-factors in the mm-wave band. One approach is to fabricate the dielectric resonator from an ultra-high resistivity silicon wafer [1]. An emerging type of mm-wave dielectric resonator that can be implemented using a silicon wafer is an electromagnetic bandgap (EBG) resonator, also known as a photonic crystal resonator [2, 3]. Such a resonator is realized by engineering an EBG in the silicon wafer through the introduction of periodic holes in order to confine a localized resonant mode. A resonator designed in this manner may have a Q-factor limited only by material loss. This material loss may be reduced by designing the resonator in such a way as to concentrate most of the energy outside the silicon and in air. This approach allows the realization of extremely high Q-factors which is a key aspect to achieving very low phase noise in oscillator applications.

Research papers and laboratory demonstrations [4, 5] have shown that dielectric resonators made from low-loss materials such as high resistivity silicon may become an interesting alternative to conventional room-temperature passive mm-wave resonators used in reference and high frequency oscillators, and important components for future mm-wave applications.

This work aims to demonstrate that low-loss ultra-high resistivity silicon resonators can be utilized for high frequency oscillators with significant advantages in obtaining high Q-factor and therefore low phase noise compared to multiplied quartz crystal and traditional high frequency oscillators. In this paper, the novel experiment of using a silicon EBG resonator exhibiting a reduced dielectric filling factor of its resonant mode in an oscillator operating at 45 GHz is demonstrated successfully, establishing a route towards overcoming the

Stephen M. Hanham is with the Dept. of Electrical, Electronic and Systems Engineering, University of Birmingham, U.K. (email: s.hanham@bham.ac.uk).

Benjamin Walter, Fuanki Bavedila, and Marc Faucher are with Vmicro SAS, France (email: benjamin.walter@vmicro.fr; fuanki.bavedila@vmicro.fr; marc.faucher@vmicro.fr). Marc Faucher is also with the University of Lille, CNRS, Centrale Lille, University Polytechnique Hauts-de-France, UMR 8520 - IEMN - Institut d'Electronique de Microélectronique et de Nanotechnologie, F-59000 Lille, France.

Andrew P. Gregory is with the National Physical Laboratory, U.K. (email: andrew.gregory@npl.co.uk).

Leif Jensen is with TopSil GlobalWafers A/S, Denmark (email: lej@gw-topsil.com).

Color versions of one or more figures in this letter are available at

XXX.

Digital Object Identifier XXX

problem of excessive phase noise affecting high frequency oscillators operating in the mm-wave band.

## II. ULTRA-HIGH Q-FACTOR RESONATOR DESIGN

Low-loss and high-performance dielectric materials are crucial for realizing dielectric resonators as part of oscillators in high performance telecommunication systems. The dielectric material chosen for the investigation and characterization of the resonator is the High Resistivity Silicon for GHz and THz Applications supplied by TopSil GlobalWafers A/S [4].

The design of the silicon EBG resonator relies upon the creation of a surrounding region of the silicon exhibiting an EBG and this is realized using a triangular lattice of air holes perforating the planar silicon wafer. The resulting transverse electric (TE)-like bandgap is defined according to the substrate parameters (e.g., its height as well as the hole diameter and the lattice constant). The neutron-irradiated high-resistivity silicon (HRS) used has a measured permittivity  $\epsilon_r$  equal to 11.68 and loss tangent  $\delta_{loss}$  of  $1.2 \times 10^{-5}$  (294 K), including both dielectric and finite conductivity losses. The substrate has a thickness of 1000  $\mu\text{m}$ , the holes have a radius of 863.5  $\mu\text{m}$  and a lattice constant of 1831  $\mu\text{m}$ . The periodic EBG structure prohibits propagating modes within its bandgap and the energy stored inside a localized mode cannot be transported through this region of the silicon wafer.

The resonator is formed by the concatenation of unit cells with a small increase in horizontal width period from the central unit cell to the outer unit cells, as shown in Fig. 1, to confine the resonant mode. The unit cell analysis is performed assuming infinite periodicity in the  $x$ -axis directions. The unit cells are engineered so that the majority of the propagating mode's energy is concentrated in an air gap rather than the silicon. The approach introduced here employs the idea of reducing the dielectric filling factor of the resonator to reduce overall dielectric loss of the resonator. The filling factor  $\kappa$  is defined as the ratio of the electromagnetic energy of a resonator stored inside the silicon to the total stored electromagnetic energy. By lowering  $\kappa$  the achievable quality factor increases according to  $1/(\kappa \tan \delta)$  with  $\tan \delta$  being the loss tangent of the silicon substrate material.

The filling factor can be expressed as follows:

$$\kappa = \frac{\iiint_{V_{si}} \epsilon_{si} |E|^2 dv}{\iiint_{V_t} \epsilon(v) |E|^2 dv}, \quad (1)$$

where  $V_{si}$  is the volume of the silicon forming the EBG resonator and  $V_t$  is the total volume containing the resonant mode. The denominator represents the total energy of the mode. To minimize out-of-plane losses, it is necessary to shape the electric and magnetic field in the resonator to reduce wave-vector components inside the light cone [6, 7]. A common approach is to create a Gaussian envelope of the field by linearly increasing reflection from the center to outer unit cells. This is achieved by varying the horizontal period (width) of the unit cells quadratically with the distance in the  $\pm x$ -directions, as shown Fig. 1.

The EBG resonator design has been simulated using a range of tools implementing different techniques such as Meep with FDTD (time-domain) and rectangular grid meshing, CST Studio with FEM and tetrahedral meshing, and Empire XPU

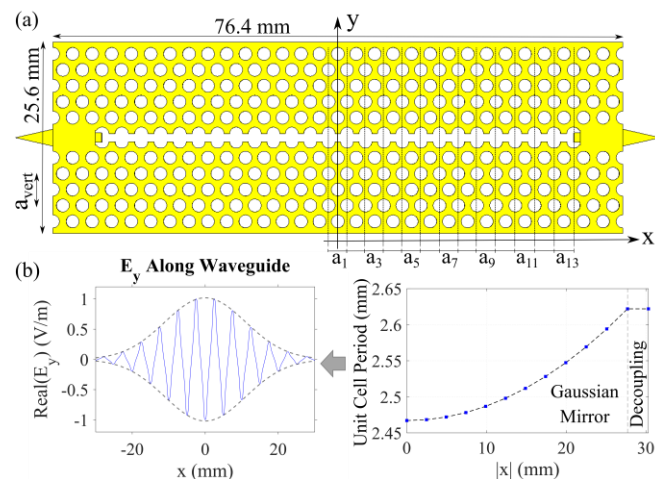


Fig. 1. (a) The EBG resonator with its dimensions and variable periodicity ( $a_n$ ) along the  $x$ -axis. (b) The Gaussian envelope of the resonant mode achieved by linearly increasing the reflection from the center to the outer unit cells.

tool. After careful optimization of the parameters and best simulation results obtained, the EBG resonator was manufactured. An NTD float zone silicon wafer with high resistivity ( $>400,000 \Omega\cdot\text{cm}$ ), 150 mm diameter and 1000  $\mu\text{m}$  thickness is etched using the deep reactive-ion etching (DRIE) method, which is a highly anisotropic process to achieve deep etch depths with steep-sided holes and trenches in wafer substrates.

The measurement results of the full two-port S-parameters achieved an outstanding loaded Q-factor ( $Q_L$ ) of 52,400 with insertion loss peak ( $S_{8,7}$ ) of -5.75 dB, shown in Fig. 2. The unloaded Q-factor ( $Q_u$ ) is calculated to be 108,300 at 45.77 GHz using  $Q_u = Q_L / (1 - |S_{8,7}(f_0)|)$ , where  $Q_L$  is calculated from the forward transmission  $S_{8,7}$  using the 3 dB method and  $f_0$  is the resonant frequency. It is important to highlight the importance of obtaining an insertion loss of approximately -6 dB to achieve the best phase noise results in oscillator applications [8, 9].

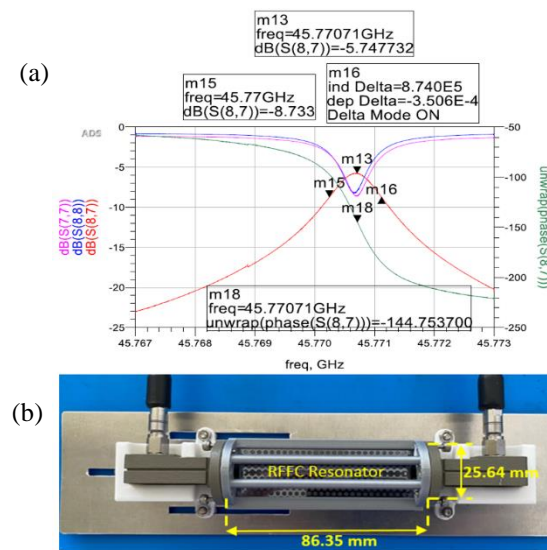


Fig. 2. (a) The measured results of the two-port S-parameters (amplitude and unwrapped phase of the forward transmission  $S_{8,7}$ , and input reflection  $S_{7,7}$  and  $S_{8,8}$  amplitudes) coefficients and (b) the EBG resonator in its test jig interfaced with the waveguide-to-coaxial adapters.



### III. VCO MMIC DESIGN

The design approach of the active circuit is based on a monolithic microwave integrated circuit (MMIC) voltage-controlled oscillator (VCO) using a high-performance 130 nm SiGe BiCMOS semiconductor technology process from IHP Microelectronics with cutoff frequency  $F_T$  up to 250 GHz and maximum frequency  $F_{max} = 340$  GHz. The oscillator has been realized in feedback topology: the MMIC contains a two-stage loop amplifier (black and red regions in Fig. 3) whose 2<sup>nd</sup> stage has been designed in a balanced configuration, a 10 dB coupler (yellow) which serves to supply the oscillator signal to the output. This is followed by an electronic phase shifter realized by a 90° hybrid coupler (blue) which is terminated by varactor diodes at two ports. The total gain realized within the oscillator loop is 12.5 dB. To couple to the  $TE_{10}$  mode in the feed waveguides, the input and output of the circuit are connected through bond-wires to waveguide (WR-19) to microstrip transition probes. The waveguides include a waveguide band-pass filter and fine and coarse phase-shifters, and connect to the EBG resonator through triangular tapers created on the edge of the silicon substrate which protrude inside a standard WR-19 waveguide to couple to the  $TE_{10}$  mode. The output of the RF signal is obtained after an output amplifier (green region in Fig. 3) with a gain of 7.8 dB connected in the same way to a waveguide to coaxial adapter.

IHP Microelectronics provides an SG13S design kit for the ADS (Advanced Design Systems) simulation tool used in the design of the oscillator.

Figure 4 shows the block diagram for the MMIC oscillator and Fig. 5 shows the assembled oscillator inside its housing. The total power consumption of the oscillator is 215 mW, size is 157 x 88 x 29 mm and the weight is 442 g, including all connectors.

The loss tangent of the silicon has a sharp increase for temperatures higher than 290 K [10]. To avoid this region, a nominal operation temperature for the oscillator of 263 K is chosen as a compromise between increased cooling power requirements and higher Q-factor. Figure 6 shows the measured phase noise levels of -94.6, -120.3 and -142.6 dBc/Hz obtained at offset frequencies of 1, 10 and 100 kHz, respectively, with an output power of -1.2 dBm at a nominal impedance of 50 Ω at 263 K with zero tuning voltage. The oscillator also works at room temperature (290 K) with a corresponding degradation of 2 - 6 dB in terms of single sideband (SSB) phase noise.

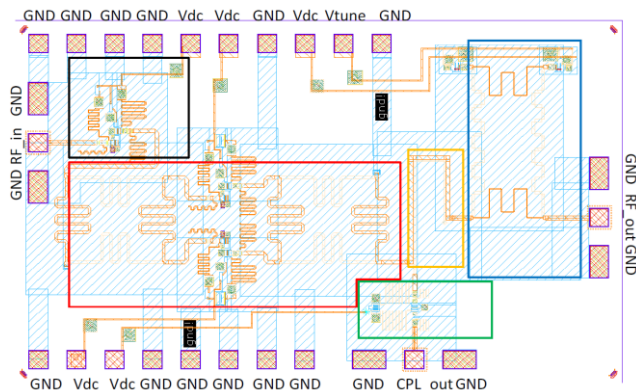


Fig. 3. Layout of the MMIC VCO circuit.

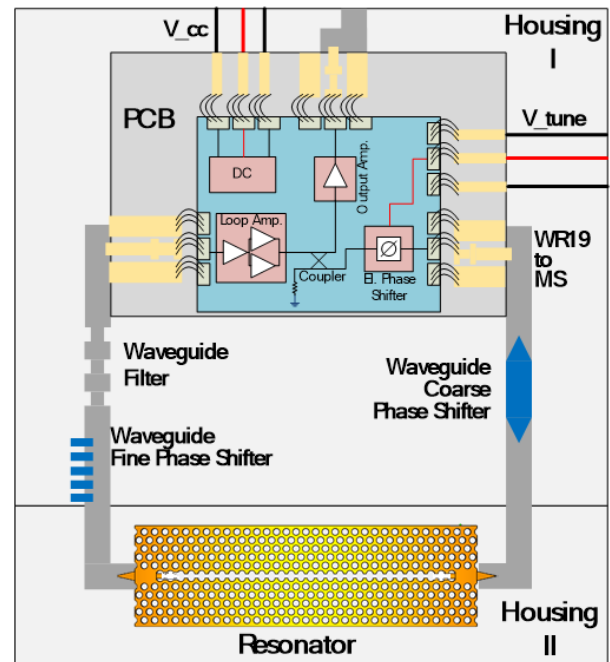


Fig. 4. The complete block diagram of the MMIC VCO.

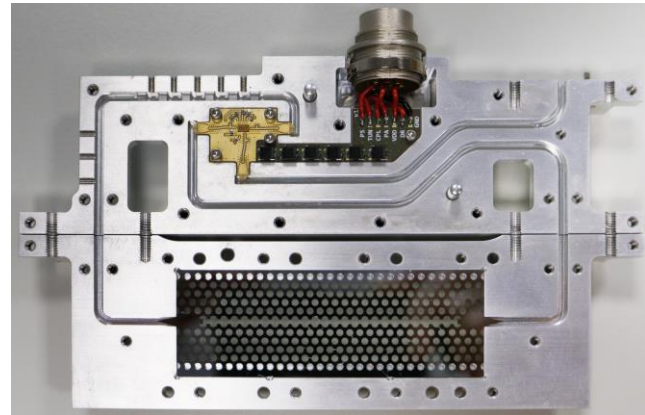


Fig. 5. The final MMIC VCO assembly in its housing (top half removed).

Owing to the temperature variation of the silicon permittivity and the reduced dielectric filling factor of the resonator of 47%, the temperature drift of the oscillator frequency is 1 MHz/K. By means of PID temperature-control and thermally isolating the oscillator from the environment it is expected that a temperature stability of  $< \pm 0.05$  K can be achieved resulting in a remaining frequency variation of  $\pm 50$  kHz. The electrical tuning range of the oscillator is 239 kHz (0 to 3 Volts), which is limited by the operation of the phase shifters within the narrow passband of the resonator. Further precise frequency adjustment can be carried out by means of the tuning voltage or varying the resonator temperature.

Table 1 compares the overall performance of the oscillator with other microwave and mm-wave oscillators described in the literature. It can be seen that the oscillator compares favourably in terms of phase noise and FOM performance with state-of-the-art oscillators. The oscillator FOM is defined as  $FOM = L(\Delta f) - 20 \log(f_0/\Delta f) + 10 \log(P_{DC}/1mW)$ , where  $L(\Delta f)$  is the phase noise in dBc/Hz at the frequency offset  $\Delta f$  from the oscillator frequency  $f_0$ , and  $P_{DC}$  is the total power consumption.

Table 1. Comparison of state-of-the-art microwave and mm-wave oscillators. All SSB phase noise values were normalised to a 45 GHz carrier frequency and estimated values, shown in grey, were estimated based on the intercept within the slope regions.

Ref.	Description	Pout [dBm]	SSB PN [dBc/Hz] @ offset	FOM [dBc/Hz]
[11]	Tunable DRO @ 12.8 GHz	+17.0	-33 @ [100 Hz] -65 @ [1 KHz] -96 @ [10 KHz] -122 @ [100 KHz] -141 @ [1MHz] -150 @ [10 MHz]	156
[12]	0.18 um CMOS Quadrature VCO (20 GHz)	-6.8	-5 @ [100 Hz] -12 @ [1 KHz] -42 @ [10 KHz] -72 @ [100 KHz] -105 @ [1 MHz] -114 @ [10 MHz]	181.5
[13]	Quad. SiGe HBT MMIC VCO (38.5 GHz)	-7.5	-11 @ [100 Hz] -41 @ [1 KHz] -49 @ [10 KHz] -61 @ [100 KHz] -73 @ [1MHz] -84 @ [10 MHz]	151
[14]	WGM-based Optoelectronic Oscillator (11 GHz)	-15.0	-19 @ [100 Hz] -51 @ [1 KHz] -79 @ [10 KHz] -106 @ [100 KHz] -135 @ [1MHz] -143 @ [10 MHz]	-
This work	EBG Oscillator (45.8 GHz)	-1.7	-57 @ [100 Hz] -95 @ [1 KHz] -120 @ [10 KHz] -142 @ [100 KHz] -151 @ [1MHz] -153 @ [10 MHz]	230

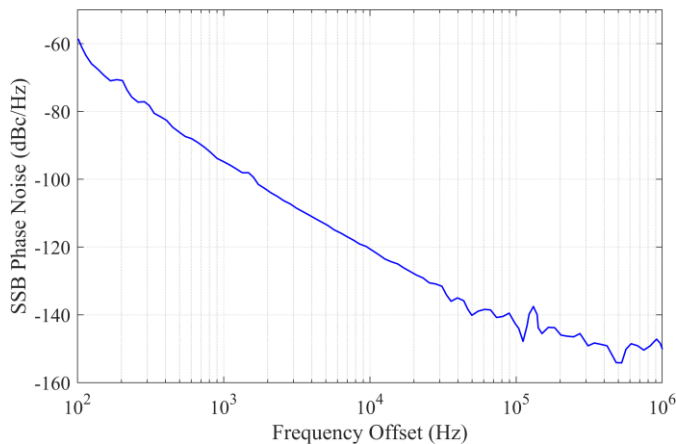


Fig. 6. Measured SSB phase noise of the oscillator at 263 K.

#### IV. CONCLUSION

This paper demonstrates a novel mm-wave oscillator employing a low-loss high-resistivity silicon resonator with a reduced dielectric filling factor of its resonant mode, leading to an improved Q-factor and thereby addressing the problem of excessive phase noise affecting high frequency oscillators operating in the mm-wave band. The oscillator also benefits from small size and low power consumption. Future work is to increase the Technology Readiness Level (TRL) of the oscillator, improve the frequency stability and tunability, and realize scaled versions operating at higher fundamental mode frequencies.

#### REFERENCES

- [1] J. Krupka, P. Kamiński and L. Jensen, "High Q-Factor Millimeter-Wave Silicon Resonators," *IEEE Trans. Microw. Theory Tech.*, vol. 64, no. 12, Dec. 2016.
- [2] J. D. Joannopoulos, S. G. Johnson, J. N. Winn, and R. D. Meade, *Photonic Crystals: Molding the Flow of Light*, 2nd ed. Princeton, NJ, USA: Princeton Univ., 2011.
- [3] W. J. Otter, S. M. Hanham, N. M. Ridler, G. Mariano, N. Klein, S. Lucyszyn, "100 GHz Ultra-high Q-factor Photonic Crystal Resonators," *Sens. Actuator A Phys.*, vol. 217, pp. 151-159, Sept. 2014.
- [4] L. Jensen, "High Resistivity (HiRes™) Silicon for GHz & THz Technology," Application Notes, version 1.1, TopSil company, Jan. 2014.
- [5] J. Krupka, J. Breeze, N. A. Centeno, N. Alford, "Measurements of Permittivity and Dielectric Loss Tangent of High Resistivity Float Zone Silicon at Microwave Frequencies," *IEEE Trans. Microw. Theory Tech.*, vol 54, no. 11, Nov. 2006.
- [6] Y. Tanaka, T. Asano and S. Noda, "Design of Photonic Crystal Nanocavity with Q-Factor of  $\sim 10^9$ ," *J. Light. Technol.*, vol. 26, no. 11, pp. 1532-1539, June 2008.
- [7] Y. Akahane, T. Asano, B.-S. Song, S. Noda, "High-Q Photonic Nanocavity in a Two-dimensional Photonic Crystal," *Nature*, vol. 425, pp. 944-947, Oct. 2003.
- [8] J. K. A. Everard, "Low Noise Oscillators", *1992 IEEE MTT-S Microwave Symposium Digest*, Albuquerque, NM, USA, 1992, pp. 1077-1080.
- [9] E. Lia, R. Dionisio, M. Kucharski, M. A. G. Lasso, A. Gómes-Torrent and I. Arregui, "High Q-Factor Silicon Resonator for High Frequency Oscillators," *Microwave Technology and Techniques Workshop (MTT)*, ESA-ESTEC, 3<sup>rd</sup>-5<sup>th</sup> Apr. 2017.
- [10] J. Krupka, W. Karcz, P. Kamiński and L. Jensen, "Electrical properties of as-grown and proton-irradiated high purity silicon," *Nucl. Instrum. Methods Phys. Res. B*, vol. 380, pp. 76-83, Aug. 2016.
- [11] R. Kaesbach, M. van Delden, T. Musch, "A Fixed-Frequency, Tunable Dielectric Resonator Oscillator with Phased-Locked Loop Stabilization", *Proc. of 2022 Asia-Pacific Microwave Conference*, Yokohama, Japan, 29<sup>th</sup> Nov. to 2<sup>nd</sup> Dec. 2022.
- [12] S. Koo, J.-G. Kim, T. Song, E. Yoon and S. Hong, "20 GHz Integrated CMOS Frequency Sources with a Quadrature VCO using Transformers," *IEEE Radio Frequency Integrated Circuits Symposium*, Forth Worth, TX, USA, 2004, pp. 269-272.
- [13] A. Dyskin, S. Wagner and I. Kallfass, "A Compact Resistive Quadrature Low Noise Ka-Band VCO SiGe HBT MMIC," *2019 12th German Microwave Conference (GeMiC)*, Stuttgart, Germany, 2019, pp. 95-98.
- [14] D. Eliyahu, A. E. Amili, R. Moss, G. Keseyan, A. Savchenkov, S. E. Ganji and L. Maleki, "Ultra-wideband Photonic VCO and Synthesizer," *2021 IEEE MTT-S International Microwave Symposium (IMS)*, Atlanta, GA, USA, 2021, pp. 538-540.