



HAL
open science

Design of optimal low-frequency NMR detection coils

Hadi Loutfi, Geneviève Tastevin, Pierre-Jean Nacher

► **To cite this version:**

Hadi Loutfi, Geneviève Tastevin, Pierre-Jean Nacher. Design of optimal low-frequency NMR detection coils. European Magnetic Resonance Meeting EUROMAR 2023, Jul 2023, Glasgow (Ecosse), United Kingdom. ⟨hal-04334251⟩

HAL Id: hal-04334251

<https://hal.science/hal-04334251v1>

Submitted on 10 Dec 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire HAL, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons CC BY-NC-ND 4.0 - Attribution - Non-commercial use - No Derivative Works - International License

Design of optimal low-frequency NMR detection coils

LOUTFI Hadi ¹, TASTEVIN Geneviève ¹, NACHER Pierre-Jean ¹

¹ Laboratoire Kastler Brossel, ENS-PSL University, CNRS, Sorbonne Université, Collège de France, Paris, France

Introduction: The signal-to-noise ratio (SNR) in NMR measurements notoriously depends on the filling factor and Q-factor of the coil, and on the matching to the low-noise amplifier (LNA). At low frequency, the length of wire in multi-layered coils is not limited and impedance matching to 50Ω is not needed. Instead, noise matching to a high-impedance LNA is important.¹

Aim: We designed PU coils to optimise SNR while achieving sufficiently uniform sensitivity maps. The solenoid-like coils surround ~2-cm³ rectangular cells for diffusion measurements of hyperpolarized ³He gas in ordered Al₂O₃ aerogels² with different constraints on their maximum size.

Methods: The principle of reciprocity conveniently relates the average magnetic field per unit current B/I (computed using the Biot-Savart law) and the emf induced by the sample. At low frequency, the thermal noise is dominated by coil losses and scales as (R_{AC})^{1/2} with the AC coil resistance. A SNR factor B/I/(R_{AC})^{1/2} is therefore computed for arbitrary coil geometry and wire parameters.

Results: SNR factors and sensitivity maps only depend on coil dimensions, not on wire diameter. A broad optimum is found for coil length and winding thickness; moreover, the SNR decrease for more compact coils is easily evaluated (Fig. 1a). The coil sensitivity maps are fairly uniform over a wide range of dimensions (Fig. 1b). Two coils with the same bore and different outer dimensions were made, and tuned near 42 and 84 kHz (Q~100). With 1.4-mm-diameter and 0.75-mm-diameter litz wires the tank circuits were suitably noise-matched to a SR560 LNA.¹

Conclusion: The PU coils were used in different set-ups, with measured SNRs consistent with expectations. This generic low-frequency optimisation approach can be used for multi-coil systems as well, e.g. for rejection of interference noise.

¹ V.V. Kuzmin and P.-J. Nacher, *J. Magn. Reson.* 310 (2020) 106622.

² H. Loutfi et.al., this conference.

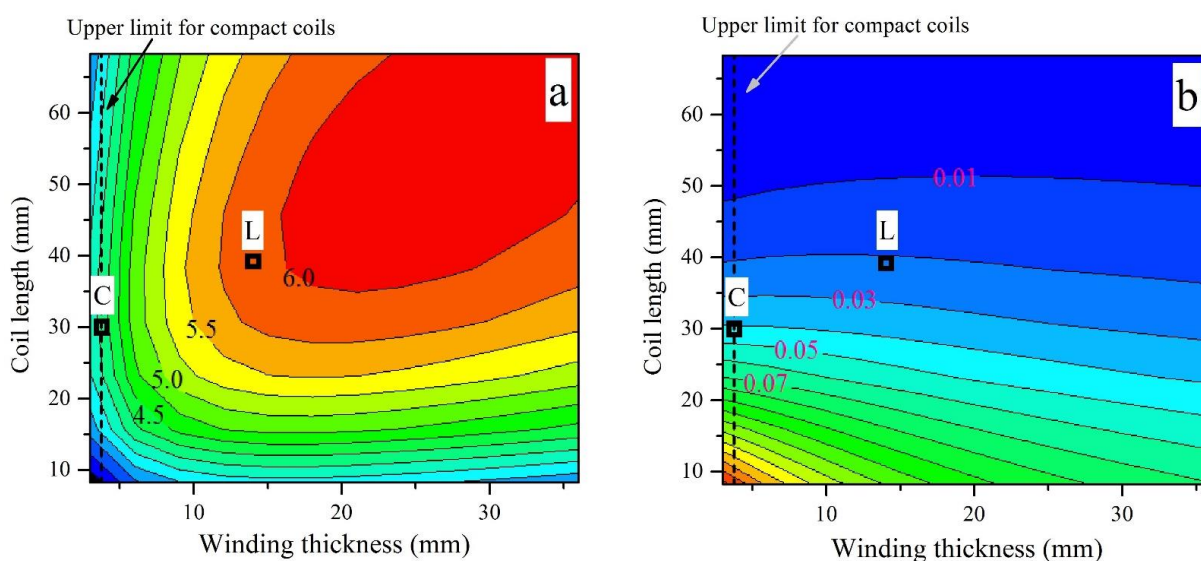


Fig. 1 2D maps of a: the coil SNR factor $B/I/R_{AC}^{1/2}$ and b: the standard deviation of coil sensitivity, for coils with rectangular bore $21.5 \times 24\text{mm}^2$. The symbols mark the parameters of the tested compact (C) and large (L) coils.