



**HAL**  
open science

## Light Induced Metastability in Thin Nanocrystalline Silicon Films

Marius Bauza, N P Mandal, Arman Ahnood, Andrei Sazonov, Arokia Nathan

► **To cite this version:**

Marius Bauza, N P Mandal, Arman Ahnood, Andrei Sazonov, Arokia Nathan. Light Induced Metastability in Thin Nanocrystalline Silicon Films. *Philosophical Magazine*, 2009, 89 (28-30), pp.2531-2539. <10.1080/14786430902933845>. <hal-00519086>

**HAL Id: hal-00519086**

**<https://hal.science/hal-00519086v1>**

Submitted on 18 Sep 2010

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire HAL, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization



**Light Induced Metastability in Thin Nanocrystalline Silicon Films**

Journal:	<i>Philosophical Magazine &amp; Philosophical Magazine Letters</i>
Manuscript ID:	TPHM-08-Oct-0367.R3
Journal Selection:	Philosophical Magazine
Date Submitted by the Author:	27-Mar-2009
Complete List of Authors:	Bauza, Marius; London Center of Nanotechnology Mandal, N; London Center of Nanotechnology Ahnood, Arman; London Center of Nanotechnology Sazonov, Andrei; University of Waterloo, Electrical and Computer Engineering Nathan, Arokia; London Center of Nanotechnology
Keywords:	polycrystalline, thin-film silicon
Keywords (user supplied):	persistent photocurrent, light soaking, SWE



## Light Induced Metastability in Thin Nanocrystalline Silicon Films

M. Bauza<sup>a\*</sup>, N.P. Mandal<sup>a</sup>, A. Ahnood<sup>a</sup>, A. Sazonov<sup>b</sup>, A. Nathan<sup>a</sup>

<sup>a</sup>*London Center of Nanotechnology, University College London, WC1H 0AH London, UK*

<sup>b</sup>*Electrical and Computer Engineering Department, University of Waterloo, Waterloo, Ontario N2L 3G1, Canada*

This paper examines the influence of light induced metastability on conduction in thin nc-Si:H films. To investigate the role of surface effects two sample types are considered: one with intentionally oxidised surface to form an oxide cap layer and the other with the oxide layer etched. Both Staebler-Wronski effect (SWE) and persistent photo-current (PPC) have been observed, albeit at different phases of light soaking (LS). For the nc-Si:H sample with cap layer, we attribute the presence of SWE and PPC to defect generation and interface charge trapping, while in the absence of the cap layer, these effects could be caused by unidentified photo-structural changes and defect generation.

**Keywords:** nanocrystalline silicon; light soaking; persistent photo-current; Staebler-Wronski effect

### 1. Introduction

The early 70s saw amorphous silicon (a-Si) as a low quality material with high defect density. All previous attempts to dope it had been unsuccessful because of the high defect density [1], therefore placing it in an impossible state from the standpoint of applications. However the technology was revolutionized when Spear and LeComber published their first results on the doping of a-Si with tri- and pentavalent elements [2]. They showed that by using hydrogen dilution during growth, high quality a-Si could be deposited. Soon after, Spear and collaborators demonstrated the first a-Si p-n junction with photovoltaic properties [3], pioneering an entire new area of a-Si solar cells. Later they also demonstrated the first working a-Si thin film transistor (TFT) [4], now widely used in flat panel displays. In summary, the efforts of Spear and his colleagues were a key factor that enabled a-Si to become a dominant technology for

---

\*corresponding author. Email: m.bauza@ucl.ac.uk

1  
2  
3 large area electronics, and which has led to notable developments in newly-emerging  
4 thin film materials such as nanocrystalline-Si (nc-Si).  
5  
6

7  
8 The growth rate of nc-Si:H using RF plasma enhanced chemical vapour deposition  
9 (PECVD) is generally much lower than that of amorphous silicon (a-Si:H) [1],  
10 possibly due to the high hydrogen dilution required for nc-Si:H deposition.  
11  
12 Furthermore thinner (less than about 50 nm) samples exhibit enhanced quantum  
13 confinement effects [6], which vanishes in thicker films because of increased grain  
14 size [7]. Enhanced quantum confinement offers additional properties, such as  
15 increased carrier mobility [8] which could have advantages when used in large area  
16 applications. For these reasons we examine thin nc-Si:H samples as they are attractive  
17 for use in electron devices such as thin film transistors (TFTs).  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28

29 In amorphous silicon that has been subjected to light soaking (LS), both Staebler-  
30 Wronski effect (SWE) and persistent photo-current (PPC) have been observed. While  
31 SWE was observed in both the intrinsic and doped material, PPC was found only in  
32 the latter. The most pronounced feature of the SWE is the reduction of the dark  
33 conductivity after LS [9]. This is attributed to dangling bond (DB) generation as the  
34 result of tail to tail recombination during LS [10]. Other LS-induced effects such as  
35 change in the defect density, as measured by electron spin resonance (ESR) and  
36 constant photo-current (CPC), have also been observed. A number of models have  
37 been proposed to explain the mechanism of SWE. Most of the models are based on  
38 the change in the hydrogen and silicon bonds in the film [11].  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52

53 It has been observed that incorporation of a silicon crystalline phase in the amorphous  
54 silicon matrix would reduce the SWE and hence slow the DB creation process [12]. A  
55 number of models have been proposed to explain this effect [13]. All the models are  
56  
57  
58  
59  
60

1  
2  
3 based on the assumption that the defect generation takes place in the amorphous phase  
4 and the crystalline phase is stable.  
5  
6

7  
8 Lubianiker et al. [12] argued that microcrystalline silicon incorporates two different  
9 types of amorphous phases; a highly defective, hydrogen rich amorphous silicon layer  
10 immediately adjacent to and surrounding crystalline grains, while further away is a  
11 higher-quality amorphous matrix. Photo carriers generated in the higher-quality  
12 amorphous phase during LS would recombine in the highly defective amorphous  
13 phase. This would result in a very small increase in the DB and hence slower SWE.  
14  
15 Conversely, Kamei et al [14] proposed that the photo-generated carriers diffuse to the  
16 crystalline part due to the built-in potential as the result of the difference in band  
17 energies. Recombination in this case takes place in the crystal grains leading to a  
18 suppression of the non-radiative recombination in the amorphous region. This would  
19 lead to reduction in DB creation rate and reduce the SWE.  
20  
21

22  
23 On the other hand, the PPC effect, traditionally observed in a-Si:H multilayers or  
24 porous Si [15], may be described by the potential barrier model for crystalline doping  
25 superlattices. According to this theory, the PPC in multilayers arises from photo-  
26 induced electron-hole pairs separated by the electric field at the p-n junction in  
27 superlattice. Because of the large spatial separation of charge carriers, the  
28 recombination lifetime becomes large. Porous silicon appears to show similar trends,  
29 since it is composed of small crystallites, and these introduce a fluctuation in the  
30 energy bandgap throughout the material [15]. Thus photo-excited carriers are spatially  
31 separated, which leads to an exceedingly long recombination life time.  
32  
33

34  
35 Most of the conductivity studies on a-Si:H look at relatively thick films (typically 300  
36 nm) to minimise the surface effects, whilst allowing for uniform absorption of light  
37 across the film [16]. Given that the structure of a-Si:H is independent of thickness,  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 this would constitute a valid measurement method for investigating bulk film  
4 conductivity, since the contribution of surface effects is negligible. However, it is  
5 known that the structure of nc-Si:H evolves with thickness, including surface  
6 roughness [17], grain size and crystal fraction [7], and consequently grain boundary  
7 interface area. Therefore conductivity studies of thick nc-Si:H films are not directly  
8 applicable to thinner films, because the results are strongly influenced by the surface  
9 effects and cannot be directly used for investigating bulk properties.

10  
11 In this work we investigate light induced metastabilities of thin nc-Si films. We  
12 examine the conductivity while distinguishing between the influence of surface and  
13 the bulk. Most of the LS work on nc-Si has been on thick films [14][18], with  
14 thicknesses comparable to the i-layer used in solar cells. Furthermore the grain size of  
15 the sample used in this work was relatively small compared to other works [14].  
16 Although there has been some work on the light induced metastability of nc-Si in p-i-  
17 n solar cells, these are fabricated in a sandwich structure such that current flows in a  
18 direction parallel to microcrystalline growth and therefore would pass through the  
19 amorphous incubation layer, and regions with gradually increasing crystalline  
20 fraction. Yue *et al* [19] showed that the solar cell degrades at different rates  
21 depending on bias conditions. It was argued that the difference in degradation rate  
22 was due to the recombination of photo-carriers taking place in the amorphous or  
23 highly crystalline phases, depending on bias. However in our work we look at planar  
24 structures where the direction of current flow does not have an impact on the light  
25 induced degradation.

## 2. Sample Preparation and Experimental Setup

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

nc-Si:H samples used for this study were deposited at 280°C substrate temperature in a multi-chamber 13.56 MHz PECVD system from MVSystems. The nc-Si:H was deposited using a H<sub>2</sub> diluted SiH<sub>4</sub> plasma (H<sub>2</sub>:SiH<sub>4</sub>=100:1) at 900 mTorr chamber pressure. 50nm nc-Si:H film was deposited on a Corning 1737 substrate. The wafer was allowed to cool in a laboratory atmosphere, from the deposition temperature (280°C) to room temperature (20°C) thus creating a thin oxide cap layer. At this temperature and cooling rate, dehydrogenation is not expected to occur.

Then the sample was diced and one piece was left with oxide cap layer (sample I). A second piece was briefly dipped in hydrofluoric (HF) acid to remove the thin surface oxide layer (sample II). This ensures that both samples have essentially same characteristics, such as hydrogen concentration and thermal history, and are different only in surface termination. The samples considered here have a mean nanocrystallite diameter of 4-5 nm, as determined by X-ray diffraction. The optical bandgap of our nc-Si:H samples is about 1.9 eV as determined by measurement of optical transmission-reflection.

Electrical measurements were carried out using two coplanar electrodes with an approximate separation of 500 μm made by a colloidal solution of silver paste. The voltage applied was 100 volts and all measurements were done using a Keithley 4200-SCS. Throughout the measurements the samples were kept in a variable temperature vacuum chamber with a base pressure of 1×10<sup>-6</sup> Torr to avoid further oxidation.

Light soaking was performed using heat filtered white light from a 50 Watt tungsten-halogen lamp. The intensity of the light on the sample was 45 mW/cm<sup>2</sup>. During the experiment the properties of the sample were investigated using sub-bandgap light. This was done using the same light source filtered by crystalline silicon wafer (i.e.  $h\nu \leq 1.1$  eV).

### 3. Results

The effect of successive light exposures on the nc-Si:H sample with oxide cap (sample I) at room temperature is shown in Fig. 1. The light was turned on and off as indicated in the Figure. The duration of the light pulse was varied from 5 to 3600 seconds, while the dark current ( $I_{d-LS}$ ) was measured for 5 minutes in-between successive exposures. Upon light exposure, we observe a fast rise in photo-current ( $I_{ph}$ ), followed by a fast decrease after the illumination period, with a non-monotonic dependence of  $I_{d-LS}$  on the exposure duration. Here  $I_{d-LS}$  first decreases, but for longer exposures it starts to increase. Interestingly, for light exposures longer than 10 min, we note that the excess dark current (i.e. when  $I_{d-LS} > I_{d-A}$ ) is persistent and does not relax to state A. This excess dark current is referred to as the persistent photo-current.

The effect of successive light exposures on the nc-Si:H sample without oxide cap (sample II) at room temperature is shown in Fig 2. The dark current in state A is higher by an order of magnitude compared to the oxide cap counterpart. In this case, the dark current increases after exposures of up to five minutes, indicating PPC. For longer exposures (~2 hrs), however, we observe that SWE becomes dominant. Annealing at 150°C for 1 hr was necessary to restore the sample to state A.

The temperature dependence of dark current in the annealed and light soaked states for the sample with the oxide cap is shown in Fig 3. Curve A shows the temperature dependence of dark current in the annealed state A, yielding an activation energy  $E_a = 0.45 \pm 0.03$  eV determined in the 300-400 K range. Curve SWE denotes the temperature dependence of dark current after 5 min of continuous exposure, which yields  $E_a = 0.60 \pm 0.02$  eV. The SWE is annealed out at 370 K. Curve PPC shows the temperature dependence of current after continuous light exposure for up to 1 hr. The

1  
2  
3 dark current in the PPC state initially increases, then decreases from 320 K before  
4  
5 increasing again from 340 K. The activation energy for the annealing process from  
6  
7 room temperature to 320 K is  $0.23 \pm 0.02$  eV, and in the range 344 K to 415 K it is  
8  
9 about  $0.80 \pm 0.02$  eV.  
10  
11

12 The temperature dependence of the dark current in the annealed and light soaked  
13  
14 states for the HF-etched sample is shown in Fig. 4. Curve A shows the temperature  
15  
16 dependence of the dark current in the annealed state A yielding an activation energy  
17  
18  $E_a = 0.54$  eV, determined in the range of 300-450 K. Curve PPC traces the  
19  
20 temperature dependence of current after continuous light soaking up to 2 min. The  
21  
22 PPC state is annealed out at about 410 K, yielding an activation energy  $E_a = 0.45$  eV.  
23  
24 The curve SWE, which denotes the temperature dependence of dark current after  
25  
26 continuous exposure of 2 hrs, yields an activation energy  $E_a = 0.62$  eV. Table 1  
27  
28 summarizes the various findings and extracted values.  
29  
30  
31  
32  
33  
34  
35

#### 36 **4. Discussions**

37

38 For sample I after short light exposures, the Staebler-Wronski effect (SWE) was  
39  
40 found to be pronounced. In fact the decrease in dark current for short exposures is  
41  
42 similar to the SWE in undoped a-Si:H. With increasing exposure time the PPC effect  
43  
44 starts dominating. The same has been found in other structures, such as a-Si:H  
45  
46 multilayers [20][21] and porous silicon [22]. When subject to sub-bandgap  
47  
48 illumination, there is a transition between localized gap states or between localized  
49  
50 and extended states, but no generation of free electron-hole pairs. Here we observe  
51  
52 that PPC is partially quenched and does not return to the previous level after turning  
53  
54 off exposure to sub-bandgap light.  
55  
56  
57  
58  
59  
60

1  
2  
3 The non-linear nature of the dark current, while annealing from PPC state, indicates a  
4 superposition of two effects. We believe that both PPC and SWE are simultaneously  
5 present while nc-Si:H is soaked with light for 10 min or more. A similar photo-current  
6 dependence for lightly boron doped a-Si:H sample has been reported by Aker and  
7 Fritzsche [23]. Here the PPC was attributed to charge trapping at the interface of a-Si  
8 and surface oxide. A similar explanation may hold in our case, following the findings  
9 of Halverson et al. [24] that light soaking creates hole traps, which are more  
10 prominent in the light soaked state rather than the annealed state A. This implies that  
11 charges trapped at interface defect states raise the electron quasi-Fermi level  $E_F$ . In  
12 fact there is a shift in Fermi level towards the conduction band edge after long  
13 exposures (curve PPC in Fig. 3), and the low annealing temperature of the PPC state  
14 in nc-Si:H indicates that the observed PPC could be caused by trapping of charge  
15 carriers at nc-Si:H/oxide interface. This is consistent with the fact that we cannot  
16 completely quench the PPC by exposure to sub-bandgap light. Note that the SWE is  
17 dominant for short exposures while PPC prevails for long exposures.

18  
19 In contrast, for the sample without oxide cap, the PPC behaviour was recorded for  
20 short exposures and SWE for exposures greater than 30 minutes. Also when exposed  
21 to sub-bandgap light, the PPC was largely unaffected. Similar observations have also  
22 been reported for doping modulated a-Si:H multilayered thin films [20]. The  
23 relaxation time of PPC is many orders higher than the usual recombination time. To  
24 check whether the photo-current and excess dark current are controlled by the same  
25 mechanism, we measured the dependence of the photo-current on light intensity. The  
26 results appear to fit the function  $I_{ph} \sim F^\gamma$ , where  $F$  is the light intensity, and the  
27 exponent  $\gamma \sim 0.6$ . This value is quite similar for thin a-Si:H films. We therefore can  
28 conclude that the photo-current component is subject to the usual recombination-

trapping statistics. This is also in line with findings reported for doping modulated a-Si:H multilayered thin films [20].

The dark current increases by more than one order of magnitude in the HF-etched sample. The corresponding activation energies in the states A, SWE and PPC are also higher. A similar increase in activation energy on boron doped a-Si:H sample after HF treatment was observed by Aker and Fritzsche [23]. This could be explained by the shift of the effective Fermi level caused by the absence of holes at the nc-Si:H/oxide interface as a result of etching the negatively charged oxide layer [23].

The PPC effect reported here has many of the attributes predicted by the potential barrier model for crystalline doping superlattices. However, it can be annealed out only at sufficiently high temperature. This coupled with our inability to quench the PPC by sub-band gap light signifies that it is not caused by trapping of charge carriers in the mid-gap region (Fig. 4). Therefore a photo-structural change is most likely responsible in this case. On the other hand, the regular SWE is dominant for long exposures, and that causes a decrease in  $I_{DC}$  [25].

## 5. Conclusions

This work reported the light-induced metastability on conduction in thin nc-Si:H films. Both SWE and PPC effects were observed in oxide capped and HF etched nc-Si:H samples although at different phases of light soaking. With the former, the PPC was attributed to hole trapping at the oxide-Si interface, consistent with findings of Aker and Fritzsche. On the other hand, PPC in HF etched sample was found to be insensitive to sub-bandgap light, with higher activation energy, therefore indicating that some kind of structural changes are involved. The SWE observed in both cases is thought to be governed by the same mechanism as in a-Si:H. Although this is the first

1  
2  
3 time, to our knowledge, PPC has been observed in nc-Si:H, further experiments are  
4  
5 needed to be able to decisively reveal the possible microscopic mechanisms  
6  
7 underlying PPC. The metastable defects created by light soaking, have a non-  
8  
9 monotonic effect on film conduction, which changes depending on the surface  
10  
11 termination of nc-Si:H film.  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

For Peer Review Only

Table 1. Summary of the results and discussions.

	Short exposure (< 10min)	Long exposures (>1hr)	IR exposure	Annealing at 330K	Mechanism for PPC
Oxidized nc-Si:H (Sample one)	SWE	PPC	IR quenches PPC.	Removes PPC.	Charge trapping at the nc-Si/oxide interface
HF treated nc-Si:H (Sample two)	PPC	SWE	IR is unable to quench PPC.	Does not remove PPC.	Unidentified photo-structural changes

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Figure 1. Dark and photo-currents as a function of time of nc-Si:H before (state A), during, and after exposure to  $45 \text{ mW/cm}^2$  heat filtered white light for successive exposures as indicated. Inset shows more clearly that the PPC state (color line) is quenched by sub-bandgap light. Dotted line corresponds to the annealed state guided to the eye and short-dotted line corresponds to dark current after LS.


Figure 2. Current of HF treated nc-Si:H as a function of time before (state A), during, and after exposure to heat filtered white light for increasing exposure times as indicated. Dotted line is indicated as the annealed state A and short-dotted line shows dark current after LS. Inset shows dark current and photo current before, during, and after exposure lengths of 1 and 2 min.

Figure 3. Effect of thermal annealing on dark current after continuous light soaking in the annealed state A, light soaked up to 1 hr (PPC state) and light soaked up to 5 min (SWE state) for sample with oxide cap.

Figure 4. Temperature dependence of the dark current in the annealed state A, PPC state (continuous light soaked up to 2 min) and SWE state (continuous light soaked up to 2 hrs) for the HF etched nc-Si:H sample.

## References


- [1] Chittick R.C., Alexander J.H., Sterling H.F., *J. Electrochem. Soc.* 116, 77 (1969)
- [2] Spear W.E., LeComber P.G., *Solid State Commun.* 17, 1193 (1975)
- [3] Spear W.E., LeComber P.G., Kinmond S., Brodsky M.H., *Appl. Phys. Lett.* 28 (1976)
- [4] LeComber P.G., Spear W.E., Gaith A., *Elec. Lett.*, 15, 179 (1979)
- [5] Y. Feng, M. Zhu, F.Liu, J. Liu, H. Han, Y. Han, *Thin Solid Films*, 395, 213 (2001)
- [6] G.C. John and V.A. Singh, *Phys. Rev. B* 50, 5329 (1994)
- [7] S. K. Ram, S. Kumar and P. Roca i Cabarrocas, *Thin Solid Films*, 515, 19, 7469 (2007)
- [8] X. Y. Chen and W. Z. Shen, *Phys. Rev. B* 72, 035309 (2005)
- [9] D. L. Staebler and C. R. Wronski: *Appl. Phys. Lett.* 31 (1977)
- [10] M. Stutzmann, W. B. Jackson, and C. C. Tsai, *Phys. Rev. B* 32, 23 (1985)
- [11] T. Shimizu, *Jap. J. Appl. Phys.* 43, 3257 (2004)
- [12] Y. Lubianiker, J. D. Cohen, H.C. Jin, and J. R. Abelson, *Phys. Rev. B*, 60, 4434 (1999)
- [13] F. Meillaud, E. Vallat-Sauvain, A. Shah and C. Ballif, *J. Appl. Phys.* 103, 054504 (2008)
- [14] T. Kamei, P. Stradins and A. Matsuda, *Appl. Phys. Lett.* 74, 1707 (1999)
- [15] M. Hundhausen, L. Ley and R. Carius, *Phys. Rev. Lett.* 53, 1598 (1984)
- [16] K. Takahashi, M. Konagai, Wiley-Interscience, New York, 109 (1986)
- [17] H. Fujiwara M. Kondo and A. Matsuda, *Phys. Rev. B*, 63, 115306 (2001)
- [18] S. K. Ram, S. Kumar and P. Roca i Cabarrocas, *J of Non-Cryst. Sol.* 352, 1172 (2006)
- [19] G. Yue, B. Yan, J. Yang, and S. Guha, *J. Appl. Phys.* 103, 054504 (2008)
- [20] J. Kakalios and H. Fritzsche, *Phys. Rev. Lett.* 53, 1602 (1984)
- [21] S.C. Agarwal and S. Guha, *Phys Rev. B* 32, 8469 (1985)
- [22] N.P. Mandal, A. Sharma and S.C. Agarwal, *J. Appl. Phys.* 100, 24308 (2006)
- [23] B. Aker and H. Fritzsche, *J. Appl. Phys.* 54, 6628 (1983)
- [24] A.F. Halverson, J.J. Gutierrez, J.D. Cohen, B.Yan, J.Yang and S. Guha, *Appl. Phys. Lett.* 88, 071920 (2006)
- [25] See for the review, H. Fritzsche, *Annu Rev. Mater Res.* 31, 47 (2001)

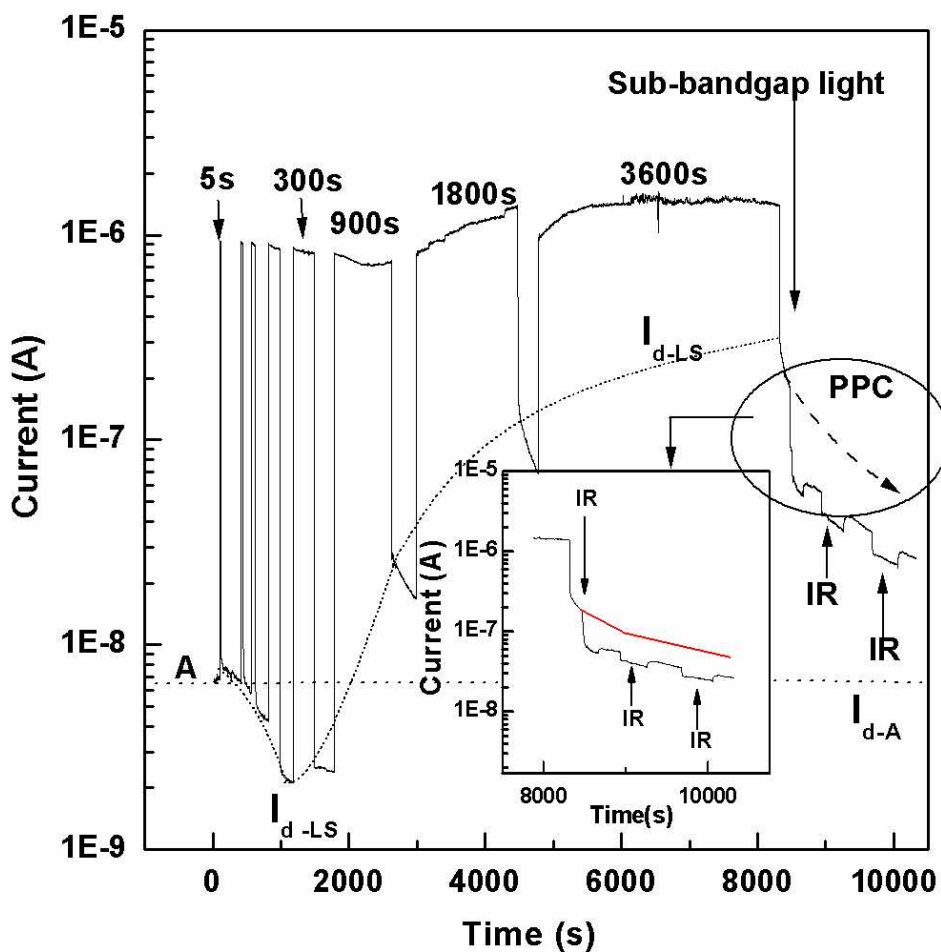

177x177mm (150 x 150 DPI)

only


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

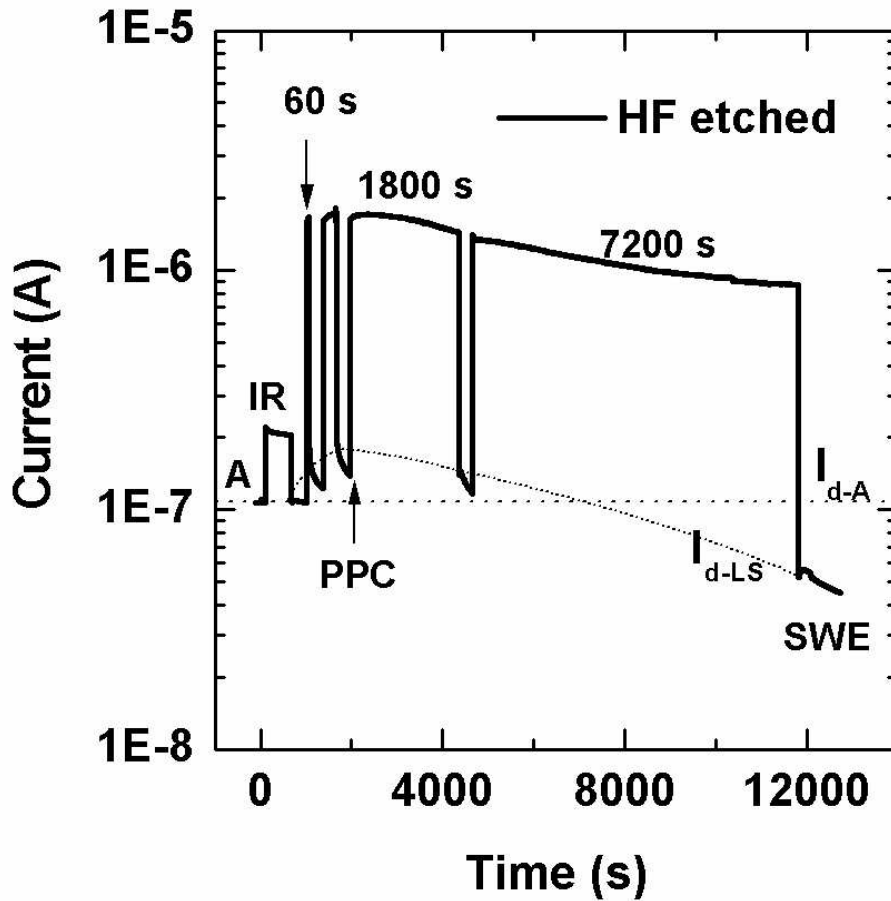

152x152mm (150 x 150 DPI)




1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

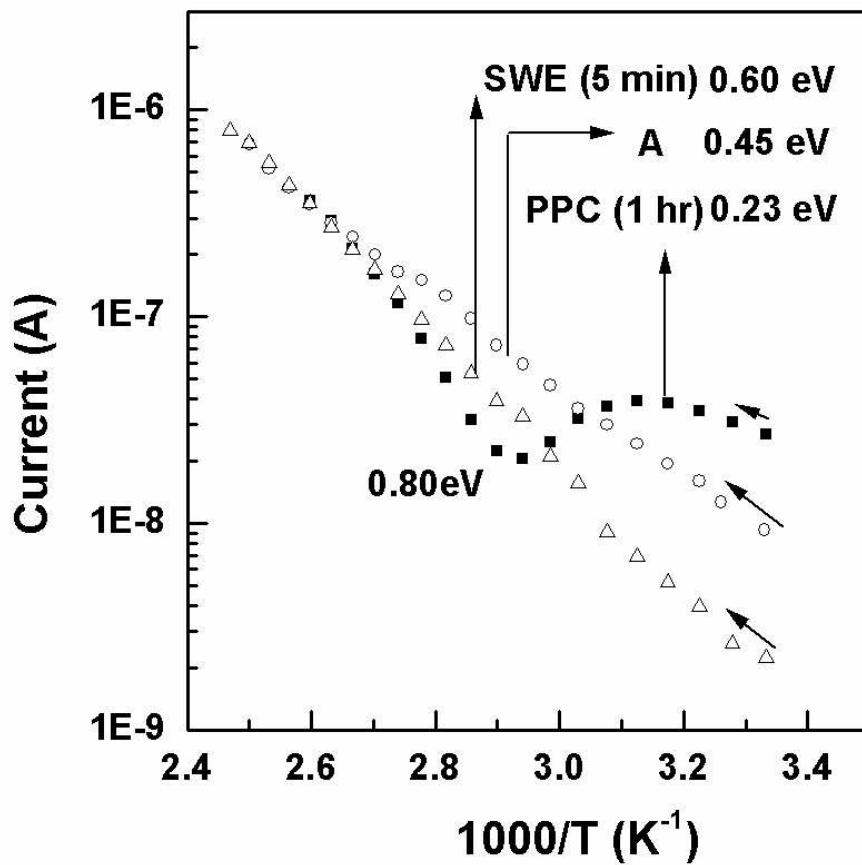

152x152mm (150 x 150 DPI)



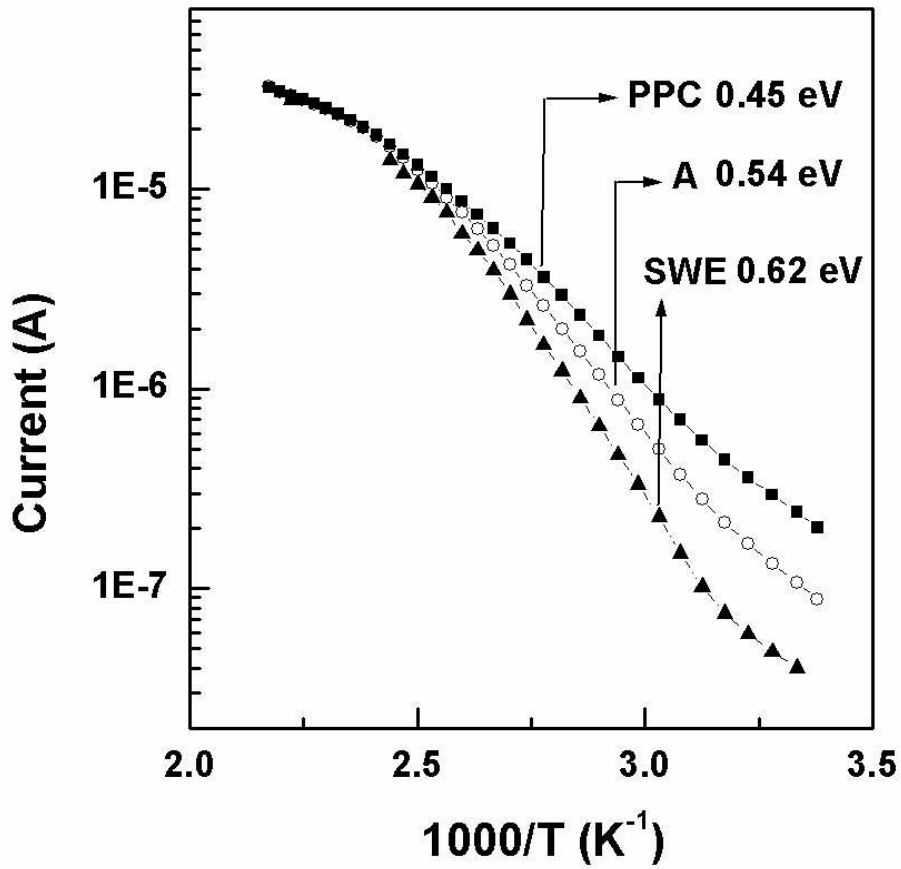

152x152mm (150 x 150 DPI)



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60