



**HAL**  
open science

## Out-of-loop frequency noise reduction of a Pound-Drever-Hall lock to an optical fiber delay line

Stéphanie Grabielle, Debanjan Show, Frédéric Audo, Jean-Pierre Coulon,  
Fabien Kéfélian

### ► To cite this version:

Stéphanie Grabielle, Debanjan Show, Frédéric Audo, Jean-Pierre Coulon, Fabien Kéfélian. Out-of-loop frequency noise reduction of a Pound-Drever-Hall lock to an optical fiber delay line. European Frequency and Time Forum (EFTF), Jun 2024, Neuchâtel (CH), Switzerland. hal-04632393

**HAL Id: hal-04632393**

**<https://hal.science/hal-04632393v1>**

Submitted on 2 Jul 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Out-of-loop frequency noise reduction of a Pound-Drever-Hall lock to an optical fiber delay line

Stéphanie Grabielle, Debanjan Show, Frédéric Audo\*, Jean-Pierre Coulon, Fabien Kéfélian

ARTEMIS, Université Côte d'Azur & Observatoire de la Côte d'Azur & CNRS, Nice, France

Email: stephanie.grabielle@oca.eu

Laser frequency noise reduction is usually achieved by locking the laser to an ultra-stable Fabry-Perot cavity using the Pound-Drever-Hall technique. As Fabry-Perot cavities require fine alignment, spatial mode matching and are quite expensive, bulky, and fragile, other alternatives should be investigated, for example for space applications. Among them is the fiber-based delay-line interferometer, which can have strong frequency discriminator factor in a very compact and light design. This technique has already demonstrated experimentally very promising results<sup>1</sup>. In this paper, we don't investigate the fiber noise itself, but we focus on characterizing and reducing the out-of-loop frequency noise of the lock, which can limit the ultimate performance.

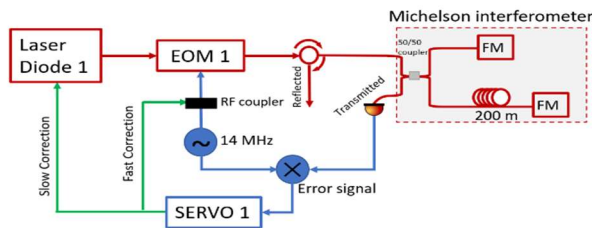


Fig.1: Laser locking set up

shown on Fig.1. The path imbalance is around 417 m corresponding to a free-spectral range of 497 600 Hz. The error signal is processed by a specially designed analog servo controller. Previous results<sup>2</sup> had demonstrated an out-of-loop white noise floor at  $2 \times 10^{-1} \text{ Hz}/\sqrt{\text{Hz}}$  up to 1 kHz which were attributed to discriminator nonlinearity. By increasing the servo controller bandwidth and thus reducing the RMS error level, we reduced this floor level below  $10^{-1} \text{ Hz}/\sqrt{\text{Hz}}$  and extended it up to 8 kHz (Fig.2). Out of loop noise floor optimization should be considered to reach fiber thermal noise floor operation, especially with diode laser exhibiting a larger white frequency noise component.

To measure the out-of-loop noise without being limited by the fiber noise, two laser diodes (model RIO ORION, 1542 nm) exhibiting a central frequency difference of 450 MHz are locked on the same interferometer and their beat noise is analyzed. Contrary to other fiber-based works that use heterodyne detection, we use the Pound-Drever-Hall technique. The setup of the lock of one laser is

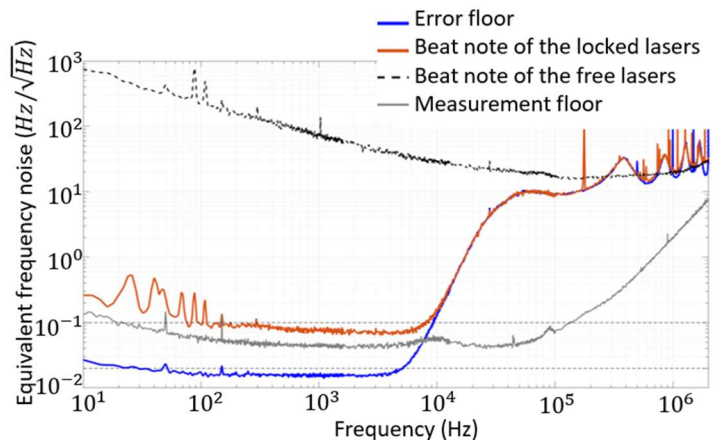


Fig.2: Out-of-loop locking frequency noise

<sup>1</sup> J. Dong, Y. Hu, J. Huang, M. Ye, Q. Qu, T. Li, and L. Liu, "Subhertz linewidth laser by locking to a fiber delay line," *Appl. Opt.*, vol 54, p. 1152-1156, 2015.

<sup>2</sup> F. Audo, J. -P. Coulon and F. Kéfélian, "Experimental evidence of a fundamental noise floor at the tens of millihertz level in laser locking onto unbalanced fibre-based Michelson interferometer," *CLEO/Europe-EQEC*, Munich, Germany, 2017.

(\*) F. Audo is now with CEA