



HAL
open science

Minimal order linear functional observers design for multicell series converter

Mariem Jday, Paul-Etienne Vidal, Joseph Haggège

► **To cite this version:**

Mariem Jday, Paul-Etienne Vidal, Joseph Haggège. Minimal order linear functional observers design for multicell series converter. International journal of advanced computer science and applications (IJACSA), 2020, 11 (3), pp.620-629. <10.14569/IJACSA.2020.0110378>. <hal-04931901>

HAL Id: hal-04931901

<https://hal.science/hal-04931901v1>

Submitted on 6 Feb 2025

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire HAL, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Minimal order linear functional observers design for Multicell Series converter

Mariam Jday¹

Laboratoire de Recherche
en Automatique,

Ecole Nationale d'Ingénieurs de Tunis,
Université de Tunis El Manar
Le Belvédère, 1002 Tunis, Tunisia
Email: mariem.jday@enit.utm.tn

Paul-Etienne Vidal²

Laboratoire de Génie
de Production,

Ecole Nationale d'Ingénieurs de Tarbes,
47 avenue d'Azereix,
65016 Tarbes CEDEX, France
Email: paul-etienne.vidal@enit.fr

Joseph Haggège³

Laboratoire de Recherche
en Automatique,

Ecole Nationale d'Ingénieurs de Tunis,
Université de Tunis El Manar
Le Belvédère, 1002 Tunis, Tunisia
Email: joseph.haggege@enit.utm.tn

Abstract

The requirement of high voltage-power level for many applications like the energy conversion system give rise to use a structure of a multilevel converter like the multicell series converter. To benefit as much as possible from this power converter an appropriate voltage distribution for each cell must be performed, hence the need to estimate this voltages. This paper aims to design a minimal single linear functional observer for a multicell series converter to estimate the capacitor voltages. Based on its hybrid model, an observability study prove the ability to estimate this capacitor voltages. Also a linear functional observers are proposed using a direct procedure without solving the Sylvester equation and based on an operation mode classification approach. Simulations of four-cells multicell converter are given in order to check the efficiency of the converter's hybrid model and the performance of the proposed minimal single linear functional observers.

Keywords

Multicell converter; Voltage capacitor; Hybrid model; Z(TN)-Observability; Functional observer

I. INTRODUCTION

Due to the energy transition combined with e-mobility, energy conversion systems require higher power level. This can be achieved with an increase of the functioning current or voltage. The increase of the functioning voltage is done in usual power structures with an increase of the switches's voltages. For instance, [?] illustrates how to apply 10 kV Silicon switches (Si) in a two voltage level converter. However, high blocking voltage switches have a lower dynamic performance. To mitigate both power level associated with higher blocking voltage, and good switching dynamics, Multicell Series Converter (MSC) are an alternative to usual conversion structures. In such a structure, the output leg voltage is produced by a specific association of switching cells. The main advantage of MSC is to increase the degree of freedom of the conversion structure and then to contribute to the reduction of the voltage constraints on the switches, such as the reduce of the harmonic distortion rate which lead to obtain a high quality output voltage [?], [?]. Nevertheless, MSC structures have inner capacitors. Each capacitor voltages must have a specific value according to the applied input voltage. This is done according to a suitable control strategy applied. A risk known of such a structure is the capacitor voltage imbalance [?], which should be avoided. As a matter of facts, capacitor voltage must be known at each time. This is possible by the mean of sensor-less strategy, also called observers, instead of the extra sensors which can increase complexities and costs of converters. Due to the converter structure complexity, one drawback of sensor-less techniques is the observability statement [?]. Hence, it is needed to proceed to an observability study before the observer design. The aim is to prove the possibility to estimate the voltage capacitors. For MSC, the observer design can be made with two types of model: the average model and the instantaneous model. In the MSC average model, the non linear behavior of the system is highlighted, so a non linear observer must be used such as the non linear sliding observer presented in [?].

The second model is the instantaneous hybrid model which expresses the dynamic of continuous variable according to the state of discrete variables. Several types of observers based on this model are developed, such as the adaptive linear observer given in [?], [?] and the sliding mode observer presented in [?].

In order to reduce the estimation algorithm complexity, linear observers can be an interesting alternative. In order to avoid non-linearities observers should be designed from the instantaneous model. Among this observers, the linear functional observer (LFO) which is a low order observer is can be used, it allows to estimate a function of the state vector. In particular each capacitor voltage of the MSC can be estimated thanks a state function. Recently, [?] detailed the design of the functional observer for switched discrete system. Furthermore, it is noticed that the study of the functional observer for a multilevel converter (even for a continue switch system) has not been reported despite its utility for such system which present an observability problem caused by a switch behaviour. This paper tackle this problem. An observability study and an appropriate strategy to estimate the MSC voltages are given for an hybrid model of the MSC. Thereafter an observation strategy using the functional observer

is defined allowing to isolate each capacitor voltage and reduce the complexity of the observer design strategy. The procedure to get the minimal order functional observer presented in this paper is based on the work of F. Rotella et al. [?], in which, it is demonstrated that the solution of Sylvester equation is not given by using this direct method. This work provides the ability to set an arbitrary dynamics to this observer to increase its performance. The paper is arranged as follows. In section 2 the hybrid model of the multi-cell series converter is given. Section 3 discusses the problem of the observability of the voltage capacitors. Section 4 is dedicated to the design of the functional observers for this system. Before the conclusion an application to a four-cells converter is provided including simulation results.

II. MODEL OF MULTICELL SERIES INVERTER

The multicell serie converter [?] [?] [?] was introduced in the 90's . The inverter structure of a MSC is illustrated in figure 1. The MSC is a serial connection of p pairs of switches $\{S_j, S'_j\}$. The switches S_j and S'_j are grouped into switching cells

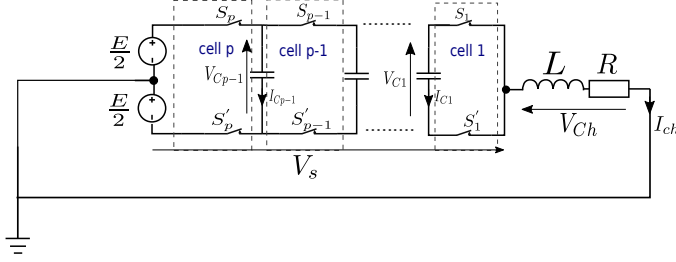


Fig. 1. Multi-cell series inverter.

where each switch S_j is associated to its binary state such as $S_j \in \{0, 1\}$, $S_j = \bar{S}'_j$. $j \in \{1, \dots, p\}$, $j \in \{\mathbb{N}\}$. I_{Ch} and V_{Ch} are respectively the load current and voltage, E is the constant input voltage, L and R are respectively the inductance and resistance of the load and V_s is the leg voltage. The inner voltage floating capacitors are V_{C1}, \dots, V_{Cp-1} . As there is $p - 1$ capacitors inserted, it exists $p - 1$ capacitor voltages and currents such as:

$$V_{Cj} = \frac{jE}{p}, \quad (1)$$

$$I_{Cj} = I_{Ch} \times (S_{(j+1)} - S_j), \quad (2)$$

where j ponderates the input voltage E .

The relationship between the leg voltage V_s and the load voltage V_{Ch} is:

$$V_{Ch} = V_s - \frac{E}{2} = L \frac{dI_{Ch}}{dt} + RI_{Ch}. \quad (3)$$

Then, the load current I_{Ch} is:

$$\dot{I}_{Ch} = \frac{V_s}{L} - \frac{R}{L} I_{Ch} - \frac{E}{2L}. \quad (4)$$

As stated in [?], equations (3) and (4) allow to express the leg voltage V_s as:

$$V_s = ES_p + \sum_{j=1}^{p-1} V_{Cj} (S_j - S_{(j+1)}). \quad (5)$$

Indeed, the new differential equation of the load current is defined by:

$$\begin{aligned} \dot{I}_{Ch} = & -\frac{R}{L} I_{Ch} + \frac{S_p E}{L} - \frac{E}{2L} \\ & - \sum_{j=1}^{p-1} \frac{V_{Cj}}{L} (S_{(j+1)} - S_j). \end{aligned} \quad (6)$$

Subsequently, the dynamic behavior of the voltage capacitor V_{Cj} is expressed as follow:

$$\dot{V}_{Cj} = I_{Ch} \frac{1}{C_j} (S_{(j+1)} - S_j). \quad (7)$$

$d_j = S_{(j+1)} - S_j$ and $d_p = S_p$ will be further introduced in order to simplify the expression. Let us remark that m is the operating mode. It is a discrete state variable of the system and it depends of the input signal d_j (and so S_j).

Let us consider the state vector $x = [V_{C1}, V_{C2}, \dots, V_{Cp-1}, I_{Ch}]^T$. As a matter of facts, the MSC instantaneous model is defined as a state space representation such as:

$$\begin{cases} \dot{x}(t) = A_m x(t) + B_m u(t) \\ y = Cx(t), \end{cases} \quad (8)$$

where:

$$A_m = \begin{bmatrix} 0 & \dots & 0 & \frac{d_1}{c_1} \\ \vdots & \ddots & \vdots & \vdots \\ 0 & \dots & 0 & \frac{d_{(p-1)}}{c_{(p-1)}} \\ -\frac{d_1}{L} & \dots & -\frac{d_{(p-1)}}{L} & -\frac{RC_h}{LC_h} \end{bmatrix}, \quad (9)$$

$$B_m = \begin{bmatrix} 0 & \dots & 0 & \frac{d_p}{LC_h} - \frac{1}{2LC_h} \end{bmatrix}^T, \quad (10)$$

$$C = [0 \quad \dots \quad 0 \quad 1]. \quad (11)$$

In such a structure, $u(t) = E$, and $y(t)$ is the measure available in the MSC which corresponds to the load current.

$A_m(p \times p)$, $B_m(p \times 1)$, $C(1 \times p)$ are a variable matrices which depend on m .

The number of m is defined according to the number of cells, such as $m = 2^p$ for p cells. Subsequently, it is noticed that this model merges continuous variables (I, V_{Cj}) and discrete variables (S_1, S_2, \dots, S_p). This is present an hybrid model of the multicell converter. To simulate the multi-cell converter with the hybrid approach every matrices A_m and B_m have to be computed. As stated in figure 2, the Pulse Width Modulation (PWM) provides the input order allowing to specify the operating mode m . According to m , the system switches to the appropriate matrices A and B .

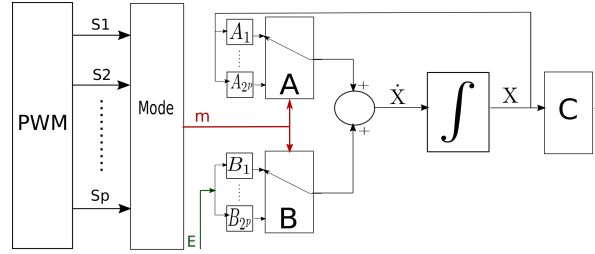


Fig. 2. Simulation model of the multicell series converter.

III. OBSERVABILITY ANALYSIS

A. Hybrid observability

Let us introduce the hybrid observability also known as the $Z(T_N)$ -observability [?]. On the one hand, the hybrid time trajectory denoted T_N is a finite or infinite interval sequence $T_N = \{I_i\}_{i=0,N}$ such as:

- $I_i = [t_{i,0}, t_{i,1}]$, $I_i > 0$ for all $0 \leq i \leq N$,
- For all $0 \leq i \leq N$, $t_{i,1} = t_{i+1,0}$,
- $t_{0,0} = t_{init}$ and $t_{N,1} = t_{end}$.

On the other hand, $\langle T_N \rangle$ is the ordered list of the discrete input d_j associated to the trajectory T_N . It orders the operating mode applied during the interval I_i such as $\langle T_N \rangle = \{\dots m_i \dots\}$.

Let us define the vector $Z(t, x)$ and the projection P_i such as $P_i Z(t, x)$, is a state function of $Z(t, x)$ containing one state variable.

The $Z(T_N)$ -observability consider the system (8) and a fixed hybrid time trajectory [?] T_N and $\langle T_N \rangle$. Suppose that $z = Z(t, x)$ is always continuous under any admissible control input. If there is a sequence of linear projection $\{P_i\}_{i=0,N}$ such as :

- for any $0 \leq i \leq N$, $P_i Z(t, x)$ is Z -observable $t \in I_i$,
- $\text{rank}(\begin{bmatrix} P_0^T & \dots & P_N^T \end{bmatrix}) = \dim(Z) = n_z$,
- $\frac{dP_i Z(t, x)}{dt} = 0$ for $t \in I_i$ where $\{ \bar{P}_i^T, P_i^T \}$ has a full rank in $\mathbb{R}^{\dim(z) \times \dim(z)}$, then z is Z -observable with respect to the hybrid time trajectory T_N and $\langle T_N \rangle$.

The first condition indicates that a projection of the state variable $P_i Z(t, x)$ is observable, at least, on a time interval I_i of an hybrid time trajectory T_N . The second implies that all the state variables must be observable for T_N including I_i . The third condition ensures that the inobservable variable must remain constant during I_i .

B. Application of the hybrid observability to the MSC

Let us consider the converter's model (8), the observable vector $Z(t, x) = [V_{C1}, V_{C2}, \dots, V_{Cp-1}]^T$ and the projection P_i such as:

$$P_i Z(t, x) = \begin{bmatrix} \delta_1 & 0 & \cdots & 0 \\ 0 & \delta_2 & \ddots & \vdots \\ \vdots & \ddots & \ddots & 0 \\ 0 & \cdots & 0 & \delta_{p-1} \end{bmatrix} \begin{bmatrix} V_{C1} \\ V_{C2} \\ \vdots \\ V_{Cp-1} \end{bmatrix}, \quad (12)$$

where for $k = \{1, \dots, p-1\}$, $\delta_k \in \{0, 1\}$. It is noticed that our wish is to observe one capacitor voltage for an interval I_i , then a single δ_k must be equal to 1.

As exemplified by [?], [?] and [?], the application of the hybrid observability yields to the following results.

The PWM strategy generates the control order d_j , $j \in \{1, \dots, p\}$ such as each order is associated to an operating mode m_i during a time interval I_i , $i \in \{1, \dots, N\}$. $T_N = \{I_i\}$ is the hybrid time trajectory and $\langle T_N \rangle = \{\dots m_i \dots\}$.

Using the following equation:

$$\dot{I}_{Ch} = -\frac{R}{L} I_{Ch} + \frac{d_p E}{L} - \frac{E}{2L} - \frac{V_{C1}}{L} d_1 - \dots - \frac{V_{Cp-1}}{L} d_{p-1}, \quad (13)$$

it is noticed that the derivatives of the measured current allows to obtain $p-1$ independent equations that used to compute the projection P_j , such as $V_{Cj} = P_j Z(t, x)$ obtained from the measurement of I_{Ch} .

Consequently $\text{rank}([P_1^T, P_2^T, \dots, P_N^T]) = p-1$.

Effectively in such control sequences d_j , the unobservable voltages are constants ($\dot{V}_{Cj} = 0$), this is verified using equation (14).

$$\dot{V}_{Cj} = I_{Ch} \frac{1}{C_j} d_j. \quad (14)$$

Consequently, the MSC is observable with respect to the hybrid time trajectory T_N and the ordered list $\langle T_N \rangle$.

IV. OBSERVER DESIGN

A. Observation problem statement

According to the previous observability study, each voltage V_{Cj} , $j = \{1, \dots, p-1\}$ is observable according to the current measurement. As the observability is related to the mode m , the capacitor voltages are not observable through the same mode m , so it is not possible to apply a full rank observer on the hybrid model (8). The solution proposed by [?] is to break down the model into non linear sub-models where each one describes the dynamic of one voltage capacitor. Then a full rank observers were applied to the sub-models. Using this proposed solution the complexity of the estimation algorithms was increased. The purpose of our study is to develop a minimal order linear functional observers for the MSC's hybrid model in order to estimate each capacitor voltage. In fact each linear functional observer allows to estimate a linear state function of a given voltage capacitor. This section deals with the direct strategy to design a minimal order functional observer to estimate one voltage capacitor from the measurement of the load current and the knowledge of the control input.

B. Functional observer definition

The functional observer [?] [?] [?] [?] is a low order observer used to estimate a linear function of the state :

$$v(t) = Px(t), \quad (15)$$

where P is $\mathbb{R}^{(f \times n)}$ matrix, n is the order of the system and f is the number of rows of P . For a linear dynamic system, the linear functional observer is expressed as follow:

$$\begin{cases} \dot{z}(t) = Fz(t) + Gu(t) + Hy(t) \\ \omega(t) = Lz(t) + Vy(t). \end{cases} \quad (16)$$

where F, G, H, L and V are a constant matrices.

Let us define q as the observer order and e is the number of measures.

The objective of the study is to provide a minimal single linear observer to estimate the voltage capacitors of the MSC. On the one hand the word *minimal* indicates that the functional observer must have an order lower than $n - e - f$. Effectively, it is possible to distinguish several types of functional observers [?] according to their order . In the other hand the word *single* implies that $f = 1$.

Moreover, in [?], a direct procedure to design this observer is presented. It is demonstrated how to guarantee a minimal q -order observer. As an hybrid system modeled in (8) is considered, an hybrid observer is proposed as:

$$\begin{cases} \dot{z}_i(t) = F_{m,i} z_{m,i}(t) + G_{m,i} u(t) + H_{m,i} y(t) \\ w_i(t) = L_{m,i} z_{m,i}(t) + V_{m,i} y(t), \end{cases} \quad (17)$$

where: m is the discrete state, i is the linear function index, $i \in \{1, \dots, s\}$, s is the number of linear functional to observe and n is the order of the system. This observer is developed to estimate the linear function $v_i(t)$ such as:

$$v_i(t) = P_i x(t), P_i \in \mathbb{R}^{(1 \times n)} \quad (18)$$

$F_{m,i}$, $G_{m,i}$, $H_{m,i}$, $L_{m,i}$ and $V_{m,i}$ are a variable matrices which depend on the operation mode m and the linear projection P_i . The following assumptions [?] [?] [?] have to be verified to ensure that a functional observer exists :

$$G_{m,i} = T_{m,i} B_m, \quad (19)$$

$$T_{m,i} A_m - F_{m,i} T_{m,i} = H_{m,i} C_m, \quad (20)$$

$$P_i = L_{m,i} T_{m,i} + V_{m,i} C_m, \quad (21)$$

where $T_{m,i}$ is defined as $\lim_{t \rightarrow \infty} (z_i(t) - T_{m,i} x(t)) = 0$ where $e = z_i(t) - T_{m,i} x(t)$. Using (17), (19) and (20), the dynamic observation error is finally expressed as follow :

$$\dot{e}_{m,i}(t) = F_{m,i} e_{m,i}(t). \quad (22)$$

The stability of the observer is ensured by the asymptotic convergence of its error. Consequently, $F_{m,i}$ must be Hurwitz matrices. The existence condition of a minimal order observer for a single linear functional where q is the minimal order is such as:

$$\text{rank}(\Sigma_{q,m,i}) = \text{rank} \left(\begin{bmatrix} \Sigma_{q,m,i} \\ P_i A_m^q \end{bmatrix} \right), \quad (23)$$

where:

$$\Sigma_{q,m,i} = \begin{bmatrix} C_m \\ P_i \\ C_m A_m \\ P_i A_m \\ \vdots \\ C_m A_m^{q-1} \\ P_i A_m^{q-1} \\ C_m A_m^q \end{bmatrix}. \quad (24)$$

Consequently, $P_i A_m^q$ must be linearly dependent of the columns $C_m A_m^j$ and $P_i A_m^j$, $j \in \{0, \dots, q\}$. So it exists $\Gamma_{j,m,i}$ and $\Lambda_{j,m,i}$ for $j \in \{0, \dots, q-1\}$ such as:

$$P_i A_m^q = \sum_{j=0}^q \Gamma_{j,m,i} C_m A_m^j + \sum_{j=0}^{q-1} \Lambda_{j,m,i} P_i A_m^j. \quad (25)$$

Let us consider the linear functional v_i and its q -derivative:

$$v_i^{(q)}(t) = P_i A_m^q x(t) + \sum_{j=0}^{q-1} P_i A_m^{q-1-j} B_m u^{(j)}(t). \quad (26)$$

Using the expression (25), $v_i^{(q)}(t)$ can be written as follows:

$$v_i^{(q)}(t) = \sum_{j=0}^q \Gamma_{j,m,i} C_m A_m^j x(t) + \sum_{j=0}^{q-1} \Lambda_{j,m,i} P_i A_m^j x(t) + \sum_{j=0}^{q-1} P_i A_m^j B_m u^{(q-1-j)}(t). \quad (27)$$

In order to remove $x(t)$ from the last expression, it's possible to express $v_i^{(q)}(t)$ as follow:

$$v_i^{(q)}(t) = \sum_{j=0}^q \Gamma_{j,m,i} y^{(j)}(t) + \sum_{j=0}^{q-1} \Lambda_{j,m,i} v^{(j)}(t) + \sum_{j=0}^{q-1} \phi_{j,m,i} u^{(j)}(t), \quad (28)$$

where $k \in \{0, \dots, q-2\}$ and Φ_k is expressed as follow:

$$\phi_k = \begin{bmatrix} P_i A_m^{q-1-k} - \sum_{j=k+1}^q \Gamma_{j,m,i} C_m A_m^{j-k-1} \\ - \sum_{j=k+1}^{q-1} \Lambda_{j,m,i} P_i A_m^{j-k-1} \end{bmatrix} B_m \quad (29)$$

and

$$\phi_{q-1} = [P_i - \Gamma_{q,m,i} C_m] B_m.$$

Thus the observer matrices are presented in expression (30).

$$\begin{aligned} \dot{z}_{m,i}(t) &= \begin{bmatrix} 0 & 0 & \Lambda_{0,m,i} \\ 1 & \ddots & \Lambda_{1,m,i} \\ 0 & \ddots & 0 \\ & & 1 & \Lambda_{q-1,m,i} \end{bmatrix} z(t) + \begin{bmatrix} \phi_{0,m,i} \\ \phi_{1,m,i} \\ \vdots \\ \phi_{q-1,m,i} \end{bmatrix} u(t) \\ &+ \begin{bmatrix} \Gamma_{0,m,i} + \Lambda_{0,m,i} \Gamma_{q,m,i} \\ \Gamma_{1,m,i} + \Lambda_{1,m,i} \Gamma_{q,m,i} \\ \vdots \\ \Gamma_{q-1,m,i} + \Lambda_{q-1,m,i} \Gamma_{q,m,i} \end{bmatrix} y(t) \\ \omega_{m,i}(t) &= [0 \quad \dots \quad 0 \quad 1] z_{m,i}(t) + \Gamma_{q,m,i} y(t). \end{aligned} \quad (30)$$

Note that a rigorous proof of this results for a dynamic system is established in [?]. According to this result it is possible to deduce the previous expression of an hybrid functional observer applied for each operation mode of the MSC. The parameters $\Gamma_{j,m,i}$ and $\Lambda_{j,m,i}$ used to define the observer matrices $F_{m,i}$, $G_{m,i}$, $H_{m,i}$, $L_{m,i}$ and $V_{m,i}$ are deduced. Finally, from expression (25), the observer gains can be obtained as follow:

$$\begin{aligned} P_i A_m \Sigma_{q,m,i}^\dagger &= \\ &[\Gamma_{0,m,i} \quad \Lambda_{0,m,i} \quad \Gamma_{1,m,i} \quad \dots \quad \Lambda_{q-1,m,i} \quad \Gamma_{q,m,i}], \end{aligned} \quad (31)$$

where $\Sigma_{q,m,i}^\dagger$ is the pseudo inverse of $\Sigma_{q,m,i}$.

C. $Z(TN)$ observability applied to the MSC hybrid model

The second condition of the $Z(TN)$ -observability of the MSC states that: $\text{rank}([|P_1|, |P_2|, \dots, |P_N|]) = p-1$ such as if $P_i Z(t, x)$ is observable then ,using expression (12), $|\delta_i| = 1$ and for $k \neq i$, $|\delta_k| = 0$.

To fulfill this condition the PWM control should be able to generate an order control which allow to have the elementary sequences $(1, 0, 0, \dots, 0)$, \dots , $(0, 0, 0, \dots, 1)$, hence the idea of using the following linear functions:

$$\begin{aligned} P_1 &= [1 \quad 0 \quad \dots \quad 0 \quad 0], P_2 = [0 \quad 1 \quad 0 \quad \dots \quad 0], \\ &\dots, P_{p-1} = [0 \quad \dots \quad 0 \quad 1 \quad 0]. \end{aligned} \quad (32)$$

To conclude, it means that $Z(T_N)$ observability allows stating that P_{p-1} projection matrices exists for $V_{C_{p-1}}$ capacitor voltage observers. The design of minimal linear functional observers applied to hybrid system leads that for every P_{p-1} and for every operating mode it exists an observer as stated in (17) that can be expressed. Finally, as the $Z(T_N)$ -observability is demonstrated for the MSC hybrid system in section III-B, a battery of observer designed from the operating modes and per capacitor voltage, will be used for the hybrid trajectory $\{T_N, < T_N >\}$.

The simulation model of the functional observer for MSC is shown in figure 3. The next section is dedicated the design of a minimal functional observer for a four cells MSC.

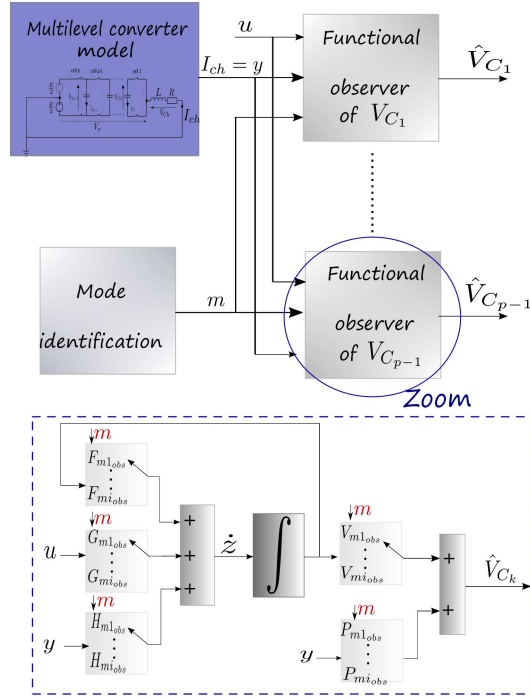


Fig. 3. Simulation model of the functional observer for MSC

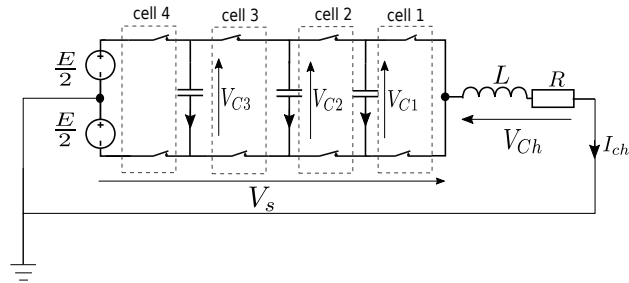


Fig. 4. Four-cells multicell series converter

TABLE I. OPERATIONS MODES FOR P=4

Mode (m)	d_4	d_3	d_2	d_1	V_s
1	0	0	0	0	0
2	0	0	0	-1	$V_s = V_{C1}$
3	0	0	-1	1	$V_s = V_{C2} - V_{C1}$
4	0	0	-1	0	$V_s = V_{C2}$
5	0	-1	1	0	$V_s = V_{C3} - V_{C2}$
6	0	-1	1	-1	$V_s = V_{C3} - V_{C2} + V_{C1}$
7	0	-1	0	1	$V_s = V_{C3} - V_{C1}$
8	0	-1	0	0	$V_s = V_{C3}$
9	1	1	0	0	$V_s = E - V_{C3}$
10	1	1	0	-1	$V_s = E - V_{C3} + V_{C1}$
11	1	1	-1	1	$V_s = E - V_{C3} + V_{C2} - V_{C1}$
12	1	1	-1	0	$V_s = E - V_{C3} + V_{C2}$
13	1	0	1	0	$V_s = E - V_{C2}$
14	1	0	1	-1	$V_s = E - V_{C2} + V_{C1}$
15	1	0	0	1	$V_s = E - V_{C1}$
16	1	0	0	0	E

V. EXAMPLE OF FOUR-CELLS MSC

Let us consider a four-cells MSC presented in figure 4. Sixteen possible modes of operation can be found. The table I summarizes the characteristics of each operation mode of four-cells MSC. The level of the output voltage reached is also indicated. $d_j = S_{(j+1)} - S - j$ and $d_p = S_p$ are defined knowing at each mode the switch state S_j .

It is noticed that $x(t) = [V_{C1}, V_{C2}, V_{C3}, I_{ch}]^T \in \mathbb{R}^4$ is the state vector. Then, the hybrid model of the four-cells MSC is presented as follow:

$$A_m = \begin{bmatrix} 0 & 0 & 0 & \frac{d_1}{C} \\ 0 & 0 & 0 & \frac{d_2}{C} \\ 0 & 0 & 0 & \frac{d_3}{C} \\ -\frac{d_1}{L_{ch}} & -\frac{d_2}{L_{ch}} & -\frac{d_3}{L_{ch}} & -\frac{R_{Ch}}{L_{Ch}} \end{bmatrix}, \quad (33)$$

$$B_m = \begin{bmatrix} 0 & 0 & 0 & \frac{d_p}{L_{Ch}} - \frac{1}{2L_{Ch}} \end{bmatrix},$$

$$C_m = [0 \ 0 \ 0 \ 1].$$

In order to check the accuracy of the proposed model, some simulations are done. The parameters used are given in Table II.

TABLE II. SIMULATION PARAMETERS

E	f_{PWM}	$f_{modulante}$	L_{ch}	R	C_1, C_2, C_3
230 V	1 kHz	50 Hz	1 mH	10Ω	4×10^{-4} F

The simulation results allows to get the load voltage and the load current which are presented respectively in figure 5 and figure 6. A sinus PWM is used with triangle carrier based signals. In this control strategy, there are four triangular carrier waves with

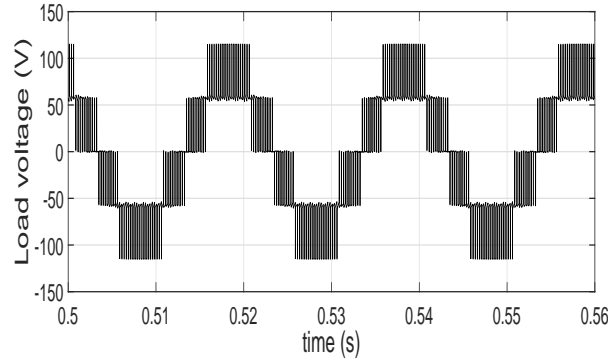


Fig. 5. Load voltage

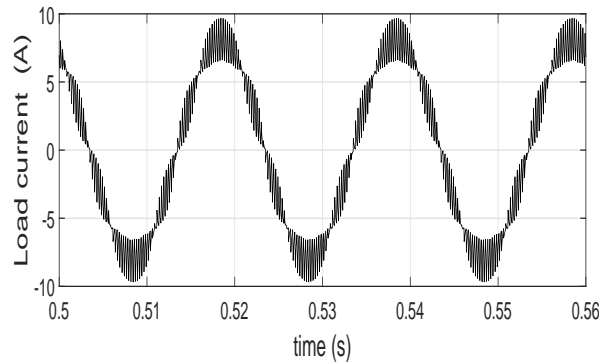


Fig. 6. load current

a phase shift of $\frac{2\pi}{p} = \frac{\pi}{2}$ for each switching cell. The control strategy and the operating mode value are depicted in figure 7 and 8 for a one period $\frac{1}{f} = 0.02s$.

Figures 7 and 8 shows that for a modulating time period, we pass through all the operating mode m .

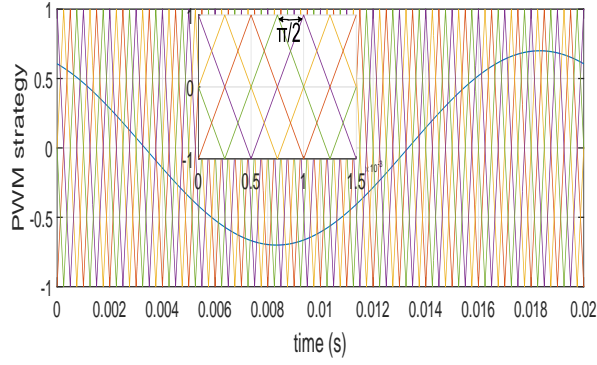


Fig. 7. PWM strategy

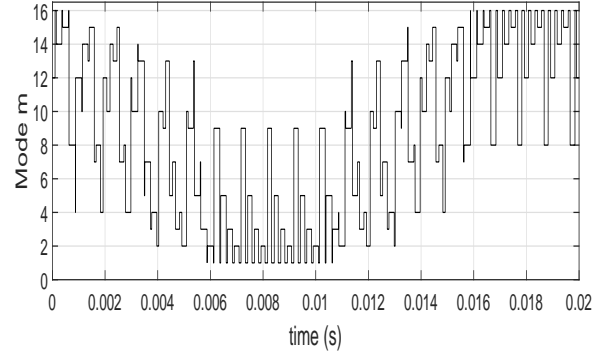


Fig. 8. Switching signal

A. Design of minimal functional observer

The following steps illustrate the procedure to get the minimal functional observers in order to estimate V_{C1} . In this case $i = 1$, so:

$$P_1 = [1 \ 0 \ 0 \ 0]. \quad (34)$$

It's noticed that this procedure is the same that can be used to estimate the other voltages of the MSC.

1) Mode classification estimation approach:

Our proposed observation approach is based on the $Z(TN)$ -observability criterion. In fact, the $Z(TN)$ -observability analysis prove the existence of a time interval I_i associated to an operating mode through it the voltage V_{C1} is observable. During this interval the other voltages (V_{C2} and V_{C3}) are unobservable and keep constant. Also, it exist an operating modes in which V_{C1} is unobservable and constant. For other modes V_{C1} is not able to be estimated but it evolves over time, in this case there an estimation of a sum of voltage V_{Cj} which caused a V_{C1} voltage information gathering. Our proposed observation approach is based on this mode classification. Therefore, the first functional observers are designed for the operating modes that allows the estimation of V_{C1} (modes 2 and 15). The second observers are designed for the modes in which V_{C1} is unobservable but evolves over time (modes 3, 6, 7, 10, 11, 14). Finally, for the last class of modes, we set zero dynamics to the estimated voltage ($\dot{\hat{V}}_{C1} = 0$). This observation approach is presented in figure 9. The first step is to define the minimal order q by using the existence condition (23).

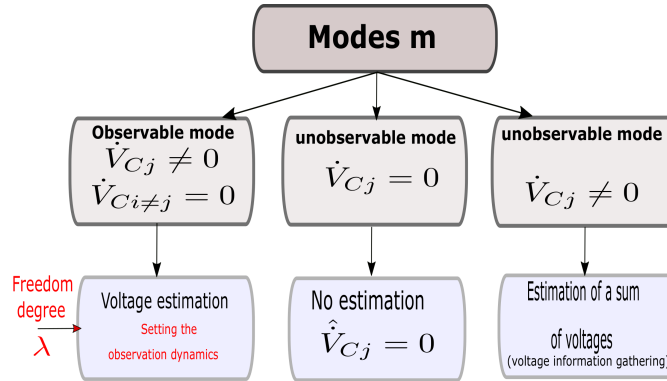


Fig. 9. Observation approach based on mode classification

2) Operation modes 2 and 15 (Observable modes of V_{C1}):

Let us consider the observable modes 2 and 15 of V_{C1} , for $q = 1$:

$$\Sigma_{1,2,1} = \begin{bmatrix} C \\ P_1 \\ CA_2 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 \\ 1000 & 0 & 0 & -10000 \end{bmatrix}, \quad (35)$$

$$\Sigma_{1,15,1} = \begin{bmatrix} C \\ P_1 \\ CA_{15} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 \\ -1000 & 0 & 0 & -10000 \end{bmatrix}, \quad (36)$$

As $P_1A_2 = [0 \ 0 \ 0 \ -2500]$ and $P_1A_{15} = [0 \ 0 \ 0 \ 2500]$,
then

$$\text{rank}(\Sigma_{1,2,1}) = \text{rank}\left(\begin{bmatrix} \Sigma_{1,2,1} \\ P_1A_2 \end{bmatrix}\right) = 2 \quad (37)$$

and

$$\text{rank}(\Sigma_{1,15,1}) = \text{rank}\left(\begin{bmatrix} \Sigma_{1,15,1} \\ P_1A_{15} \end{bmatrix}\right) = 2 \quad (38)$$

Consequently, a minimum observer can be designed to estimate the voltage V_{C1} of the four-cells MSC.

As $\Sigma_{1,m,1}$ is singular and $\dim(\ker(\Sigma_{1,m,1})) = 1$, for $m = \{2, 15\}$, the observer gains can be expressed as follow [?]:

$$\begin{bmatrix} \Gamma_{0,m,1} & \Lambda_{0,m,1} & \Gamma_{1,m,1} \end{bmatrix} = P_1A_m\Sigma_{1,m,1}^\dagger + Z(I_3 - \Sigma_{1,m,1}^\dagger\Sigma_{1,m,1}), \quad (39)$$

where $\Sigma_{1,m,1}^\dagger$ is the pseudo inverse matrix of $\Sigma_{1,m,1}$ and I_3 is the (3×3) identity matrix and Z an arbitrary matrix.

Let us consider the scalar $\lambda_m = Z\phi$ is the freedom degree such as ϕX is the full rank factorization of $(I_3 - \Sigma_{1,m,1}^\dagger\Sigma_{1,m,1})$, so the the gains observer are expressed as follow:

$$\begin{bmatrix} \Gamma_{0,m,1} & \Lambda_{0,m,1} & \Gamma_{1,m,1} \end{bmatrix} = P_1A_m\Sigma_{1,m,1}^\dagger + \lambda_m X. \quad (40)$$

For $m = \{2, 15\}$, λ_m is set such that $F_{m,1}$ is a Hurwitz matrix. For this modes, the freedom degree allows to fix the observer dynamic. For $m = 2$ the gains observer are expressed as follow:

$$\begin{aligned} \Gamma_{0,2,1} &= 24.7525 - 0.995\lambda_2, \\ \Lambda_{0,2,1} &= -247.5248 + 0.0995\lambda_2, \\ \Gamma_{1,2,1} &= -0.2475 - 0.0001\lambda_2. \end{aligned} \quad (41)$$

Based on expressions (30) and (42), $F_{2,1}$ is a Hurwitz matrix if $\lambda_2 < 2487.686$.

For $m = 15$, the gains observer are expressed as follow:

$$\begin{aligned} \Gamma_{0,15,1} &= 24.7525 - 0.995\lambda_{15}, \\ \Lambda_{0,15,1} &= -247.5248 - 0.0995\lambda_{15}, \\ \Gamma_{1,15,1} &= -0.2475 - 0.0001\lambda_{15}. \end{aligned} \quad (42)$$

So, $F_{15,1}$ is a Hurwitz matrix if $\lambda_{15} > -2487.686$.

Based on observer matrices expressions (30), we obtain the observer gains for mode 2 and 15 which are illustrated in Table III. The obtained pole is -98.2 which indicate the stability of the minimal functional observers.

TABLE III. OBSERVER GAINS FOR MODES 2 AND 15

m	λ_m	$F_{m,1}$	$G_{m,1}$	$H_{m,1}$	$L_{m,1}$	$V_{m,1}$
2	1500	-98.2	49.13	-1527	1	0.09
15	-1500	-98.2	49.13	1527	1	-0.09

3) *Case of modes 3, 6, 7, 10, 11 and 14* : Let us consider the modes 3, 6, 7, 10, 11 and 14 in which V_{C1} is unobservable but it is not constant. We test the existence condition for $q = 1$ and for the mode $m = 3$.

$$\Sigma_{1,3,1} = \begin{bmatrix} C \\ P_1 \\ CA_3 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 \\ -1000 & 1000 & 0 & -10000 \end{bmatrix}. \quad (43)$$

As

$$P_1A_3 = [0 \ 0 \ 0 \ 2500], \quad (44)$$

then

$$\text{rank}(\Sigma_{1,3,1}) = \text{rank}\left(\begin{bmatrix} \Sigma_{1,3,1} \\ P_1A_3 \end{bmatrix}\right) = 3. \quad (45)$$

This existence condition is also true for the operating modes 6, 7, 10, 11, 14. Consequently, a minimum observer can be designed for this operation modes of the MSC.

As $\dim(\ker(\Sigma_{1,m,1})) = 0$, for $m = 3, 6, 7, 10, 11, 14$, there is no freedom degree, so the observer gains are expressed as follow:

$$[\Gamma_{0,m,1} \quad \Lambda_{0,m,1} \quad \Gamma_{1,m,1}] = P_1 A_m \Sigma_{1,m,1}^\dagger. \quad (46)$$

Using the gains expression from (46), and based on a the expression (30) of the functional observer, the obtained gains observer values for this modes are presented in table IV. From table III and IV we deduce that these operation modes are not intervene on

TABLE IV. OBSERVER GAINS FOR MODES 3, 6, 7, 10, 11, 14

m	$F_{m,1}$	$G_{m,1}$	$H_{m,1}$	$L_{m,1}$	$V_{m,1}$
3	0	0	2500	1	0
6	0	0	-2500	1	0
7	0	0	2500	1	0
10	0	0	-2500	1	0
11	0	0	2500	1	0
14	0	0	-2500	1	0

observation dynamic of the voltage V_{C1} . In fact, the observation dynamics and the convergence are defined through the modes 2 and 15 in which the output I_{ch} depend only on the voltage V_{C1} thanks to the freedom degree. The same observer design strategy are used for the estimation of the voltage V_{C2} and V_{C3} . The obtained gains observer values are given in the appendix.

B. Simulation results

The simulation results showing the performance of the minimal functional observer for the all voltages capacitor are presented in figures 10, 11, 12,13,14 and 15.

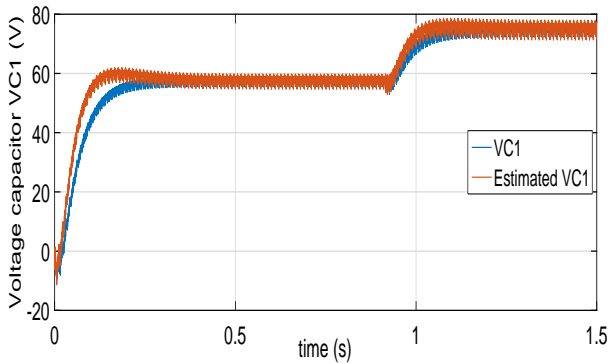


Fig. 10. Estimation of voltage capacitor C1

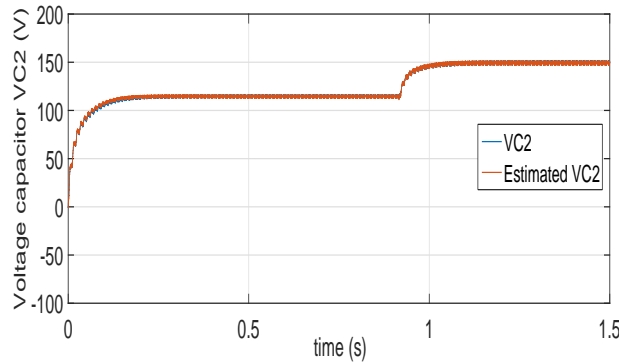


Fig. 11. Estimation of voltage capacitor C2

One can note that this observer keeps good properties in term of asymptotic convergence. In fact for $E = 230V$, the estimation of the voltage capacitors converge to its expected steady state values which are $V_{C1} = 57.5V$, $V_{C2} = 115V$ and $V_{C3} = 172.5V$. In order to test the robustness of this observer, at $t = 0.8s$ the input voltage is set to $300V$. The estimated voltage values respond to the abrupt change of the input signal.

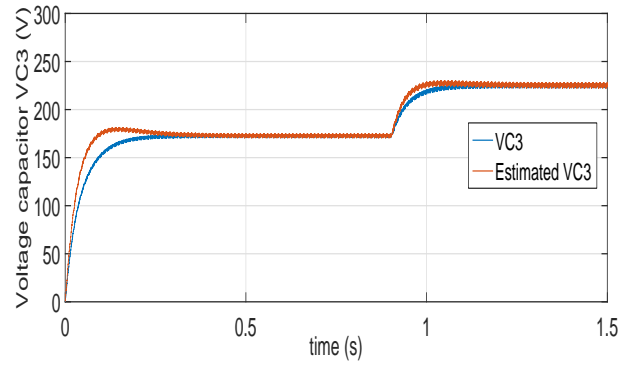


Fig. 12. Estimation of voltage capacitor C3

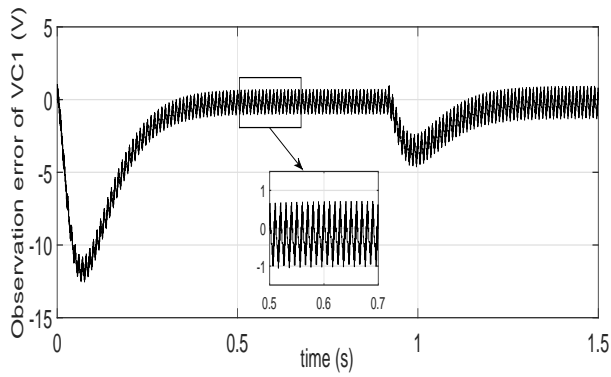


Fig. 13. Observation error of voltage capacitor C1

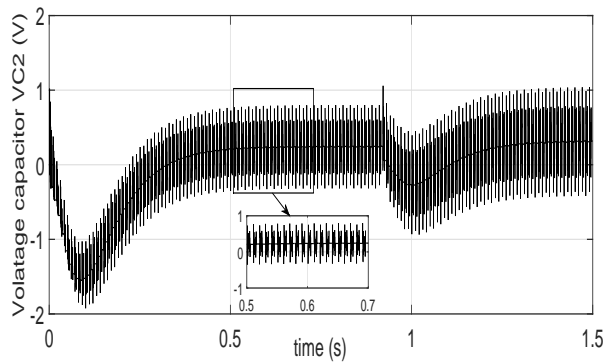


Fig. 14. Observation error of voltage capacitor C2

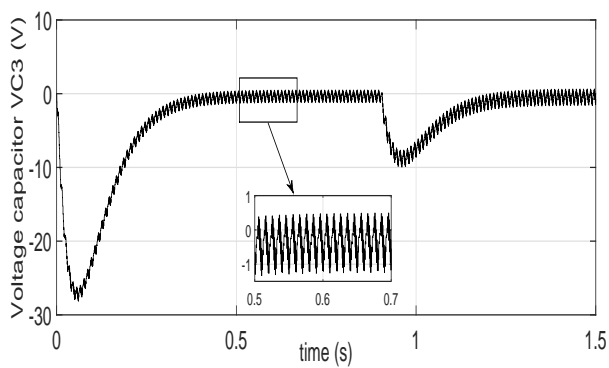


Fig. 15. Observation error of voltage capacitor C3

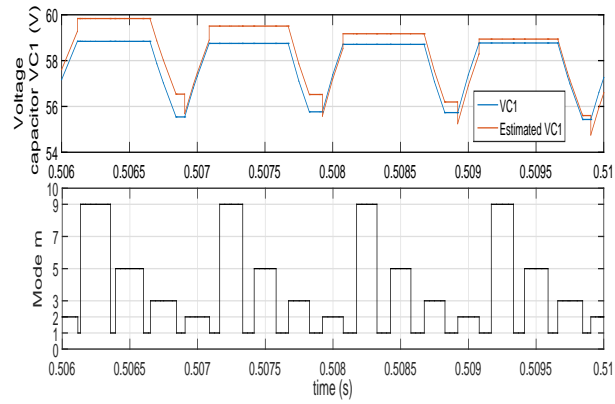


Fig. 16. Zoom on voltage capacitor C1 and its estimation

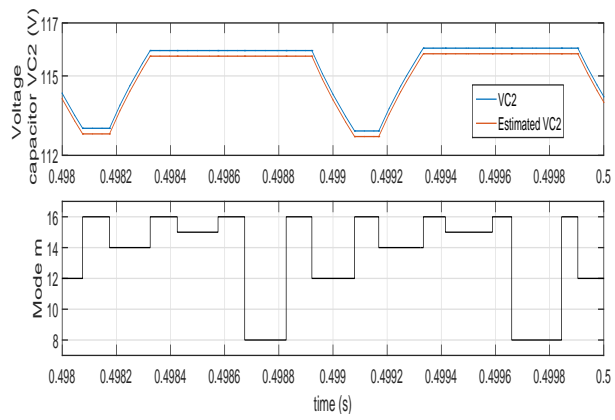


Fig. 17. Zoom on voltage capacitor C2 and its estimation

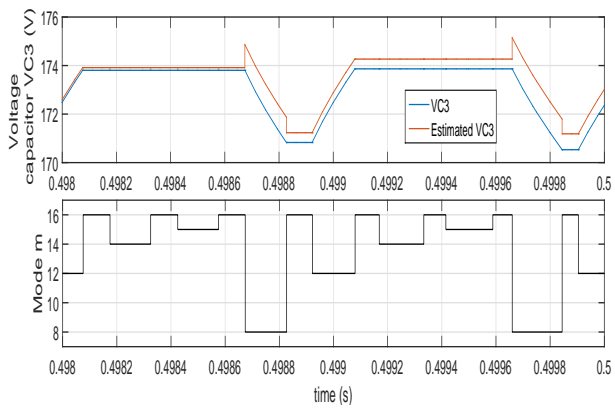


Fig. 18. Zoom on voltage capacitor C3 and its estimation

C. Discussion

As presented in figures 16, 17 and 18, the estimated capacitor voltage V_{Cj} is variable when the system switch to an observable mode, and keep constant when an other voltage is observable to avoid its re-observation. This result prove the respect of $Z(TN)$ -observability criterion.

The estimation approach adopted in this paper are based on the $Z(TN)$ -observability. The observer proposed in this paper is the minimal linear functional observer. On one hand this observer aims at reducing the system order and estimating each voltage separately on the other hand. A functional observer battery is designed for each voltage and for different operating modes. The adopted strategy in the functional observer design for each voltage capacitor is based on the classification of the operating modes which is a way to simplify the observation algorithm. In fact, When the system switch to the modes through it the voltage is not observable and constant, a zero dynamic is set. We deduce that the classification allows to specify the modes which intervene in the observation and neglects the other modes. As a results, the operating modes used for the voltage estimation are reduced from 16 to 8 modes (for four-cells converter). The simulation result prove that only the modes in which the voltage is observable, intervene on the observation dynamic.

This method becomes more complicated as the number of cells increases. In this case a huge number of battery of linear function observers are needed to estimate each voltages of the floating capacitors, there are also a significant number of modes.

VI. CONCLUSION

In this paper the minimal single functional observer is proposed in order to estimate the capacitor voltages of the multicell converter which belongs to the hybrid dynamic system class. The problem of the capacitor voltages estimation is solved. Some simulations results of the four cells converters illustrate the performance and robustness of the proposed observer in the dynamic behaviour. This software sensor is an effective solution to detect the voltage imbalance instead of extra sensors. The deterioration of floating capacitors can be the cause of voltage unbalance. Consequently, our further work involves the application of the observer introduced in this paper in the presence of a capacitor default. Later, a synthesis of a closed-loop control using the estimated voltages in order to compensate this default is feasible .

VII. APPENDIX

A. Estimation of V_{C2}

To estimate the voltage capacitor V_{C2} , the vector P_2 is set such as:

$$P_2 = [0 \quad 1 \quad 0 \quad 0] . \quad (47)$$

The observable mode of V_{C2} are modes 3, 4, 5, 6, 11, 12, 13, 14. The modes liable to the observation dynamic of the voltage V_{C2} are the modes 4 and 13. So, the observer gains are presented in table V. $\lambda_4 = 1500$ and $\lambda_{13} = -1500$.

TABLE V. OBSERVER GAINS FOR MODES 3, 4, 5, 6, 11, 12, 13, 14

m	$F_{m,1}$	$G_{m,1}$	$H_{m,1}$	$L_{m,1}$	$V_{m,1}$
3	0	0	-2500	1	0
4	-98.26	49.13	-1.527	1	0.0983
5	0	0	2500	1	0
6	0	0	2500	1	0
11	0	0	-2500	1	0
12	0	0	-2500	1	0
13	-98.26	49.13	1527	1	-0.0983
14	0	0	2500	1	0

B. Estimation of V_{C3}

To estimate the voltage capacitor V_{C3} , the vector P_3 is set such as:

$$P_3 = [0 \quad 0 \quad 1 \quad 0] . \quad (48)$$

Observable mode of V_{C3} are modes 5, 6,7, 8, 9, 10, 11, 12. The modes liable to the observation dynamic of the voltage V_{C3} are the modes 8 and 9. So, The observer gains are presented in table VI.

$\lambda_8 = 1500$ and $\lambda_9 = -1500$.

TABLE VI. OBSERVER GAINS FOR MODES 5, 6, 7, 8, 9, 10, 11, 12

m	$F_{m,1}$	$G_{m,1}$	$H_{m,1}$	$L_{m,1}$	$V_{m,1}$
5	0	0	-2500	1	0
6	0	0	-2500	1	0
7	0	0	-2500	1	0
8	-98.26	49.13	-1527	1	0.0983
9	-98.26	49.13	1527	1	-0.0983
10	0	0	2500	1	0
11	0	0	2500	1	0
12	0	0	2500	1	0