



**HAL**  
open science

## Efficiency Analysis of German Electricity Distribution Utilities - Non-Parametric and Parametric Tests

Christian Von Hirschhausen, Astrid Cullmann, Andreas Kappeler

► **To cite this version:**

Christian Von Hirschhausen, Astrid Cullmann, Andreas Kappeler. Efficiency Analysis of German Electricity Distribution Utilities - Non-Parametric and Parametric Tests. Applied Economics, 2006, 38 (21), pp.2553-2566. 10.1080/00036840500427650 . hal-00581912

**HAL Id: hal-00581912**

**<https://hal.science/hal-00581912>**

Submitted on 1 Apr 2011

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



**Efficiency Analysis of German Electricity Distribution Utilities  Non-Parametric and Parametric Tests**

Journal:	<i>Applied Economics</i>
Manuscript ID:	APE-05-0102.R1
Journal Selection:	Applied Economics
Date Submitted by the Author:	09-Jul-2005
JEL Code:	C14 - Semiparametric and Nonparametric Methods < C1 - Econometric and Statistical Methods: General < C - Mathematical and Quantitative Methods, L43 - Legal Monopolies and Regulation or Deregulation < L4 - Antitrust Policy < L - Industrial Organization, L51 - Economics of Regulation < L5 - Regulation and Industrial Policy < L - Industrial Organization, L94 - Electric Utilities < L9 - Industry Studies: Transportation and Utilities < L - Industrial Organization
Keywords:	efficiency analysis, econometric methods, electricity distribution, benchmarking, Germany

powered by ScholarOne  
Manuscript Central™

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

For Peer Review

Efficiency Analysis of German Electricity Distribution Utilities –  
Non-Parametric and Parametric Tests

(Running title: Efficiency Analysis of German Electricity)

Paper re-submitted to  
Applied Economics  
July 2005 <sup>1</sup>

ABSTRACT

This paper applies parametric and non-parametric and parametric tests to assess the efficiency of electricity distribution companies in Germany. We address traditional issues in electricity sector benchmarking, such as the role of scale effects and optimal utility size, as well as new evidence specific to the situation in Germany. We use labour, capital, and peak load capacity as inputs, and units sold and the number of customers as output. The data cover 307 (out of 553) German electricity distribution utilities. We apply a data envelopment analysis (DEA) with constant returns to scale (CRS) as the main productivity analysis technique, whereas stochastic frontier analysis (SFA) with distance function is our verification method. The results suggest that returns to scale play but a minor role; only very small utilities have a significant cost advantage. Low customer density is found to affect the efficiency score significantly, in particular in the lower third of all observations. Surprisingly, East German utilities feature a higher average efficiency than their West German counterparts. The correlation tests imply a high coherence of the results.

**Keywords:** Efficiency analysis, econometric methods, electricity distribution, benchmarking, Germany

**JEL Classification:** L51, L43, L94, C14

1  
2  
3  
4 1. INTRODUCTION  
5  
6  
7

8 Efficiency analysis has played a crucial role in defining regulatory policies, mainly  
9 in industries characterized by natural monopolies and/or by public ownership.  
10 Examples are telecommunication (e.g. Uri, 2001), transport (Coelli and Perelman,  
11 1998, 2000), energy (e.g. Jamasb and Pollitt, 2001, 2003), schooling (e.g. Mizala,  
12 Romaguera and Farren, 2002), hospitals (e.g. Steinmann and Zweifel, 2003), and  
13 even museums (e.g. Bishop and Brand (2003) using a stochastic analysis of  
14 museums in South Western England). Efficiency analysis is also increasingly  
15 applied for other sector-specific analysis, such as farming (e.g. Latruffe, et al.,  
16 2004, on crop and livestock farms), banking (e.g. Färe, et al., 2004, and Hauner,  
17 2005), or the cement industry (Tsekouras and Skuras, 2005). In the electricity  
18 sector, efficiency analysis has played a particularly important role in the  
19 liberalization process towards a competitive industry structure and market-  
20 orientated regulation, both in electricity transmission and electricity distribution.  
21 The objective of this paper is to assess the relative efficiency of decision-making  
22 units (here: electricity distribution companies), in order to generate information  
23 for an incentive-oriented regulation, with benchmarking and yardstick  
24 competition.  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48

49 Data envelopment analysis (DEA) and stochastic frontier analysis (SFA) are the  
50 most commonly used methods in the literature on benchmarking and efficiency  
51 analysis in the electricity sector. They have been particularly useful in the  
52 regulatory process in Great Britain, Switzerland, the Nordic States, the  
53 Netherlands, and Austria. Many authors concentrate on scale effects, and the  
54 optimal size and relative efficiency of utilities. Jamasb and Pollitt (2001) give an  
55  
56  
57  
58  
59  
60

1  
2  
3 extensive comparison of international efficiency studies for the electricity sector,  
4 stressing the importance of the proper variable choice. In a subsequent paper,  
5  
6 Jamasb and Pollitt (2003) perform an international benchmarking study of 63  
7  
8 utilities from six European countries comparing several SFA and DEA  
9  
10 specifications. Although they determine a high correlation among the models, the  
11  
12 results for single utilities differ noticeably. Using panel data of 59 Swiss  
13  
14 distribution companies over eight years, Farsi and Filippini (2004) argue that  
15  
16 different methodologies may lead to different results, but that the reasonable out-  
17  
18 of-sample “prediction errors suggest that panel data models can be used as a  
19  
20 prediction instrument in order to narrow the information gap between the regulator  
21  
22 and regulated companies” (p.2). In a similar panel data analysis for six Latin  
23  
24 America countries, Estache, Rossi and Ruzzier (2004) also show that national  
25  
26 regulators can reduce information asymmetry through cross-country efficiency  
27  
28 analysis.

29  
30 Other examples of panel-data approaches are Burns, Davies and Riechmann  
31  
32 (1999) with a dynamic benchmarking analysis for 12 regional electricity  
33  
34 distribution utilities in Great Britain, Hjalmarsson’s (1992) analysis of Swedish  
35  
36 electricity retail distributors, and the productivity study of Norwegian electricity  
37  
38 utilities conducted by Forsund and Kittelsen (1998). Quality is recently explicitly  
39  
40 taken into account and related to benchmarking in a study by Giannakis, et al.  
41  
42 (2004) on the UK electricity distribution utilities.

43  
44 The present paper is the first productivity analysis of German electricity  
45  
46 distributors to date. We address both traditional issues of electricity sector  
47  
48 benchmarking, such as the role of scale effects and optimal utility size, as well as  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 new evidence specific to the situation in Germany. Regarding the latter, we  
4  
5 consider the potential effects of three structural variables: consumer density, grid  
6  
7 composition (cable versus aerial lines), and differences between East and West  
8  
9 German distribution companies. Our empirical section thus follows the structural  
10  
11 criteria set out by the German association agreements (“*Verbändevereinbarung*  
12  
13 *Strom VV II+*”), a predecessor of the new energy law of 2005. The data cover 307  
14  
15 (out of 553) German electricity distribution utilities.<sup>2</sup>  
16  
17  
18  
19

20  
21 Our study is motivated by two factors: first, efficiency analysis in electricity  
22  
23 distribution currently faces serious issues in determining whether there are  
24  
25 significant returns to scale. The question arises whether or not smaller utilities do  
26  
27 have systematically lower efficiency scores than larger ones, implying increasing  
28  
29 returns (“big is beautiful”). Filippini (1998), Filippini, Hrovatin and Zoric (2004),  
30  
31 and a number of other studies suggest significant economies of scale in “small”  
32  
33 electricity distribution systems, e.g. Switzerland and Slovenia. Smaller utilities  
34  
35 could reduce costs by merging and thereby extending their sub-optimal service  
36  
37 territory size. This would suggest that the current, atomized structure of the  
38  
39 German electricity utilities may be subject to structural change as well. Second, in  
40  
41 the wake of liberalization, the German electricity industry is currently undergoing  
42  
43 structural change from local monopolies to regulated competition. Observers  
44  
45 suggest that liberalization will lead to a structural change of the sector, which has  
46  
47 up to now comprised a large number of companies: four in high-voltage  
48  
49 transmission, 56 in regional distribution, and 553 in local electricity distribution.  
50  
51 These numbers contrast sharply with the U.K. system, for instance, which features  
52  
53 only 13 regional electricity companies altogether.  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 The next section briefly describes the institutional context of electricity sector  
4 reform in Germany. Section 3 presents our methodology and data. Results from  
5 the basic model, and from several extended models, estimated by using DEA and  
6 SFA are provided in Section 4; we also carry out a correlation analysis of different  
7 estimations. Section 5 concludes.  
8  
9  
10  
11  
12  
13  
14  
15  
16

## 17 2. ELECTRICITY SECTOR REFORMS IN GERMANY

18  
19  
20 Germany is the largest electricity producer and consumer in the European Union,  
21 and thus plays an important role in the liberalization of the sector launched by the  
22 European Commission in the mid 1990s. However, until recently, Germany has  
23 held the red lantern of the countries resisting European electricity deregulation,  
24 together with France and a few other countries. Subsequently the European Union  
25 has speeded up its attempts towards liberalization and vertical unbundling of the  
26 electricity sector. The so-called “acceleration directive” (2003/54/EC) requires  
27 legal unbundling of electricity distribution companies with more than 100,000  
28 connected customers, i.e. creating legally independent commercial units for  
29 generation, transmission, and distribution. This goes well beyond the former EU  
30 electricity directive 96/92. Given the slow progress of liberalization in most  
31 member states, the acceleration directive also calls for an intensification of  
32 regulatory oversight and the introduction of an explicit regulatory body in each  
33 country, responsible for regulating electricity distribution. A review of the  
34 implementation of the acceleration directive is scheduled for 2007.  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54

55  
56  
57 Consequently, in Germany the electricity industry will now be subordinated to ex-  
58 ante regulation for the first time in its history. Under the former directive 96/92,  
59 Germany had implemented a model of negotiated access and had – to that end –  
60



1  
2  
3 authorized industry self-regulation. The electricity industry and the large  
4  
5 electricity consumers were given freedom to negotiate network access prices and  
6  
7 conditions in so-called association agreements (“Verbändevereinbarungen”).  
8  
9  
10 Given the systemic information advantage of the electricity industry over the  
11  
12 customers, and the hesitation of the German government to establish a sufficient  
13  
14 countervailing power in a regulatory agency, self-regulation did not succeed in  
15  
16 bringing prices down, or in establishing a significant level of competition. In its  
17  
18 annual benchmarking reports, the European Commission has regularly criticized  
19  
20 the German approach of self-regulation of network access charges (e.g. European  
21  
22 Commission, 2003).<sup>3</sup> The new German energy law, in force since July 2005,  
23  
24 therefore set up a regulatory agency and required ex-ante regulation of network  
25  
26 access. As observed in other countries implementing UK-style reforms, e.g. the  
27  
28 Netherlands and Austria, the process of unbundling and the introduction of ex-  
29  
30 ante regulation are likely to lead to conflicts between the incumbent operators,  
31  
32 potential market entrants, and the regulatory authorities. These conflicts revolve  
33  
34 around the absolute level of access tariffs, the relative level, and non-tariff  
35  
36 discrimination.  
37  
38  
39  
40  
41  
42  
43

44  
45 Surprisingly, the literature on that issue in Germany is sparse: Riechmann (2000)  
46  
47 investigates the efficiency of the 53 regional distributors in Germany with DEA  
48  
49 and finds significant cost reduction potentials. Haupt, Kinnunen and Pfaffenberger  
50  
51 (2002) compare network access prices of German electricity distributors and  
52  
53 identify reasons for differences beyond the decision framework of the companies.  
54  
55 They consider structural variables in order to take explicit account of regional  
56  
57 specificities, for example settlement density and consumer structure; but they do  
58  
59  
60

1  
2  
3 not include a comparative efficiency analysis. Growitsch and Wein (2005) try to  
4 explain the high network charges in German electricity distribution, but efficiency  
5 considerations are not included in the analysis. In a study for the German energy  
6 consuming industry, Frontier Economics and Consentec (2003) assess a sample of  
7 27 regional and local electricity distributors, using turnover as input, and peak  
8 load, units sold, and structural parameters as output. Interestingly, a regional  
9 distributor in East Germany was found to be on the efficient frontier, indicating  
10 that the traditional post-reunification bias towards higher costs in East German  
11 distribution may have decreased by now.  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25

### 26 3. METHODOLOGY AND DATA

#### 27 28 29 30 31 3.1. Methodology

32  
33 To measure the relative efficiency of the German distribution utilities we use  
34 traditional data envelopment analysis (DEA) as well as stochastic frontier analysis  
35 (SFA), including the multi-output multi-input version of the distance function,  
36 mainly as a verification method. Our analysis is confined to the measurement of  
37 technical efficiency. DEA is a non-parametric approach determining a piecewise  
38 linear efficiency frontier along the most efficient utilities to derive relative  
39 efficiency measures of all other utilities. The efficiency scores can be obtained  
40 either within a constant returns to scale (CRS) approach or a less restrictive  
41 variable returns to scale (VRS) approach. The VRS approach compares companies  
42 only within similar sample sizes; this approach is appropriate if the utilities are not  
43 free to choose or adapt their size. Therefore we argue that the CRS approach is  
44 more relevant for our analysis. It assumes that companies are flexible to adjust  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

their size to the one optimal firm size at least in the German context. However, we also calculate the VRS model in order to report scale efficiency information, which is delivered by the difference between the CRS and VRS scores.

The determination of the efficiency score of the  $i$ -th firm in a sample of  $N$  firms in the CRS model is equivalent to the following optimization:

$$\begin{aligned} & \min_{\theta, \lambda} \theta \\ & \text{s.t.} \\ & -y_i + Y\lambda \geq 0, \\ & \theta x_i - X\lambda \geq 0, \\ & \lambda \geq 0. \end{aligned}$$

$\theta$  is the efficiency score, and  $\lambda$  a  $N*1$  vector of constants. Assuming that the firms use  $E$  inputs and  $M$  outputs,  $X$  and  $Y$  represent  $E*N$  input and  $M*N$  output matrices, respectively. The input and output column vectors for the  $i$ -th firm are represented by  $x_i$  and  $y_i$ . The constraints ensure that the  $i$ -th firm is compared to a linear combination of firms similar in size. To determine efficiency measures under the VRS assumption a further convexity constraint  $\sum \lambda = 1$  has to be considered. The system is solved once for each firm (for details, see Jamasb and Pollitt, 2003, 1612, and Coelli, et al., 1998, Chapter 6).

Calculations can be done using an input-orientation or an output-orientation. The input-orientation considers the output to be fixed so that the input has to be adjusted in order to maximize efficiency. In the output-orientation, inputs are considered fix and the objective is the maximization of output. Traditionally,

1  
2  
3 efficiency analyses in the electricity sector assume the output fixed in a market  
4  
5  
6 with the legal duty to serve all customers in a predefined service territory. In order  
7  
8  
9 to avoid potential errors of misspecification, we calculated both input- and output  
10  
11 efficiency measures. The two measures provide the same value under CRS and  
12  
13 estimate exactly the same frontier, therefore identify the same set of utilities being  
14  
15  
16 on the efficient frontier; (see, Coelli, 1996). Our VRS results obtained under the  
17  
18  
19 output-orientated approach do not differ significantly in comparison to the input-  
20  
21 orientation.

22  
23 DEA is a relatively uncomplicated approach. The determination of an explicit  
24  
25 production function is not required. However, since DEA is a non-parametric  
26  
27 approach the impact of the respective input factors on the efficiency cannot be  
28  
29 determined. Furthermore, DEA does not account for possible noise in the data and  
30  
31 outliers can have a large effect on the result. We therefore introduce a second  
32  
33 methodology, the stochastic frontier analysis (SFA). SFA delivers a parametric  
34  
35 approach to efficiency benchmarking. The theory of stochastic frontier production  
36  
37 functions was originally proposed by Aigner, Lovell and Schmidt (1977) as well  
38  
39 as Meeusen and van den Broeck (1977). This approach requires the definition of  
40  
41 an explicit production or cost function. Based on the usual OLS regression a  
42  
43 parallel shift of the original production function yields the efficiency frontier. This  
44  
45 is caused by an underlying assumption splitting the error term into a stochastic  
46  
47 residuum (noise) and an inefficiency-term. Usually, stochastic errors are assumed  
48  
49 to be distributed half-normally. Originally the model was specified for cross-  
50  
51 sectional data. Hence, the mathematical expression of the production process is:  
52  
53  
54  
55  
56  
57  
58  
59

$$Y_i = x_i\beta + (v_i - u_i), \quad i = 1, \dots, N \quad (1)$$

1  
2  
3 where  $Y_i$  is output (or the logarithm of output) of the  $i$ -th firm,  
4  
5

6  
7  $x_i$  is a  $k \times 1$  vector of input quantities of the  $i$ -th firm,  
8  
9

10  
11  $\beta$  is a vector of parameters to be estimated,  
12  
13

14  
15  $v_i$  are random variables which are assumed to be iid.  $N(0, \sigma_v^2)$ ,  
16  
17

18 independent of  $u_i$ .  
19  
20

21  
22  $u_i$  are non-negative random variables usually assumed to be half normal  
23 distributed (iid.  $[N(0, \sigma_u^2)]$ ), thereby accounting for individual technical  
24 inefficiency.  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

This original specification has been extended by different assumptions on the distribution of  $u_i$ , such as truncated normal or two-parameter gamma distributions. The further extension of the model to panel data, systems of equations, and time-varying technical efficiencies follows more recent developments in econometrics and productivity analysis.

SFA is more complex than DEA in terms of data requirements and handling, but has the advantage of allowing to deal with multiple-outputs multiple-inputs<sup>4</sup> in the form of a distance function, originally proposed by Shephard (1970). The basic idea is that in the case of a given production possibility frontier, for every producer the distance from the production frontier is a function of the vector of inputs used,  $X$ , and the level of outputs produced,  $Y$ . For the output-oriented model the distance function is defined as:

$$D_o(X, Y) = \min \{ \theta : (Y / \theta) \in P(x) \} \quad (2)$$

where  $D_o(X, Y)$  is the distance from the firm's output  $P(X)$  set to the production frontier.  $D_o(X, Y)$  is non-decreasing, positively linearly homogeneous and convex in  $Y$ , and decreasing in  $X$ .  $\theta$  is the scalar distance by which the output vector can be deflated (Coelli 2002) and can be interpreted as the level of efficiency. The output distance function aims at identifying the largest proportional increase in the observed output vector  $Y$  provided that the expanded vector  $(Y / \theta)$  is still an element of the original output set (Grosskopf et al., 1995). If  $Y$  is located on the outer boundary of the production possibility set then  $D_o(X, Y) = \theta = 1$  and the utility is 100% efficient. On the other hand, values of  $D_o(X, Y) = \theta \leq 1$  indicate inefficient enterprises lying within the efficiency frontier.

The input orientated approach is defined on the input set  $L(Y)$  and considers, by holding the output vector fixed how much the input vector may be proportionally contracted. The input distance function is expressed by:

$$D_i(X, Y) = \max \{ \rho : (X / \rho) \in L(Y) \} \quad (3)$$

$D_i(X, Y)$  is non-decreasing, positively linearly homogeneous and concave in  $X$ , and increasing in  $Y$ .  $\rho$  is the scalar distance by which the input vector can be deflated. If  $D_i(X, Y) = \rho = 1$ ,  $X$  is located on the inner boundary of the input set and the utility is 100% efficient.

The first step is to estimate the distance from the frontier. Therefore both the efficiency frontier as well as the relationship between inputs and outputs has to be

determined. These considerations also include the case of multi-output production functions which can not be estimated with conventional SFA techniques. The most common and appropriated functional form is the translog production function. The translog input distance function in its parametric form with  $M(m=1,2,\dots,M)$  outputs and  $K(k=1,2,\dots,K)$  inputs is specified as (Coelli, 2002)

$$\begin{aligned} \ln(D_i) = & \alpha_0 + \sum_{m=1}^M \gamma_m \ln y_m + \frac{1}{2} \sum_{m=1}^M \sum_{n=1}^M \gamma_{mn} \ln y_m \ln y_n + \sum_{k=1}^K \beta_k \ln x_k \\ & + \frac{1}{2} \sum_{k=1}^K \sum_{l=1}^K \beta_{kl} \ln x_k \ln x_l + \sum_{k=1}^K \sum_{m=1}^M \delta_{km} \ln x_k \ln y_m \end{aligned} \quad (4)$$

In order to maintain the homogeneity and symmetry a number of restrictions need to be imposed. For homogeneity the following restrictions have to be considered:

$$\sum_{k=1}^K \beta_k = 1, \quad \sum_{l=1}^K \beta_{kl} = 0 \quad \text{and} \quad \sum_{k=1}^K \delta_{km} = 0 \quad (5)$$

For symmetry, two other restrictions have to be observed:

$$\gamma_{mn} = \gamma_{nm} \quad \text{and} \quad \beta_{kl} = \beta_{lk} \quad (6)$$

Imposing homogeneity and symmetry restrictions and normalizing equation (4) by dividing it by one of the inputs delivers the estimating form of the input distance function:

$$\begin{aligned} -\ln(x_K) = & \alpha_0 + \sum_{m=1}^M \gamma_m \ln y_m + \frac{1}{2} \sum_{m=1}^M \sum_{n=1}^M \gamma_{mn} \ln y_m \ln y_n + \sum_{k=1}^{K-1} \beta_k \ln \left( \frac{x_k}{x_K} \right) \\ & + \frac{1}{2} \sum_{k=1}^{K-1} \sum_{l=1}^{K-1} \beta_{kl} \ln \left( \frac{x_k}{x_K} \right) \ln \left( \frac{x_l}{x_K} \right) + \sum_{k=1}^{K-1} \sum_{m=1}^M \beta_{km} \ln \left( \frac{x_k}{x_K} \right) \ln y_m - \ln D_i \end{aligned} \quad (7)$$

$\ln D_i$  can be interpreted as error term which reflects the difference between the observed data realizations and the predicted points of the estimated function. Replacing  $\ln D_i$  by a composed error term (the stochastic error  $v_i$  and the technical inefficiency  $u_i$ ) yields the common SFA form. It can be estimated by a stochastic frontier production function defined as  $y = f(x) + v - u$ . For  $I(i=1, \dots, I)$  firms, this econometric specification with  $\ln D_{0i} = v_i - u_i$ , in its normalized form is expressed by:

$$\begin{aligned}
 -\ln(x_{Ki}) &= \alpha_0 + \sum_{m=1}^M \gamma_m \ln y_{mi} + \frac{1}{2} \sum_{m=1}^M \sum_{n=1}^M \gamma_{mn} \ln y_{mi} \ln y_{ni} + \sum_{k=1}^{K-1} \beta_k \ln \left( \frac{x_{ki}}{x_{Ki}} \right) \\
 &+ \frac{1}{2} \sum_{k=1}^{K-1} \sum_{l=1}^{K-1} \beta_{kl} \ln \left( \frac{x_{ki}}{x_{Ki}} \right) \ln \left( \frac{x_{li}}{x_{Ki}} \right) + \sum_{k=1}^{K-1} \sum_{m=1}^M \beta_{km} \ln \left( \frac{x_{ki}}{x_{Ki}} \right) \ln y_{mi} + v_i - u_i
 \end{aligned} \tag{8}$$

As discussed above, a certain distribution for  $u_i$  has to be assumed in order to separate stochastic and inefficiency effects. Most common are the normal distribution,  $u_i \sim N(\mu, \sigma^2)$  and the half-normal distribution truncated at zero,  $u_i \sim N(0, \sigma^2)$ . Further, the inefficiency can also be assumed to be constant over time resulting in  $u_{it} = u_i (\exp\{\eta(T-t)\})$  (Battese and Coelli, 1992).

### 3.2. Choice of Variables and Data

In the literature, a variety of specifications is employed depending on what exactly is being investigated and which variables are being used as inputs and as outputs.<sup>5</sup> The choice of variables for input and output needs to take into account the international experience with electricity distribution benchmarking, and is



1  
2  
3 constrained by data availability. In this respect, Germany has to be ranked among  
4  
5 the least developing countries. The absence of regulation has thus far prevented  
6  
7 the systematic collection of the relevant data. We therefore have to cope with a  
8  
9 data set providing a representative sample for one year only (2001).  
10  
11

12 We estimate a base model, using the traditional input and output variables, and  
13  
14 then add variations to this model. The base models include labour, grid size, and  
15  
16 peak load (as the proxy for transformation capacity) as inputs, and units sold, the  
17  
18 number of customers, and the inverse density index as outputs. In the extended  
19  
20 models, we disaggregate both the consumers (number of industrial and number of  
21  
22 residential customers) and the type of cable (aerial and underground), and we  
23  
24 introduce an additional input variable: the electricity losses by each company. Last  
25  
26 but not least, we compare the performance of utilities in East Germany and in  
27  
28 West Germany to check whether this historical distinction still causes a structural  
29  
30 difference between the two regions. The data specification is as follows:  
31  
32  
33  
34  
35

- 36  
37 - Labour input is estimated by the number of workers.<sup>6</sup> Some of the utilities  
38  
39 have their own generating plants and we only dispose of employment data  
40  
41 covering all workers in the electricity utility. To get an approximation of  
42  
43 workers employed in electricity distribution, we subtract one employee for  
44  
45 each 20 GWh electricity produced (following Auer, 2002, p. 128);  
46  
47  
48 - capital input is approximated by the length of the existing electricity cables.  
49  
50 We differentiate between voltage levels (high, medium and low voltage) by  
51  
52 introducing a cost factor for each type of line.<sup>7</sup> In addition, in one of the  
53  
54 extended models, we distinguish between the cable grid and the aerial grid  
55  
56 (following Auer, 2002, and others); cable is supposed to be more expensive  
57  
58  
59  
60

1  
2  
3 than aerial grid. Thus, we substitute the simple grid size variable of the basic  
4  
5 model by a weighted sum of cable and aerial grid;<sup>8</sup>  
6

- 7  
8 - in one model we also take into account the maximum peak load as a further  
9  
10 cost factor to approximate transformer capacity;  
11  
12 - the amount of electricity distributed to end users (units sold) and the total  
13  
14 number of customers are used as output variables; in an extended model we  
15  
16 use turnover (national revenue) instead of units sold as a further output  
17  
18 variable;<sup>9</sup>  
19  
20 - losses are included as a proxy for the technical quality of the grid or the  
21  
22 service quality of the grid. We consider losses as an input;<sup>10</sup>  
23  
24 - the use of the inverse density index (settled area in kilometres per customers  
25  
26 supplied) in the base model specification is motivated by the argument that  
27  
28 utilities with a dense customer structure have a natural cost advantage over  
29  
30 those with a weak customer density. When taken as an output, the inverse  
31  
32 density index improves the performance of sparsely inhabited distribution  
33  
34 areas;<sup>11</sup>  
35  
36 - in addition, we distinguish between utilities situated in West Germany and  
37  
38 those in East Germany (the former GDR). The latter are expected to display  
39  
40 particularities due to their socialist heritage which may have a significant  
41  
42 effect on their efficiency scores. An example is increasing costs because of the  
43  
44 rough surface a utility has to cope with; another one is the density of a territory  
45  
46 that a utility has to serve. Also, electricity consumption has plummeted  
47  
48 significantly since the end of socialism, and the existing networks may have  
49  
50 been too extensive.  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 The electricity distribution data used in this study include information on 307  
4 German distribution companies in the year 2001 (or, for some variables, previous  
5 years). The data was collected from publicly available sources.<sup>12</sup> We have verified  
6 that the sample is representative: it covers 56% of the total number of utilities, and  
7 60.3% of the electricity sold. For the models 3-7, we have 197 observations.  
8  
9 Summary statistics of the data are presented in Table 1.  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19

20  
21 Insert Table 1  
22  
23  
24  
25

#### 26 4. EMPIRICAL RESULTS

##### 27 28 29 30 4.1 Overview of the Model Runs

31  
32 The presentation of results is divided into two broad sections: in the first section,  
33 the base model is developed, consisting of two inputs (labour, network size) and  
34 three outputs (units sold, no. of customers, inverse density index). Subsequently,  
35 we run variations of the base model, including the use of turnover as a monetary  
36 variable (instead of units sold), a disaggregation of the consumers (industrial and  
37 residential), as well as a disaggregation of the network (into aerial lines and  
38 underground cable). Further, we consider peak load as a proxy for transformer  
39 capacity (for which no data is available). To extend the classical efficiency  
40 measurement approach quality is included: grid quality is approximated by the  
41 sum of losses as a further input variable. Results for East and West Germany will  
42 also be discussed separately. Models 1 and 2 are separately estimated with DEA  
43 (CRS and VRS) and SFA<sup>13</sup>, and the correlations and rank-correlations are  
44 checked. For models 3-7, we limit ourselves to DEA. The limited data availability  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 for firm-specific characteristics leads to a reduced data sample of 195 utilities in  
4  
5  
6 the second approach. Since model 2 is estimated with the full data sample as well  
7  
8 as with the reduced data sample, it serves as reference model to compare results  
9  
10 obtained in the two parts. Table 2 lists the different model specifications in more  
11  
12 detail.  
13  
14  
15  
16  
17

18 Insert Table 2  
19

## 20 21 4.2. Results from the Base Model 22

### 23 24 25 4.2.1. Model 1 26

27 Model 1 considers two inputs (labour and grid size) and two outputs (units sold  
28  
29 and number of customers). DEA delivers the efficiency estimates depicted in  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Figure 1.<sup>14</sup> The average efficiency for model 1 is 63.2%. Twelve utilities are on the efficient frontier. We observe a positive correlation between the size of the utility and its efficiency score: the average efficiency for the 154 largest utilities is 69%, whereas for the smaller half of the sample it is only 57%. In particular, there seems to be a problem with very small utilities: the 25 smallest distribution companies average an efficiency score of only 41.4 %.

If we use the VRS specification of model 1 instead, the efficiency scores rise significantly: 32 of the 307 utilities are on the efficient frontier. This can be explained by the fact that now utilities of similar size are compared with each other and not with the best ones in the sample. With VRS, the average efficiency increases to 68.3%, 5.1% higher than the results under the CRS assumption. For individual utilities, this improvement is significantly higher, in particular for the smaller ones. However, also the largest companies are considered more efficient under the VRS assumption because they are operating in an area of decreasing returns to scale. This may imply that they are too big to be efficient. Further analyses and specifications will show that some of the inefficiencies detected in the base model can be explained by further firm-specific characteristics or structural variables.

Insert Figure 1

#### 4.2.2. Impact of Structural Particularities

In the following analysis we address the first two structural variables that are used in the association agreement's assessment of potential cost drivers: density, and East-West structure. It is reasonable to assume that regional particularities can have a strong impact on the efficiency of distribution utilities, although they are outside their decision framework. As mentioned before an example is increasing costs because of the rough surface a utility has to cope with; another one is the density of a territory that a utility has to serve.

In model 2 we measure the first structural variable, the inverse density index, defined as service territory in kilometres divided by the number of inhabitants of the region.<sup>15</sup> This structural variable increases the efficiency of utilities in sparsely settled regions.<sup>16</sup>

The average productivity for model 2 increases moderately compared to model 1, from 63.2% to 66.7%. Fifteen utilities are on the efficient frontier, three more than under the CRS assumption for model 1. Figure 2 compares the CRS result for model 2, including the inverse density index, with the CRS result from model 1 (without structural variable). It turns out that for the 190 largest utilities, the structural effect is less significant (average efficiency increase of 0.4%), whereas for the smaller ones, density is an important cost driver (average increase of 6.9%); the effect is particularly strong for the 50 smallest utilities,<sup>17</sup> because considered relatively: density, as a cost driver, has a higher impact for smaller utilities

Insert Figure 2

1  
2  
3 If we use the VRS specification of model 2 instead, the efficiency scores rise  
4 significantly. 35 of the 307 utilities are on the efficient frontier, which can again  
5 be explained by the fact that now utilities of similar size are compared with each  
6 other, and not with the best ones in the sample. With VRS, the average efficiency  
7 increases to 69.9%, 3.2% higher than the results under the CRS assumption. For  
8 individual utilities, this improvement is significantly higher, in particular for the  
9 smallest but also the largest ones. Figure 3 shows the difference in efficiency  
10 scores between the VRS and the CRS model. It seems that the optimal utility size,  
11 i.e. the one where the VRS and the CRS efficiency scores converge, is around  
12 utility number 100 in our sample. This corresponds to about 200 GWh sold.  
13 Figure 3 also makes one issue clear: on the one hand smaller utilities could  
14 significantly gain in efficiency by merging; in this area, considerable economies of  
15 scale can be realized. On the other hand also larger utilities could become more  
16 efficient by becoming smaller.<sup>18</sup>

17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
Insert Figure 3

#### 4.2.3. Correlation analysis and verification with SFA

Before we continue the DEA estimations of the extended models we check the robustness of our results with a stochastic frontier analysis (SFA), the input distance approach. The correlation analysis of the results serves as verification of the obtained DEA efficiency measures. For verification with SFA we use a translog input distance function specification. In fact, this is a curved productivity function, similar to DEA-VRS where economies of scales are not considered to be

1  
2  
3 relevant for efficiency. Therefore, it is more appropriate to compare our SFA  
4  
5 results with DEA VRS.  
6

7  
8 Table 3 presents the correlation between the DEA and the SFA approaches for our  
9  
10 first two models. All correlations are above 75% and thus seem to be significant.  
11  
12 We can conclude that the obtained DEA measures can generally be assumed to be  
13  
14 robust and coherent. For the following analyses, we apply the (stricter) constant  
15  
16 returns to scale approach to the sample. This implies that the size of companies is  
17  
18 flexible. Given the recent liberalization of the sector, and the fact that mergers do  
19  
20 occur regularly, this seems to be the more realistic assumption.  
21  
22  
23  
24  
25  
26

27  
28 Insert Table 3  
29  
30  
31  
32

#### 33 34 4.2.4. Analysis of Differences between East and West Germany

35  
36  
37  
38 The model also permits an analysis of structural differences in efficiency between  
39  
40 West and East German distribution utilities.<sup>19</sup> In fact, the association agreement  
41  
42 includes a structural variable “East-West”, implying that East German utilities  
43  
44 have on average higher costs than their West German counterparts. This is  
45  
46 supposedly due to the structural legacy inherited from socialist times, as well as to  
47  
48 the drop in electricity consumption in East Germany after reunification, whereas  
49  
50 network sizes have remained constant. In order to test the East-West hypothesis,  
51  
52 we split up the sample into 259 West German utilities and 48 East German ones.  
53  
54  
55  
56  
57  
58 The results of the East-West comparison are somewhat surprising: East German  
59  
60



1  
2  
3 utilities feature an average efficiency of 77%, against a West German average of  
4  
5  
6 65%.

7  
8 This result may suggest that investment efforts of the last decade have led to an  
9  
10 accelerated modernization process in East Germany, and thus a more efficient use  
11  
12 of resources. Electricity production and distribution can now revert to a  
13  
14 modernized power station park distribution system. The results tend in the same  
15  
16 direction as those of Frontier Economics and Consentec (2003, p. 19), which find  
17  
18 that some East German utilities have some of the highest efficiency scores.  
19  
20  
21

### 22 23 24 4.3 Results from the Extended Model

25  
26 We now estimate the efficiency taking into account a broader set of variables. In  
27  
28 order to keep the results comparable, we estimate our base model with the reduced  
29  
30 data sample of 195 utilities (“model 2b”).  
31  
32  
33

#### 34 35 4.3.1 Peak Load, Turnover and Quality

36  
37 In addition to the traditional inputs, grid line and labour, we consider peak load (as  
38  
39 a proxy for transformer capacity, for which no data is available) to be a separate  
40  
41 cost factor. Model 3 thus contains three input and three output variables. The  
42  
43 efficiency estimates are slightly higher than before, averaging 73%. We find no  
44  
45 structural correlation between the size of a utility and its peak load as a structural  
46  
47 variable affecting efficiency. In the case of lacking cost data, it may therefore  
48  
49 make sense to work with two different variables accounting for capital costs.  
50  
51  
52

53  
54 In model 4, we introduce a monetary variable, turnover, as output measure. The  
55  
56 results are not significantly different from those obtained with model 2: the  
57  
58 average efficiency decreases by about 1% point. This is due only to the drop of the  
59  
60 average efficiency of the 50% largest distribution utilities. The average of the

1  
2  
3 smallest one remains the same. An explanation of this uneven effect of the  
4  
5 turnover variable could be that larger utilities generally have more industrial  
6  
7 customers in relation to household customers. Since industrial customers obtain  
8  
9 lower prices and thus lead to a lower average per unit revenue, this has an adverse  
10  
11 effect on the efficiency score.  
12  
13

14  
15 Model 5 attempts to identify the relation between quality and efficiency. We  
16  
17 define the quality of distribution by the electricity losses that occur during this  
18  
19 process. As could be expected, the average efficiency of all utilities increases  
20  
21 when we introduce this additional input. We do not detect any difference in the  
22  
23 relative change of efficiency scores between the large and small utilities. This  
24  
25 result contradicts the common view that large utilities are in possession of better  
26  
27 grids.  
28  
29  
30  
31  
32

#### 33 4.3.2. Grid Composition and Customer Structure

34  
35 A third structural variable that may have an impact on efficiency scores is the  
36  
37 composition of the grid, i.e. the relation of aerial lines to cable lines. The idea  
38  
39 behind this reasoning is that cable lines are on average more expensive than aerial  
40  
41 lines. However, regional utilities are often not free to choose the most appropriate  
42  
43 grid type. This is particularly true in densely settled areas where national law  
44  
45 prohibits aerial lines. We approach the issue in the following way: to show the real  
46  
47 cost structure of the capital input we substitute in model 6 the simple grid size  
48  
49 variable of the basic model by a weighted sum of cable and aerial grid. Since cable  
50  
51 lines are on average more expensive we define an upwards factor of 1.25 for each  
52  
53 km of cable line, and thereby indirectly consider higher prices for cables. This  
54  
55  
56  
57  
58  
59  
60

1  
2  
3 takes into account the disadvantage of the utilities that are forced to maintain a  
4  
5 high proportion of cable lines.  
6  
7

8 The first noticeable result is that average efficiency remains almost unchanged; it  
9  
10 increases slightly to 67.0% compared to the 66% in the original specification  
11  
12 (model 2b). The modest change in efficiency is not surprising: some utilities use a  
13  
14 grid with a higher proportion of cable lines, others with more aerial lines. These  
15  
16 two tendencies compensate each other while the average productivity remains  
17  
18 almost the same. The efficiency of single utilities, in contrast, changes more  
19  
20 significantly: utilities with a higher share of cables benefit from this  
21  
22 transformation. All in all, the grid composition does not add much to the  
23  
24 interpretation of results, a finding also suggested by Frontier Economics and  
25  
26 Consentec (2003, p. vii) who doubt that grid composition is a significant cost  
27  
28 driver.  
29  
30  
31  
32  
33

34 In addition, we now consider the structure of customers. We distinguish between  
35  
36 industrial and households customers taking into account the difference in the price  
37  
38 structure of the end user prices. Figure 4 shows that the higher is the share of  
39  
40 industrial customers to total customers, the lower is the efficiency increase from  
41  
42 model 2b to 7. In model 4 we already noticed the same result: that an increase of  
43  
44 the share of industrial customers represents a disadvantage for the utilities in terms  
45  
46 of efficiency.  
47  
48  
49  
50  
51  
52  
53

54 Insert Figure 4  
55  
56  
57  
58

### 59 4.3.3 Characteristics of most inefficient utilities 60

1  
2  
3 In order to detect some regularities of inefficiency we now give a short summary  
4 of technical characteristics for the most inefficient firms. For this purpose we  
5 consider the extended models 2b to 7 and sorted out first the 34 most inefficient  
6 firms across all models. In a second step we compared these technical indicators  
7 (inputs and outputs) of the less efficient utilities with those of the more efficient  
8 ones (see Table 4). Within the 34 most inefficient utilities, only one is located in  
9 East Germany, which tends to confirm the result that West German utilities tend  
10 to be less efficient when compared to their East German counterparts. Notice that  
11 all inefficient utilities have proportionally a higher share of network length with  
12 respect to their number of customers.<sup>20</sup> In a second step we check if there are any  
13 regularities between inefficiency and the amount of electricity sold for each  
14 customer. Relative to the firm size, there seems to no such correlation. Further we  
15 note that inefficiency is related to the electricity sold per employee. Most of the  
16 inefficient firms provide a relative low share of electricity sold and employees.  
17 Across all firms we find low revenue per km network length and a share of  
18 network length per MWh electricity sold.  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44

45 Insert Table 4  
46  
47  
48  
49

#### 50 4.3.4 Correlation analysis of DEA models

51 In this section we again check the robustness of our results by conducting a  
52 correlation analysis for the respective model specifications. Table 5 shows the  
53 correlation analysis for models 2b to 7. Overall, the correlation among the models  
54 is high. All are above 79%. Thus we can conclude that the obtained DEA  
55 efficiency measures can generally be assumed to be robust.  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Insert Table 5

## 5. CONCLUSIONS

This paper has extended the literature on efficiency analysis to the electricity distribution sector in Germany. In addition to conventional DEA analysis, we have performed SFA distance function estimations, and find relatively high correlations between the two methods. We have addressed the general issue of optimal utility size and specific issues related to the "Balkanization", i.e. the atomisation of the German electricity distribution industry. The results suggest that returns to scale play only a minor role: only very small utilities have a significant cost disadvantage. Low customer density is found to affect the efficiency score significantly in the lower third of the sample. The grid composition does not produce systematic effects. Surprisingly, East German utilities show a higher average efficiency than their West German counterparts. Peak load as a structural input variable does not seem to be an important determinant of efficiency, when compared to the base model without peak load. Utilities with a high share of industrial customers seem to suffer a disadvantage by the efficiency analysis.

Further research should focus on using cost data for the inputs to make comparison of allocative efficiency possible. Additional analysis of quality and its relation with efficiency seems to be the most urgent policy relevant question, but it would require a substantial effort in data collection and treatment.

## 6. REFERENCES

- Auer, H. (2002) Benchmarking und Regulierung elektrischer Netze in Liberalisierten Strommärkten: Grundlagen, internationale Erfahrungen und Anwendung auf Österreich, Energy Economics Group, Technical University Wien, Wien.
- Battese, G.E. and T.J. Coelli (1992) Frontier Production Function, technical efficiency and panel data: with application to Paddy Farmers in India, *Journal of Productivity Analysis*, 3 , 153-169.
- Bishop P. and S. Brand (2003) The Efficiency of Museums: a Stochastic Frontier Production Function Approach, *Applied Economics*, 35/17, 1853-1858.
- Brunekreeft, G. (2003) *Regulation and Competition Policy in the Electricity Market - Economic Analysis and German Experience*, Nomos, Baden-Baden.
- Brunekreeft, G. (2005) The electricity market in Germany: RegTP or REGTP? forthcoming in *Energy Journal*.
- Burns, P., J. Davies and C. Riechmann (1999) Benchmarking von Netzkosten - Data Envelopment Analyse am Beispiel der Stromverteiler in Großbritannien, *Zeitschrift für Energiewirtschaft*, 99/4, 285-301.
- Burns, P. and T. Weyman-Jones (1996) Cost Functions and Cost Efficiency in Electricity Distribution: A Stochastic Frontier Approach, *Bulletin of Economics Research*, 48/1, 41-64.
- CEPA (2003) Background to Work on Assessing Efficiency for the 2005 Distribution Price Control Review, Scoping Study - Final Report, prepared for Ofgem.

- 1  
2  
3 Coelli, T. (2002): On the Econometric Estimation of the Distance Function  
4  
5 Representation of a Production Technology, Draft Version, University of  
6  
7 New England.  
8  
9
- 10 Coelli, T. (1996): A Guide to Frontier Version 4.1: A Computer Programm for  
11  
12 Stochastic Frontier Production and Cost Function Estimation, CEPA Working  
13  
14 Paper, University of New England, Armidale, Australia.  
15  
16
- 17 Coelli, T. and S. Perelman (1998): A comparison of Parametric and Non-  
18  
19 parametric Distance Functions: With Application to European Railways,  
20  
21 *European Journal of Operations Research*, 117, 326-339.  
22  
23
- 24 Coelli, T. and S. Perelman (2000): Technical Efficiency of European Railways: a  
25  
26 Distance Function Approach, *Applied Economics*, 32/15, 1967-1976.  
27  
28
- 29 Coelli, T., D.S. Prasada Rao and G. E. Battese (1998) *An Introduction to*  
30  
31 *Efficiency and Productivity Analysis*, Bostron/Dordrecht/London, Kluwer  
32  
33 Academic Publishers.  
34  
35
- 36 Estache, A., M. A. Rossi and C. A. Ruzzier (2004) The Case for International  
37  
38 Coordination of Electricity Regulation: Evidence from the Measurement of  
39  
40 Efficiency in South America, *Journal of Regulatory Economics*, 25/3, 271-  
41  
42 295.  
43  
44
- 45 European Commission (2003): Second Benchmarking Report on the  
46  
47 Implementation of the Internal Electricity and Gas Market. Update Brussels,  
48  
49 Commission Staff Working Paper, SEC (2003) 448 (April 7).  
50  
51
- 52 Färe, Rolf, Shawna Grosskopf, and William L. Weber (2004) The Effect of Risk-  
53  
54 Based Capital Requirements on Profit Efficiency in Banking, *Applied*  
55  
56 *Economics*, 36/15, 1731-1743.  
57  
58  
59  
60

- 1  
2  
3 Farsi, M. and M. Filippini (forthcoming): Regulation and Measuring Cost  
4 Efficiency with Panel Data Models: Application to Electricity Distribution  
5 Utilities, *Review of Industrial Organization*.  
6  
7  
8  
9  
10 Filippini, M. (1998) Are Municipal Electricity Distribution Utilities Natural  
11 Monopolies? *Annals of Public and Cooperative Economics*, 69/2, 157-174.  
12  
13  
14 Filippini, M., N. Hrovatin and J. Zoric (2004): Regulation of the Slovenian  
15 Electricity Distribution Companies, *Energy Policy*, 32, 335-344.  
16  
17  
18 Filippini, M. and J. Wild (2001) Regional Differences in Electricity Distribution  
19 Costs and their Consequences for Yardstick Regulation of Access Prices,  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60
- Frontier Economics and Consentec (2003) Netzpreisaufsicht in der Praxis, Final Report to VIK and BDI, London.
- Giannakis, D., T. Jamasb and M. Pollitt (2003) Benchmarking and Incentive Regulation of Quality of Service: An Application to the UK Electricity Distribution Utilities. Cambridge, CMI Working Paper No. 35.
- Grosskopf, S., D. Margaritis and V. Valdmanis (1995) Estimating Output Substitutability of Hospital Services: A Distance Function Approach, *European Journal of Operational Research*, 80(3), 575-587.
- Growitsch, C. and T. Wein (2005) Network Access Charges, Vertical Integration, and Property Rights Structure – Experiences from the German Electricity Market, *Energy Economics*, 27(2), 257-278.



- 1  
2  
3 Hauner, D. (2005) Explaining Efficiency Differences Among Large German and  
4  
5 Austrian Banks, *Applied Economics*, 37/9, 969-980.  
6  
7  
8 Haupt, U., K. Kinnunen and W. Pfaffenberger (2002) Anwendung der  
9  
10 Vergleichsmarktanalyse auf die Netzentgelte in der Stromwirtschaft, Bremer  
11  
12 Energie Institut, Bremen, Expertise for EnBW AG.  
13  
14  
15 Hjalmarsson, L. and A. Veiderpass (1992) Productivity in Swedish Electricity  
16  
17 Retail Distribution, *Scandinavian Journal of Economics*, 94, 193-205.  
18  
19  
20 Jamasb, T. and M. Pollitt (2001) Benchmarking and Regulation : International  
21  
22 Electricity Experience, *Utilities Policy*, 9, 107-130.  
23  
24  
25 Jamasb, T. and M. Pollitt (2003) International Benchmarking and Yardstick  
26  
27 Regulation: An Application to European Electricity Distribution Utilities,  
28  
29 *Energy Policy*, 31, 1609-1622.  
30  
31  
32 Kumkar, L. (2002) The European Electricity Market: Centralization of Regulation  
33  
34 of Competition between Regulatory Approaches?, *Kieler*  
35  
36 *Diskussionsbeiträge*, 387.  
37  
38  
39 Latruffe, Laure, Kelvin Balcome, Sophia Davidova, and Katarzyna Zawalinska  
40  
41 (2004) Determinants of Technical Efficiency of Crop and Livestock Farms in  
42  
43 Poland, *Applied Economics*, 36/12, 1255-1263.  
44  
45  
46 Mizala A., P. Romaguera and D. Farren (2002) The Technical Efficiency of  
47  
48 Schools in Chile, *Applied Economics*, 34/12, 1533-1522.  
49  
50  
51 Müller, C. and W. Wienken (2004) Degree of Market Openness of the German  
52  
53 Electricity Supply Industry, *Utilities Policy*, 12(3), 283-290.  
54  
55  
56 Pollitt, M. (1995) *Ownership and Performance in Electric Utilities: The*  
57  
58 *International Evidence on Privatization and Efficiency*, Oxford, Oxford  
59  
60 University Press.

- 1  
2  
3 Riechmann, C. (2000) Kostensenkungsbedarf bei Deutschen Stromverteilern,  
4  
5 *Wirtschaftswelt Energie*, 55, 6-8.  
6  
7  
8 Steinmann L. and Zweifel (2003) On the (In)efficiency of Swiss Hospitals,  
9  
10 *Applied Economics*, 35/3, 361-370.  
11  
12  
13 Tsekouras, K.D. and D. Skuras (2005) Productive Efficiency and Exports: an  
14  
15 Examination of Alternative Hypotheses for the Greek Cement Industry,  
16  
17 *Applied Economics*, 37/3, 279-291.  
18  
19  
20 Uri, N. D. (2001) Technical Efficiency, Allocative Efficiency, and the  
21  
22 Implementation of a Price Cap Plan in Telecommunications in the United  
23  
24 States, *Journal of Applied Economics*, 4(1), 163-186.  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

---

<sup>1</sup> This paper presents the results of a research project on the European electricity industry restructuring that was partly funded by the 6<sup>th</sup> Framework Program of the European Union. We thank Nicole Adler, Gert Brunekreeft, Jean-Michel Glachant, Manfred Horn, Karsten Neuhoff, Konstantin Staschus, Beatriz Tovar de la Fe, and the participants of the conference of the European Association for Research in Industrial Economics (Berlin, September 2004), the 6<sup>th</sup> European Conference of the International Association for Energy Economics (IAEE, September 2004, Zurich), and the 3<sup>rd</sup> Conference on Applied Infrastructure Research (October 2004, Berlin) for useful suggestions and comments. The usual disclaimer applies.

<sup>2</sup> In a previous (discussion paper) version of this study, we used a sample of 380 utilities. The reduction of the sample size was due to the inclusion of the inverse density index, and the exclusion of evident outliers with doubtful data.

<sup>3</sup> See Brunekreeft (2003, 2005) for a detailed account of the regulatory context in German electricity.

<sup>4</sup> See Coelli and Perelman (2000). They measure the technical efficiency of European railways by means of a distance function approach and illustrate its usefulness in the analysis of production in multi-output industries

<sup>5</sup> For example, most studies consider the grid size as an input to approximate the capital costs whereas other studies cited by Jamasb and Pollitt (2001) specify the total length of line as output variable to approximate the complexity of the grid structure. Likewise, the transformer capacity is found to be an input in 11 of the 20 studies analysed, whereas two of the studies chose it as an output.

<sup>6</sup> We are aware of the criticism of this choice of variable due to the potentially distorting effect of outsourcing: an utility can improve its efficiency simply by switching from in-house production to outsourcing.

<sup>7</sup> Following standard practice used by the German network association (VDN): factor 5 for high voltage, 1.6 for medium voltage, and 1 for low voltage cables.

<sup>8</sup> The share of cable lines of total lines is one of the structural variables in the German association agreements.

<sup>9</sup> Due to data limitations, we cannot differentiate between operating costs (OPEX) and capital costs (CAPEX). For curiosity reasons, we have also run a model specification using turnover as the only input. If one assumes identical profitability among the distribution companies, then turnover can be used as a proxy for total costs (TOTEX).

<sup>10</sup> Alternatively, other studies use the inverse of the losses as an output.

<sup>11</sup> Density is also one of the structural variables defined in the German association agreements.

<sup>12</sup> The sources of the data are the following:

Verlags- und Wirtschaftsgesellschaft der Elektrizitätswerke m.b.H. – VWEW:

-, „Jahresdaten der Stromversorger 2001“; VWEW Energieverlag GmbH, Frankfurt am Main, Heidelberg. (2002) for number of customers, units sold, number of employees and grid data.

-VDEW-Statistik 1996/1997 Leistung und Arbeit; VWEW-Verlag, Frankfurt am Main; (1997/98) for inverse density index and peak load.

Some data were also discovered by internet research on the utilities' homepages.

<sup>13</sup> DEA was conducted using the Computer program DEAP Version 2.1; for SFA, we used the software package FRONTIER Version 4.1. Both were written by T. Coelli.

<sup>14</sup> In Figure 1 as well as in all subsequent figures, the utilities are ordered by units sold and, thereby, by size. Thus, utility no. 1 is the largest in size, and utility no. 307 the smallest.

<sup>15</sup> The inverse density index may also pick up some of the topographical particularities, since regions with a rough topography tend to have a lower density.

<sup>16</sup> DEA considers this effect under the present specification as an increase in output that will increase the estimated efficiency of utilities in sparsely settled areas. Companies with a higher inverse density index and thereby a territory with few customers per square kilometer will increase their efficiency.

<sup>17</sup> The extreme case is utility no. 297, which increases its efficiency score by 66.3 percentage points.

<sup>18</sup> The nature of the scale inefficiencies (due to increasing or decreasing returns to scale) can directly be determined in DEAP Version 2.1 by running an additional

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

---

DEA problem with non-increasing returns to scale (NIRS) imposed; (for more details see Coelli 1998, p. 151). The empirical results indicate that large utilities are operating in an area of decreasing returns to scale, whereas the smaller utilities of our sample are operating in an area of increasing returns to scale. However, to make a definitive statement about the optimal utility size for the German electricity distribution sector, a more detailed analysis would be required.

<sup>19</sup> In our analysis we cannot incorporate a “modernisation” measure. This is due to the fact that because of limited data availability we apply a static model. Only with panel data we would be able to provide measures of technical change by means of dynamic DEA and SFA models.

<sup>20</sup> The ratio of network length and number of customers varies around 0.6. The more efficient firms show a significantly lower ratio. Only some very small more efficient utilities have a higher quotient. But this is due to the fact that they can compensate the high utilization of the input factor capital with a very low utilization of labour.

Table 1: Sample Summary Statistics

<b>Variable</b>	<b>Obs.</b>	<b>Mean</b>	<b>Std. Dev.</b>	<b>Min</b>	<b>Max</b>
<b>Units sold (MWh)</b>	307	346306.3	1182148	5675	1420000000
<b>No. of customers</b>	307	38494.9	103225,8	7	1060000
<b>Grid size (km)</b>	307	1190.7	3328,4	20,60	38899
<b>Labour</b>	307	100.6	291,1	2	3077
<b>Inv. Density Index</b>	307	0.0027	0,0034	0,00022	0,028
<b>Peak load (kW)</b>	195	78265.6	2191046	1363	2041000
<b>Turnover (mn.EUR)</b>	195	49595.1	1806072	597	2182300
<b>Losses (MWh)</b>	195	21690.9	1065133	53	1340262
<b>Aerial Line (km)</b>	195	213.5	5807	1	5529
<b>Cable Line (km)</b>	195	1189.9	26047	12,4	192234
<b>Non res. Customers</b>	195	45197.8	1118686	60	909000
<b>Res. Customers</b>	195	4639.5	137061	2	151000

Table 2: Model Specification for the Analysis

	Labour	Grid Size	Losses	Peak Load	Units Sold	Turnover	No. of Customers	Inverse Density I.
Model 1	I	I			O		O	
Model 2	I	I			O		O	O
Model 2, VRS	I	I			O		O	O
Model 2, West/East	I	I			O		O	O
Model 3	I	I		I	O		O	O
Model 2b	I	I					O	O
Model 4	I	I				O	O	O
Model 5	I	I	I		O		O	O
Model 6, Grid disaggregated	I	I			O		O	O
Model 7, Cust. disaggregated	I	I			O		O	O

Table 3: Correlation Analysis for Models 1 to 2, Sample Size 307

Samle Utilities	DEA – VRS Model 1	DEA – VRS Model 2	SFA – DF Model 1	SFA – DF Model 2
DEA – VRS Model 1	1.00	0.97	0.81	0.74
DEA – VRS Model 2		1.00	0.77	0.76
SFA – DF Model 1			1.00	0.89
SFA – DF Model 2				1.00



Table 4: Efficiency Differences between Large and Small Utilities

Model DEA	Note	Average	First 50% of Utilities	Last 50% of Utilities
DEA 1	307	0.63	0.69	0.57
DEA 2	307, Inverse Density Index	0.67	0.70	0.64
DEA 2, VRS	307, Inverse Density Index	0.70	0.73	0.67
DEA 2b	195, Inverse Density Index	0.66	0.67	0.64
DEA 3	195, Peak load	0.73	0.74	0.72
DEA 4	195, Turnover	0.65	0.66	0.64
DEA 5	195, Losses	0.71	0.71	0.71
DEA 6	195, Grid Composition	0.67	0.68	0.65
DEA 7	195, Customer structure	0.69	0.71	0.68

Table 5: Correlation Analysis between DEA Models from Section 2 (Reduced Data Sample)

	DEA – Model 2b CRS	DEA – Model 3 CRS	DEA – Model 4 CRS	DEA – Model 5 CRS	DEA – Model 6 CRS	DEA – Model 7 CRS
DEA – Model 2b CRS	1.00	0.93	0.90	0.90	1.00	0.98
DEA – Model 3 CRS		1.00	0.82	0.86	0.93	0.93
DEA – Model 4 CRS			1.00	0.79	0.90	0.89
DEA – Model 5 CRS				1.00	0.90	0.88
DEA – Model 6 CRS					1.00	0.97
DEA – Model 7 CRS						1.00

Figure1: DEA Analysis, Model 1 with CRS


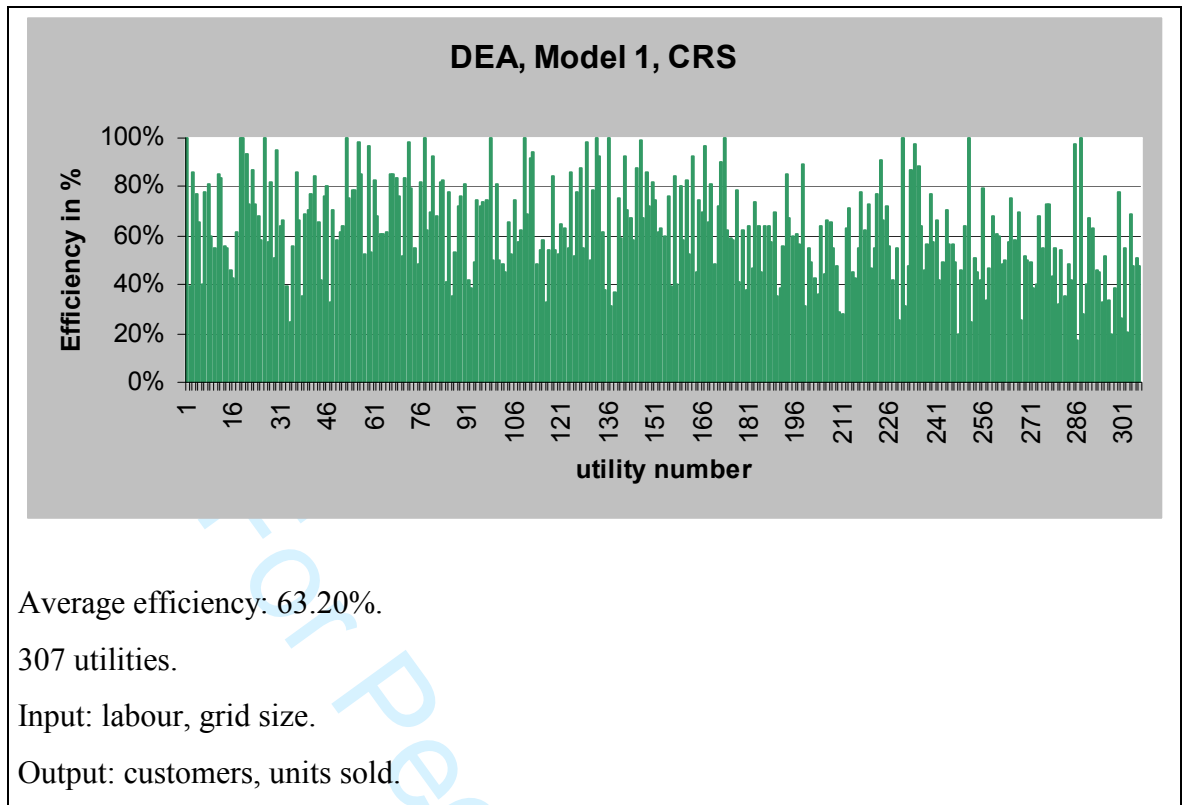


Figure 2: Differences for each Utility between Measures of Model 2 and Model 1

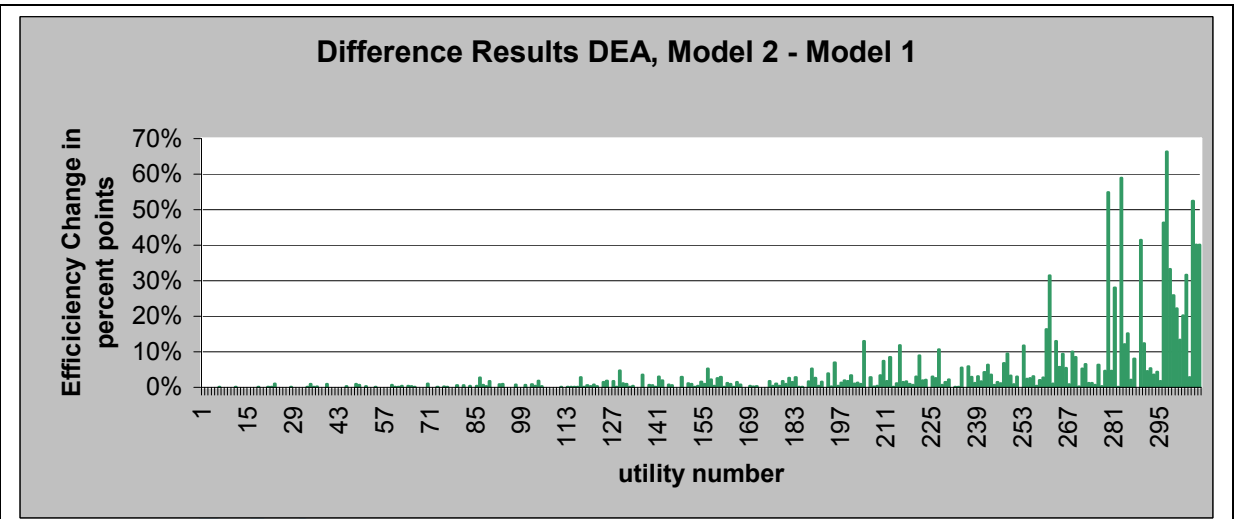


307 utilities.

Input: labour, grid size.


Output: customers, units sold, inverse density index (model2)

Figure 3: Difference Results DEA, Model 2, VRS-CRS

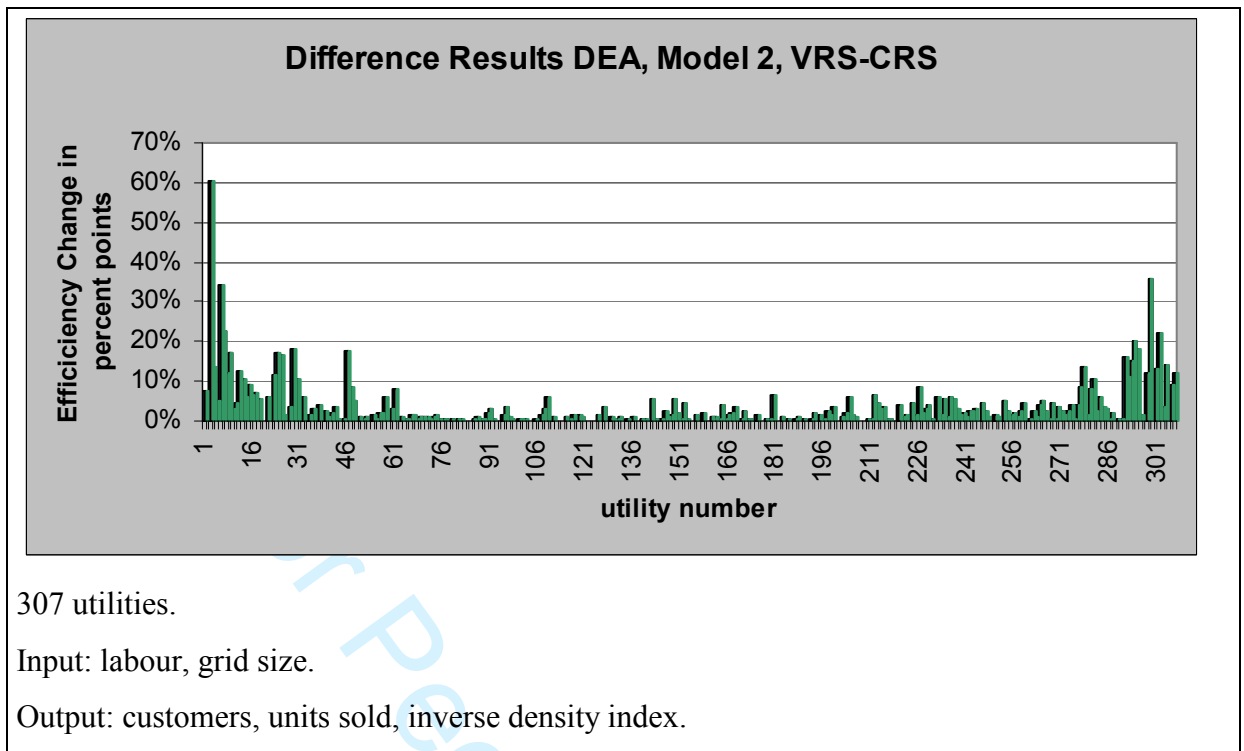

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Figure 4: Correlation between Customer Structure and Efficiency

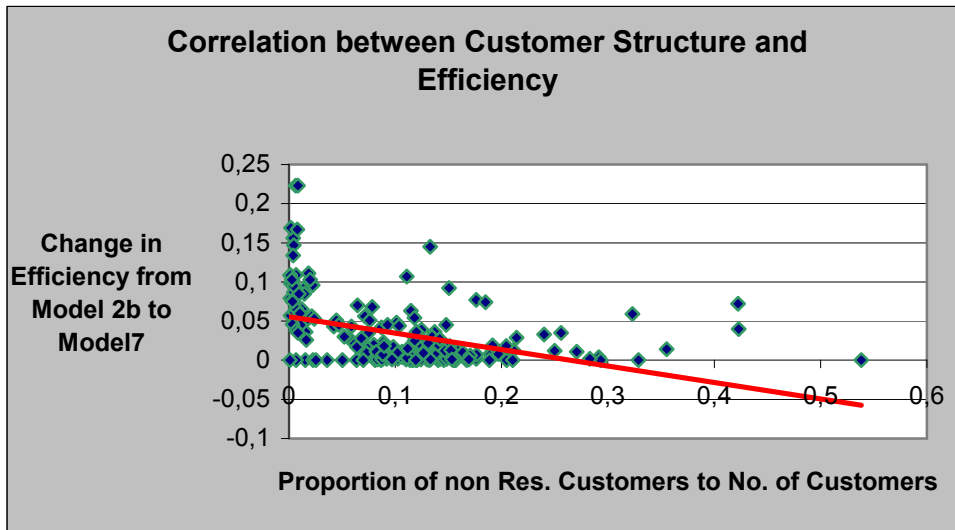

Or Peer Review