



HAL
open science

Axisymmetric vortex breakdown in constricted pipes

Francois Gallaire, Philippe Meliga

► **To cite this version:**

Francois Gallaire, Philippe Meliga. Axisymmetric vortex breakdown in constricted pipes. EUROMECH Colloquium 525 - Instabilities and transition in three-dimensional flows with rotation, Jun 2011, Ecully, France. <hal-00600419>

HAL Id: hal-00600419

<https://hal.science/hal-00600419v1>


Submitted on 14 Jun 2011

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization



AXISYMMETRIC VORTEX BREAKDOWN IN CONSTRICTED PIPES

François GALLAIRE¹, Philippe MELIGA²

¹Laboratory of Fluid Mechanics and Instabilities, Ecole Polytechnique Fédérale de Lausanne CH-1015 Lausanne, Switzerland.

²M2P2, UMR-6181 CNRS IMT, 38, Rue Frédéric Joliot-Curie 13451 MARSEILLE Cedex 13, France.

We investigate numerically and theoretically the axisymmetric vortex breakdown occurring in a contracting pipe of finite extension, i.e. the transition from a smooth columnar state to a breakdown state exhibiting a recirculation bubble. Velocity distributions are prescribed at the pipe inlet under the form of Batchelor vortices with uniform axial velocity and variable levels of confinement. A numerical continuation technique is developed to follow the branches of nonlinear steady solutions when varying the swirl parameter. In the most general case, for $Re=500$, vortex breakdown occurs abruptly owing to a subcritical, global instability of the non-parallel, viscous columnar solution, and results in the coexistence of multiple stable solutions over a finite range of swirl. For highly confined vortices, a second scenario prevails, where the flow transitions smoothly from the columnar to the breakdown state without any instability. These results are reminiscent of those obtained by [2] and [1] where slip is allowed at the wall.

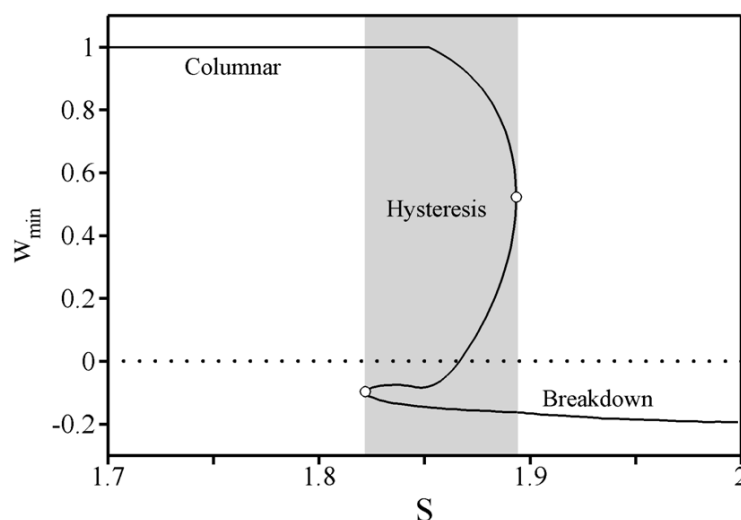


Figure 1: Bifurcation diagram illustrating the onset of vortex breakdown as the swirl is increased. The minimum axial velocity u_{min} is plotted as a function of the swirl - $Re = 500$.

The effect of a low flow rate jet positioned at the pipe wall is then characterized in the perspective of control. Its effectiveness is evaluated in light of three practically meaningful criteria, namely the ability of the control to optimize either the stability domain or the topology of the columnar state, and its ability to alleviate hysteresis. For each criterion, an optimal jet position is determined from nonlinear simulations.

The results are in good agreement with those issuing from an weakly nonlinear asymptotic expansion of the Navier- Stokes equations, which yields two normal forms describing the two saddle-node bifurcations underlying the fold structure of the bifurcation. The open-loop control enters as a forcing term in the resulting amplitude equations.

References

- [1] P. S. Beran and F. E. Culick, The role of non-uniqueness in the development of vortex breakdown in tubes, *J. Fluid Mech.* **242**, 491–527 (1992).
- [2] J.M. Lopez, "On the bifurcation structure of axisymmetric vortex breakdown in a constricted pipe" *Phys. Fluids* **6**, 3683–3693 (1993).