



**HAL**  
open science

## Direct RF magnetic field conversion by electro-optic effect for MR endoluminal coil

R. Aydé, A.-L. Perrier, R. Sablong, L. Duvillaret, G. Gaborit, O. Beuf

► **To cite this version:**

R. Aydé, A.-L. Perrier, R. Sablong, L. Duvillaret, G. Gaborit, et al.. Direct RF magnetic field conversion by electro-optic effect for MR endoluminal coil. ESMRMB 2013, Oct 2013, Toulouse, France. hal-00872846

**HAL Id: hal-00872846**

**<https://hal.science/hal-00872846>**

Submitted on 16 Jan 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Abstract 47847

Direct RF magnetic field conversion by electro-optic effect for MR endoluminal coil

Type: Scientific Session Communications

Topic: Preclinical Studies and Basic Science / RF systems

Authors: R. Ayde<sup>1</sup>, A.-L. Perrier<sup>1</sup>, R. Sablong<sup>1</sup>, L. Duvillearet<sup>2</sup>, G. Gaborit<sup>2, 3</sup>, O. Beuf<sup>1</sup>; <sup>1</sup>Villeurbanne,FR,Creatis-CNRS UMR 5220 – INSERM U1044,University of Lyon1, <sup>2</sup>Le Bourget Du Lac,FR,Kapteos,Savoie Technolac, Le Bourget-du-Lac, <sup>3</sup>Le Bourget-du-Lac,FR,IMEP-LAHC, UMR CNRS 5130,University of Savoie

### Purpose/Introduction


The benefit of MR endoluminal coil was demonstrated for imaging of internal tissue layers such as colon walls [1]. However, since metallic coaxial cables are used, heating phenomena may occur in neighbored biological tissues due to local electric field concentration [2]. Optical fiber link for MR signal transmission could be used to overcome local heating, thus ensuring patient safety. In this work, the use of electro-optic effect occurring in a LiTaO<sub>3</sub> crystal associated to a single loop endoluminal coil to perform a local electro-optic conversion was demonstrated and characterized.

### Subjects and Methods


The conversion of the Radio-Frequency (RF) magnetic field into an electric signal by electro-optic (EO) effect was validated with, an experience showed on Fig. 1. RF magnetic field  $B_x$  at 127 MHz was generated using an emission RF surface coil with a function generator. The electrical power  $P_{in}$  of the generator varying from 14 dBm down to -60 dBm.

The endoluminal coil shown in Fig. 2, tuned to a frequency of 127 MHz, was placed to probe the magnetic field  $B_x$ . Thus an electromotive force  $\varepsilon$  was induced onto the z-axis of the crystal thanks to copper deposited electrodes.

A linear polarized optical probe beam passes through the EO crystal, whose eigen refractive indices change due to  $\varepsilon$ . Hence, a modulation of the laser polarization state appears. A quarter wave plate and a polarizer convert this modulation into a modulation of optical power. Finally, this latter is converted into an electrical signal using a photodiode. A spectrum analyzer state the output signal power  $P_{out}$  [3].

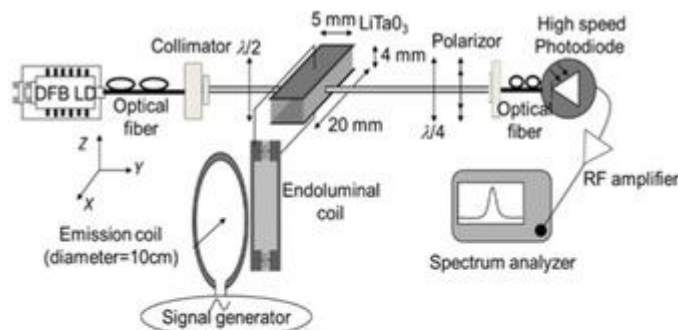


*Fig.1: Schematic set up of the experiment for the EO conversion of the RF magnetic field for an endoluminal coil.*

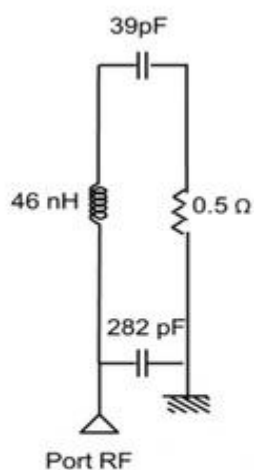

*Fig.2: Circuit of the endoluminal coil tuned to a frequency of 127 MHz and matched to 50 Ohms*

## Results

The sensibility and the linearity of the EO conversion are shown in Fig. 3. The measured values fit closely to the expected values and the dynamic exceeds 60 dB which is down limited by the noise floor. The minimum detectable magnetic field is  $176 \pm 4$  pT.

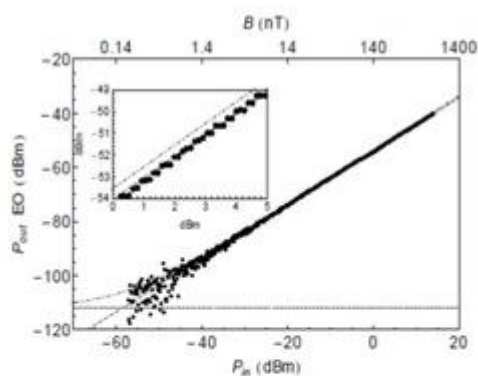

*Fig.3: EO response as a function of the input power feeding the transmit coil and the correspond magnetic field (top axis). Black dots are the measurement points and dashed dotted line is the theoretical curve.*

## Discussion/Conclusion

The EO signal conversion using a LiTaO<sub>3</sub> crystal with an endoluminal RF coil was demonstrated using an experimental bench of measure. The sensibility of the conversion could still be improved. The next step will be to build an endoluminal coil with active optical decoupling to perform first phantom experiments.

## References

- [1] O. Beuf et al., *JMRI*, 2004, Vol. 20, 1, pp. 90-96.
- [2] C. Armenean et al., *Magn. Reson. Med.*, 2004, Vol.52, 5, pp. 1200-1206.
- [3] R. Ayde et al., *IEEE sensors journal*, 2013, Vol.13, pp. 1274-1280.

Print