



**HAL**  
open science

## Online implementation of SVM based fault diagnosis strategy for PEMFC system

Zhongliang Li, Rachid Outbib, Stefan Giurgea, Daniel Hissel, Samir Jemei

► **To cite this version:**

Zhongliang Li, Rachid Outbib, Stefan Giurgea, Daniel Hissel, Samir Jemei. Online implementation of SVM based fault diagnosis strategy for PEMFC system. the 6th International Conference on "Fundamentals & Development of Fuel Cells" (FDFC), Feb 2015, Toulouse, France. hal-01113589

**HAL Id: hal-01113589**

**<https://hal.science/hal-01113589v1>**

Submitted on 12 Feb 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Online implementation of SVM based fault diagnosis strategy for PEMFC system

Zhongliang Li<sup>1</sup>, Rachid Outbib<sup>2</sup>, Stefan Giurgea<sup>1</sup>, Daniel Hissel<sup>1</sup>, Samir Jemei<sup>1</sup>

<sup>1</sup>FCLAB, FR CNRS 3539, FEMTO-ST/Energy Department, UMR CNRS 6174, France.

<sup>2</sup>LSIS, UMR CNRS 7296, Aix-Marseille University, France.

*zhongliang.li@lsis.org, stefan.giurgea@utbm.fr, rachid.outbib@lsis.org, daniel.hissel@univ-fcomte.fr, samir.jemei@femto-st.fr*

**Keywords:** PEMFC systems, Fault diagnosis, SVM, Online implementation, Robustness.

## ABSTRACT

This paper deals with the online diagnosis of Polymer Electrolyte Membrane Fuel Cell (PEMFC) systems. The pattern classification tool Support Vector Machine (SVM) is used to achieve fault detection and isolation (FDI). The algorithm is integrated into an embedded system of the type System in Package (SiP) and validated online in an experimental platform. Four concerned faults are diagnosed successfully online. Additionally, a procedure is proposed to improve the performance of robustness and raise the diagnosis accuracy.

## 1. INTRODUCTION

During the last decades, fault diagnosis devoted to improve the reliability and durability performance of Polymer Electrolyte Membrane Fuel Cell (PEMFC) systems has drawn the attention of both academic and industrial communities. Through an efficient diagnosis strategy, more serious faults can be avoided thanks to an early fault alarm. With the help of diagnosis results, the downtime (repair time) can be reduced. Moreover, the precise diagnosis information can speed up the development of new technologies [1].

Several fault diagnosis strategies have been studied during the last decade. Since the first principle models of PEMFC systems are not evident to be found or estimated. The application of data-driven fault methodologies has been drawing the attention of researchers [2]. Within the scope of data based fault diagnosis, a number of pattern classification techniques have been widely used since fault detection and isolation (FDI) can be considered as a classification problem. Thanks to the contributions from the computer science and information community, lots of mature experiences can be utilized for PEMFC diagnosis purpose. Generally, the classification based fault diagnosis proceeds in two phases. In the offline training phase, the historical data which distribute in different health states are firstly collected. A classifier is then trained based on the collected dataset. In the online performing phase, the real-time data can be classified into the known classes with the obtained classifier. Thus, the health state of real-time data can be diagnosed.

Although some classification based diagnosis strategies have been proposed for PEMFC systems [3] [4], the online implementation results are announced rarely. Actually, for practical online applications, such as fuel cell electric vehicles, the diagnosis strategy should be integrated into an embedded system and run in real-time. Hence, the importance of online implementation cannot be over-emphasized. Otherwise, the work will stay in the step of "academic studying".

In this paper, a classification tool Support Vector Machine (SVM) is employed for fault detection and isolation (FDI) of PEMFC systems. The diagnosis algorithm is also integrated into a specially designed embedded system, which is of the type System in Package (SiP). The embedded system is installed into a PEMFC system, and the diagnosis algorithm is verified in real-time. Besides, a procedure is proposed to improve the robustness of the diagnosis algorithm.

## 2. SVM BASED DIAGNOSIS ALGORITHM

SVM is a classification method developed by V. Vapnik [5] and has been widely applied the last two decades. Good generalization performance, absence of local minima and sparse representation of solution make SVM an attractive classification tool. The basic theory comes from binary classification problem. As Fig. 1 shows, there are data samples distributed in two classes, suppose we have some hyperplane which separates the points. Then, SVM looks for the optimal hyperplane with the maximum distance from the nearest training samples. A subset of training samples that lie on the margin are called support vectors.

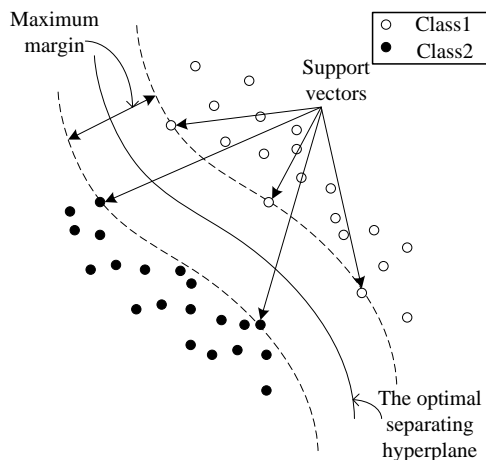


Figure 1: SVM schematic diagram

To explain the binary SVM more mathematically and specifically, take  $(N_1 + N_2)$  labeled sample  $\mathbf{z}_1, \mathbf{z}_2, \dots, \mathbf{z}_{N_1+N_2}$  from 1st and 2nd classes as training examples.  $g_n \in \{-1, 1\}$  is defined as the class label of sample  $\mathbf{z}_n$  ( $-1$  for class 1,  $1$  for class 2). Without going to the detailed deducing process which can be found in many materials on pattern recognition ([5] for instance), the training problem can be converted to the following quadratic problem (QP)

$$\min L(\mathbf{a}) = \frac{1}{2} \sum_{n=1}^{N_1+N_2} \sum_{m=1}^{N_1+N_2} a_n a_m g_n g_m k(\mathbf{z}_n, \mathbf{z}_m) - \sum_{n=1}^{N_1+N_2} a_n \quad (1)$$

subject to

$$\begin{cases} \sum_{n=1}^{N_1+N_2} a_n g_n = 0 \\ 0 \leq a_n \leq D \quad n = 1, 2, \dots, N_1 + N_2 \end{cases} \quad (2)$$

where  $\{a_n | n = 1, \dots, N_1 + N_2\}$  are Lagrange multipliers, which are expressed collectively as  $\mathbf{a} = [a_1, \dots, a_{N_1+N_2}]^T$ ;  $D$  is a parameter which need to be initialized;  $k(\mathbf{z}_n, \mathbf{z}_m)$  is kernel function which is introduced to solve the nonlinear problem. A representative kernel function which named Gaussian kernel is expressed as

$$k(\mathbf{z}_n, \mathbf{z}_m) = \exp\left(-\frac{\|\mathbf{z}_n - \mathbf{z}_m\|^2}{\sigma}\right) \quad (3)$$

where  $\sigma$  is an author defined parameter.

In our study, a practical approach, namely Sequential Minimal Optimization (SMO), is used solve the QP problem (1) [5]. After solving the QP problem, the Lagrange multipliers  $a_1, a_2, \dots$ ,

$a_{N_1+N_2}$  are obtained. The samples corresponding to positive Lagrange multipliers are SVs, which are denoted by  $\mathbf{z}_1^s, \mathbf{z}_2^s, \dots, \mathbf{z}_S^s$ .  $S$  is the number of SVs. The corresponding  $a_n$  and  $g_n$  of SV  $\mathbf{z}_n^s$  are denoted by  $a_n^s$  and  $g_n^s$ .

The class label  $g$  of an arbitrary data point  $\mathbf{z}$  can be determined by the following equation:

$$g = \text{sign} \left( \sum_{n=1}^S a_n^s g_n^s k(\mathbf{z}_n^s, \mathbf{z}) + b \right) \quad (4)$$

where the bias  $b$  is given

$$b = \frac{1}{S} \sum_{j=1}^S \left( g_j^s - \sum_{n=1}^S a_n^s g_n^s k(\mathbf{z}_n^s, \mathbf{z}_j^s) \right) \quad (5)$$

From (4), it could be observed that the determination of the class label is depended on the SVs, and the corresponding parameters  $\{a_n^s\}$  and  $\{g_n^s\}$ . This property is central to the online applicability of SVM. The training process and the performing procedure can be synthetically summarized as Algorithm 1.

---

**Algorithm 1** Binary SVM

---

**Training:**

- 1: Collect  $(N_1 + N_2)$  labeled sample  $\mathbf{z}_1, \mathbf{z}_2, \dots, \mathbf{z}_{N_1+N_2}$  from classes 1 and 2.  $g_n \in \{-1, 1\}$ , is the class label of the sample  $\mathbf{z}_n$ . Initial  $D$  and  $\sigma$ .
- 2: Solve the quadratic problem (1) by using SMO method.
- 3: Save support vectors:  $\mathbf{z}_1^s, \mathbf{z}_2^s, \dots, \mathbf{z}_S^s$  and corresponding  $g_n$  and  $a_n$ , which are denoted by  $\{g_n^s\}$  and  $\{a_n^s\}$ .

**Performing:**

For a new sample  $\mathbf{z}$ , its class label is determined with respect to (4).

---

To extend the binary classifier to multi-classification situations, there are several ways. A method named ‘‘One-Against-One’’ is adopted in this chapter. Actually,  $C(C - 1)/2$  binary SVMs can be constructed based on the training data in  $C$  classes. When an arbitrary sample comes, its classification results of all the binary SVMs are firstly obtained. The final classification is obtained by voting all binary classification results. The details can be found in [6].

### 3. DIAGNOSIS STRATEGY DEVELOPING PLATFORM

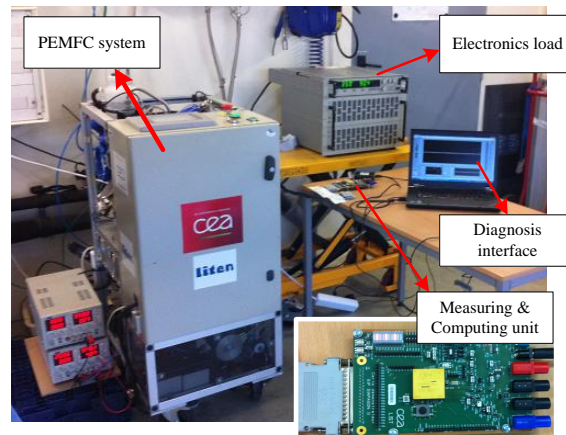


Figure 2: Overview of the developing platform

As Fig. 2 shows, the developing platform dedicated to online implementation of the diagnosis strategy consists the following parts:

- **PEMFC system:** A 64-cell PEMFC stack, which was fabricated by the French research organization CEA specially for automotive application<sup>1</sup>, is concerned. The nominal operating condition of the stack is summarized in Table 1. In the system, a number of physical parameters impacting or expressing stack performances can be regulated flexibly and monitored. Stack temperature, pressures and stoichiometries of hydrogen and air at inlets, relative humidity of the inlet air can be regulated. This could help causing different health states. The stack voltage and single cell voltages, as well as the above mentioned variables can all be measured with the sample time of 1 s.

Table 1: Nominal conditions of the stacks

Parameter	Value
Stoichiometry $H_2$	1.5
Stoichiometry $Air$	2
Pressure at $H_2$ inlet	150 kPa
Pressure at $Air$ inlet	150 kPa
Differential of anode pressure and cathode pressure	30 kPa
Temperature (exit of cooling circuit)	65-70 °C
Anode relative humidity	50%
Cathode relative humidity	50%
Current	90 A
Voltage per cell	0.7 V
Electrical power	4032 W

- **Electronics load:** The load current can be flexibly varied through an electronic load.
- **Measuring and computing unit:** The core of the measuring and computing board is the specially-designed SiP (yellow square component shown in Fig. 2). Fig. 3 shows the structure of the SiP. The upper layer is equipped with Smartfusion on-chip system developed by Microsemi company. The device integrates an FPGA fabric, ARM Cortex-M3 Processor, and programmable analog circuitry which fulfill the A/D and D/A functions [7]. Up to 512 KB flash, 64 KB of SRAM and another two chips of 16 M memory are equipped to this SiP. With the abundant connecting ports, kinds of communications can be realized with other devices. The other two layers, which are equipped with Giant magnetoresistance (GMR) sensors, are used for measuring the voltage signals precisely.
- **Diagnosis interface:** The measurements and the calculation results obtained from the measuring and computing unit are exported to a general computer equipped with Labview software. With the help of Labview, the real-time cell voltage signals, the diagnosis results can be visualized on the screen. The real-time data can also be saved for advanced analysis.

## 4. ONLINE IMPLEMENTATION OF THE DIAGNOSIS STRATEGY

### 4.1 Offline training and algorithm integration

Knowing that classification based diagnosis belongs to supervised learning methods, the data from various classes are needed for training. To prepare the training dataset, several faults were deduced deliberately. Table 2 summarizes the operations in the experiment of training data preparation. In this study, the individual cell voltages are considered as the variables. From our previous study,

<sup>1</sup>CEA: Alternative Energies and Atomic Energy Commission


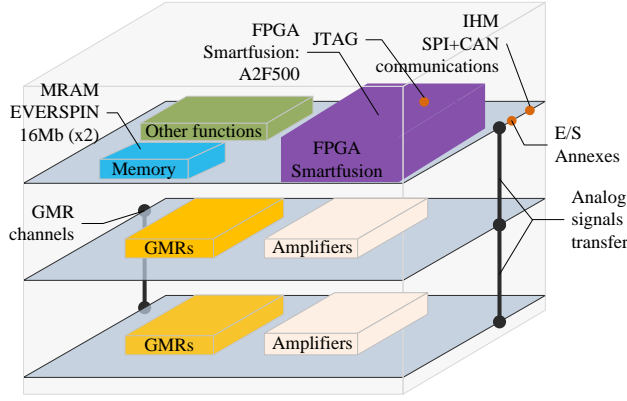


Figure 3: Embedded system designed for PEMFC system diagnosis [8]


individual cell voltages show different magnitudes and distributions in different health states. This feature is utilized for FDI. Constrained by the measuring capability of the 1st version SiP. The voltages of 14 cells which located near to one side of the stack can be measured and used as the variables for diagnosis. The evolutions of individual cell voltages of training data are shown in Fig. 4(a).

Table 2: Experimental procedure for the preparation of training dataset

Starting time	Ending time	Operation	Health state
0	879	Nominal condition	Normal state (N1)
880	1675	Pressure at 1.3 bar at each side	Low pressure fault (F1)
1676	2618	Back to nominal condition	Normal state (N1)
2619	3499	Pressure at 1.7 bar at each side	High pressure fault (F2)
3500	4892	Back to nominal condition	Normal state (N1)
4893	6288	Lower relative humidity	Drying fault (F3)
6289	7518	Back to nominal condition	Normal state (N1)
7519	8287	St. Air 1.5	Low air stoichiometry fault (F4)
8288	8955	Back to nominal condition	Normal state (N1)

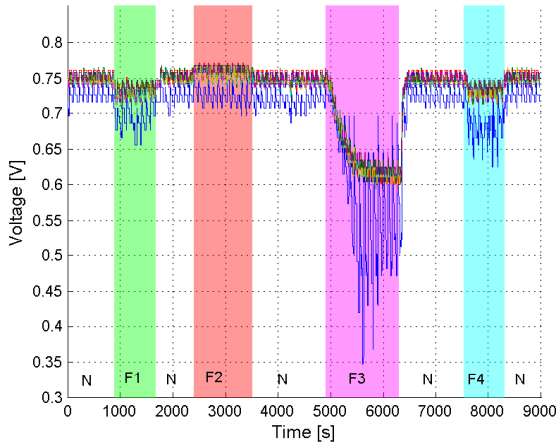

(a) Evolutions of cell voltages: training data

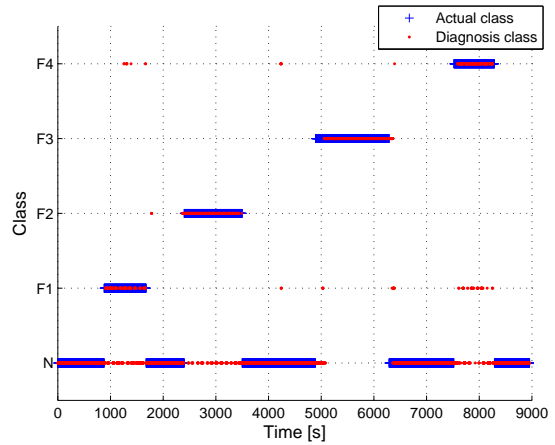

(b) Diagnosis results: training data

Figure 4: Training data and diagnosis results

With the training dataset, the SVM classifier is trained. Classifying the training data with the trained SVM, the diagnosis accuracy rate is 84.98%. More detailed diagnosis results can be summarized as a confusion matrix shown quantitatively in Table 3 and visually in Fig. 4(b). It could be observed that the false alarm rate, i.e. the rate of the samples in normal state are wrongly diagnosed into the fault classes, is relatively low. The diagnosis accuracy for the data in F3 is high, while a considerable part of data in classes F1, F2, and F4 are wrongly classified into the normal class.

Table 3: Distributions of samples in different classes: case4

		Diagnosed classes				
		Nl	F1	F2	F3	F4
Actual classes	Nl	4762	29	25	68	11
	F1	406	373	0	0	17
	F2	300	0	800	0	0
	F3	157	11	0	1228	0
	F4	239	82	0	0	448

The trained SVM classifier was coded into the memory of SiP. When the diagnosis algorithm was carried out using the training dataset respectively in MATLAB environment and the SiP, the accordant results could be obtained and the diagnosis algorithm could be calculated within a sampling cycle (i.e. 1s). That is to say the diagnosis algorithm is successfully integrated into the embedded system.

#### 4.2 Online validation

To realize online validation, the embedded system was tested online with the real-time data during another experiment. The operations of this experiment are summarized in Table 4, and the measured cell voltages (i.e. the variables for diagnosis) are plotted as Fig. 4(b). The diagnosis accuracy of the online implementation is 85.93%. Similarly, the online diagnosis results were recorded and summarized visually in Fig. 5(b) and quantitatively in Table 5. A similar observation as the case for training could be obtained when the confusion matrix (i.e. Table 5(b)) of test data is analyzed.

Table 4: Experimental procedure for online validation

Starting time	Ending time	Operation	Health state
0	3660	Nominal condition	Normal state (Nl)
3661	4543	Pressure at 1.3 bar at each side	Low pressure fault (F1)
4544	5374	Back to nominal condition	Normal state (Nl)
5375	6541	Pressure at 1.7 bar at each side	High pressure fault (F2)
6542	8128	Back to nominal condition	Normal state (Nl)
9842	11909	St. Air 1.5	Low air stoichiometry fault (F4)
8910	9841	Back to nominal condition	Normal state (Nl)
8129	8909	Lower relative humidity	Drying fault (F3)
11910	12459	Back to nominal condition	Normal state (Nl)

#### 4.3 Improvement of the robustness and accuracy

When the faults F1, F2, and F4 are concerned, it can be observed from the Fig. 5(b) that the diagnosis results vibrate between the corresponding fault and normal classes. The performance of

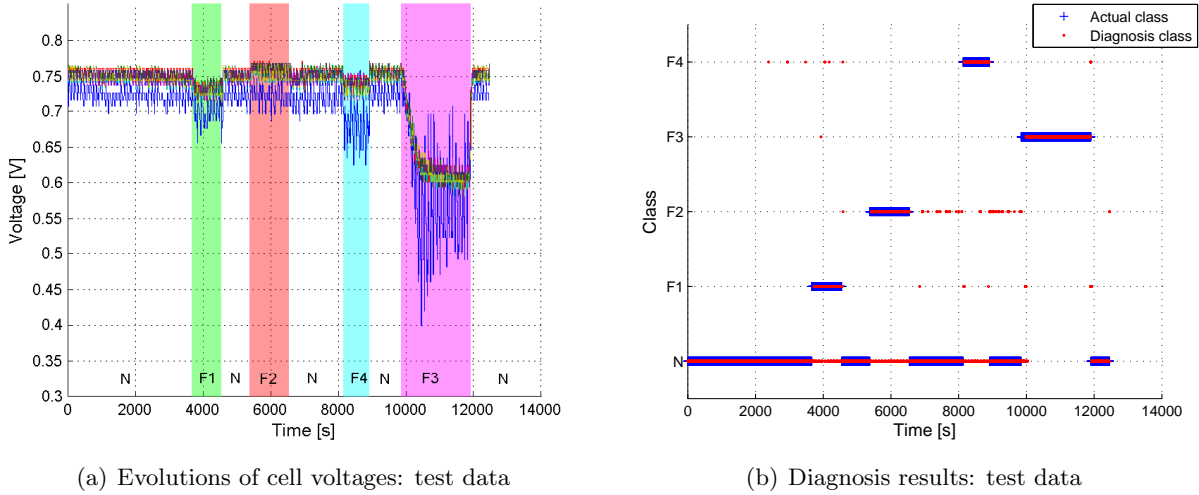


Figure 5: Test data and diagnosis results

robustness is not satisfying. Here we propose to use a lagged results to improve the robustness and accuracy of the diagnosis. Specifically, at time  $k$ , the diagnosis results of last  $N_{lag}$  are taken into account (i.e. from  $k - N_{lag} + 1$  to  $k$ ). Concerning these  $N_{lag}$  data, if fault degree (i.e. the rate of one fault) is above the pre-defined threshold, the fault occurs at time  $k$ .

Here we set  $N_{lag} = 100$  and threshold as 0.4. The fault degrees of the concerned four faults are shown in Fig. 6(a). The diagnosis results are shown in Fig. 6(b) and Table 6. Comparing Fig. 6(b) to Fig. 5(b), more consistent and robust results can be obtained when fault degree is used as the indicator of the faults. Considering diagnosis accuracy, the global diagnosis accuracy is 90.39% which is significantly improved. Notice that sensitivity and robustness are two conflicting factors, the performance of sensitivity is certainly alleviated when the procedure is employed.


Table 5: Distributions of samples in different classes: case4

		Diagnosed classes				
		N1	F1	F2	F3	F4
Actual classes	N1	7302	31	220	0	10
	F1	446	432	0	1	4
	F2	477	0	690	0	0
	F3	142	28	5	1880	8
	F4	363	14	14	0	390


Table 6: Distributions of samples in different classes: case4

		Diagnosed classes				
		N1	F1	F2	F3	F4
Actual classes	N1	7413	0	62	48	40
	F1	215	668	0	0	0
	F2	88	0	1079	0	0
	F3	202	0	0	1861	0
	F4	150	0	0	0	631



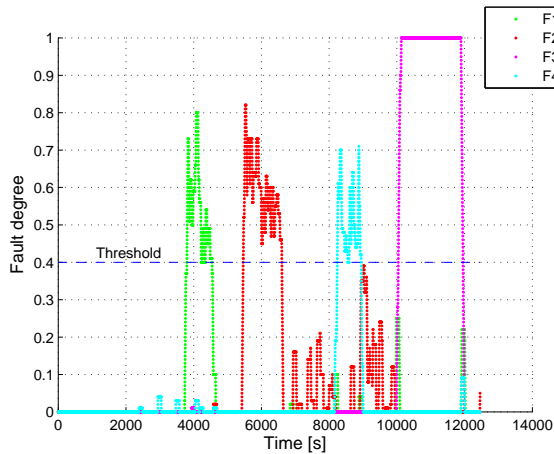

(a) Fault degrees of 4 faults

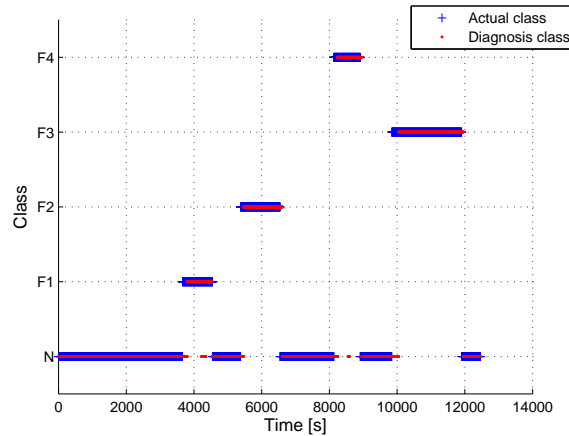

(b) Diagnosis results: test data

Figure 6: Improved diagnosis results

## 5. CONCLUSION

In this paper, classification method SVM is used to realized fault diagnosis for PEMFC systems. The algorithm was successfully integrated into a specially designed embedded system. The integrated system was installed into a PEMFC system and tested online. Four faults can be detected and isolated. The robustness and diagnosis accuracy performances are improved by introducing the concept of fault degree.

## REFERENCE

- [1] Z. Li, *Data-driven fault diagnosis for PEMFC systems*. PhD thesis, Aix-Marseille University, 9 2014.
- [2] Z. Zheng, R. Petrone, M. Péra, D. Hissel, M. Becherif, C. Pianese, N. Yousfi Steiner, and M. Sorrentino, “A review on non-model based diagnosis methodologies for PEM fuel cell stacks and systems,” *International Journal of Hydrogen Energy*, vol. 38, pp. 8914–8926, July 2013.
- [3] D. Benouioua, D. Candusso, F. Harel, and L. Oukhellou, “Fuel cell diagnosis method based on multifractal analysis of stack voltage signal,” *International Journal of Hydrogen Energy*, vol. 33, pp. 1–10, Dec. 2013.
- [4] Z. Li, R. Outbib, D. Hissel, and S. Giurgea, “Data-driven diagnosis of PEM fuel cell: A comparative study,” *Control Engineering Practice*, vol. 28, pp. 1–12, July 2014.
- [5] J. C. Platt, “Sequential Minimal Optimization : A Fast Algorithm for Training Support Vector Machines,” *Technical Report MSR-TR-98-14, Microsoft Research*, pp. 1–21, 1998.
- [6] C.-W. Hsu and C.-J. Lin, “A comparison of methods for multiclass support vector machines,” *Neural Networks, IEEE Transactions on*, vol. 13, no. 2, pp. 415–425, 2002.
- [7] “Website: Smartfusion introduction.”
- [8] A. GIRAUD, “Embedded smart sensors for measurement and diagnosis of measurement and diagnosis of multicells pemfc.” Report - project DIAPASON, June 2012.