



**HAL**  
open science

## Simulation of a solid sorption ice-maker based on the novel composite sorbent "lithium chloride in silica gel pores"

G. Maggio, L.G. Gordeeva, A. Freni, Yu. I. Aristov, G. Santori, F. Polonara,  
G. Restuccia

### ► To cite this version:

G. Maggio, L.G. Gordeeva, A. Freni, Yu. I. Aristov, G. Santori, et al.. Simulation of a solid sorption ice-maker based on the novel composite sorbent "lithium chloride in silica gel pores". Applied Thermal Engineering, 2010, 29 (8-9), pp.1714. 10.1016/j.applthermaleng.2008.07.026 . hal-00615126

**HAL Id: hal-00615126**

**<https://hal.science/hal-00615126>**

Submitted on 18 Aug 2011

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Accepted Manuscript

Simulation of a solid sorption ice-maker based on the novel composite sorbent  
“lithium chloride in silica gel pores”

G. Maggio, L.G. Gordeeva, A. Freni, Yu. I. Aristov, G. Santori, F. Polonara, G.  
Restuccia


PII: S1359-4311(08)00327-X  
DOI: [10.1016/j.applthermaleng.2008.07.026](https://doi.org/10.1016/j.applthermaleng.2008.07.026)  
Reference: ATE 2590

To appear in: *Applied Thermal Engineering*

Received Date: 25 October 2007  
Revised Date: 8 July 2008  
Accepted Date: 29 July 2008

Please cite this article as: G. Maggio, L.G. Gordeeva, A. Freni, u.I. Aristov, G. Santori, F. Polonara, G. Restuccia, Simulation of a solid sorption ice-maker based on the novel composite sorbent “lithium chloride in silica gel pores”, *Applied Thermal Engineering* (2008), doi: [10.1016/j.applthermaleng.2008.07.026](https://doi.org/10.1016/j.applthermaleng.2008.07.026)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

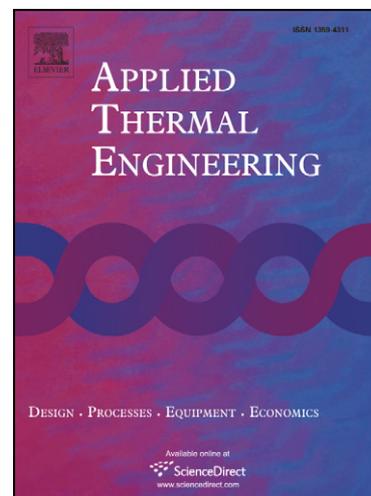

**Simulation of a solid sorption ice-maker based on the novel  
composite sorbent “lithium chloride in silica gel pores”**

**G. Maggio<sup>a\*</sup>, L. G. Gordeeva<sup>b</sup>, A. Freni<sup>a</sup>, Yu. I. Aristov<sup>b</sup>,**

**G. Santori<sup>c</sup>, F. Polonara<sup>c</sup>, G. Restuccia<sup>a</sup>**

<sup>a</sup>*CNR - Istituto di Tecnologie Avanzate per l'Energia “Nicola Giordano”,  
Via Salita S. Lucia sopra Contesse 5, 98126 Santa Lucia, Messina, Italy.*

<sup>b</sup>*Boreskov Institute of Catalysis, Siberian Division, Russian Academy of Sciences,  
Pr. Akademika Lavrentieva 5, Novosibirsk 630090, Russia.*

<sup>c</sup>*Università Politecnica delle Marche, Facoltà di Ingegneria, Dipartimento di Energetica,  
Via Brezze Bianche, Monte Dago, 60131 Ancona, Italy.*

\* Corresponding author. Tel.: +39-90-624243; fax: +39-90-624247.

E-mail address: gaetano.maggio@itae.cnr.it

**Abstract**

In this paper, a novel composite sorbent “lithium chloride in silica gel pores” is proposed for application in solar-powered adsorptive ice makers. A mathematical model was used in order to calculate the performance of an ice-maker using this material as adsorbent and methanol as adsorbate. The results of the model showed that a maximum solar Coefficient Of Performance (COPs) of 0.33 and a maximum Daily Ice Production (DIP) of 20 kg m<sup>-2</sup> can be obtained for an ice-maker equipped with a solar collector area of 1.5 m<sup>2</sup> and 36 kg of adsorbent material. Such performance are noticeably higher than those obtained using commercial activated carbon, that is the adsorbent mostly proposed till now.

*Keywords:* Adsorption cooling; Solar ice-maker; Lithium Chloride in silica gel pores; Activated carbon; Dynamic simulation

**Nomenclature**

$A_i$ ( $i=1-5, 9$ )	Heat transfer surface, $m^2$
$c$	Specific heat, $J\ kg^{-1}\ K^{-1}$
$COP_s$	Solar Coefficient Of Performance
$DIP$	Daily Ice Production, kg
$I_\beta$	Available solar radiation @ $\beta=30^\circ$ , $W\ m^{-2}$
$K_i$ ( $i=1-3$ )	Flag: 0 or 1 (see Eqs. (2) and (9))
$L_a$	Adsorbate latent heat of condensation/evaporation $J\ kg^{-1}$
$L_w$	Water latent heat of solidification, $J\ kg^{-1}$
$m$	Mass, kg
$m_a$	Initial adsorbate mass inside evaporator, kg
$m_w$	Liquid water mass, kg
$n$	Solar collector area, $m^2$
$p$	Pressure, Pa
$T$	Temperature, K
$t$	Time, s
$t_{cycle}$	Cycle time, s
$U_i$ ( $i=1-9$ )	Global heat transfer coefficient, $W\ m^{-2}\ K^{-1}$
$w$	Uptake, $kg\ kg^{-1}$

*Greek letters*

$(\tau\alpha)_{eff}$	Transmittance/absorptivity coefficient
$\Delta H$	Adsorption/desorption enthalpy, $J\ kg^{-1}$

$\Delta T$	Variation of temperature, K
$\Delta w$	Variation of uptake, $kg\ kg^{-1}$

*Subscripts*

1	Solar collector/environment
2	Solar collector/adsorbent
3	Condenser/environment
4	Evaporator/liquid water
5	Environment/liquid water
6	Evaporator/phase-changing water
7	Evaporator/solid water
8	Environment/solid water
9	Evaporator/environment
$a$	Adsorbate
$ads$	Adsorption
$amb$	Ambient
$c$	Condenser
$des$	Desorption
$eq$	Equivalent
$ev$	Evaporator
$ice$	Iced water
$lw$	Liquid water
$m$	Solar collector
$s$	Solid adsorbent material (dry)
$w$	Water
$\beta$	Tilt angle

*Superscripts*

$C$	Closed ventilation windows
$O$	Open ventilation windows

**1. Introduction**

A solar-powered adsorptive ice-maker consists of a small size adsorbent reactor connected to a solar collector, for regeneration of the sorbent material during the day, and connected to an evaporator, for ice production during the night [1-2]. Different prototypes were realized, showing the potentiality of this technology [2-5].

In particular, Sumathy and Li [2-3] designed and tested in Hong Kong a solar adsorption ice-maker with a single flat-plate collector ( $0.92\ m^2$  exposed area), based on activated carbon/methanol pair. Their experiments showed that this system can produce  $4.3-5.4\ kg\ m^{-2}\ day^{-1}$  of ice, with a solar COP of 0.10-0.12. These values are in good agreement with those reported by M. Li [4] for a similar flat-plate ice-maker tested in Shanghai:  $4.7-6.7\ kg\ m^{-2}\ day^{-1}$  of ice and a COP of 0.12-0.15, for a solar collector of  $0.75\ m^2$ . Anyanwu and Ezekwe [5] designed, constructed and tested in Nsukka,

Nigeria, a flat-type solar adsorption refrigerator using activated carbon/methanol, with effective exposed area of  $1.2 \text{ m}^2$ . They obtained a maximum solar COP of 0.02, but this low value was attributed to the “non-selective collector plate surface coating used”.

Recently, Khattab [6] proposed and tested an innovative modular ice-maker with the adsorbent (granular carbon bonded with blackened steel) placed in a glass container, positioned between reflector panels. This system, using methanol as adsorbate, provided a COP of 0.16 and a daily ice production of  $9.4 \text{ kg m}^{-2} \text{ day}^{-1}$ . S.G. Wang and R.Z. Wang [7] reported a COP of 0.18 for a sophisticated two-bed adsorption prototype ice-making machine operating with heat and mass recovery and based on activated carbon/methanol pair.

Several authors estimated the performance of adsorption ice-makers by mathematical modelling [8-13]. The solar COP and the DIP calculated by simulations ranged between 0.10-0.12 and  $4\text{-}10 \text{ kg m}^{-2} \text{ day}^{-1}$ , respectively. Such results are in good agreement with those obtained by testing experimental prototypes.

It must be pointed out that most of the ice-makers presented in literature use conventional activated carbon as adsorbent. The adsorption capacity of activated carbons is rather low and usually does not exceed 30-40 wt.%.

The utilization of novel adsorbent materials with improved methanol sorption ability can be an efficient way to increase the performance of the system. Recently, the Boreskov Institute of Catalysis, Novosibirsk, Russia in collaboration with the CNR-ITAE, Messina, Italy, developed a new class of methanol composite sorbents [14, 15]. This new class of sorbents is directly derived by the SWSs (Selective Water Sorbents; i.e. a composite materials consisting of “inorganic salts confined to porous matrices”), that have already been proposed for water vapour sorption [16]. The synthesised composite sorbents demonstrated a strong affinity to methanol. Indeed, the maximal amount of methanol sorbed  $w_{max}=75\text{-}80 \text{ wt.}\%$  exhibited by some composites is much

higher than the methanol sorption capacity of conventional activated carbons [17]. This great enhancement of adsorptivity is due to the high contribution of methanol absorption by the salt embedded in the silica gel porous matrix (see [15] for details).

Among the different composites synthesised, the sorbent “Lithium Chloride in mesoporous silica gel” (2-50 nm pore diameter) appeared to be the best candidate for sorption cooling driven by a low temperature energy source [18].

The aim of this paper is to evaluate the performance of a solar-powered adsorptive ice-maker using the novel composite “Lithium Chloride in mesoporous silica gel” by applying the simulation tool presented in Ref. [19].

The model makes it possible to calculate the performance of the unit in terms of solar Coefficient Of Performance (COPs), Daily Ice Production (DIP) and equivalent Daily Ice Production ( $DIP_{eq}$ ). The obtained performance are compared with those corresponding to the commercial adsorbent activated carbon AC35. In the first part of the paper, the main features of the composite sorbent and of the simulated adsorptive unit are presented. Then, performance of the adsorptive ice-maker are calculated.

## **2. Main features of the composite sorbent “Lithium Chloride in mesoporous silica gel”**

The composite sorbent “Lithium Chloride in mesoporous silica gel” (salt content 29.5 wt.%) was synthesised by impregnation of silica gel Grace Davison 8926.02 (average pore diameter  $d_{av} = 15$  nm, specific surface  $S_{sp} = 326$  m<sup>2</sup> g<sup>-1</sup>, pore volume  $V_p = 1.5$  cm<sup>3</sup> g<sup>-1</sup>) with an aqueous solution of Lithium Chloride. More details on the synthesis procedure were presented by Gordeeva et al. [15]. Figure 1 shows the basic thermodynamic cycles for an adsorption air conditioner ( $T_{ev}=10$  °C,  $T_c=T_{ads}=35$  °C,  $T_{des}=80$  °C) and an ice-maker ( $T_{ev}=-2$  °C,  $T_c=T_{ads}=30$  °C,  $T_{des}=80$  °C) using the

composite “Lithium Chloride in mesoporous silica” and the commercial activated carbon AC35.

The cycles are plotted over an isosteric diagram that was obtained from the experimental equilibrium data presented in Refs. [15, 20] (only the significant isosters are plotted). It is evident that this novel composite sorbent presents an outstanding variation of methanol uptake per cycle ( $\Delta w = 46$  wt.% and 18 wt.% for air conditioning and ice-making, respectively), which is much larger than those of the conventional carbon AC35 ( $\Delta w = 11$  wt.% and 9 wt.% for air conditioning and ice-making, respectively). This is a convenient feature, because the performance of adsorptive machines increase when the amount of cycled working fluid increases [17].

The stability of adsorbent is of primary importance for evaluation of practical potential. Study on the phase composition, porous structure, and sorption properties of both the fresh and tested composites showed that no significant change, in composite structure and sorption ability, occurs during the cycling. Further details can be found in [21]. Furthermore, the stability to the cyclic treatment has been verified for this typology of materials [22]. A stability of the porous structure of the solid adsorbent, identical to the material studied in this paper, has been evidenced, even after thousands of cycles.

### **3. Description of the ice-maker**

The scheme of the solar-powered adsorptive ice-maker is presented in Fig. 2. It consists of the following components: a solar collector, in which the adsorbent material is embedded; a condenser for the methanol condensation and the heat rejection to the ambient during the day; a “cold chamber”, containing the evaporator for the methanol evaporation and the liquid water to be frozen during the night.

We selected a flat planar panel because the proposed working pair is able to efficiently work with this type of solar collector. Moreover, the niche application for this system (ice production in remote areas) asks for employment of cheap components.

During the day, the solar energy received by the collector produces the desorption of methanol from the sorbent bed. Methanol vapour flows to the condenser, condenses, and then is collected inside the receiver. During this phase the valves  $V_1$  and  $V_2$  are closed (see Fig. 2). In the late afternoon the valve  $V_1$  is opened, and the liquid methanol flows from the receiver to the evaporator. Then,  $V_1$  is closed and  $V_2$  is opened for the whole night, allowing adsorption of methanol by the sorbent layer. The evaporation of methanol inside the cold chamber cools down the liquid water, which is converted into ice.

The adsorbent/adsorbate working pair follows the typical adsorptive cycle, consisting of four phases [23]: I) isosteric heating until the pressure reaches  $p_c$ ; II) desorption at high temperature and pressure of condensation; III) isosteric cooling until the pressure decreases down to  $p_{ev}$ ; IV) adsorption at low temperature and pressure of evaporation. During this last phase, three sub-steps may occur: IVa) cooling of the liquid water inside the cold box, IVb) freezing of the liquid water, IVc) under-cooling of the ice.

#### 4. Modelling

The model is of dynamic type and is based on energy and mass balances for the adsorbent reactor and the connected components. The main governing equations are:

Solar collector:

$$n(\tau \alpha)_{eff} I \beta = m_m c_m \frac{dT_m}{dt} + U_2 A_2 (T_m - T_s) + U_1^{C/O} A_1 (T_m - T_{amb}) \quad (1),$$

where  $U_1^{C/O}$  is equal to  $U_1^C$  or  $U_1^O$  for heating and cooling phases, respectively.

Adsorbent bed:

$$U_2 A_2 (T_m - T_s) = (m_s c_s + w m_s c_a) \frac{dT_s}{dt} - K_1 m_s \Delta H(w) \frac{dw}{dt} \quad (2),$$

with  $K_1=0$  for isosteric phases and  $K_1=1$  for isobaric phases.

Condenser:

$$L_a (T_c) m_s \frac{dw}{dt} = -m_c c_c \frac{dT_c}{dt} - U_3 A_3 (T_c - T_{amb}) \quad (3),$$

Evaporator:

$$L_a (T_{ev}) m_s \frac{dw}{dt} = -U_\alpha A_4 (T_{ev} - T_w) - [m_{ev} c_{ev} + (m_a - \Delta w m_s) c_a] \frac{dT_{ev}}{dt} - U_9 A_9 (T_{ev} - T_{amb}) \quad (4),$$

Water/ice heat and mass balances:

$$m_w c_w \frac{dT_w}{dt} = U_\alpha A_4 (T_{ev} - T_w) + U_\beta A_5 (T_w - T_{amb}) \quad (5),$$

$$L_w \frac{dm_{ice}}{dt} = L_a (T_{ev}) m_s \frac{dw}{dt} \quad (6),$$

where  $U_\alpha = U_4$ ,  $U_\beta = U_5$  and  $c_w = c_{lw}$  for Step IVa;

$U_\alpha = U_6$  for Step IVb;

$U_\alpha = U_7$ ,  $U_\beta = U_8$  and  $c_w = c_{ice}$  for Step IVc.

Further supplementary equations are reported in a previous paper [19].

The accompanying initial conditions and starting values are:

$$\begin{cases} T_m(0) = T_s(0) = T_{amb}(0) \\ p_s(0) = p_{ev} \\ w(0) = w_2 \end{cases} \quad (7),$$

$$\begin{cases} T_c(t_1) = T_{amb}(t_1) \\ T_{ev}(t_3) = T_w(t_3) = T_{ev,0} \\ m_{ice}(t_{4a}) = 0 \end{cases} \quad (8),$$

where  $p_{ev}$  is calculated from the initial evaporator temperature,  $w_2$  is calculated from the initial temperature and pressure of the adsorber,  $t_1$  is the time of the end of Phase I (and start of Phase II),  $t_3$  is the time of the end of Phase III (and start of Step IVa),  $t_{4a}$  is the time of the end of Step IVa (and start of Step IVb) and  $T_{ev,0}$  is the initial evaporator temperature.

Depending on the phase of the thermodynamic cycle, only a certain number of the previous equations (1)-(6) is applied and the relative coefficients/parameters assume a different form (see [19] for details).

The end phase conditions are the following:

Phase I:  $p_s = p_c$ ; Phase II:  $I_\beta < 100 \text{ W m}^{-2}$  or  $w \leq 2\%$ ; Phase III:  $p_s = p_{ev}$ ;

Step IVa:  $T_w = 0$  or  $t = 24 \text{ h}$ ; Step IVb:  $m_{ice} = m_w$  or  $t = 24 \text{ h}$ ; Step IVc:  $t = 24 \text{ h}$ .

Furthermore, for each day, the corresponding solar Coefficient Of Performance (COPs) is calculated as:

$$COP_s = \frac{\text{Useful effect}}{\text{Available solar energy}} = \frac{m_w c_{lw} \Delta T_w|_{\text{step IVa}} + K_2 m_{ice} L_w + K_3 m_w c_{ice} \Delta T_w|_{\text{step IVc}}}{n \int_0^{t_{\text{cycle}}} I_\beta(t) dt} \quad (9),$$

where  $K_2=0$  and/or  $K_3=0$  when Step IVb and/or IVc does not occur.

This definition of solar COP is identical to that reported in other literature works (see, in particular, Refs. [5] and [24]).

The Daily Ice Production (DIP) and its equivalent value (DIP<sub>eq</sub>), which accounts for the equivalent mass of ice corresponding to the possible under-cooling of the ice, are given

by

$$DIP = K_2 m_{ice} \quad (10),$$

and

$$DIP_{eq} = DIP \left( 1 + \frac{m_w c_{ice} \Delta T_w|_{step IVc}}{m_{ice} L_w} \right) \quad (11).$$

The model equations were numerically solved by using a commercial software (Mathematica<sup>®</sup> 4.0 by Wolfram Research) for ordinary differential equation (ODE) systems, based on a function which automatically switches between stiff (Gear) and non-stiff (Adams) integration methods [25].

## 5. Results and comments

### 5.1. Results of a base-case

A base-case was assumed considering an adsorption ice-maker with a solar collector area  $n=1.5 \text{ m}^2$ , mass of adsorbent material  $m_s=36 \text{ kg}$ , mass of liquid water inside the cold chamber  $m_w=20 \text{ kg}$ . The simulations were carried out for a long period, considering as adsorbent material the activated carbon AC35 and the composite sorbent “lithium chloride in silica gel pores”. Results are here presented for a few days of an intermediate season. Figure 3 shows the values of the dynamic data (useful solar radiation  $I_\beta$  and ambient temperature  $T_{amb}$ ) for the six-day period considered for simulations (May 1-6, 2005). The data were recorded by a meteo-station installed at the CNR-ITAE in Messina, Italy ( $38^\circ 12' \text{ N}$ ). From this figure, it results that the daily ambient temperature ranges from  $13.7 \text{ }^\circ\text{C}$  to  $23.6 \text{ }^\circ\text{C}$ ; while the daily average useful solar radiation is about  $500 \text{ W m}^{-2}$ , with a maximum daily radiation ranging from  $970 \text{ W m}^{-2}$  to  $1055 \text{ W m}^{-2}$ . The third day, i.e. May 3, 2005 showed the lowest ambient temperature, but the day that exhibits the most instable climatic conditions is May 6, 2005.

In Figs. 4 and 5 the calculated temperatures of the adsorbent material and of the condenser are presented for the activated carbon AC35 and the “LiCl silica gel” sorbent, respectively. Figure 4 shows that the maximum daily temperature reached by the activated carbon is  $78^\circ\text{C}$  (on May the 2<sup>nd</sup>), while the lowest daily temperature is  $57^\circ\text{C}$ ,

due to the unfavourable conditions on May the 6<sup>th</sup>. The condenser temperature was always slightly higher than the ambient temperature.

The temperature evolution calculated for the composite sorbent “LiCl in silica gel” is rather different (see Fig. 5). Indeed, the sorbent maximum daily temperature is lower, ranging from 47°C to 57°C. This effect can be explained considering that a big part of the incoming radiant energy is required for rejection of the high amount of methanol sorbed by the composite. Besides, the higher content of methanol inside the adsorbent bed leads to higher thermal capacity, which contributes to increase the sensible heat of the system.

Correspondingly, the methanol uptake variation per day,  $\Delta w$ , ranged from 9 to 20 wt.%, for the case of AC35, and from 20 to 35 wt.%, for the case of the composite sorbent “LiCl in silica gel”. This confirms the better sorption properties for the proposed sorbent with respect to the commercial carbon.

Figures 6, 7 show the calculated values of the temperature of methanol inside the evaporator and the mass of water converted into ice, inside the cold chamber. It can be observed that the system based on activated carbon (Fig. 6) is not able to produce 20 kg (i.e. 13.3 kg m<sup>-2</sup>) of ice every day, and the corresponding temperature is higher than -5 °C. On the contrary, the system based on “LiCl in silica gel” (Fig. 7) demonstrated a capability of Daily Ice Production of 20 kg and a lower evaporation temperature (-10 °C is the minimum). Only for the first day the DIP is lower than 20 kg (18.6 kg, i.e. 12.4 kg m<sup>-2</sup>); this is due to the low adsorbent temperature (see Fig. 5) and the corresponding high uptake, that are affected by the weather conditions of the previous (not represented) days. The temperature of the water in the cold chamber is almost coincident with that of evaporation, due to the good thermal contact between liquid methanol and water.

Inspection of Fig. 7 shows that, in the case of the system based on “LiCl in silica gel”, the evaporator is significantly under-cooled after the production of 20 kg of ice.

Subsequently, it can be argued that this system could be able to produce a further amount of ice (i.e., more than  $20 \text{ kg day}^{-1} = 13.3 \text{ kg m}^{-2} \text{ day}^{-1}$ ). Therefore the potentiality of this material, for ice-making applications, deserves a deeper investigation that is described in the next paragraph.

### 5.2. Calculation of performance

The performance were calculated considering an ice-maker with the same design of the above described base-case and different amounts of liquid water to be frozen. The Daily Ice Production (DIP), its equivalent value ( $\overline{\text{DIP}}_{\text{eq}}$ ) and the daily Coefficient Of Performance (COPs), were calculated according to Eqs. (9)-(11). Afterwards, the average values of these parameters ( $\overline{\text{DIP}}$ ,  $\overline{\text{DIP}}_{\text{eq}}$  and  $\overline{\text{COPs}}$ ), corresponding to the whole period considered for simulations, were determined. Figure 8 reports the  $\overline{\text{DIP}}_{\text{eq}}$  (in  $\text{kg m}^{-2}$ ) calculated for the two adsorbents. The values of ice production calculated for the system based on activated carbon/methanol pair ( $7.5\text{-}11 \text{ kg m}^{-2} \text{ day}^{-1}$ ) are in good agreement with the values reported in literature for this configuration [7, 12-13]. It is evident that the adsorption ice-maker based on AC35 provides a maximum of  $11 \text{ kg m}^{-2} \text{ day}^{-1}$  of ice, due to the limited adsorption capacity of the carbon. Furthermore, this value decreases when the amount of liquid water in the cold chamber increases, due to the higher liquid water sensible heat.

Thus the optimum amount of liquid water to put in the cold box is about 19 kg for the AC35-CH<sub>3</sub>OH pair. This value is much higher (about 37 kg of water) for the LiCl-CH<sub>3</sub>OH pair, with a corresponding maximum of  $20 \text{ kg m}^{-2} \text{ day}^{-1}$  of ice production. This is evidently due to the higher adsorption capacity of the composite sorbent.

Figure 9 reports the  $\overline{\text{COPs}}$  calculated for the two adsorbents. It results that the average solar COP corresponding to the system using activated carbon is equal to 0.17, independently on the liquid water mass. This result, which is coherent with the values reported by other authors [6, 7, 10, 12], confirms that the use of activated carbon cannot ensure the design of a highly performing adsorption ice-maker. Differently, the COPs of the system based on Lithium Chloride increases when liquid water mass increases, and reaches a noticeable value of 0.33, which is almost twice the maximum value obtained for AC35.

These results clearly demonstrate that the outstanding methanol sorption properties of the composite sorbent “LiCl in silica gel” make possible the realization of an adsorption ice-maker which performs much better than the units previously proposed in literature and that is potentially attractive for the niche-market of the solar cooling in remote areas.

The COP and DIP values previously reported in literature for activated carbon/methanol systems represent a preliminary validation of the proposed model, which should be definitely accomplished when the measured performance parameters of a prototype, based also on the other adsorbent/adsorbate pair, will be available. This will be done in a following paper.

## 6. Conclusions

This study evidences that the utilization of innovative adsorbent materials with high sorption ability can improve the performance of adsorptive cooling systems. In particular, it was shown that the novel composite sorbent “Lithium Chloride in silica gel pores” makes it possible to design highly efficient solar-powered adsorptive ice-makers. Indeed, mathematical modelling demonstrated that a maximum solar Coefficient Of Performance (COPs) of 0.33 and a maximum Daily Ice Production (DIP) of  $20 \text{ kg m}^{-2}$

can be obtained for an ice-maker using a solar collector area of 1.5 m<sup>2</sup> and 36 kg of “Lithium Chloride in silica gel pores” sorbent. Such performance are more than 80% higher than those obtained using common activated carbon.

## References

- [1] A. Dieng, R.Z. Wang, Literature review on solar adsorption technologies for ice-making and air-conditioning purposes and recent developments in solar technology, *Renewable & Sustainable Energy Reviews* 5 (4) (2001) 313-342.
- [2] Z.F. Li, K. Sumathy, A solar powered ice-maker with the solid adsorption pair of activated carbon and methanol, *International Journal of Energy Research* 23 (6) (1999) 517-527.
- [3] K. Sumathy, L. Zhongfu, Experiments with solar-powered adsorption ice-maker, *Renewable Energy* 16 (1-4) (1998) 704-707.
- [4] M. Li, R.Z. Wang, Y. Xu, J. Wu, A. Dieng, Experimental study on dynamic performance analysis of a flat-plate solar solid-adsorption refrigeration for ice maker, *Renewable Energy* 27 (2) (2002) 211-221.
- [5] E.E. Anyanwu, C.I. Ezekwe, Design, construction and test run of a solid adsorption solar refrigerator using activated carbon/methanol, as adsorbent/adsorbate pair, *Energy Conversion & Management* 44 (18) (2003) 2879-2892.
- [6] N.M. Khattab, Simulation and optimization of a novel solar-powered adsorption refrigeration module, *Solar Energy* 80 (2006) 823-833.
- [7] S.G. Wang, R.Z. Wang, Recent developments of refrigeration technology in fishing vessels, *Renewable Energy* 30 (2005) 589-600.
- [8] M. Li, R.Z. Wang, Heat and mass transfer in a flat plate solar solid adsorption refrigeration ice maker, *Renewable Energy* 28 (4) (2003) 613-622.

- [9] Y.J. Dai, K. Sumathy, Heat and mass transfer in the adsorbent of a solar adsorption cooling system with glass tube insulation, *Energy* 28 (14) (2003) 1511-1527.
- [10] E.F. Passos, J.F. Escobedo, F. Meunier, Simulation of an intermittent adsorptive solar cooling system, *Solar Energy* 42 (2) (1989) 103-111.
- [11] E.J. Hu, R.H.B. Exell, Simulation and sensitivity analysis of an intermittent solar powered charcoal/methanol refrigerator, *Renewable Energy* 4 (1) (1994) 133-149.
- [12] A. Boubakri, J. Guilleminot, F. Meunier, Adsorptive solar powered ice-maker: experiments and model, *Solar Energy* 69 (3) (2000) 249-263.
- [13] A.P.F. Leite, M. Daguene, Performance of a new solid adsorption ice maker with solar energy, *Energy Conversion & Management* 41 (15) (2000) 1625-1647.
- [14] Yu.I. Aristov, L.G. Gordeeva, Yu.D. Pankratiev, L.M. Plyasova, I.V. Bikova, A. Freni, G. Restuccia, Sorption Equilibrium of Methanol on new composite sorbents “CaCl<sub>2</sub>/Silica Gel”, *Adsorption* 13 (2) (2007) 121-127.
- [15] L.G. Gordeeva, A. Freni, T.A. Krieger, G. Restuccia, Yu.I. Aristov, Composites “lithium halides in silica gel pores”: methanol sorption equilibrium, *Microporous and Mesoporous Materials* 112 (1-3) (2008) 254-261.
- [16] Yu.I. Aristov, G. Restuccia, G. Cacciola, V.N. Parmon, A family of new working materials for solid sorption air conditioning systems, *Applied Thermal Engineering* 22 (2) (2002) 191-204.
- [17] L.G. Gordeeva, A. Freni, G. Restuccia, Yu.I. Aristov, A new family of methanol sorbents for adsorptive air conditioning driven by low temperature heat in: Proceedings of the International Conference on Heat Powered Cycles, Newcastle upon Tyne, 11-14 September 2006, pp. 21-22.
- [18] L.G. Gordeeva, A. Freni, G. Restuccia, Yu.I. Aristov, Influence of characteristics of methanol sorbents “salt in mesoporous silica” on the performance of adsorptive

- air conditioning cycle, *Industrial & Engineering Chemistry Research* 46 (9) (2007) 2747-2752.
- [19] S. Vasta, G. Maggio, G. Santori, A. Freni, F. Polonara, G. Restuccia, An adsorptive solar ice-maker dynamic simulation for north Mediterranean climate, *Energy Conversion & Management*, accepted for publication 2008.
- [20] G. Restuccia, Yu.I. Aristov, G. Maggio, G. Cacciola, M.M. Tokarev, Performance of sorption systems using new selective water sorbents in: *Proceedings of the International Sorption Heat Pump Conference, Munich, 24-26 March 1999*, pp. 219-223.
- [21] A. Freni, L.G. Gordeeva, S. Vasta, Yu. I. Aristov, G. Restuccia, Composite sorbent of methanol “lithium chloride in mesoporous silica gel” for adsorptive cooling machines: performance evaluation, *International Symposium on Innovative Materials for Processes in Energy Systems (IMPRES)*, 28-31 October, 2007, Kyoto, Japan; paper ID: A035.
- [22] G. Restuccia, S. Vasta, A. Freni, F. Russo, Yu. I. Aristov, An advanced solid sorption chiller using SWS-1L: performance analysis and hydrothermal cycling stability of the sorbent bed, in: *Proceedings of the International Sorption Heat Pump Conference, June 22-24, 2005, Denver, CO, USA*; paper # ISHPC-078-2005. <http://www.enme.umd.edu/ceee/ishpc/content/ISHPC2005Proceedings.pdf>
- [23] G. Cacciola, G. Restuccia, Reversible adsorption heat pump: a thermodynamic model, *International Journal of Refrigeration* 18 (2) (1995) 100-106.
- [24] H.L. Luo, Y.J. Dai, R.Z. Wang, R. Tang, M. Li, Year round test of a solar adsorption ice maker in Kunming, China, *Energy Conversion and Management* 46 (13-14) (2005) 2032-2041.

- [25] K. Radhakrishnan, A.C. Hindmarsh, Description and use of LSODE, the Livermore Solver for Ordinary Differential Equations in: Lawrence Livermore National Laboratory technical report UCRL-ID-113855, March 1994.

ACCEPTED MANUSCRIPT

## FIGURE CAPTIONS

- Figure 1:** Comparison between the composite sorbent “Lithium Chloride in mesoporous silica gel” and the activated carbon AC35, in terms of air conditioning and ice-making cycles.
- Figure 2:** Scheme of the solar-powered adsorptive ice-maker.
- Figure 3:** Ambient temperature and solar radiation recorded in May 1-6, 2005.
- Figure 4:** Condenser and adsorbent temperature, calculated for activated carbon and 20 kg of liquid water.
- Figure 5:** Condenser and adsorbent temperature, calculated for LiCl in silica gel and 20 kg of liquid water.
- Figure 6:** Evaporator temperature and mass of ice calculated for activated carbon and 20 kg of liquid water.
- Figure 7:** Evaporator temperature and mass of ice calculated for LiCl in silica gel and 20 kg of liquid water.
- Figure 8:** Equivalent Daily Ice Production vs. liquid water mass, calculated for the two adsorbents.
- Figure 9:** Average Solar Coefficient Of Performance vs. liquid water mass, calculated for the two adsorbents.




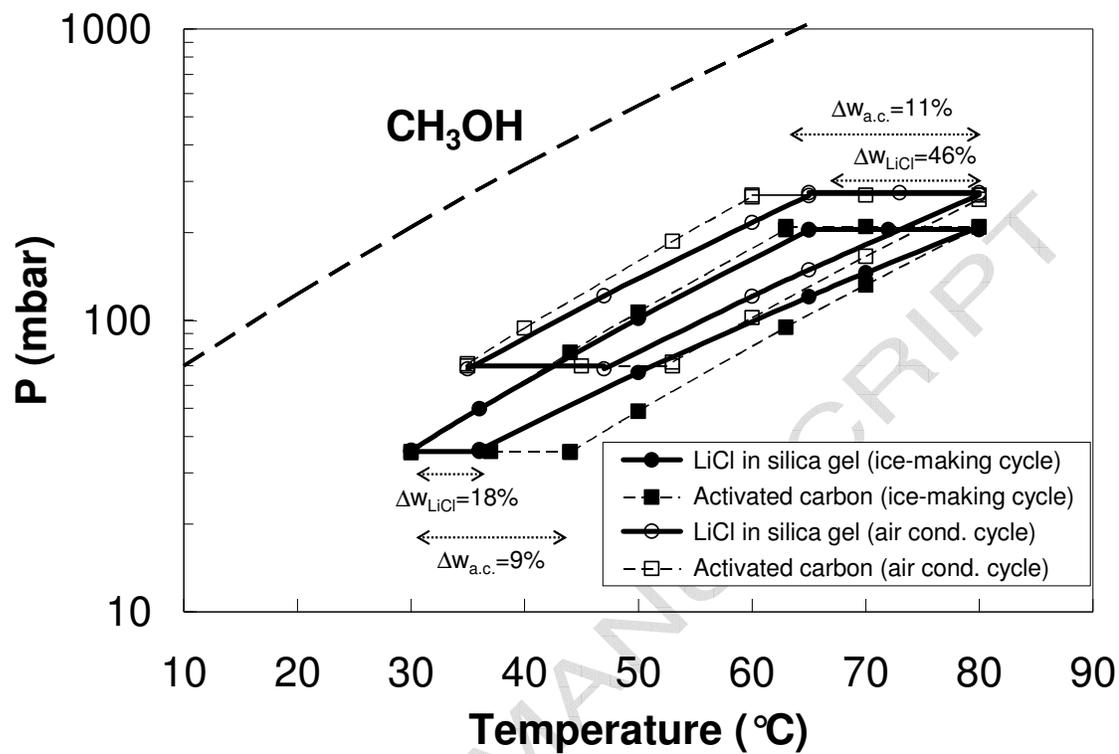



Figure 1

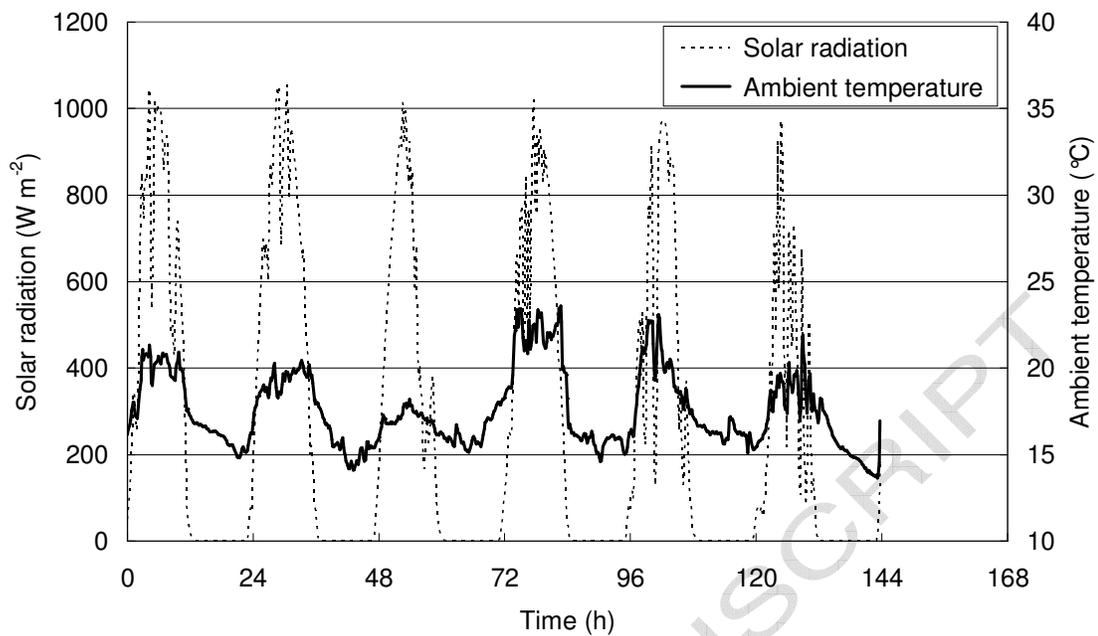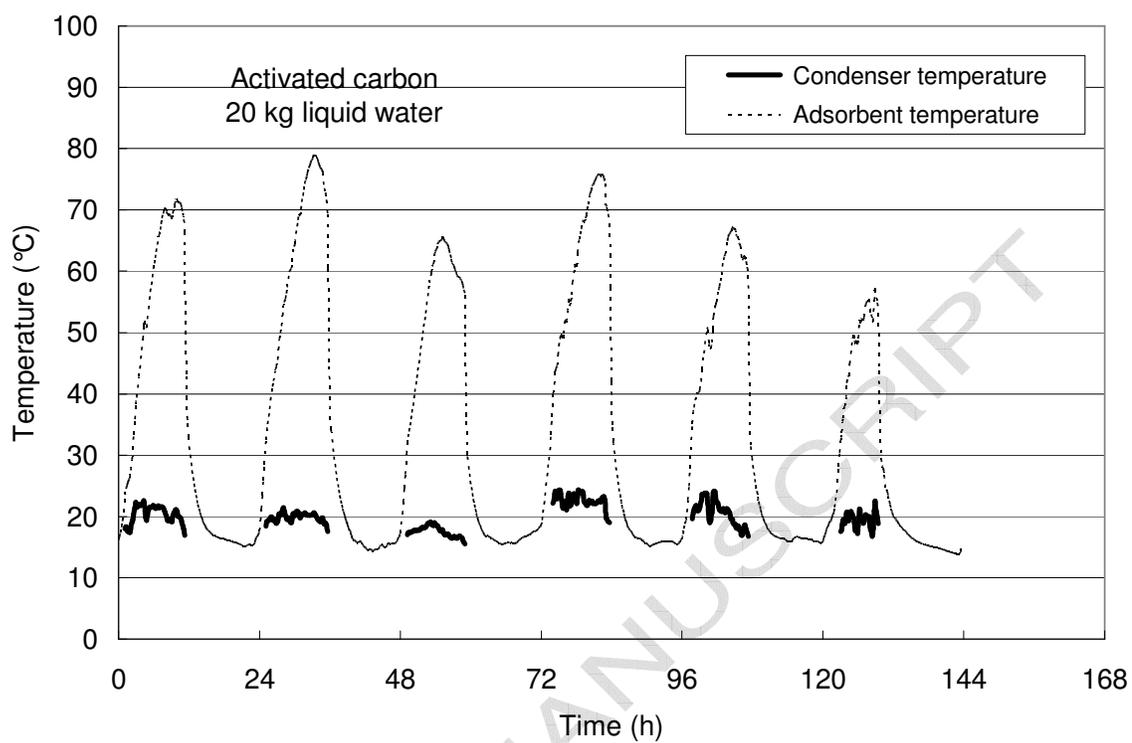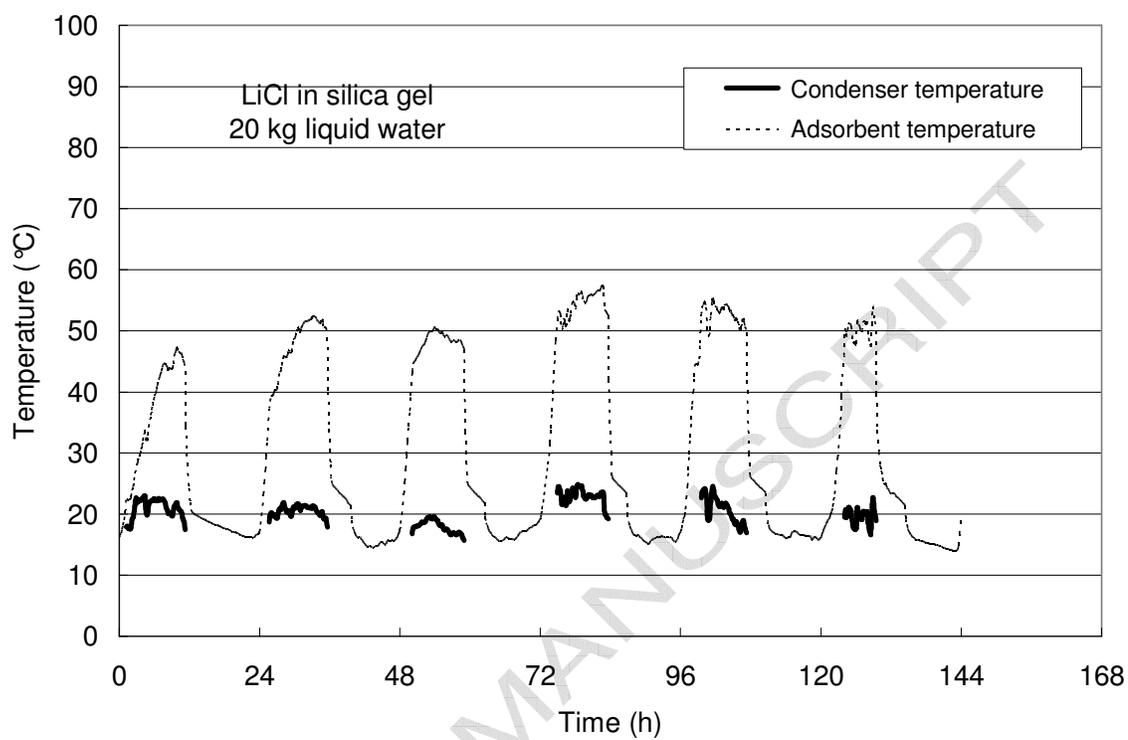

**Figure 3**

**Figure 4**

**Figure 5**

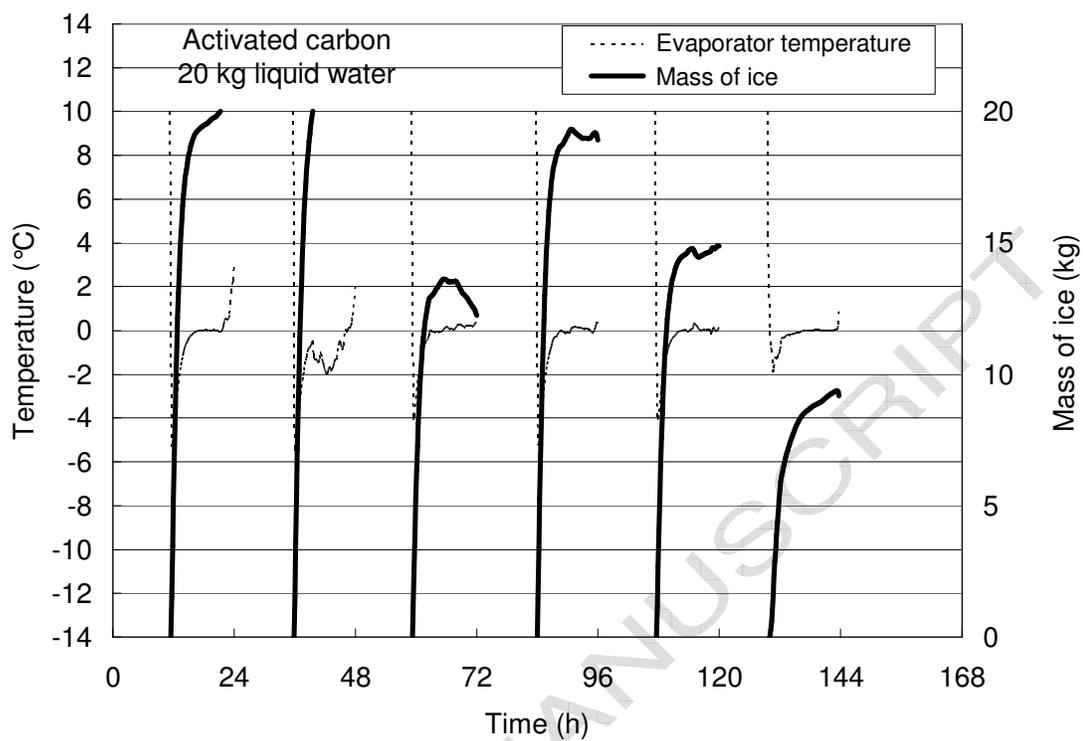**Figure 6**

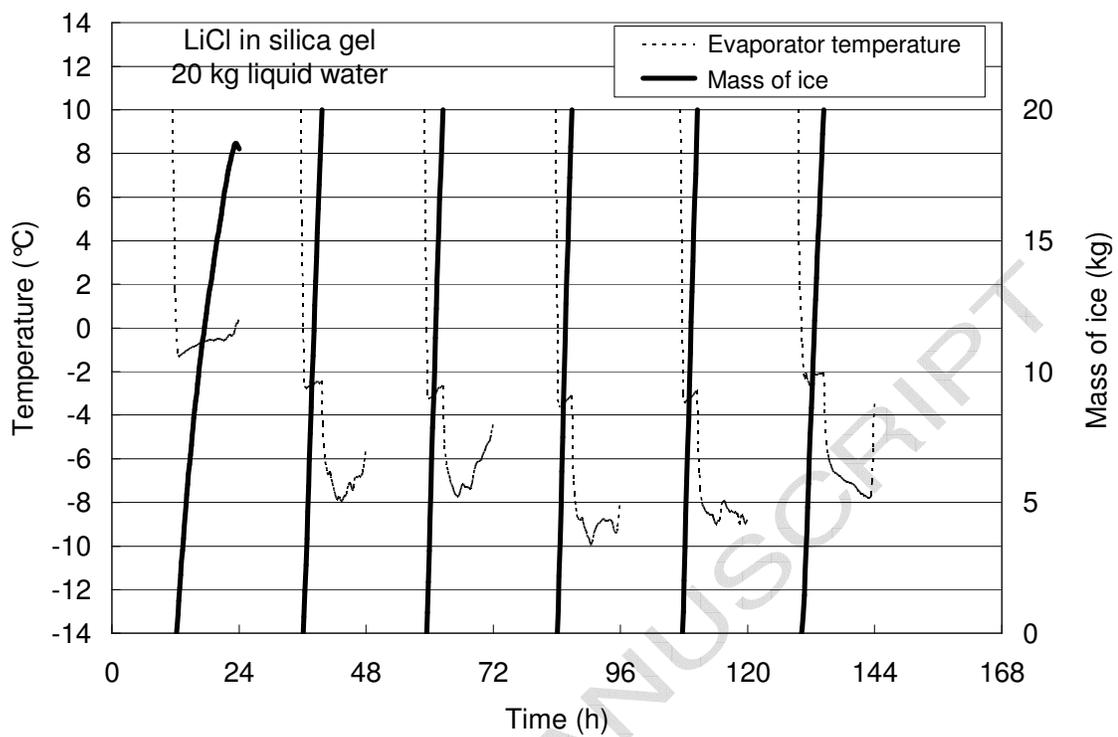


Figure 7

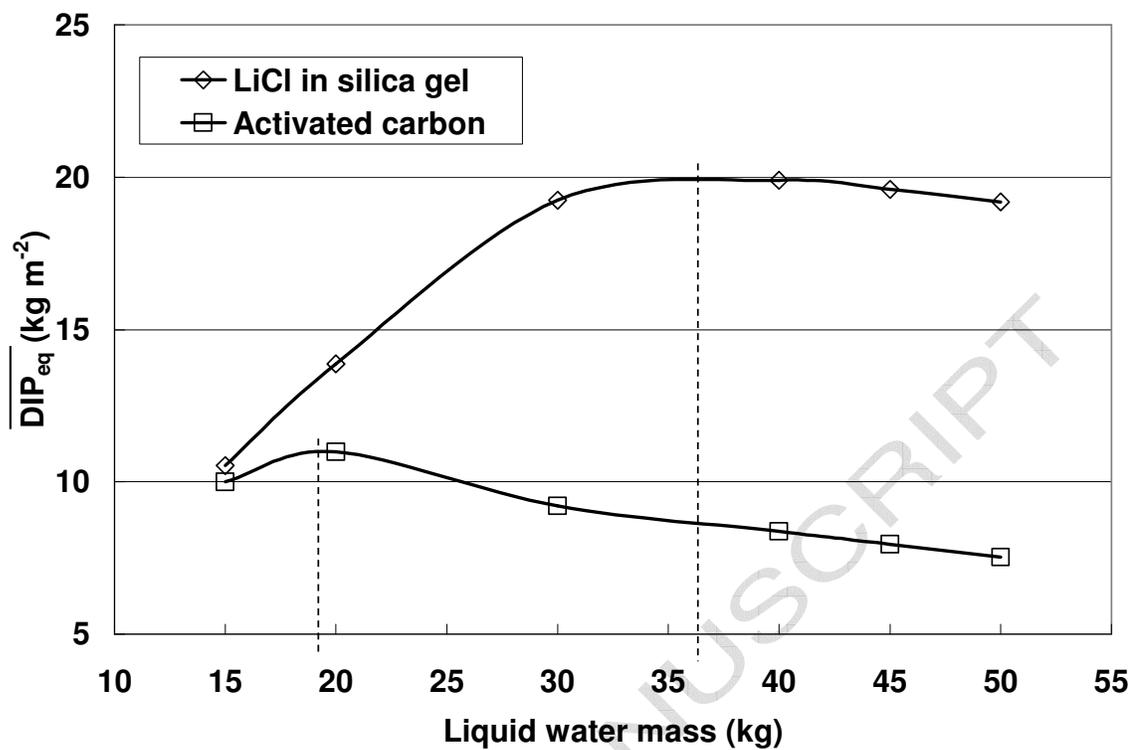


Figure 8

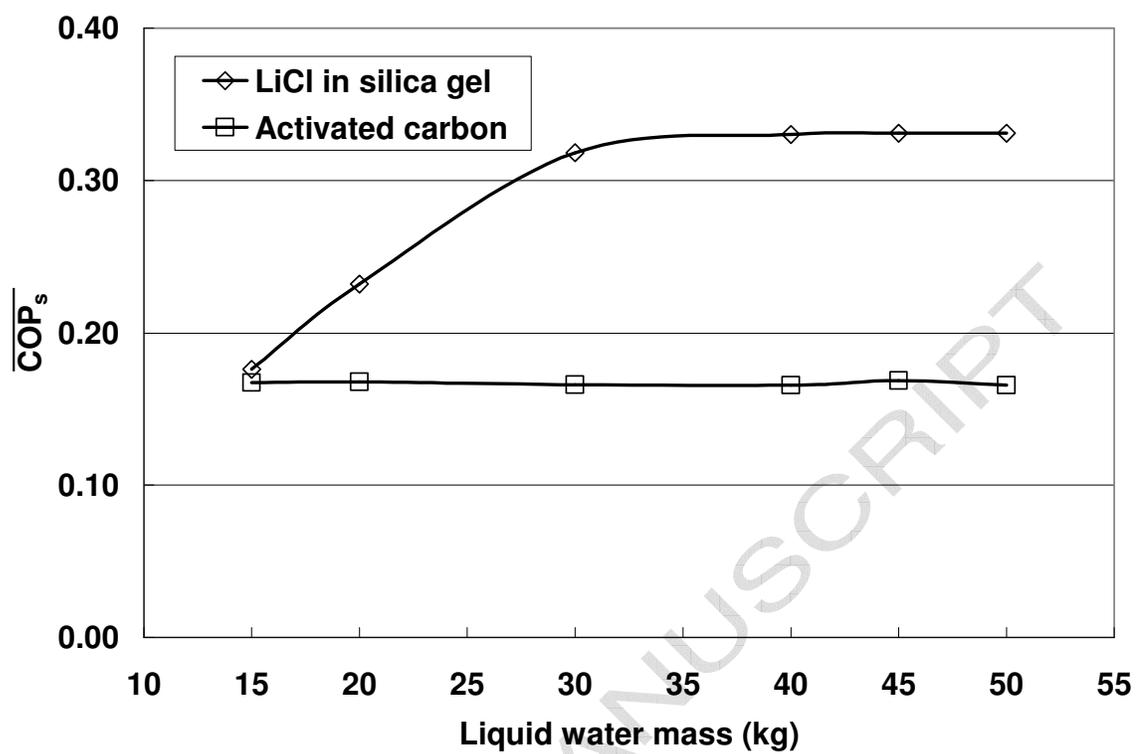


Figure 9