



HAL
open science

An Optimal Control Problem of Unmanned Aerial Vehicle

Kahina Louadj, Fethi Demim, Abdelkrim Nemra, Philippe Marthon

► **To cite this version:**

Kahina Louadj, Fethi Demim, Abdelkrim Nemra, Philippe Marthon. An Optimal Control Problem of Unmanned Aerial Vehicle. 5th International Conference on Control, Decision and Information Technologies (CoDIT 2018), Apr 2018, Thessaloniki, Greece. pp.751–756, 10.1109/CoDIT.2018.8394830 . hal-03033994

HAL Id: hal-03033994

<https://hal.science/hal-03033994v1>

Submitted on 2 Dec 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

An Optimal Control Problem of Unmanned Aerial Vehicle

Kahina LOUADJ ^{1,3}, Fethi DEMIM ², Abdelkrim NEMRA ² and Philippe MARTHON ³

Abstract—An unmanned aerial vehicle (UAV) has grown rapidly the last years. They are being engaged in many types of missions, ranging from military to agriculture passing from entertainment and rescue or even delivery. This work consist to ensure the convergence of positions and yaw angle, to their desired trajectories while maintaining stability of roll and pitch angle. For this, formulate this problem to an optimal control problem which minimizes the distance between state and desired state in free final time. Our contribution is to use the Bocop software to solve this problem. And to implement Shooting method with Matlab software.

I. INTRODUCTION

Unmanned Aerial Vehicles (UAV) commonly called "Drones" [1], [2], [3]; since the earliest days of aviation, their use has increased dramatically in the first decade of the 21st century, as they have many advantages compared to air vehicles conventional fixed wings. They can take off and land vertically in limited spaces and easily hover above of the target, which allows their use in any which ground, to the opposition of fixed-wing aircraft, which require prepared tracks for them to taking off and to land. Drones can be used for everything from law enforcement, to search and rescue after natural disasters, weather research, pest control, and even for taking aerial shots for real estate developers.

There are several types of drones, in this paper, we are interested in the quad-rotor kind, the choice of this type of drone is motivated by the simplicity of mechanics which facilitates its maintenance, its small size which let fly near obstacles and its dynamic that represents a very attractive control problem [4], [6]. Indeed, these drones are unstable in open loop, hence to drive them, it is necessary to stabilize them using a control algorithm in closed loop.

In our case, We choose quad-rotors drone which is handy, allow vertical takeoff and landing, as well as flying in hard to- Reach areas. The disadvantages are its mass and the consumption of energy caused by motors. The drone can perform three flight modes; hover, vertical flight and translation flight. In our work, we are interested in a translation flight that corresponds to the navigation on a horizontal plane, it is ensured by basing itself on pitch and roll tilting movements [25].

In the present study, we consider an optimal control problem of quad-rotor. In order to illustrate this study, we consider distance minimization problem between state and desired state in free final time. To solve this problem we will use the principle of Pontryaguin [18], [19], [24], [26], and determine the optimality equations resulting from this principle; i.e.; a differential-algebraic system as the state equation is provided

and the adjoint equation. Thus, in order to determine the initial condition of the adjoint state; we use Bocop software [28] to ensure the convergence of this method. The work presented in this paper is organized as follows : In section I, a dynamic model of the quad-rotor is considered. In section II, implementation of the Shooting method with Matlab software. Finally, discussion, simulation results and conclusion are provided in Section III.

II. QUAD-ROTOR FLIGHT MODEL

Let

$$X = [\phi, \dot{\phi}, \theta; \dot{\theta}, \psi, \dot{\psi}, x, \dot{x}, y, \dot{y}, z, \dot{z}]^T \quad (1)$$

The model dynamic of the quad-rotor is given under the state space as $\dot{x} = f(x) + g(x, u)$ considering $X = [x_1, x_2, x_3, x_4, x_5, x_6, x_7, x_8, x_9, x_{10}, x_{11}, x_{12}]^T$, and $u = [u_1, u_2, u_3, u_4]^T$ be the state, the control vector of the system respectively is given as follows:

$$\begin{cases} \dot{x}_1 = x_2, \\ \dot{x}_2 = a_1 x_4 x_6 + a_2 x_4 \Omega + b_1 u_1, \\ \dot{x}_3 = x_4, \\ \dot{x}_4 = a_3 x_2 x_6 + a_4 x_2 \Omega + b_2 u_2, \\ \dot{x}_5 = x_6, \\ \dot{x}_6 = a_5 x_2 x_4 + b_3 u_3, \\ \dot{x}_7 = x_8, \\ \dot{x}_8 = \frac{u_4}{m} (\cos x_1 \sin x_3 \cos x_5 + \sin x_1 \sin x_5), \\ \dot{x}_9 = x_{10}, \\ \dot{x}_{10} = \frac{u_4}{m} (\cos x_1 \sin x_3 \sin x_5 - \sin x_1 \cos x_5), \\ \dot{x}_{11} = x_{12}, \\ \dot{x}_{12} = \frac{\cos x_1 \cos x_3}{m} u_4 - g, \\ -\pi/2 \leq x_1 \leq \pi/2, -\pi/2 \leq x_3 \leq \pi/2, \\ -\pi \leq x_5 \leq \pi, x_i(0) = 0, i = \overline{1, 12}, \\ -20 \leq u_j \leq 20, j = \overline{1, 4}, 0 \leq u_4 \leq 20. \end{cases} \quad (2)$$

Where $g(m/s^2)$:gravity acceleration; $I_x, I_y, I_z(kg/m^2)$:roll, pitch and yaw inertia moments respectively; $J_r(kg/m^2)$: the rotor inertia; $m(kg)$: mass; $x, y, z(m)$: longitudinal, lateral and vertical motions respectively; $\phi, \theta, \psi(rad)$: roll, pitch and yaw angles, respectively; $w_k(rad/s)$: rotor angular velocity, where, k equal to 1, 2, 3 and 4; $d(m)$: the distance between the quadrotor center of mass and the propeller rotation axis; $u_1, u_2, u_3(N.m)$: aerodynamical roll, pitch and yaw moments respectively; $u_4(N)$: lift force.

With $\Omega = w_1 - w_2 + w_3 - w_4$, $a_1 = \frac{I_y - I_z}{I_x}$, $a_2 = \frac{-J_r}{I_x}$, $a_3 = \frac{I_z - I_x}{I_y}$, $a_4 = \frac{J_r}{I_y}$, $a_5 = \frac{I_x - I_y}{I_z}$, $b_1 = \frac{d}{I_x}$, $b_2 = \frac{d}{I_y}$, $b_3 = \frac{d}{I_z}$.

The one of the main objectives of this paper is to find control which ensure the convergence of positions $\{x, y, z\}$ and yaw angle ψ , to their desired trajectories respectively $\{x_d, y_d, z_d\}$, and yaw angle ψ_d while maintaining stability of roll and pitch angle $\{\phi, \theta\}$ in free final time.

*K.Louadj, F.Demim, A.Nemra, P.Marthon

¹ Université de Bouira. Département de Mathématiques. Bouira. Algérie. louadj_kahina@yahoo.fr

² Laboratoire Robotique et Productique, Ecole Militaire Polytechnique, Bordj El Bahri, BP 17, 16111, Alger. Algérie. demifethi@gmail.com, karim_nemra@yahoo.fr

³ IRIT-ENSEEIH. Toulouse, France. Philippe.Marthon@enseeiht.fr

Then, the criterion is formulate as follows:

$$J = \int_0^{t_f} \left(\frac{1}{\rho} (x_5 - \psi_d)^2 + (x_7 - x_d)^2 + (x_9 - y_d)^2 + (x_{11} - z_d)^2 \right) dt \quad (3)$$

where t_f (second) : free final time ; $\{x_d, y_d, z_d\}$: desired trajectory of $\{x, y, z\}$; ψ_d : desired trajectory of ψ .

III. SHOOTING INDIRECT METHOD

The shooting indirect method is used to obtain the value of $p(0)$ necessary to the solution of the problem characterized by the Pontryaguin principle. If it is possible, from the condition of minimization of the Hamiltonian to express the control extremal function of $(x(t), p(t))$ then the extremal system is a differential system of the form $\dot{v}(t) = G(t, v(t))$ where $v(t) = (x(t), p(t))$.

The Hamiltonian of the system 2 is given by:

$$H = p_1 x_2 + p_2 (a_1 x_4 x_6 + a_2 x_4 \Omega + b_1 u_1) + p_3 (x_4) + p_4 (a_3 x_2 x_6 + a_4 x_2 \Omega + b_2 u_2) + p_5 (x_6) + p_6 (a_5 x_2 x_4 + b_3 u_3) + p_7 (x_8) + p_8 \left(\frac{u_4}{m} (\cos x_1 \sin x_3 \cos x_5 + \sin x_1 \sin x_5) \right) + p_9 (x_{10}) + p_{10} \left(\frac{u_4}{m} (\cos x_1 \sin x_3 \sin x_5 - \sin x_1 \cos x_5) \right) + p_{11} (x_{12}) + p_{12} \left(\frac{\cos x_1 \cos x_3}{m} u_4 - g \right) + \frac{1}{\rho} [(x_5 - \psi_d)^2 + (x_7 - x_d)^2 + (x_9 - y_d)^2 + (x_{11} - z_d)^2].$$

The Euler-Lagrange equations leads to:

$$\begin{cases} \dot{x}_1 = \frac{\partial H}{\partial p_1} = x_2, \\ \dot{x}_2 = \frac{\partial H}{\partial p_2} = a_1 x_4 x_6 + a_2 x_4 \Omega + b_1 u_1, \\ \dot{x}_3 = \frac{\partial H}{\partial p_3} = x_4, \\ \dot{x}_4 = \frac{\partial H}{\partial p_4} = a_3 x_2 x_6 + a_4 x_2 \Omega + b_2 u_2, \\ \dot{x}_5 = \frac{\partial H}{\partial p_5} = x_6, \\ \dot{x}_6 = \frac{\partial H}{\partial p_6} = a_5 x_2 x_4 + b_3 u_3, \\ \dot{x}_7 = \frac{\partial H}{\partial p_7} = x_8, \\ \dot{x}_8 = \frac{\partial H}{\partial p_8} = \frac{u_4}{m} (\cos x_1 \sin x_3 \cos x_5 + \sin x_1 \sin x_5), \\ \dot{x}_9 = \frac{\partial H}{\partial p_9} = x_{10}, \\ \dot{x}_{10} = \frac{\partial H}{\partial p_{10}} = \frac{u_4}{m} (\cos x_1 \sin x_3 \sin x_5 - \sin x_1 \cos x_5), \\ \dot{x}_{11} = \frac{\partial H}{\partial p_{11}} = x_{12}, \\ \dot{x}_{12} = \frac{\partial H}{\partial p_{12}} = \frac{\cos x_1 \cos x_3}{m} u_4 - g, \\ \dot{p}_1 = -\frac{\partial H}{\partial x_1} = -p_8 \frac{u_4}{m} (-\sin x_1 \sin x_3 \cos x_5 + \cos x_1 \sin x_5) - p_{10} \frac{u_4}{m} (-\sin x_1 \sin x_3 \sin x_5 - \cos x_1 \cos x_5) - p_{12} \left(\frac{-\sin x_1 \cos x_3}{m} u_4 \right), \\ \dot{p}_2 = -\frac{\partial H}{\partial x_2} = -p_1 - p_4 (a_3 x_6 + a_4 \Omega) - p_6 (a_5 x_4), \\ \dot{p}_3 = -\frac{\partial H}{\partial x_3} = -p_8 \frac{u_4}{m} (\cos x_1 \cos x_3 \cos x_5) - p_{10} \left(\frac{u_4}{m} (\cos x_1 \cos x_3 \sin x_5) - p_{12} \left(\frac{-\cos x_1 \sin x_3}{m} u_4 \right) \right), \\ \dot{p}_4 = -\frac{\partial H}{\partial x_4} = -p_2 (a_1 x_6 + a_2 \Omega) - p_3 - p_6 (a_5 x_2), \\ \dot{p}_5 = -\frac{\partial H}{\partial x_5} = -p_8 \frac{u_4}{m} (-\cos x_1 \sin x_3 \sin x_5 + \sin x_1 \sin x_5) - p_{10} \frac{u_4}{m} (\cos x_1 \sin x_3 \sin x_5 + \sin x_1 \cos x_5) - \frac{2}{\rho} (x_5 - \psi_d), \\ \dot{p}_6 = -\frac{\partial H}{\partial x_6} = -p_2 (a_1 x_4) - p_4 (a_3 x_2) - p_5, \\ \dot{p}_7 = -\frac{\partial H}{\partial x_7} = -\frac{2}{\rho} (x_7 - x_d), \\ \dot{p}_8 = -\frac{\partial H}{\partial x_8} = -p_7, \\ \dot{p}_9 = -\frac{\partial H}{\partial x_9} = -\frac{2}{\rho} (x_9 - y_d), \\ \dot{p}_{10} = -\frac{\partial H}{\partial x_{10}} = -p_9, \\ \dot{p}_{11} = -\frac{\partial H}{\partial x_{11}} = -\frac{2}{\rho} (x_{11} - z_d), \\ \dot{p}_{12} = -\frac{\partial H}{\partial x_{12}} = -p_{11}, \end{cases} \quad (4)$$

Let us defined a control law:

$$\begin{cases} \frac{\partial H}{\partial u_1} = p_2 b_1 + \frac{1}{2\rho} u_1, \\ \frac{\partial H}{\partial u_2} = p_4 b_2 + \frac{1}{2\rho} u_2, \\ \frac{\partial H}{\partial u_3} = p_6 b_3 + \frac{1}{2\rho} u_3, \\ \frac{\partial H}{\partial u_4} = \frac{p_8}{m} (\cos x_1 \sin x_3 \cos x_5 + \sin x_1 \sin x_5) + \frac{p_{10}}{m} (\cos x_1 \sin x_3 \sin x_5 - \sin x_1 \cos x_5) + p_{12} \left(\frac{\cos x_1 \cos x_3}{m} \right) + \frac{1}{2\rho} u_4, \end{cases} \quad (5)$$

Then, the control is:

$$\begin{cases} u_1 = \frac{-1}{2\rho} p_2 b_1, \\ u_2 = \frac{-1}{2\rho} p_4 b_2, \\ u_3 = \frac{-1}{2\rho} p_6 b_3, \\ u_4 = \frac{1}{2\rho} \left(\frac{p_8}{m} (\cos x_1 \sin x_3 \cos x_5 + \sin x_1 \sin x_5) + \frac{p_{10}}{m} (\cos x_1 \sin x_3 \sin x_5 - \sin x_1 \cos x_5) + p_{12} \left(\frac{\cos x_1 \cos x_3}{m} \right) \right), \end{cases} \quad (6)$$

The transversality condition of the Hamiltonian is defined as follows:

$$H(t_f, x_i, p_i, u_j, i = \overline{1, 12}, j = \overline{1, 4}) = 0 \quad (7)$$

To implement Shooting method, consider $|u_j| \leq 1, j = \overline{1, 4}$. Then, we have to solve the following system :

$$\begin{cases} \dot{v}_1 = v_2, \\ \dot{v}_2 = a_1 v_4 v_6 + a_2 v_4 \Omega + b_1 u_1, \\ \dot{v}_3 = v_4, \\ \dot{v}_4 = a_3 v_2 v_6 + a_4 v_2 \Omega + b_2 u_2, \\ \dot{v}_5 = v_6, \\ \dot{v}_6 = a_5 v_2 v_4 + b_3 u_3, \\ \dot{v}_7 = v_8, \\ \dot{v}_8 = \frac{u_4}{m} (\cos v_1 \sin v_3 \cos v_5 + \sin v_1 \sin v_5), \\ \dot{v}_9 = x_{10}, \\ \dot{v}_{10} = \frac{u_4}{m} (\cos v_1 \sin v_3 \sin v_5 - \sin v_1 \cos v_5), \\ \dot{v}_{11} = v_{12}, \\ \dot{v}_{12} = \frac{\cos v_1 \cos v_3}{m} u_4 - g, \\ \dot{v}_{13} = -v_{20} \frac{u_4}{m} (-\sin v_1 \sin v_3 \cos v_5 + \cos v_1 \sin v_5) - v_{22} \frac{u_4}{m} (-\sin v_1 \sin v_3 \sin v_5 - \cos v_1 \cos v_5) - v_{24} \left(\frac{-\sin v_1 \cos v_3}{m} u_4 \right), \\ \dot{v}_{14} = -v_{13} - v_{16} (a_3 v_6 + a_4 \Omega) - v_{18} (a_5 v_4), \\ \dot{v}_{15} = -v_{20} \frac{u_4}{m} (\cos v_1 \cos v_3 \cos v_5) - v_{22} \left(\frac{u_4}{m} (\cos v_1 \cos v_3 \sin v_5) - v_{24} \left(\frac{-\cos v_1 \sin v_3}{m} u_4 \right) \right), \\ \dot{v}_{16} = -v_{14} (a_1 v_6 + a_2 \Omega) - v_{18} - v_{18} (a_5 v_2), \\ \dot{v}_{17} = -v_{20} \frac{u_4}{m} (-\cos v_1 \sin v_3 \sin v_5 + \sin v_1 \sin v_5) - v_{22} \frac{u_4}{m} (\cos v_1 \sin v_3 \sin v_5 + \sin v_1 \cos v_5) - \frac{2}{\rho} (v_5 - \psi_d), \\ \dot{v}_{18} = -v_{14} (a_1 v_4) - v_{16} (a_3 v_2) - v_{17}, \\ \dot{v}_{19} = -\frac{2}{\rho} (v_7 - x_d), \\ \dot{v}_{20} = -v_{19}, \\ \dot{v}_{21} = -\frac{2}{\rho} (v_9 - y_d), \\ \dot{v}_{22} = -v_{21}, \\ \dot{v}_{23} = -\frac{2}{\rho} (v_{11} - z_d), \\ \dot{v}_{24} = -v_{23}, \\ v_i(0) \in \mathbf{R}, \quad i = \overline{1, 24} \end{cases} \quad (8)$$

Let $v(t, x_i, p_i, i = \overline{1, 12})$ be the solution of the previous system at time t with the initial condition $(v_i(0), i = \overline{1, 24})$. We construct a shooting function given by:

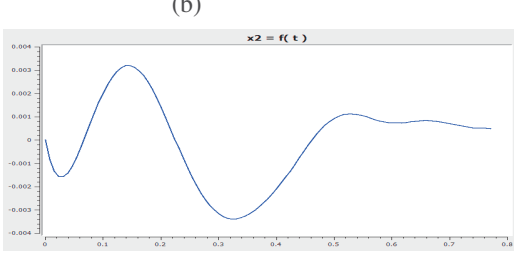
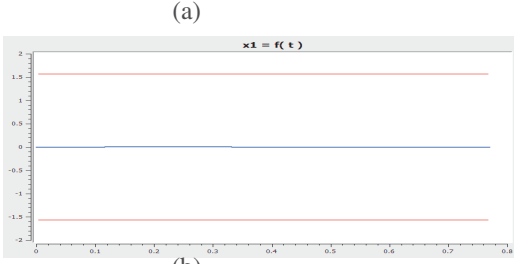


Fig. 1. Trajectory state of x_1 and x_2 respectively .

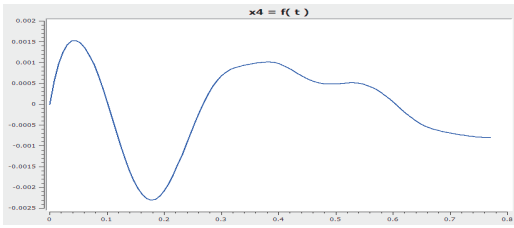
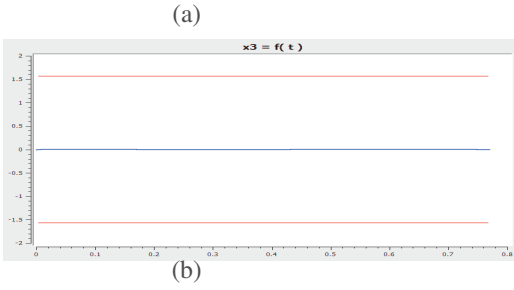


Fig. 2. Trajectory state of x_3 and x_4 respectively .

$$\varphi(p) = \begin{pmatrix} v_5(t_f, x_i, p_i, i = \overline{1, 12}) \\ v_7(t_f, x_i, p_i, i = \overline{1, 12}) \\ v_9(t_f, x_i, p_i, i = \overline{1, 12}) \\ v_{11}(t_f, x_i, p_i, i = \overline{1, 12}) - 2 \end{pmatrix}$$

In the solution, we used the Newton's method. The solution of $\varphi(p(0)) = 0$ is to find $p(0)$ such that $\varphi(p(0))$ gives the desired value of $x(t_f) = (\psi_d, x_d, y_d, z_d)$, which in our case uses the method quasi-newton (implemented in 'fsolve' of Matlab).

IV. SIMULATION AND DISCUSSION

$w_1 = 150$; $d = 0.213$; $m = 0.6$; $I_x = I_y = \frac{I_z}{2} = 5.66 \times 10^{-3}$; $J_r = 3.4 \times 10^{-5}$; $g = 9.8$, $\psi_d = 0$, $x_d = y_d = 0$; $z_d = 2$.

The red line is the delimiter of x_1 , x_3 , x_5 , u_1 , u_2 , u_3 , u_4 respectively. And the blue line is the trajectories.

The results given by Bocop software are presented in figures 1-8. This figures shows that the distance between the

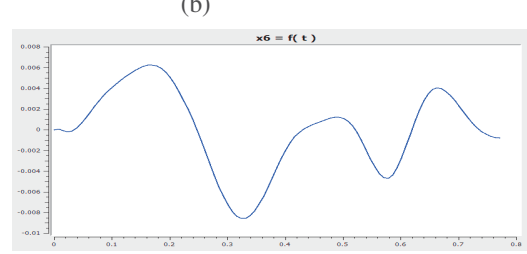
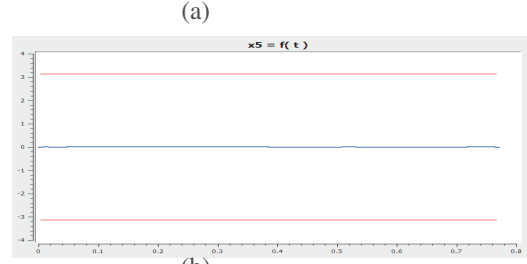


Fig. 3. Trajectory state of x_5 and x_6 respectively .

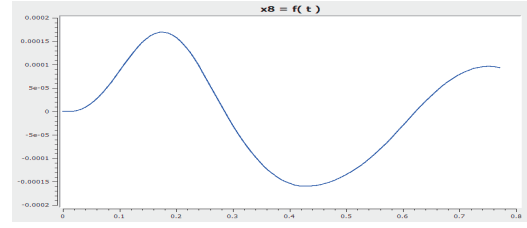
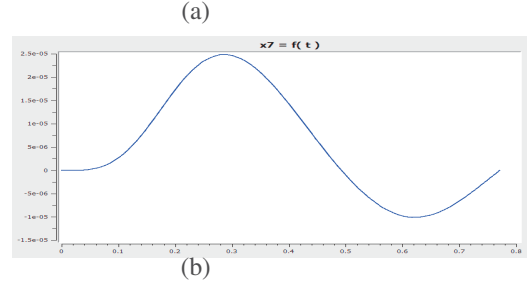


Fig. 4. Trajectory state of x_7 and x_8 respectively .

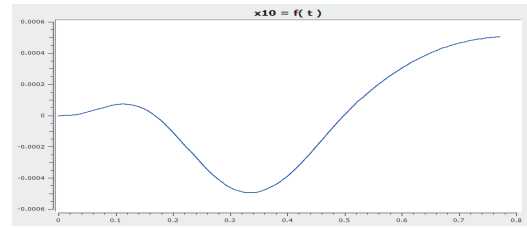
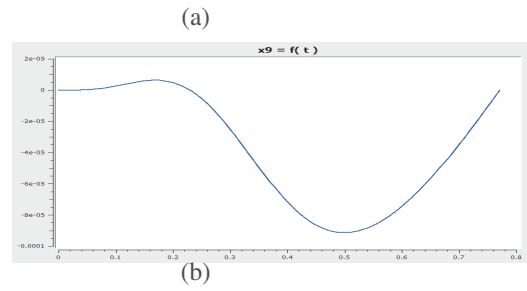


Fig. 5. Trajectory state of x_9 and x_{10} respectively .

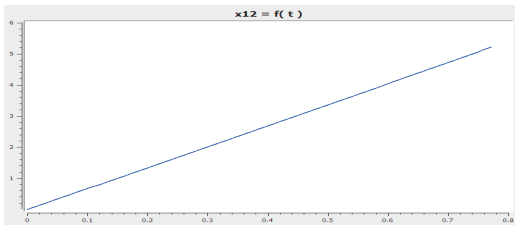
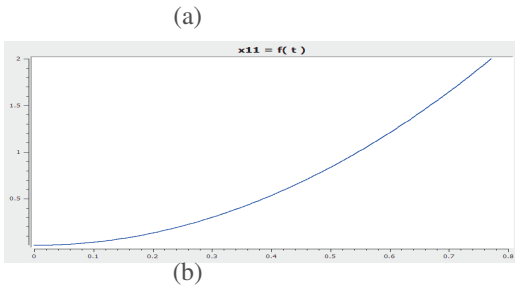


Fig. 6. Trajectory state of x_{11} and x_{12} respectively .

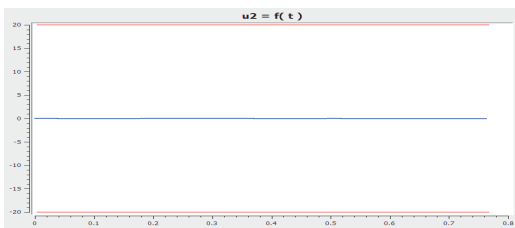
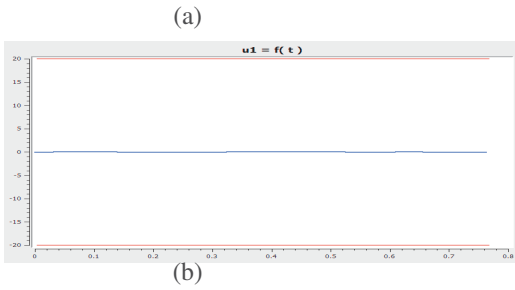


Fig. 7. Control u_1 and u_2 respectively .

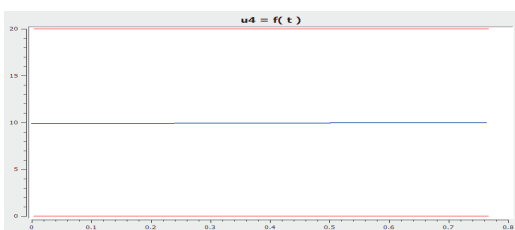
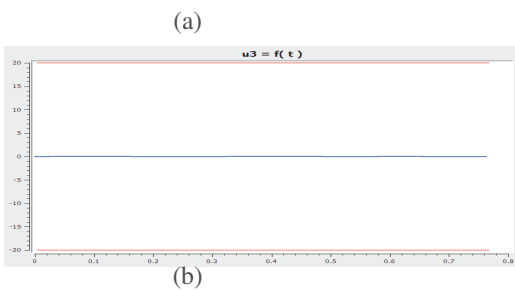


Fig. 8. Control of u_3 and u_4 respectively .

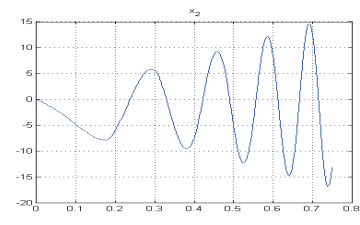
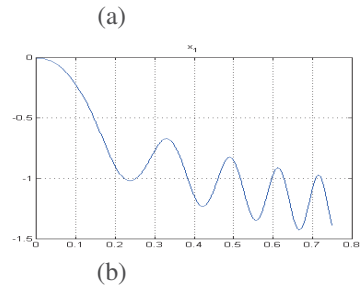


Fig. 9. Trajectory state of x_1 and x_2 respectively .

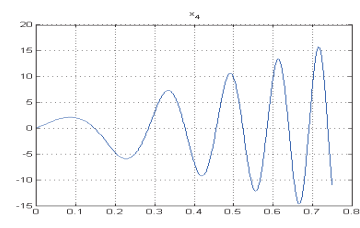
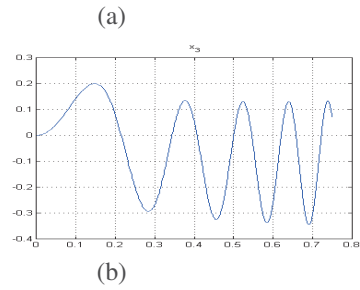


Fig. 10. Trajectory state of x_3 and x_4 respectively .

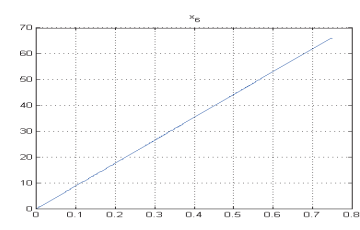
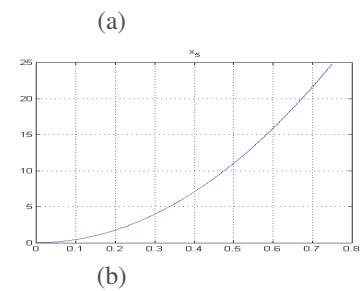


Fig. 11. Trajectory state of x_5 and x_6 respectively .

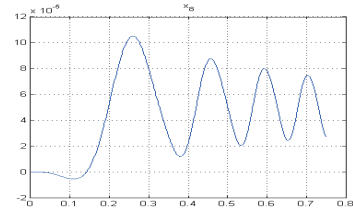
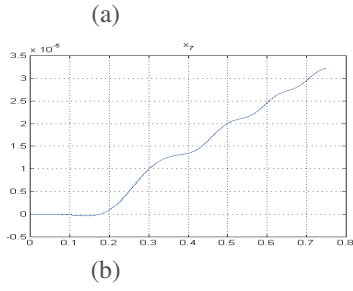


Fig. 12. Trajectory state of x_7 and x_8 respectively .

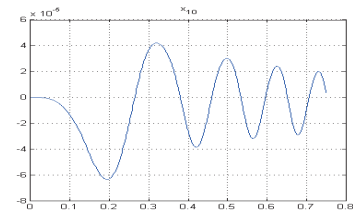
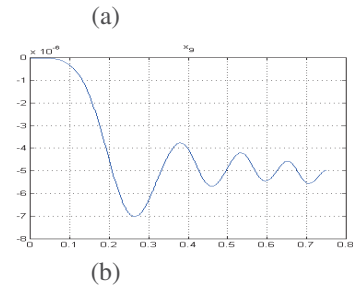


Fig. 13. Trajectory state of x_9 and x_{10} respectively .

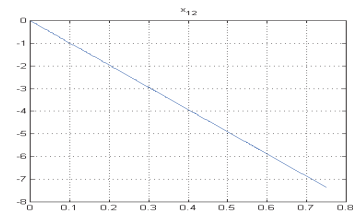
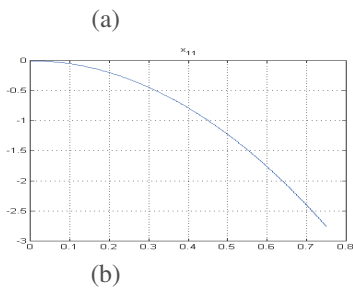


Fig. 14. Trajectory state of x_{11} and x_{12} respectively .

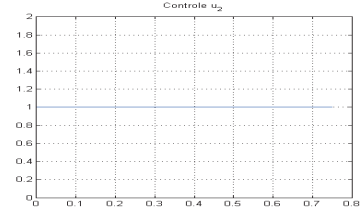
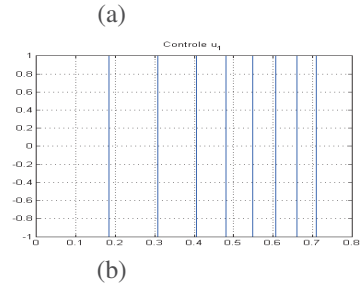


Fig. 15. Control u_1 and u_2 respectively .

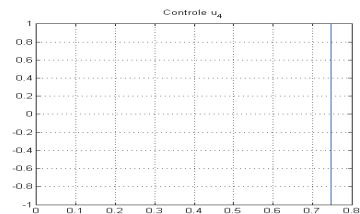
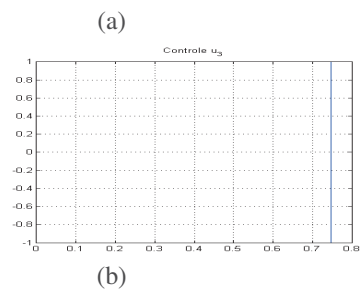


Fig. 16. Control of u_3 and u_4 respectively .

state $\{x, y, z, \psi\}$ and their desired trajectories $\{0, 0, 0, 2\}$ is ensured in 141 iterations with 9.63 second, and final time $t_f = 0.77036second$. And the results which are given by Shooting method are presented in figures 9-14. Final time with Shooting method is 0.7889 second, in 2 iterations with 15.869417 seconds. To ensure the convergence of Newton method which is the method's used to founded the zero of the Shooting function, we uses a result of the book of Ortega and Rheinboldt [27]; indeed if the discretization step h_{ij} are small and tend to zero.

V. CONCLUSION

In this work, we have solved an optimal control problem of unmanned aerial vehicle to minimize the distance between the state and the desired state in free final time.

The results are adequate for our purpose in the computational time is 9.63s in 141 iterations with Bocop software. The convergence is fast and the computational time is small. But, with Shooting method, the sensibility of the initial condition of the adjoint state, go slower time with a lot of iterations to find an optimal solution.

REFERENCES

- [1] J. F. Shamma and M. Athans, *Analysis of gain scheduled control for nonlinear plants*, IEEE Trans. On Auto. Control, 35(8):898-907, 1990.
- [2] W. J. Rugh, *Analytical framework for gain scheduling*. IEEE Control Systems Magazine, 11(1):79-84, 1991.
- [3] J-J. E. Slotine and W. Li, *Applied Nonlinear Control*, Prentice Hall, Englewood Cliffs, NJ, 1991.
- [4] K. A. Wise, J. L. Sedwick, and R. L. Eberhardt, *Nonlinear control of missiles* McDonnell Douglas Aerospace Report MDC 93B0484, October 1993.
- [5] D. Ehrler and S. R. Vadali, *Examination of the optimal nonlinear regulator problem*, In Proceedings of the AIAA Guidance, Navigation, and Control Conference, Minneapolis, MN, August 1988.
- [6] Beard, R., Kingston, D., Quigley, M., Snyder, D., Christiansen, R., Johnson, W., McLain, T., Goodrich, M., *Autonomous Vehicle Technologies for Small Fixed-Wing UAVs*, AIAA Journal of Aerospace Computing, Information and Communication, Vol. 2, January 2005.
- [7] Guo, W., Gao, X., Xiao, Q., *Multiple UAV Cooperative Path Planning based on dynamic Bayesian network*, Control and Decision Conference (CCDC), pp. 2401-2405, July 2008.
- [8] Monia MECHIRGUI, *Commande Optimale minimisant la consommation d'énergie d'un Drone*; Relai de communication, Maîtrise en Génie Électrique, Montréal, Le 15 Octobre 2014.
- [9] Asma Ammar Boudjellal, Farès Boudjema, *Commande par Backstepping basée sur un Observateur Mode Glissant pour un Drone de type Quadri-rotor*, icee2013, 2013.
- [10] David G. Hull, *Optimal control theory for applications*, Springer-Verlag, 2003.
- [11] E.Trelat, *Contrôle optimal: théorie et applications*, Vuibert, collection Mathématiques Concrètes, 2005.
- [12] Suresh P.Sethi, Gerald L.Thompson, *Optimal control theory, applications to management science and economics*, second edition, 2000.
- [13] Walid Bouhafs, Nahla Abdellatif, Frédéric Jean, Jérôme Harmand, *Commande optimale en temps minimal d'un procédé biologique d'épuration de l'eau*, Arima, Janvier 2013.
- [14] Alexander J. Zaslavski, *Structure of approximate solutions of optimal control problems*, Springer, 2013.
- [15] Leonid D. Akulenko, *Problems and Methods of Optimal Control*, Springer, 1994.
- [16] I. H. Mufti, *Computational Methods in Optimal Control Problems*, Springer, 1970.
- [17] R. Pytlak, *Numerical Methods for Optimal Control Problems With State Constraints*, Spinger, 1999.
- [18] M. Athans and P. Falb . *Optimal control: an introduction to the theory and its applications*. Dover Publications, Inc.,2007.
- [19] F.Demim, K.Louadj, M.Aidene, A. Nemra, *Solution of an Optimal Control Problem with Vector Control using Relaxation Method*, Automatic Control and System Engineering Journal, Volume 16, Issue 2, ISSN 1687-4811, ICGST LLC, Delaware, USA, 2016.
- [20] Kahina Louadj, Mohamed Aidene, *Optimization of a problem of optimal control with free initial state*, Applied Mathematical Sciences, vol.4, no.5, pp.201-216, 2010.
- [21] Kahina Louadj, Mohamed Aidene, *Adaptive method for solving optimal control problem with state and control variables*, Mathematical Problems in Engineering, Vol. 2012, 15 pages, 2012.
- [22] Kahina Louadj, Mohamed Aidene, *Direct Method for Resolution of Optimal Control Problem with Free Initial Condition*, International Journal of Differential Equations, Vol. 2012, Article ID 173634, 18 pages, 2012.
- [23] Kahina Louadj, Mohamed Aidene, *A problem of optimal control with free initial state*, Proceedings du Congrès National de Mathématiques Appliquées et Industrielles, SMAI'11, Orleans du 23rd May to au 27th, pp 184 -190, 2011.
- [24] Saliha Titouche, Pierre Spiteri, Frédéric Messine, Aidene Mohamed, *optimal control of a large thermic*, Journal Control System, Vol.25, pp.50-58, January 2015.
- [25] M. Geisert, N. Mansard, *Trajectory Generation for Quadrotor Based Systems using Numerical Optimal Control*. IEEE International Conference on Robotics and Automation (ICRA) Stockholm, Sweden, May, 16-21, 2016.
- [26] F.Demim, A. Nemra, K.Louadj, M.Hamerlain. *Simultaneous localization, mapping, and path planning for unmanned vehicle using optimal control*, Advances in Mechanical Engineering, Vol. 10(1) 1-25, 2018.
- [27] J.M.Ortega and W.C.Rheinboldt, *Iterative solution of nonlinear equations in several variables*. Academic Press, New York, 1970.
- [28] F.Bonnans, P. Martinon, V.Grélard. *Bocop - A collection of examples*. [Research Report] RR-8053, INRIA. 2012.