



HAL
open science

Effects of voids on thermal-mechanical reliability of lead-free solder joints

Lahouari Benabou, van Nhat Le, Zhidan Sun, Philippe Pougnet, Victor Etgens

► **To cite this version:**

Lahouari Benabou, van Nhat Le, Zhidan Sun, Philippe Pougnet, Victor Etgens. Effects of voids on thermal-mechanical reliability of lead-free solder joints. MATEC Web of Conferences, 2023, 12, pp.04026. 10.1051/mateconf/20141204026 . hal-03589929

HAL Id: hal-03589929

<https://hal.science/hal-03589929>

Submitted on 6 Jun 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Effects of voids on thermal-mechanical reliability of lead-free solder joints

Lahouari Benabou^{1,a}, Van Nhat Le¹, Zhidan Sun¹, Philippe Pougnet² and Victor Etgens¹

¹LISV, University of Versailles Saint Quentin-en-Yvelines, 78035 Versailles, France

²VALEO, Powertrain Systems, 95892 Cergy Pontoise, France

Abstract. Reliability of electronic packages has become a major issue, particularly in systems used in electrical or hybrid cars where severe operating conditions must be met. Many studies have shown that solder interconnects are critical elements since many failure mechanisms originate from their typical response under thermal cycles. In this study, effects of voids in solder interconnects on the electronic assembly lifetime are estimated based on finite element simulations.

1. Introduction

Pre-existing voids in solder joints are generated during the manufacturing process and can be classified into various categories. We will focus here on macrovoids which are caused by nonuniform solder shrinkage or by entrapped air due to outgassing during the reflow process. In literature, many conflicting results have been reported regarding the effects of voids on damage in the solder material [1]. The main objective of this study is to investigate separately the effects of void size and location on lifetime of the solder joint. The electronic assembly (Fig. 1a), whose reliability is investigated under thermal cycling, contains lead-free solder interconnections (SAC). Inspection with X-ray tomography (Fig. 1b) reveals that voids are mostly prevalent in the lower solder layer.

2. Constitutive law and damage model for the solder joint

The viscoplastic deformation behaviour of the SAC solder is considered using a separated constitutive description where the inelastic strain is decomposed into rate-dependent plastic strain and rate-dependent creep strain, $\varepsilon_{in} = \varepsilon_p + \varepsilon_c$. The elastic perfectly plastic model is a reasonable approximation for the behaviour of Sn3.0Ag0.5Cu [2]. Contribution of primary creep may be neglected when compared with that of secondary creep [3] and the steady state secondary creep rate can be described by the classical hyperbolic-sine law as $d\varepsilon_c/dt = A[\sinh(\zeta\sigma)]^n e^{-Q/RT}$.

All solder properties used in computations are provided in Table 1. It should be noted that hardening is only modeled as isotropic. Strain energy density is usually selected as a damage control parameter in

^a Corresponding author: lahouari.benabou@uvsq.fr

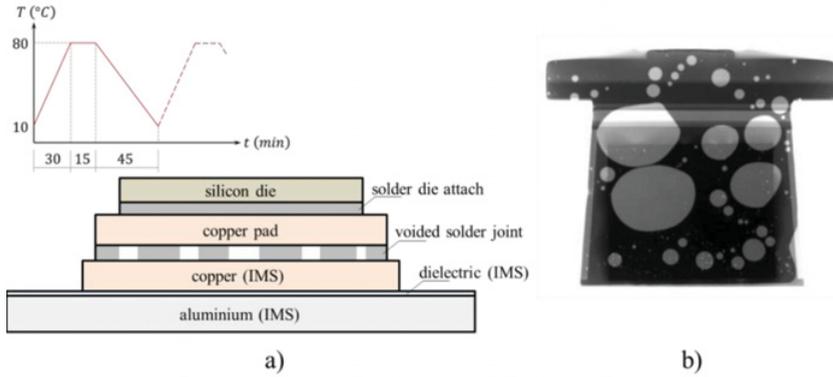


Figure 1. a) Schematic representation of the electronic assembly, b) X-ray tomography inspection of the solder voids.

Table 1. Material parameters of separated model for Sn3.0Ag0.5Cu.

Rate-dependent yield stress values				Hyperbolic-sine model constants			
strain rate (s ⁻¹)	yield stress (MPa) at			A (s ⁻¹)	ξ (MPa ⁻¹)	n	Q/R (K)
	25°C	75°C	125°C				
4.02e-6	49.0	27.0	15.0	3.1e6	3.7e-2	7	1.0e4
4.02e-5	55.5	37.5	23.5				
4.02e-4	59.5	42.5	26.0				

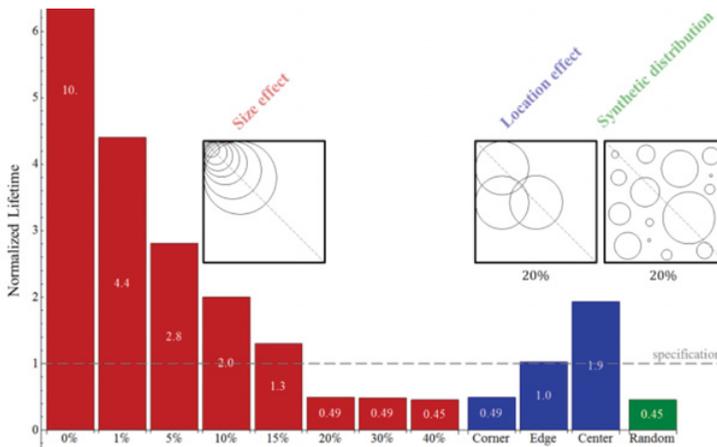


Figure 2. Lifetime normalized with respect to specification of 10000 cycles for different configurations of voids.

fatigue models because it is a comprehensive quantity including effects of both stress and strain. The Morrow’s energy-based low cycle fatigue law is given as $N_f^{0.38} \Delta w_{in} = 4.30$.

3. Finite element simulations

To reduce sensitivity to meshing, the energy density dissipated per cycle was averaged over a volume of the voided joint including the most critical elements. Figure 2 shows the predicted lifetime for different

configurations of voided joints. Analyses, carried out with one void at a time, show that the void size is clearly detrimental to reliability. Also, life decreases when a void is located closer to the corner of the joint while its effect is lesser in the middle or near the edge. Finally, lifetime is computed with a synthetic distribution of voids (total volume of 20%) based on measured statistical parameters.

References

- [1] L.J. Ladani, A. Dasgupta, J. Electron. Packaging **130**, 011008 (2008)
- [2] K. Mysore, G. Subbarayan, V. Gupta, R. Zhang, IEEE T. Electron. Pack. **32**, 221 (2009)
- [3] J.P. Tucker, D.K. Chan, G. Subbarayan, C.A. Handwerker, J. Electron. Mater. **41**, 596 (2012)