



HAL
open science

Assembly of Low Phase noise Sub-Millimeter Wave Local Oscillator in Ku Band Frequency

Mahmoud Moghavvemi, Hossein Ameri Mahabadi, Aliyar Attaran

► **To cite this version:**

Mahmoud Moghavvemi, Hossein Ameri Mahabadi, Aliyar Attaran. Assembly of Low Phase noise Sub-Millimeter Wave Local Oscillator in Ku Band Frequency. United Kingdom - Malaysia - Ireland Engineering Science Conference 2011 (UMIES 2011), Jul 2011, Kuala Lumpur, Malaysia. pp.103-109. hal-00716770

HAL Id: hal-00716770

<https://hal.science/hal-00716770>

Submitted on 5 Aug 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Assembly of Low Phase noise Sub-Millimeter Wave Local Oscillator in Ku Band Frequency

M. Moghavvemi

University Malaya

Center of research and applied electronics, University of Malaya, 50603, Kuala Lumpur, Malaysia

Email: mahmoud@um.edu.my¹

H. Ameri

University Malaya

Center of research and applied electronics, University of Malaya, 50603, Kuala Lumpur, Malaysia

Email: itmmwave@streamyx.com¹

A. Attaran*

University Malaya

Center of research and applied electronics, University of Malaya, 50603, Kuala Lumpur, Malaysia

Email: aliyarattaran@gmail.com¹

Abstract - A design and fabrication of a dual-band synthesizer device is presented in this paper. The noise analysis in synthesizer loop block component is modeled individually. The Design methodology is elaborated along with the test results. The initial frequency synthesizer in 1.8-2.4GHz frequency range (L and S-band) is designed and it is multiplied by 8. Microstrip bandpass filters (LFCN) are used to filter out the spurious frequency contents; the final output frequency is 14-20GHz (Ku-band). Phase noise investigation, design steps, filter assembling of 14-20GHz synthesizer is presented in this paper.

Keywords: frequency synthesizer; serial radio link, phase noise

1 INTRODUCTION

Designing a low jitter and phase noise frequency synthesizers as an integrated CMOS trend usually demands proportionally larger die area and power dissipation. In high speed communication systems where the frequency coverage is large, the best strategy to satisfy the design parameters is assembling compatible synthesizer system blocks which exist in the market [1]. The VCO block contributes a large portion in the total noise. Recently, high quality LC oscillators have been presented which exhibit very low jitter and phase noise along with acceptable frequency bandwidth [2]. However the output frequency is limited to less than a few Giga-Hertz. The other technique

is to use special ring oscillator topologies which have shown high phase noise performance without power dissipation increment [3]. Design and assembling of frequency synthesizers are intensively covered in various references. Some of them discuss about the synthesizers in general and some discuss the IC design of synthesizers, other resources discuss about the design steps of particular synthesizer modules [4].

As the key component of mm-wave system, the demand for mm-wave frequency synthesizer with high spectral purity and integrity is growing rapidly [5]. The most commonly used technique is PLL-based mm-wave frequency synthesizer [6]; hence phase-lock-loop (PLL) technology

* : Aliyar Attaran



dictates the main design parameters such as phase noise, power consumption and frequency stability.

The mm-wave frequency synthesizer designed in this paper embodies PLL and frequency multiplying scheme. The band frequency synthesizer is designed with low cost chip and external VCO to provide very low phase noise with high frequency resolution [7]. The frequency doublers are from Mincircuit Company www.minicircuits.com. The L-band frequency synthesizer is composed of ADF4118 by analog devices www.analog.com as the frequency synthesizer chip. It is an integer-N synthesizer with highly integrated and low phase noise and maximum frequency of 3GHz. ROS-2432-119+ from Minicircuits is chosen as the VCO, which has an output frequency band of 1662-2432MHz. it has typical output power of +5.5 dBm and -100 dBc/Hz at 10KHz and -122dBc/Hz at 100KHz offset frequency. The frequency of crystal TXO200U TCXO from RAKON Company is 10MHz with phase noise of -150dBc/Hz in 10KHz offset frequency www.rakon.com.

2 System block diagram

After the fabricating of the 1.8-2.4GHz synthesizer, we proceed to our main design target which is 14.4-19.7GHz synthesizer diagram.

The topology is based on frequency multiplication, as expressed below:

$$\frac{14.4-19.7}{2^3} = 1.8 - 2.4 \quad (12)$$

The step size of synthesizer is increased by multiplication factor.

$$\text{step size}_{\text{in } 14.4-19.7\text{GHz synthesizer}} = 10\text{KHz} \times 8 = 80\text{KHz} \quad (13)$$

Also take note that additional phase noise due to frequency doublers is calculated by:

$$20\log 2^3 = 18\text{dB} \quad (14)$$

Hence our Synthesizer phase noise will be [8]:

$$98 - 18 = 80 \text{ dBc/Hz} \quad (15)$$

3 Band-pass Filter specifications

The Band Pass filters in this synthesizer application are very important to be accurate in terms of lower and upper band frequencies. The main reason is that after each multiplication by two, so many spurs frequencies will appear. In order to avoid these spurs contents on desired frequencies we designed three band pass (LFCN) filters with Microwave Office software. These band pass filters are Micro-strip filters which their simulated results are shown in figures 1 to 3.

It is observed that each band pass filter has its own specific frequency bandwidth to pass.

4 Conclusion

The output of the synthesizer is 14-20 GHz while the frequency step is 80KHz with 6GHz bandwidth. To measure the phase noise and spur contents,. The SPAN, RBW, and VBW are set to 50 KHz, 1 KHz, and 30 Hz respectively. The 51.03 dB power different between carrier and 10 KHz offset frequency leads to the output phase noise of the signal to be:

$$\text{Phase noise}_{\text{at } 2.1\text{GHz}} = -51.03 - 10\log\text{RBW} = -80 \text{ dBc/Hz} \quad (17)$$

Phase noises in different frequencies are measured by frequency spectrum analyzer of HP H8560 and they agree with the predicted measurements.

References

- [1] M. Moghavvemi, A. Attaran, and H. Ameri, "Design an X-band frequency synthesizer," *Microwaves and RF*, vol. 49, pp. 98-103, June, 2010.
- [2] A. Attaran and M. Moghavvemi, "Body-Biased VCO Tunes 12 To 16 GHz," *Microwave and RF*, vol. 50, April 2011.
- [3] A. Attaran, M. Moghavvemi, and H. Ameri, "Design a 14 to 20GHz stable source," *Microwave and RF*, vol. 49, pp.



62-66, December 2010.

[4] M. Moghavvemi, H. Ameri, and A. Attaran, "A Compact Analytical Design of Dual-Loop 18GHz Frequency Synthesizer to Enhance signal reliability in Digital Millimeter Radio Link System," *Frequenz*, vol. 2, 2011.

[5] A. Attaran, M. Moghavvemi, and M. Khalaj-Amirhosseini, "Arbitrary Dual-Band RLC Circuits," *Journal of Telecommunications*, vol. 6, January 2011.

[6] M. Moghavvemi, H. Ameri, and A. Attaran, "Design a 8.35GHz Frequency synthesizer," *Microwave and RF*, vol. 50, June 2011.

[7] M. Moghavvemi and A. Attaran, "Performance Review of High Quality Factor-Low Noise and Wideband Radio-Frequency LC-VCO for Wireless Communication," *IEEE Microwave Magazine*, vol. 12, p. in press, 2011.

[8] M. Moghavvemi and A. Attaran, "Recent Advances in Delay Cell VCOs " *IEEE Microwave Magazine*, vol. 12, p. in press, 2011.



**United Kingdom - Malaysia - Ireland
Engineering Science Conference 2011
(UMIES 2011), Kuala Lumpur, 12-14 July 2011**



Prof. Dr. Mahmoud Moghavvemi was born in Tehran, Islamic republic of Iran in 1969. He obtained his BSc in Electrical Engineering from the State University of New York, MSc from University of Bridgeport and PhD from the University of Malaya. His current post is the chair of Electrical Engineering in University of Malaya. Prof. Moghavvemi is the Director of Centre for Research in Applied Electronics (CRAE). His current research interests are; Electronic circuit design; application toward sensory interface electronics in industrial, commercial, scientific, transportation, and biomedical systems



Hossein Ameri was born in Ardestan, Iran. He received the B.S.E.E. and M.S.E.E degree from the University of Tehran, and is currently working toward the Ph.D. in electrical engineering at the University of Malaya(UM) at Malaysia. His research interests include microwave, millimeter-wave, passive and active components, sub-systems and systems. Such a Synthesizer, power amplifier, high power combiner, antennas, digital microwave, mm-wave Links, Terahertz synthesizer and antennas.



Aliyar Attaran was born in Tehran, Islamic republic of Iran in 1984. He obtained his BSc in Electrical Engineering from the Multimedia University in Malaysia, and currently pursuing MSc degree from University of Malaya.

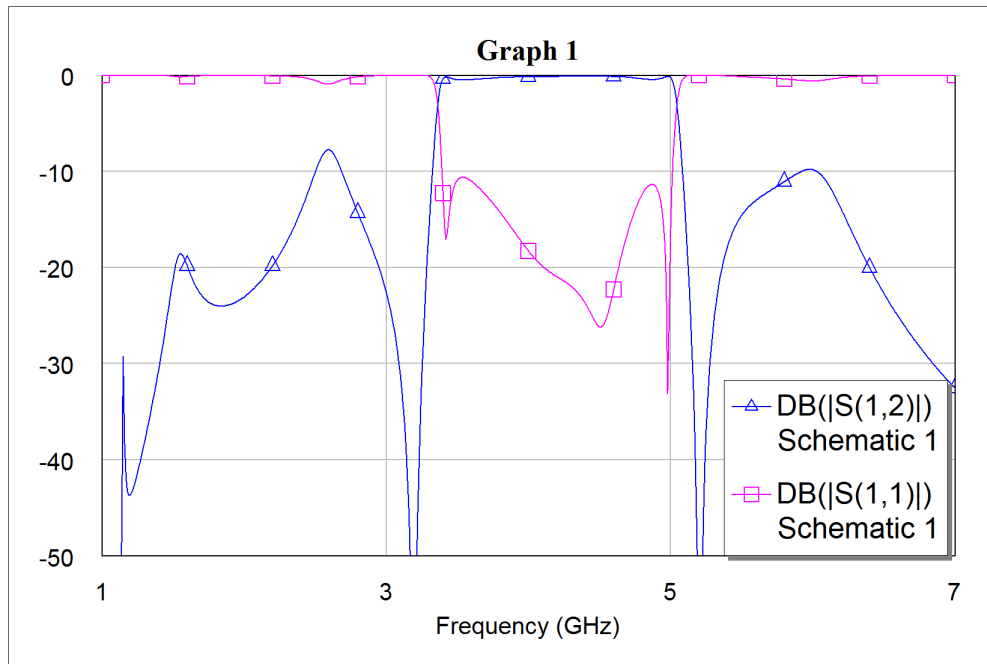


Figure 1. Frequency response of Filter from 3.6 to 4.8GHz

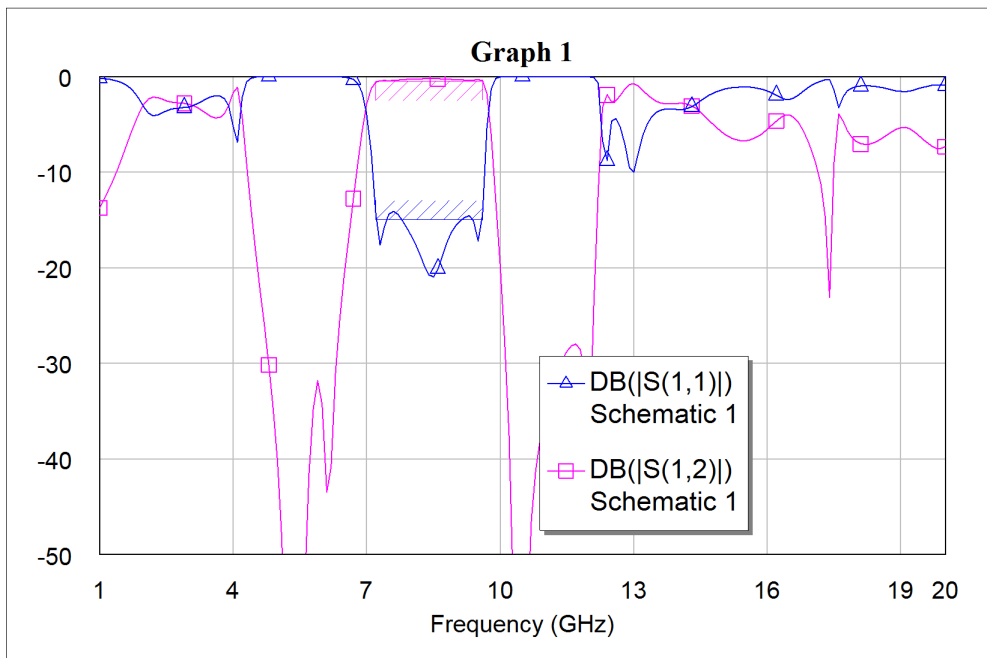


Figure 2. Frequency response of Filter from 7.2 to 9.6GHz

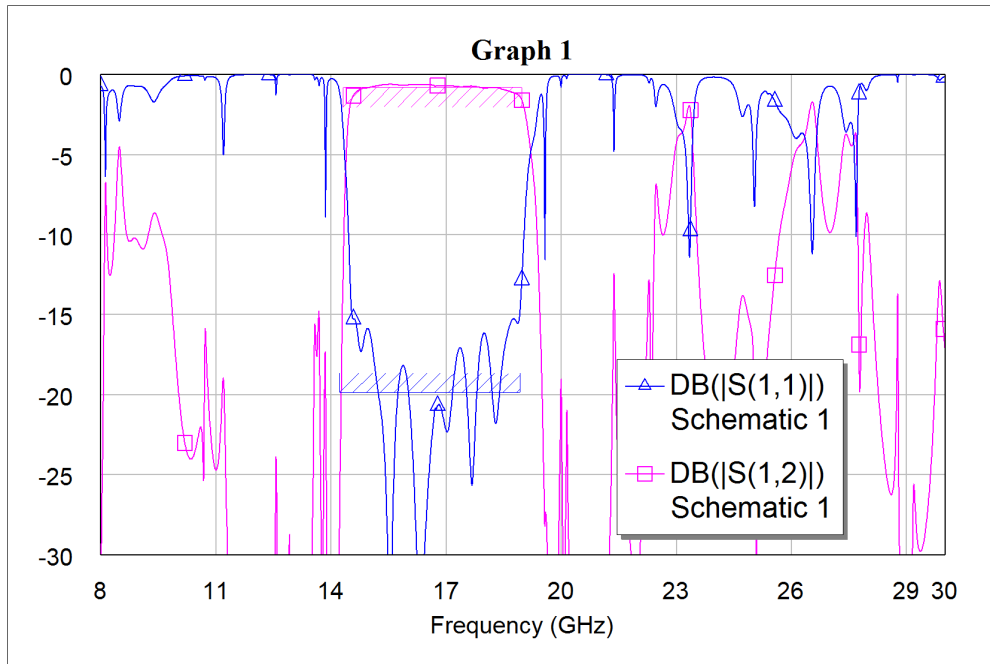


Figure 3. Frequency response of Filter from 14.4 to 19.7GHz