



HAL
open science

Applying an integrated logistics network design and optimisation model: the Pirelli Tyre Case

Alessandro Creazza, Fabrizio Dallari, Tommaso Rossi

► **To cite this version:**

Alessandro Creazza, Fabrizio Dallari, Tommaso Rossi. Applying an integrated logistics network design and optimisation model: the Pirelli Tyre Case. *International Journal of Production Research*, 2011, pp.1. 10.1080/00207543.2011.588614 . hal-00723192

HAL Id: hal-00723192

<https://hal.science/hal-00723192>

Submitted on 8 Aug 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Applying an integrated logistics network design and optimisation model: the Pirelli Tyre Case

Journal:	<i>International Journal of Production Research</i>
Manuscript ID:	TPRS-2010-IJPR-0553.R2
Manuscript Type:	Original Manuscript
Date Submitted by the Author:	06-Apr-2011
Complete List of Authors:	Creazza, Alessandro; Università Carlo Cattaneo LIUC, Logistics Research Centre Dallari, Fabrizio; Università Carlo Cattaneo LIUC, Logistics Research Centre Rossi, Tommaso; Università Carlo Cattaneo LIUC, Logistics Research Centre
Keywords:	LOGISTICS, SUPPLY CHAIN MANAGEMENT, MIXED INTEGER LINEAR PROGRAMMING, OPTIMIZATION
Keywords (user):	SUPPLY CHAIN DESIGN, CASE STUDY

SCHOLARONE™
Manuscripts

Applying an integrated logistics network design and optimisation model: the Pirelli Tyre Case

Alessandro Creazza

Logistics Research Centre, Università Carlo Cattaneo LIUC, Castellanza (VA), Italy

Corso Matteotti 22, 21053, Castellanza, Varese, Italy

Fabrizio Dallari

Logistics Research Centre, Università Carlo Cattaneo LIUC, Castellanza (VA), Italy

Corso Matteotti 22, 21053, Castellanza, Varese, Italy

Tommaso Rossi

Logistics Research Centre, Università Carlo Cattaneo LIUC, Castellanza (VA), Italy

Corso Matteotti 22, 21053, Castellanza, Varese, Italy

The aim of the present paper is to provide an application to a real life supply chain context (i.e. the Pirelli Tyre European logistics network) of an integrated logistics network design and optimisation model. Starting from the analysis of supply chain under study and of the configuration problem to be solved, we identified the most suitable approach: a mixed integer linear programming optimisation model endowed with a series of guidelines for gathering and processing all the data necessary to set-up and run the model. The application of the selected integrated design and optimisation model to the Pirelli Tyre case allowed obtaining significant cost savings related to three different service level scenarios. Thus, the applied model could be profitably implemented by supply chain and logistics managers for optimising various operating contexts. Moreover, the exemplified data mapping section represents a useful guideline, which can be applied by practitioners to gather and handle the high volume of data necessary for running the model in a real-life context. In conclusion, being the current state of the art particularly wanting of exhaustive supply chain design models, the implemented integrated approach represents a significant contribution to the existing body of knowledge on supply chain configuration.

Keywords: supply chain design, spreadsheet programs, linear programming, data mapping

Applying an integrated logistics network design and optimisation model: the Pirelli Tyre Case

The aim of the present paper is to provide an application to a real life supply chain context (i.e. the Pirelli Tyre European logistics network) of an integrated logistics network design and optimisation model. Starting from the analysis of supply chain under study and of the configuration problem to be solved, we identified the most suitable approach: a mixed integer linear programming optimisation model endowed with a series of guidelines for gathering and processing all the data necessary to set-up and run the model. The application of the selected integrated design and optimisation model to the Pirelli Tyre case allowed obtaining significant cost savings related to three different service level scenarios. Thus, the applied model could be profitably implemented by supply chain and logistics managers for optimising various operating contexts. Moreover, the exemplified data mapping section represents a useful guideline, which can be applied by practitioners to gather and handle the high volume of data necessary for running the model in a real-life context. In conclusion, being the current state of the art particularly wanting of exhaustive supply chain design models, the implemented integrated approach represents a significant contribution to the existing body of knowledge on supply chain configuration.

Keywords: supply chain design, spreadsheet programs, linear programming, data mapping

1. Introduction and background

In recent years supply chains have witnessed a restless evolution, due to impressive changes of the world economy and of the competitive environment. In particular, an ever-growing pressure on service level (Gunaserakan et al., 2008) concurrently with a global competition, which causes reduction of the price of goods and services (Jammerneegg and Reiner, 2007; Christopher, 2007; Jahene et al., 2009), drive companies in seeking the optimal topological configuration of their supply chain, especially those ones characterised by a global supply chain with numerous subsidiaries in different worldwide locations. In fact, nowadays the supply chain design issue, i.e. the definition of the number, size and location of the supply chain nodes (Canel and Khumawala, 2001; Teo and Shu, 2004; Simchi-Levi et al., 2005; Zhang et al., 2008), is proving itself to have great importance for companies to gain cost effectiveness and competitiveness (Ballou, 2005). In order to address this issue, these days supply chain managers need decision support tools which allow to easily,

1
2
3 more accurately and more frequently configure/re-design logistics networks
4
5
6 (Melachrinoudis and Min, 2007; Melo et al., 2009).
7

8 For responding to this requirement, the logistics network configuration
9
10 problem has been widely addressed by means of a number of different methodological
11
12 approaches, including genetic or heuristic methods, simulation methods and, as
13
14 foremost approach, linear programming (Gargeya and Meixell, 2005; Truong and
15
16 Azadivar, 2005; Chopra and Meindl, 2007). Generally speaking, linear programming
17
18 is characterised by some limitations (Sharma, 2006): first of all, it is necessary that
19
20 both the objective function and the constraints are linear. Then, linear programming is
21
22 not the most suitable technique for considering the effect of time and uncertainty and
23
24 the model parameters are usually considered as constant in the optimisation horizon.
25
26 Moreover, linear programming is not suitably applicable when in a multi-objective
27
28 problem the objective function includes different measures for the diverse objectives.
29
30 With linear programming, any model which tends to be as more realistic as possible
31
32 entails the solution of an impressive amount of calculations, hence requiring powerful
33
34 computer systems, and not always such complex models have a possible solution.
35
36 Notwithstanding its limitations, its wide adoption and use are due to the fact that it
37
38 allows for easily developing solvers, which enable solutions for the network
39
40 configuration problems to be obtained, taking into account a series of objectives and
41
42 constraints (Sharma, 2006). Moreover, this kind of solvers can be easily implemented
43
44 by means of spreadsheet software packages, so as they can be used in a very effective
45
46 way for analysing logistics and supply chain issues and creating different scenarios
47
48 for deriving the optimal values of variables such as, for instance, facility number and
49
50 size (Smith, 2003).
51
52
53
54
55
56
57
58
59
60

1
2
3 For these reasons, in the present case study, which concerns with the re-
4 configuration of the European Pirelli Tyre supply chain, we decided to apply linear
5 programming and, in particular, the mixed integer linear programming model we
6 proposed in a previous work (Creazza et al., 2011). We decided to choose our model
7 since, on the one hand, it is able to deal with multi-commodity and multi-layer supply
8 chains as well to consider service level constraints and, on the other hand, it is
9 provided with data gathering and processing guidelines. According to us, such
10 characteristics make our model actually suitable for addressing the supply chain
11 configuration problem in real-life cases.
12
13
14
15
16
17
18
19
20
21
22
23

24 The present paper is organised as follows: an introduction of Pirelli Tyre and
25 of its operating context is provided in paragraph 2.1, along with a description of the
26 as-is configuration of its European logistics network (paragraph 2.2). Afterwards, we
27 describe the implementation of the optimisation model and of the data mapping
28 procedure to the Pirelli Tyre case (paragraph 2.3). The model is validated in
29 paragraph 3, while the results of the entire implementation process are illustrated in
30 paragraph 4. A series of concluding remarks and managerial implications deriving
31 from the present study are discussed in paragraph 5.
32
33
34
35
36
37
38
39
40
41
42
43

44 **2. The Pirelli Tyre Case**

45 The objective of a logistics network configuration problem is to find a minimal-cost
46 configuration of the logistics network able to satisfy product demands at specified
47 customer service levels. The integrated logistics network configuration model
48 proposed by the authors (Creazza et al., 2011) encompasses all these issues and it is
49 accompanied by data gathering and processing guidelines, which allow it to be
50 practically implemented. As a consequence, we applied our model to re-configure the
51 Pirelli European logistics network.
52
53
54
55
56
57
58
59
60

2.1 *Pirelli Tyre: the company*

Pirelli Tyre is a multinational automotive tyre manufacturer, headquartered in Italy, member of the Pirelli & C. Group. Its product range includes a wide variety of tyres, from commodity products to motorsport special tyres, and it can be subdivided in three main categories: car, motorcycle and truck tyres. Each of them is characterised by different features, basically regarding quality and product density (volume/weight ratio). Pirelli's customers can be subdivided in two main groups: original equipment manufacturers (OEM customers, represented by automotive manufacturers) and replacement customers (technical assistance centres for automobiles, garages, fast fitters, tyre wholesalers, retail shops). OEM customers basically receive direct shipments from plants, following a make-to-order policy. Replacement customers, which approximately demand 65% of the overall annual Pirelli's production volume, require a high service level in terms of short delivery times. Consequently, in order to replenish these customers (more than 40,000 delivery points located on the entire European area) with small size and frequent orders, Pirelli has built a logistics network composed by a series of Regional Distribution Warehouses, where a stock to serve a specific market area is held.

With respect to the European market, Pirelli Tyre is challenged in increasing the cost-efficiency of its supply chain, with the aim to gain competitive advantage in a business environment characterised by a growing pressure on cost control and ever stricter service level requirements. The Pirelli Tyre European logistics network is a 2-echelon network composed by a series of production plants, a set of regional distribution warehouses and a number of delivery points. In particular, in the configuration problem the company needs to optimise the set of regional distribution

1
2
3 warehouses (in terms of number, size and location) and the network linkages (i.e. the
4 linkages between plants and warehouses, and warehouses and delivery points), but
5
6 without modifying the production network, which the company considers as given in
7
8 the medium term horizon.
9
10

11
12 **Before presenting the details of the Pirelli Tyre case, we would like to inform**
13 **the reader that all the numerical data shown in the paper have been entirely disguised**
14 **for strict confidentiality reasons.**
15
16
17
18
19
20
21

22 ***2.2 The current Pirelli Tyre European logistics network***

23 In the current Pirelli Tyre European logistics network six product-focused production
24 plants, 15 regional distribution warehouses and approximately 40,000 delivery points
25 are present (for a scheme of the European Pirelli Tyre logistics network see Figure 1).
26
27
28
29
30

31 Figure 1. Current configuration of the European Pirelli logistics network
32
33

34
35 The products of the different plants basically differ for quality and product density,
36 the regional distribution warehouses are served by plants through full truck loads
37 (FTL) and, finally, the delivery points are supplied by the regional distribution
38 warehouses according to a single sourcing policy. In details, the regional distribution
39 warehouses are owned and run by third-party logistics service providers (3PL) and
40 Pirelli has signed with them three-year logistics outsourcing contracts. The physical
41 distribution process from the regional distribution warehouses to the each single
42 delivery point is generally performed by means of less than truck load deliveries
43 (LTL), often through the network of transit points run by the 3PLs. It is worth to
44 remind that this last section of the physical distribution process is out of the scope of
45 the present work, not being under Pirelli's direct responsibility.
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

As far as the objectives given by Pirelli Tyre to the re-design activity, they are represented by:

- defining the regional distribution warehouses (named as RDW_h) to be included into the new logistics network configuration (such RDW_h must be selected among the 15 current ones and 9 other further potential locations. The choice of the potential locations has been driven by the geographical distribution of Pirelli's customer demand concurrently with the analysis of the best locations in the European logistics real estate market);
- defining which of the activated RDW_h must serve which delivery points;

so as to minimize the overall logistics and distribution cost connected to the network, i.e. the sum of the primary and secondary distribution costs as well as of the warehousing cost (given, in turn, by the sum of housing and handling costs).

2.3 The implementation of the optimisation model and of the data mapping section

In this paragraph we aim at recalling the main specifications and characteristics of the adopted mixed integer linear programming model, with particular reference to the Pirelli operating context, and we aim at describing how, for the Pirelli Tyre case, we applied the data mapping procedure.

The input data of the optimisation model selected for the application are the following:

- 6 production plant (P_p) originating the logistics flows, with their geographical location (i.e. latitude and longitude) all over the European continent, and manufactured type of product;
- a set of 15 current regional distribution warehouses (RDW_h) and 9 further potential RDW_h , with their geographical location all over the European continent, maximum floor space size, inventory turnover ratio and throughput capacity;
- 42,455 delivery points (to be aggregated in a set of Aggregated Delivery Points - ADP_j) to be served, with their geographical location, service level requirements;
- the demand characteristics (annual amount of required products) of each delivery point (to be aggregated in the ADP_j).

The model is aimed at minimising the overall logistics cost (primary and secondary distribution costs and warehousing costs), fulfilling a required service level, by setting the values of the following decision variables:

- a Boolean decision variable (k_h) for selecting which RDW_h out of the potential locations must be activated;
- a Boolean decision variable ($k_{h,j}$) for determining which RDW_h , if activated, must serve which ADP_j .

In designing our model, we considered the following model variables and parameters:

- $cs_{h,j}$ is the unit secondary distribution cost for shipping one unit of product along one unit of distance (i.e. according to the commonly adopted transportation rates, this is the cost for shipping one kilogram of product for one kilometre) from RDW_h to ADP_j [$\text{€}/\text{kg}\cdot\text{km}$];
- $d_{h,j}$ is the distance between RDW_h and ADP_j [km];
- D_j is the annual demand of ADP_j [kg/year];
- cw_h is the unit housing cost [$\text{€}/\text{m}^2\cdot\text{year}$];
- S_j is the average space utilisation index connected to the products requested by ADP_j [kg/m^2];
- ITR_h is the average yearly inventory turnover ratio characterising the products requested by ADP_j [1/year];
- ch_h is the unit handling cost for RDW_h [$\text{€}/\text{kg}$];
- $cp_{p,h}$ is the primary distribution cost for a full truck load shipment from P_p to RDW_h [$\text{€}/\text{FTL shipment}$];
- $m_{p,j}$ is the percentage of D_j fulfilled by means of products supplied by P_p ;
- LC_p represents the average full truck load capacity for a FTL shipment from P_p [kg/FTL shipment].

It is particularly opportune to mention that the unit secondary distribution cost is a unit transportation rate calculated on the basis of a series of fixed costs (e.g. truck depreciation, road taxes) and variable costs (e.g. fuel and lubricants, tyres, maintenance costs, road tolls), which are allocated to each unit of product to be delivered, according to the distance to be covered in a shipment and to the amount of products transported in that shipment. In order to practically derive the value of $cs_{h,j}$, please refer to section 2.3.4. Obviously, the definition of this variable is based on the assumption that the secondary distribution cost is directly dependent on the distance to be travelled and on the quantity to be shipped. This is a realistic assumption for the considered context but also from a general perspective, since it is a very common

practice that the distribution rate defined by the majority of transport service providers is based on the abovementioned factors (i.e. distance and loaded quantities).

Other assumptions in the definition of the model variables concern S_j and the product mix. With respect to S_j , we assumed that its value is almost exclusively depending on the required products' space utilisation index (essentially deriving from the product density and from its physical configuration) and not on the features of the warehouse. We deem this is a valid assumption since we are studying a context where the tyres are stored in specific metal cages and the stock piling is limited to 5 levels due to safety and stability requirements.

As regards the product mix, we considered the percentage of product volumes manufactured by the various plants and required by the delivery points (and thus by the ADP_j) equal to the one of the previous years. This is a strong assumption since it considers that the demand is not going to significantly vary in the considered time horizon and that there is no production relocation on different plants by Pirelli Tyre (here it is important to recall that the different plants are product focused).

The model's objective function, representing the minimisation of the annual overall logistics cost, is shown by expression 1 (where, if the overall number of Regional Distribution Warehouses H and the overall number of Production plants P are given, the overall number of Aggregated Delivery Points J is not defined yet at this point, since the model needs to be operationalized, as it will be explained in section 2.3.1):

$$\min \left(\begin{aligned} & \sum_{h=1}^{24} \sum_{j=1}^J cs_{h,j} \cdot d_{h,j} \cdot k_{h,j} \cdot D_j + \sum_{h=1}^{24} \sum_{j=1}^J \frac{cw_h \cdot k_{h,j}}{ITR_h} \cdot \frac{D_j}{S_j} + \\ & + \sum_{h=1}^{24} \sum_{j=1}^J ch_h \cdot k_{h,j} \cdot D_j + \sum_{h=1}^{24} \sum_{p=1}^6 \frac{\sum_{j=1}^J m_{p,j} \cdot k_{h,j} \cdot D_j}{LC_p} \end{aligned} \right) \quad (1)$$

The constraints of the mixed integer linear programming model are given by the following expressions:

$$\sum_{h=1}^{24} k_{h,j} = 1 \quad \forall j \quad (2)$$

$$k_{h,j} \leq I_{h,j} \cdot k_h \quad \forall h, j \quad (3)$$

$$k_{h,j} = \text{bin} \quad \forall h, j \quad (4)$$

$$k_h = \text{bin} \quad \forall h \quad (5)$$

$$\sum_{j=1}^J k_{h,j} \cdot \frac{D_j}{S_j \cdot \text{ITR}_h} > 4,000 \quad \forall h \quad (6)$$

Expression 2 represents the single sourcing policy constraint (each ADP_j can be served by a single RDW_h only). Expression 3 represents the service level requirement constraint: the linkage between a RDW_h and an ADP_j exists only if that activated RDW_h allows goods to be delivered to that ADP_j within a given time (the Boolean variable I_{h,j} allows modelling this condition). Expressions 4 and 5 constrains the decision variables k_{h,j} and k_h respectively to be Boolean variables and expression 6 constraints the minimum size of a RDW_h to be activated (the minimum size is set equal to 4,000 square metres since this represents the typical minimum plot size offered by logistics service providers, on whom Pirelli relies for its warehousing activities).

After having described the optimisation model adopted in the Pirelli Tyre case, in the following pages we present the numerical implementation of the data mapping procedure, whose guidelines are summarized in Table 1 (including the steps, the processing instructions, the sources of information along with the suggested support

1
2
3 tools necessary for completing the model operationalisation and finally the
4
5 parameterized variables).

6
7
8
9 Table 1. Summary of the data mapping steps, processing instructions, suggested
10 support tools and parameterised variables
11

12 13 14 2.3.1 Definition of the ADP_j and the aggregation of customer's demand

15 With reference to the ADP_j to be used in the model, they are obtained by clustering,
16
17 according to a geographical basis, the destination points characterising the Pirelli Tyre
18
19 European logistics network. Hereinafter, due to simplicity reasons (being Austria the
20
21 first market area represented in Figure 1) the definition of the Austrian ADP_j
22
23 geographical aggregation is described (see Table 2, where the characteristics of the
24
25 nine Austrian ADP_j in terms of NUTS3 clusters they refer to, demand and location are
26
27 depicted).
28
29
30
31
32

33 Table 2. The Austrian ADP_j
34

35
36 The Austrian 1,972 delivery points are firstly grouped according to the NUTS coding
37
38 (*Nomenclature des Unités Territoriales Statistiques*, Nomenclature of Territorial
39
40 Units for Statistics, proposed by Eurostat in 1988). Three different levels of
41
42 aggregation are present in the NUTS codes, based on the number of inhabitants per
43
44 aggregated cluster. As suggested in Creazza et al., (2011), we chose the most
45
46 disaggregated codes (NUTS3), and we obtained 35 NUTS3 areas characterising the
47
48 Austrian territory, i.e. from AT111 to AT342. For instance, all the delivery points
49
50 located in Graz belong to the cluster corresponding to the NUTS3 code AT221. For
51
52 each of the abovementioned clusters, the demand is calculated as the sum of the
53
54 demands (in kilograms of products) of all the delivery points which belong to that
55
56 specific cluster, i.e. to the corresponding NUTS3 area. In the Austrian case, nine
57
58
59
60

clusters only (i.e. AT112, AT123, AT126, AT130, AT211, AT221, AT312, AT323 and AT332) are characterised by a not null demand. They correspond to the ADP_j used in the mixed integer linear programming model for representing the Pirelli Austrian market. The location of each of the nine ADP_j is obtained by geographically referencing on the ArcGISTM software package the demand data of the delivery points belonging to the corresponding cluster. Moving from this data, ArcGISTM is able to calculate the geographical coordinates of the cluster's centre of gravity, which are assigned to the corresponding ADP_j .

Applying this procedure to the entire European Pirelli Tyre network (composed by 42,455 delivery points), we obtained 976 NUTS3 areas, which represent the clustered demand of the aggregated delivery points (ADP_j).

2.3.2 Definition of the product mix

As far as the product mix is concerned, it is necessary to define the various $m_{p,j}$ percentages, which can be calculated according to expression 7:

$$m_{p,j} = \sum_{k=K'}^{\tilde{K}} \frac{m_{p,k} \cdot d_k}{D_j} \quad \forall j \quad \forall p \quad (7)$$

where:

- $m_{p,k}$ is the percentage of the delivery point demand (d_k) represented by the product manufactured by P_p and
- D_j is the ADP_j demand.

However, it should be remarked that in the Pirelli Tyre case the products mix requested by each delivery point, i.e. the percentages according to which the delivery points' demands are split among the different product-focused plants ($m_{p,k}$), is not known. For this reason, we consider the following assumption: if the RDW_h 's demand

is satisfied by the different plants P_p according to the percentages $M_{p,h}$ and the k -th delivery point in the as-is configuration of the Pirelli European logistics network is served by the h -th RDW, then the demand of that delivery point inherits from that specific RDW _{h} the product mix percentages according to which its demand is fulfilled from the different plants P_p . Hence, we calculate the percentages $m_{p,j}$ according to equation 8:

$$m_{p,j} = \frac{\sum_{k=K'}^{\tilde{K}} \sum_{h=1}^{24} M_{p,h} \cdot d_k \cdot I_{k,h}}{D_j} \quad \forall p, \forall j \quad (8)$$

where $I_{k,h}$ is a Boolean variable whose value is 1 if in the as-is configuration of the logistics network the k -th delivery point receives products from that specific considered RDW _{h} , 0 otherwise and K' and \tilde{K} are the indexes of the generic delivery point within a generic ADP _{j} .

With reference to the Austrian territory, Table 3 shows, for each ADP _{j} representing the Pirelli Tyre Austrian market, the number of delivery points served (in round brackets) and the kilograms of products supplied (in square brackets) by each RDW _{h} .

Table 3. Sourcing features of the Austrian territory

As shown in Table 3, all the delivery points included into each Austrian ADP _{j} are served by RDW₁ only, i.e. by the RDW _{j} located in Gumtransdorf – AT (see Figure 1). As a consequence, by applying equation 8 the equality shown by expression 9 for ADP₂ can be obtained.

$$\begin{aligned}
 m_{p,2} &= \frac{\sum_{k=28}^{107} \sum_{h=1}^{15} M_{p,h} \cdot d_k \cdot I_{k,h}}{D_2} = \frac{\sum_{k=28}^{107} M_{p,1} \cdot d_k \cdot 1 + \sum_{k=28}^{107} \sum_{h=2}^{15} M_{p,h} \cdot d_k \cdot 0}{D_2} = \\
 &= \frac{M_{p,1} \cdot \sum_{k=28}^{107} d_k \cdot 1}{D_2} = \frac{M_{p,1} \cdot D_2}{D_2} = M_{p,1} \quad \forall p
 \end{aligned} \tag{9}$$

An expression similar to expression 9 can be written for all the Austrian ADP_j.

In particular, it is possible to surmise that each of them is characterized by percentages $m_{p,j}$ exactly equal to the percentages $M_{p,h}$ characterizing RDW₁, i.e. to the percentages according to which the generic production plant P_p serves the Gumstrandorf RDW. Due to the data provided by Pirelli Tyre for the quantities of products that RDW₁ yearly receives from each plant, the $m_{p,j}$ percentages characterizing the Austrian DP_j can be calculated and they are depicted in Table 4.

Table 4. $m_{p,j}$ percentages characterizing the Austrian ADP_j

2.3.3 Definition of the primary transportation cost

The other elements necessary for running the model and concurring in determining the primary transportation costs are represented by the unit cost per FTL shipment ($cp_{p,h}$) from a P_p to RDW_h and the average FTL transport capacity (LC_p , expressed in kg/FTL shipment). We obtained the various rates per delivery (from each plant to each Pirelli existing RDW_h) from the contracts signed by the company with its providers for the considered cases and by means of a benchmarking activity involving the best-in-class transport service providers for the other potential locations not included in the current Pirelli Tyre logistics network. LC_p was derived considering the quantity (expressed in kilograms) that can be loaded on a trailer according to an average product mix, as indicated in the transport accounting sheets provided by the company itself. In Table 5 we report the values of $cp_{p,h}$ for each considered RDW_h.

Table 5. $cp_{p,h}$ values for the considered RDW_h

As abovementioned, all values in the analysis have been disguised for confidentiality reasons. In particular, in this case we set as a fictitious measure the value “1” for the cost for connecting P_4 (Settimo Torinese) to RDW_{14} (Novara): the other values are multiples of this baseline value.

In Figure 2 we include the values of LC_p for the Pirelli Tyre case (with reference to the 15 existing RDW_h). As further information, it is worth to specify that LC_p values are influenced by the loaded product type (being Pirelli Tyre products characterised by different product density values) and by the particular load weight restrictions applied by the various countries hosting Pirelli’s warehouses and plants.

Figure 2. LC_p values (in tons) for the Pirelli Tyre case

2.3.4 Definition of the secondary distribution cost

With reference to the secondary distribution cost, it is necessary to first derive the unit cost to ship a kilogram of tyres from a certain RDW_h to a certain ADP_j . It can be obtained from the secondary distribution cost function of each single RDW_h , which, in turn, is derived from the RDW_h transport accounting sheet and from the quantities of product (in kilograms) yearly shipped. Hereinafter, the definition of the secondary distribution cost for RDW_1 , located in Gumstrandorf – AT (see Figure 1), and the calculation of the unit secondary distribution costs to connect RDW_1 to each ADP_j are shown. Tables 6 and 7 respectively represent a portion of the transport accounting sheet and a sample of the quantities shipped from RDW_1 during the year 2008.

Table 6. Portion of the transport accounting sheet related to RDW_1

1
2
3 Table 7. Shipped quantities from RDW₁ to Wien and Stockerau
4
5
6

7 It is possible to see from such tables that, in the Pirelli Tyre case, the transport
8 accounting sheet reports the transport rates (€/kg) for different weight ranges and
9 destinations. In this case as well, the values have been disguised for confidentiality
10 reasons.
11
12

13
14
15 In particular, for each destination indicated in Table 6, the average €/kg rate
16 weighted on the actual shipped quantities per weight range (Table 7) can be
17 calculated. Then, by dividing each rate by the distance between the corresponding
18 destination and RDW₁, the related €/kg·km rate is obtained (see Table 8).
19
20
21
22
23
24
25

26
27 Table 8. €/kg·km rates from RDW₁ to Wien and Stockerau
28
29

30 Finally, by plotting the values of all the €/kg·km rates (i.e. not only the ones
31 reported in Table 8) against the distance and performing a regression analysis on such
32 points, the cost function is derived. It is important to underline that this cost function
33 is valid for distance ranges comprised between 50 and 700 km. In Figure 3 the cost
34 function for RDW₁ is depicted (such a cost function is the one obtained by using not
35 disguised values of tariffs and shipped quantities).
36
37
38
39
40
41
42
43
44
45
46

47 Figure 3. Secondary distribution cost function for RDW₁
48
49

50 Moving from the function depicted in Figure 3, it is possible to derive the
51 secondary distribution costs for connecting each ADP_j to RDW₁. To do this, it is
52 necessary to calculate the Euclidean distance between RDW₁ and each ADP_j moving
53 from their geographical coordinates and to multiply such a distance by the circuitry
54 factor corresponding to the country the ADP_j belongs to. The circuitry factor is a
55
56
57
58
59
60

multiplier used to convert and correct estimated distances into approximate actual travel distances (Ballou et al., 2002). Circuity factors are expressed by means of an average and a standard deviation values and for instance for the Austrian country the average circuity factor is equal to 1.34, with a standard deviation equal to 0.18. Entering in the cost function depicted by Figure 3 with the adjusted distances allows the €/kg·km rates referring to the couples given by RDW_1 and each ADP_j to be obtained. Finally, the unit secondary distribution cost (in Euros) for moving one kilogram of products from RDW_1 to each ADP_j is obtained by multiplying such rates by the adjusted distances between RDW_1 and each ADP_j . Table 9 shows this calculation with reference to the nine Austrian ADP_j .

Table 9. Calculation of the secondary distribution costs for connecting RDW_1 to the Austrian ADP_j

2.3.5 Definition of the housing and handling costs

For deriving the housing cost we needed the value of S_j and ITR_h in order to transform the annual flow of goods (kg/year) into required warehouse floor space, along with the unit warehousing cost (cw_h), expressed in €/m²·year.

S_j and ITR_h values were provided by Pirelli Tyre for each ADP_j and RDW_h . In particular, S_j values are almost exclusively depending on the required products' space utilisation index (essentially deriving from the product density and from the physical configuration of each stock keeping unit), since we are considering in the present study a set of similar and equivalent warehouses (potential and activated), while ITR_h can be considered as a standard average value for the new potential RDW_h while for the existing RDW_h the current values apply.

With respect to the cw_h values, they were found in the contracts signed by Pirelli Tyre with warehousing companies, for each of the RDW_h currently present in

1
2
3 the Pirelli logistics network. As for the other locations, it was necessary to contact
4 primary logistics real estate companies (e.g. Cushman&Wakefield, Jones Lang
5 LaSalle and CB Richard Ellis) which provided a series of documents including the
6 values of the annual rent per square metre for the potential sites we considered in the
7 study. With reference to Gumstrandorf, i.e. to the current Austrian RDW, the annual
8 rent is equal to 60 €/m²·year. For Brno and Katowice, i.e. for two potential RDW_h,
9 such cost is equal respectively to 48 €/m²·year and 36 €/m²·year.
10
11
12
13
14
15
16
17
18
19

20 With regards to the handling cost, we needed the handling unit cost ch_h ,
21 which, similarly to the housing cost, was derived from the contracts signed by Pirelli
22 Tyre with service providers for the already preset RDW_h and from a survey of the
23 handling rates applied by logistics service providers for the potential considered
24 locations. With reference to Gumstrandorf, the current applied handling rate is equal
25 to 0,059 €/kg; with reference to Brno and Katowice the handling rate is equal
26 respectively to 0,050 €/kg and 0,056 €/kg.
27
28
29
30
31
32
33
34
35
36
37

38 2.3.6 Definition of the service level

39 As far as the service level is concerned, in the Pirelli Tyre case we considered three
40 different scenarios: the first (S1) where all the ADP_j must be served within 24 hours,
41 the second (S2) where all the ADP_j must be served within 36 hours and the third (S3)
42 where all the ADP_j must be served within 48 hours. In particular, to fill in the row of
43 Table 9 corresponding to RDW₁, i.e. to the Gumstrandorf RDW_h, in the scenario S1 it
44 is necessary to derive, by means of Microsoft MapPoint 6.0TM, the area reachable
45 within 24 hours from RDW₁ (i.e. the RDW₁ 24-hour isochronal zone), considering an
46 average driving speed of 60 km/hours and 4 hours driving stops every 8 hours. Once
47 such an isochronal zone has been drawn, it is possible to verify which NUTS3 areas
48 are completely included in there and which lie outside this zone (see Figure 4). Then,
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 in the possible origin-destination matrix the cells corresponding to the ADP_j that refer
4 to the former NUTS3 areas should be set to 1, to 0 the others (see Table 10 for an
5 example focused on the Austrian RDW and including the Austrian, Hungarian, Czech
6 and Slovakian ADP_j).
7
8
9

10
11
12
13
14 Figure 4. NUTS3 areas covered within 24 hours from RDW_1

15
16 Table 10. Example of a service level origin-destination matrix
17
18

19 20 **3. Model validation**

21 After having completed the data mapping section implementation, it was then possible
22 to solve the configuration problem for the Pirelli Tyre European logistics network.
23
24

25
26 First of all, we decided to test the adherence of the model as well as of the
27 input data by deriving the overall logistics costs of the current configuration of the
28 Pirelli Tyre European logistics network (i.e. the sum of transportation costs and of the
29 warehousing costs). To this aim we set the decision variables k_h and $k_{h,j}$ so as to
30 replicate the logistics network structure depicted in Figure 1. The model provides an
31 overall logistics cost very similar to actual figures for year 2008, with a difference
32 equal to only -0,9%. Such a result allows for proving the adherence of the model
33 objective function and of the input data to the Pirelli logistics cost function and
34 context respectively. On the other side, in more general terms, it demonstrates the
35 effectiveness of the proposed data mapping section.
36
37
38
39
40
41
42
43
44
45
46
47
48

49 With regard to the development of the model, we had to confront some critical
50 points in order to match the real dynamics of the considered operating environment.
51 In fact, some choices regarding the model variables were immediately induced by the
52 modelisation process (e.g. primary transportation cost and the handling cost). On the
53 other hand, other choices such the unit secondary distribution cost required a series of
54 iterations in order to derive a meaningful approximation: we initially started by
55
56
57
58
59
60

1
2
3 considering an average distribution rate based on weight ranges for the shipments
4
5 from RDW_h to ADP_j from the transport accounting reports. However, by deeply
6
7 analysing the reports, we understood that the rates we previously obtained were
8
9 strongly depending on the shipped quantities along the various linkages between
10
11 RDW_h and ADP_j , since they were closely referred to those specific transport linkages.
12
13 Then, since in our modelisation it is evident that the transport leg set changes from a
14
15 configuration to another, it is generally unfeasible to directly apply the cost values
16
17 present in the transport accounting reports for assessing the overall secondary
18
19 distribution cost. For these reasons, we had to derive for each RDW_h a function of the
20
21 travelled distance expressing the secondary distribution unit cost. Such a function is
22
23 derived by means of a regression analysis which allows for obtaining the best fitting
24
25 curve interpolating the €/kg rate per each single destination, weighted on the basis of
26
27 the shipped volume for each weight range, divided by the distances between the
28
29 corresponding destinations and the considered RDW_h .
30
31
32
33
34
35
36
37
38

39 **4. Outcomes of the optimisation process**

40
41 In the present section we report the results of the optimisation process applied
42
43 to the Pirelli Tyre case and we then propose a sensitivity analysis aimed at evaluating
44
45 the robustness of the solution obtained for Scenario 2, as it will be explained.
46
47
48

49 **4.1. Numerical results**

50
51 We exploited the mixed integer linear programming model to solve the
52
53 configuration problem. In particular, by using Lindo What's Best? 9.0TM software, the
54
55 values of k_h and $k_{h,j}$ which minimise the overall logistics cost function in the three
56
57 different service level scenarios (S1, S2 and S3) are found. Table 11 synthesises the
58
59 results obtained for the configuration problem in each scenario and compares them
60

1
2
3 with the *as-is* configuration of the Pirelli Tyre European logistics network (the base
4 case), in terms of number of activated RDW_h and of percentage reduction of each cost
5 item of the overall logistics cost. For the three considered optimisation processes, the
6 average computational time was about 2,400 seconds (on a 1.3 GHz chipset machine
7 with 512 RAM DDR).
8
9
10
11
12
13
14

15
16 Table 11. The outcomes of the implementation of the optimisation model (consider as
17 100% the overall logistics cost of the base case)
18
19

20
21 In particular, it is possible to observe how the service level constraint
22 influences the total logistics cost. It is interesting to notice how for a very high service
23 level (S1, i.e. delivery time within 24 hours) the number of warehouses resulting from
24 the optimisation is the same as for the base case, even though 3 warehouses out of 15
25 change (i.e. they are not the same warehouses as before). The saving (equal to 4%)
26 arises from the selection of an optimised set of RDW_h and of linkages between the
27 logistics network nodes so as to reduce each single item of the overall logistics cost.
28 In S2 (i.e. delivery time within 36 hours), which allows broader reachable
29 geographical zones within a wider time window due to a less strict service level
30 constraint, 14 RDW_h are activated. In this case the optimisation allows for a higher
31 saving (equal to 7%). Of course, the saving concerning the warehousing cost is to be
32 ascribed to the fact that a wider time window allows selecting a more efficient set of
33 RDW_h , in terms of unit warehousing costs, compared to current ones. In scenario S3
34 (i.e. delivery time within 48 hours) the model returns a configuration for the Pirelli
35 Tyre European logistics network equal to the one returned in the case of scenario S2.
36 This is probably due to the fact that the savings in the warehousing costs obtainable
37 by the selection of a more efficient set of RDW_h (due to the fact that, with an even
38 wider allowed time window, a lower number of warehouses could be potentially
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 activated) are more than compensated by the consequent increases in the primary and
4 secondary distribution costs to connect RDW_h with more distant P_p and ADP_j , due to
5
6
7
8 the lower number of activated RDW_h and to the deriving increased distance between
9
10
11 the nodes of the network.

12
13 It is important to underline that the overall warehouse floor space does not
14
15 change in the considered scenarios, even if the number of activated RDW_h varies in
16
17 the different analysed cases: in fact, the overall required warehouse floor space
18
19 depends on the flows of products through the logistics network and on the values of S_j
20
21 and ITR_j , which are connected to the ADP_j overall demand product mix, which does
22
23 not vary as well in the different considered scenarios.
24
25
26
27
28

29 ***4.2. Sensitivity analysis***

30 In order to discuss the robustness of the obtained solution, we used the developed
31
32 model to perform a sensitivity analysis. We took as a reference the network
33
34 configuration obtained from the optimisation of Scenario 2. As a matter of fact, the
35
36 resulting logistics network configuration is the lowest one and the service level
37
38 characterising Scenario 2 is the one Pirelli Tyre has to assure in its real-life context. In
39
40 particular, we used as benchmark variable the overall logistics cost and we modified
41
42 the values of significant model variables and parameters (selected by discussing their
43
44 relevance with Pirelli Tyre). We ran the model and we derived the new optimal
45
46 logistics network configuration (named as “new solution”) connected to the changed
47
48 input variables (and the corresponding value of the overall logistics cost). Then, we
49
50 calculated the overall logistics cost connected to the original logistics network
51
52 configuration in Scenario 2 (named as “original solution”) due to the changes in the
53
54 values of the input variables. We measured the robustness of “original solution” by
55
56 calculating the percentage difference between the overall logistics costs connected to
57
58
59
60

“original solution” and to “new solution”. The relevant model variables and parameters we considered in the sensitivity analysis were:

- cw_h and ch_h values referred to a potential RDW_h located in Kassel (Germany). As a matter of fact Pirelli Tyre was awaiting for receiving an offer from a logistics service provider whose warehouse is placed in Kassel. Since in “original solution” Kassel was not activated, in the sensitivity analysis we considered only a reduction of its cw_h and ch_h values. Pirelli Tyre suggested that the reduction of these value could range from 5% to 10%;
- product mix: Pirelli Tyre wanted to know the impacts of the relocation of the production of certain products from one or more production plants to another. In particular, the relocations of a 10% and a 15% of product volumes were tested. For confidentiality reasons, in this paper we do not report the details of the plants potentially involved in the production relocation.

The results of the sensitivity analysis are depicted in Table 12, as a % value of the base case configuration overall logistics cost (which is considered equal to 100%).

Table 12. The outcomes of the performed sensitivity analysis

As it is possible to see from Table 12, the maximum percentage difference between the overall logistics costs connected to “original solution” and to “new solution” (taking as a reference the optimal cost, i.e. the one related to “new solution”) is equal to 0.35% (corresponding to Variation “-10% cw_h & ch_h (RDW_h Kassel)”). Consequently, we are able to affirm that the logistics network configuration obtained for Scenario 2, besides being the most realistic one in terms of considered service level constraints and the most cost-efficient one, it is also remarkably robust.

5. Concluding remarks

The present paper addresses a topical and current supply chain issue, i.e. supply chain configuration and optimisation, by means of a case study. In particular, a design and

1
2
3 optimisation model for logistics and distribution networks, based on mixed integer
4 linear programming (see Creazza et al., 2011), was applied to a real-life supply chain
5
6 (the Pirelli Tyre European logistics network).
7
8
9

10 In detail, we exhaustively implemented the integrated approach we proposed
11 in our previous work, starting from the gathering of the input data necessary for
12 running the optimisation model. To accomplish this task, we relied on the data
13 mapping procedure, composed of different sub-sections, which allowed obtaining the
14 values of all the required parameters, substantially reducing the complexity of the data
15 mapping and processing activity, which is considered as a relevant, difficult and time-
16 consuming operation in real-life contexts (Carlsson and Ronnqvist, 2005).
17
18
19
20
21
22
23
24
25
26

27 Then, after having implemented the model (parameterized with the data
28 previously obtained) on a spreadsheet software package, we succeeded in applying it
29 to the Pirelli Tyre European logistics network, which is characterised by a high
30 complexity level (being a multi-product and multi-stage supply chain with more than
31 40,000 nodes) and by service level as a pre-eminent critical success factor. In
32 particular, based on the comparison of the outcomes of the model with budgetary
33 data, the model proved to be accurate and adherent to the actual figures. Then, we
34 solved the configuration problem for Pirelli Tyre, obtaining significant results in
35 terms of saving, compared to the as-is configuration, with different scenarios of
36 service level constraints. In fact, in any of the considered cases, the savings resulting
37 from the implementation of the proposed method (i.e. the developed mapping section
38 and integer linear programming model) are significant (see Table 10). Such a result
39 allows for proving the usefulness of the proposed method in the Pirelli context and in
40 addition it demonstrates, in more general terms, the effectiveness of the proposed
41 method for configuring multi-item, multi-layer logistics networks.
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 We believe that the model we implemented in the present case study could be
4 profitably applied by supply chain and logistics managers for optimising operating
5 contexts characterised by similar features compared to the considered one. Moreover,
6 the exemplified data mapping section could represent a useful guideline, which can be
7 successfully applied by practitioners to gather and handle the high volume of data
8 necessary for running the model in a real-life context. In more general terms, being
9 the current state of the art particularly wanting of exhaustive configuration models,
10 i.e. models dealing with real-life complexity and practically implemented in realistic
11 contexts and including the data mapping section as well (see for examples the
12 scientific contributions analysed by Melo et al., 2009), we believe that the
13 implemented integrated approach could represent a significant contribution to the
14 existing body of knowledge on supply chain configuration.

15
16 Furthermore, our proposed approach, besides being an optimisation tool for
17 configuring/redesigning supply chains, represents also a useful instrument for
18 performing scenario and what-if analysis.

19
20 In fact, the proposed model can be exploited by supply chain managers for
21 analysing the variations of the supply chain performance (i.e. the overall logistics
22 cost) with reference to the changes of the key parameters of the model. For instance,
23 they could assess the overall logistics cost in function of the unit cost value
24 modifications. In this way, they could build a sort of managerial cockpit where
25 monitoring the supply chain performance in function of the variation of the key
26 parameters of the model, by running the optimisation model in a changed
27 environment.

28
29 On the other hand, supply chain managers, by modifying themselves the
30 values of the Boolean decision variables (without running the model), can easily

1
2
3 evaluate the impact of their decisions concerning the activation of different RDW_h
4 and/or the sourcing policy (i.e. the allocation of the logistics flows from the various
5 RDW_h to the ADP_j) on the supply chain performance. In this way, for instance, supply
6 chain managers could consider the outcomes of the what-if analysis as a basis for
7 negotiating the service level the sales & marketing wants to ensure to their customers.
8
9

10
11
12
13
14
15 Moving from this statement, supply chain managers could similarly assess the
16 risk connected to disruptions of a certain production plant or of a RDW . In fact, they
17 could simulate the shut down of a production plant/ RDW or else the reduction of the
18 production capacity of a production plant. By running the model excluding a P_p or a
19 RDW_h , or else modifying their specific features, the model is able to provide a
20 simulation on how the logistics flows get redistributed in the network according to the
21 changed context conditions, deriving the resulting overall logistics cost. In this case,
22 supply chain managers modify by themselves such values and then they should run
23 the optimisation model and assess the impact of such variations on the supply chain
24 configuration and on the supply chain performance. This what-if scenario analysis of
25 the behaviour of the supply chain allows to quantify the effect on the overall logistics
26 cost, i.e. the variation of the supply chain performance from its as-is optimised
27 network configuration value in each considered scenario.
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44

45
46 Still, the proposed integrated approach presents some limitations which should
47 be critically discussed. In fact, even if the provided data mapping guidelines allow for
48 an easier and more structured operationalisation of the model, our model necessitates
49 a considerable amount of reliable and sound data to be elaborated (e.g. the data
50 necessary for determining the secondary distribution cost). Then, our proposed
51 approach can be used in those contexts where production plants are product focused
52 and where it is possible to clearly identify and define an unambiguous equivalent
53
54
55
56
57
58
59
60

1
2
3 product unit (e.g. tons or pallets or kilos), since the LC_p values and the required
4
5 warehouse floor space depend on this equivalent product unit. Finally, with respect to
6
7 the modelling features, our approach is not time-dependent, even if, by allowing the
8
9 possibility to handle a definitely higher computational complexity and longer
10
11 computational times, it could be made time-dependent: this represents one of our aims
12
13 as a further research on this theme, along with the development of a multi-location
14
15 layer mixed integer linear programming model for considering the redesign and the
16
17 optimisation of production-distribution networks.
18
19
20
21
22

23 Acknowledgments

24 We would like to express our gratitude to the reviewers for their valuable contribution in enhancing the
25 quality of the present paper and to our native-English-speaking proof reader for supporting us in
26 refining the writing style of the paper.
27
28
29
30

31 References

- 32
33 Ballou, R.H., 2005. *Business Logistics Management*. Prentice-Hall.
34 Ballou, R.H., 2002. Selected country circuitry factors for road travel distance
35 estimation. *Transportation Research Part A: Policy and Practice*, 36 (9). 843-
36 848.
37
38 Canel, C. and Khumawala, B.M., 2001. International facilities location: A heuristic
39 procedure for the dynamic uncapacitated problem. *International Journal of*
40 *Production Research*, 39 (30), 3975–4000.
41
42 Carlsson, D. and Ronnqvist, M., 2005. Supply chain management in forestry - case
43 studies at Sodra cell AB. *European Journal of Operational Research*, 163 (3),
44 589–616.
45
46 Chopra, S. and Meindl, P., 2007. *Supply chain management: Strategy, planning and*
47 *operations*. Prentice Hall.
48
49 Christopher, M., 2007. New Directions in Logistics. In: Waters, D., eds. *Global*
50 *Logistics: new directions in supply chain management*, Kogan Page.
51 Creazza, A., Dallari, F., Rossi, T., 2011, An integrated model for designing and
52 optimising an international logistics network. *International Journal of*
53 *Production Research*, forthcoming.
54
55 Gargeya, V., Meixell, M. (2005), “Global supply chain design: a literature review and
56 critique”, *Transportation Research part E*, Vol. 41, No. 6, pp. 531-550.
57
58 Gunaserkaran, A., Lai, K. and Cheng, T.C.E., 2008. Responsive supply chain: A
59 competitive strategy in a networked economy. *Omega*, 36 (4), 549-564.
60
61 Jahene, D.M., Riedel, R. and Mueller, E., 2009. Configuring and operating global
62 production networks. *International Journal of Production Research*, 47 (8),
63 2013-2030.

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
- Jammerneegg, W. and Reiner, G., 2007. Performance improvement of supply chain processes by coordinated inventory and capacity management. *International Journal of Production Economics*, 108 (1-2), 183-190.
- Melachrinoudis, E. and Min, H., 2000. The dynamic relocation and phase-out of a hybrid, two echelon plant/warehousing facility: A multiple objective approach. *European Journal of Operational Research*, 123 (1), 1–15.
- Melo, M.T., Nickel, S. and Saldanha-da-Gama, F., 2009. Facility location and supply chain management – A review, *European Journal of Operational Research*, 196 (2), 401-412.
- Sharma, J.K., 2006. *Linear programming: theory and applications*, MacMillan.
- Simchi-Levi D., Kaminski P. and Simchi-Levi E., 2005. *Designing and managing the supply chain: concepts, strategies and case studies - 2nd edition*. McGraw Hill.
- Smith, G.A., 2003. Using integrated spreadsheet modelling for supply chain analysis”. *Supply Chain Management: An International Journal*, 8 (4), 285-290.
- Teo, C.P. and Shu., J., 2004. Warehouse-retailer network design problem. *Operations Research*, 52 (3), 396–408.
- Truong, T.H. and Azadivar, F., 2005. Optimal design methodologies for configuration of supply chains. *International Journal of Production Research*, 43 (11), 2217-2236.
- Zhang, X., Huang, G.Q. and Rungtusanatham, M.J., 2008. Simultaneous configuration of platform products and manufacturing supply chains. *International Journal of Production Research*, 46 (21), 6137-6162.

Table 1. Summary of the data mapping steps, processing instructions, considered variables and suggested support tools

Data mapping steps	Processing instructions	Information data input and sources	Suggested support tools	Parameterized variables
Aggregation of customers' demand	<ul style="list-style-type: none"> - Aggregate the various delivery points k basing on the NUTS3 coding into Aggregated Delivery Points (ADP_j). - Sum the demand of the single delivery points included in each ADP_j. - Determine the geographical coordinates of the centre of gravity of each ADP_j weighted on the basis of the demand of each delivery point included in the cluster. 	The various delivery points k, gathered from company's delivery database.	ArcGIS™	ADP _j
		Single demand and geographical coordinates of the various delivery points k, gathered from company's delivery database.	ArcGIS™	ADP _j demand (D _j) and geographical coordinates
Product mix definition	<ul style="list-style-type: none"> - Define the product mix required by each ADP_j from the various P_p, as the weighted average of the product mix required by each single delivery point k on the ADP_j (which the delivery point k belongs to) overall demand 	The mix of products manufactured by a specific P _p and required by the single delivery point k, gathered from the company's accounting sheets, D _j .	Excel™	Product mix (m _{p,j})
Primary transportation cost per FTL shipment and FTL capacity definition	<ul style="list-style-type: none"> - Calculate the average transportation cost of FTL shipments (cp_{p,h}) - Calculate the average FTL capacity (LC_p) 	<p>Transportation cost of each FTL shipment occurred in the last year for each linkage P_p-RDW_h, gathered from contracts with logistics providers.</p> <p>Amount of products transported in each FTL shipment occurred in the last year for each linkage P_p-RDW_h, gathered from transport accounting sheets</p>	Excel™	cp _{p,h} and LC _p
Unit secondary distribution cost	<ul style="list-style-type: none"> - For each RDW_h, calculate the weighted average unit secondary distribution rate for linking RDW_h to each ADP_j on the amount of products shipped in each of the predefined weight ranges. - For each RDW_h, calculate the Euclidean distance to each connected ADP_j, correcting it by the circuitry factor corresponding to the country the ADP_j belongs to. - For each RDW_h, divide the weighted average unit secondary distribution rates for linking RDW_h to the different ADP_j by the distance between RDW_h and the corresponding ADP_j (obtaining a €/kg-km rate) - For each RDW_h, plot the values of all the €/kg-km rates against the distance. - For each RDW_h, perform a regression analysis deriving the function expressing the unit secondary distribution cost (cs_{h,j}). 	The currently applied transport rates (expressed in €/kg per destination) gathered from company's transport accounting sheets. Geographical coordinates of ADP _j and RDW _h returned by ArcGIS™. Circuitry factors, gathered from Ballou et al. (2002).	Excel™ and ArcGIS™	cs _{h,j}
Housing cost definition	<ul style="list-style-type: none"> - For each potential location perform a benchmark activity for estimating the unit housing cost (cw_h) 	The sources of cw _h are logistics real estate companies for the potential locations and the company's contracts		cw _h

		for the existing locations.		
Handling cost definition	- For each potential location perform a benchmark activity for estimating the unit handling cost (ch_h)	The sources of cw_h are handling service providers for the potential locations and the company's contracts for the existing locations.		ch_h
Service level requirement definition	- Define a required delivery time for each ADP_j . - From each RDW_h draw the isochronal zone for the various required delivery times, considering the average driving speeds and other factors such as the driving stops imposed by regulations. - Verify which ADP_j completely lie within the isochronal zone for each RDW_h . - Fill in each cell ($I_{h,j}$) of the origin-destination matrix with 1 if the correspondence between each RDW_h and each ADP_j is verified, with 0 otherwise.	RDW_h and ADP_j geographical coordinates returned by ArcGIS TM , driving speeds and number and frequency of driving stops, gathered from local and international regulations. Delivery times gathered by service level specifications.	Excel TM , MapPoint TM and ArcGIS TM	$I_{h,j}$

Table 2. The Austrian ADP_j

ADP _j	NUTS3 cluster	ADP _j demand [kg]	ADP _j geographical coordinates	
			X coordinate	Y coordinate
ADP ₁	AT112	95,009	131,116	-237,154
ADP ₂	AT123	465,655	48,041	-204,049
ADP ₃	AT126	297,091	100,847	-183,598
ADP ₄	AT130	503,437	102,108	-198,224
ADP ₅	AT211	403,415	-75,938	-375,822
ADP ₆	AT221	764,405	29,379	-319,175
ADP ₇	AT312	1,201,131	-63,222	-194,536
ADP ₈	AT323	450,261	-133,736	-248,635
ADP ₉	AT332	503,743	-276,214	-304,616

Table 3. Sourcing features of the Austrian territory

ADP ₁	ADP ₂	ADP ₃	ADP ₄	ADP ₅	ADP ₆	ADP ₇	ADP ₈	ADP ₉
RDW ₁	RDW ₁	RDW ₁	RDW ₁	RDW ₁	RDW ₁	RDW ₁	RDW ₁	RDW ₁
(27)	(107)	(65)	(119)	(102)	(189)	(275)	(121)	(167)
[95,00 9]	[465,65 5]	[297,09 1]	[503,43 7]	[403,41 5]	[764,40 5]	[1,201,13 1]	[450,26 1]	[503,74 3]
RDW ₂ to RDW ₁₅								
(0)								
[0]								

Table 4. m_{p,j} percentages characterizing the Austrian ADP_j

	p=1 (UK)	p=2 (DE)	p=3 (RO)	p=4 (IT)	p=5 (TR)	p=6 (ES)
$\forall j$ (1 ≤ j ≤ 9)	14%	18%	8%	31%	20%	9%

Table 5. $cp_{p,h}$ values for the considered RDW_h

	P ₁ - Carlisle	P ₂ - Breuberg	P ₃ - Slatina	P ₄ - Settimo T.	P ₅ - Izmit	P ₆ - Manresa
RDW ₁ – Guntramsdorf (AT)	16,29	8,86	6,90	12,16	18,00	18,55
RDW ₂ – Effretikon (CH)	15,71	8,29	14,00	8,56	26,50	13,50
RDW ₃ – Moscow (RU)	43,35	37,00	33,00	44,00	49,50	53,55
RDW ₄ – Izmit (TR)	35,05	19,48	15,25	26,00	0,50	6,45
RDW ₅ – Miramas (FR)	15,02	12,25	17,00	10,55	28,00	10,00
RDW ₆ – Saint Witz (FR)	7,88	8,46	16,00	12,71	25,50	11,05
RDW ₇ – Mszczonow (PL)	16,15	10,40	12,90	16,80	25,00	21,79
RDW ₈ – Athens (GR)	31,30	35,27	13,00	24,00	18,00	36,20
RDW ₉ – Eskilstuna (SW)	12,42	22,20	24,00	31,86	48,00	29,43
RDW ₁₀ – Subirats (ES)	16,15	13,85	21,10	11,33	38,00	1,20
RDW ₁₁ – Sesena (ES)	20,85	20,54	23,50	14,50	37,00	2,00
RDW ₁₂ – Otzberg (DE)	9,07	0,80	12,00	9,18	22,00	12,37
RDW ₁₃ – Barton (UK)	0,50	16,64	24,50	23,50	33,90	21,50
RDW ₁₄ – Novara (IT)	13,77	8,00	12,50	1,00	14,50	6,97
RDW ₁₅ – Aprilia (IT)	18,78	14,24	15,00	5,00	19,00	14,20
RDW ₁₆ – Brussels (BE)	9,05	5,50	16,00	13,40	21,50	13,20
RDW ₁₇ – Brno (CZ)	16,68	8,00	7,47	14,02	18,08	17,88
RDW ₁₈ – Kassel (DE)	9,55	2,86	12,00	14,00	20,50	14,85
RDW ₁₉ – Stoccarda (DE)	13,45	2,86	12,85	11,00	21,00	13,00
RDW ₂₀ – Zaragoza (ES)	18,12	17,74	22,46	15,20	30,51	4,39
RDW ₂₁ – Lyon (FR)	9,56	8,75	14,72	5,99	23,79	7,58
RDW ₂₂ – Piacenza (IT)	11,96	9,83	14,23	2,78	16,45	10,50
RDW ₂₃ – Bologna (IT)	19,60	12,60	13,14	3,29	15,58	9,00
RDW ₂₄ – Katowice (IT)	15,75	8,20	9,50	15,00	20,00	19,50

Table 6. Portion of the transport accounting sheet related to RDW_1

Tariffs [€/kg]		Weight ranges [kg]										
Destinations (zip code)	Dist. [km]	≤20	20-50	50- 100	100- 200	200- 300	300- 500	500- 1000	1000- 2000	2000- 3000	3000- 5000	>5000
Wien (10)	28	1,50	1,04	0,80	0,69	0,61	0,56	0,34	0,19	0,15	0,11	0,10
Wien (11)	31	1,50	1,04	0,80	0,69	0,61	0,56	0,34	0,19	0,15	0,11	0,10
Wien (12)	34	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (20)	56	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (21)	44	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (22)	54	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (23)	43	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (24)	40	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (25)	11	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (26)	19	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (27)	36	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11
Stockerau (28)	41	1,75	1,21	0,93	0,80	0,71	0,66	0,39	0,25	0,19	0,14	0,11

Table 7. Shipped quantities from RDW₁ to Wien and Stockerau

Shipped quantities [kg] Destinations (zip code)	Weight ranges [kg]										
	≤20	20-50	50-100	100-200	200-300	300-500	500-1000	1000-2000	2000-3000	3000-5000	>5000
Wien (10)	1,128	4,781	5,929	5,681	3,719	5,607	8,739	7,398	1,162	1,707	
Wien (11)	1,864	7,047	7,237	4,998	4,148	6,281	2,962	5,149	3,660		
Wien (12)	2,788	11,331	16,775	17,274	11,975	15,971	22,180	21,943	22,596	6,751	13,256
Stockerau (20)	389	1,149	1,904	1,737	1,156	1,284	1,558	4,815	1,076	3,758	
Stockerau (21)	200	1,185	1,826	1,607	2,177	565	1,866	735	1,163		
Stockerau (22)	189	1,043	1,403	1,363	1,439	1,319	983	3,528		1,902	
Stockerau (23)	705	3,204	4,453	4,706	2,290	1,730	3,017	2,975		1,529	
Stockerau (24)	346	1,402	2,892	3,136	845	1,255	1,270		2,051	1,476	
Stockerau (25)	660	2,562	2,754	1,859	1,155	878	1,801	1,538			12,704
Stockerau (26)	234	1,104	1,690	2,301	728	1,547	873			5,725	
Stockerau (27)	570	1,904	2,314	2,804	2,388	1,395	1,613	1,558	1,063		
Stockerau (28)	50	335	729	597	938	324	3,173	3,756	2,449	2,155	

Table 8. €/kg·km rates from RDW₁ to Wien and Stockerau

Delivery point code	10	11	12	20	21	22	23	24	25	26	27	28
Weighted €/kg rate	0.5547	0.6446	0.5402	0.5020	0.6903	0.5630	0.7274	0.6826	0.4721	0.5514	0.7386	0.3783
Distance [km]	28	31	34	56	44	54	43	40	11	19	36	41
€/kg·km rate	0.0198	0.0208	0.0159	0.0090	0.0157	0.0104	0.0169	0.0171	0.0429	0.0290	0.0205	0.0092

Table 9. Calculation of the secondary distribution costs for connecting RDW₁ to the Austrian ADP_j

	Geographical coordinates		Distance [km] from RDW ₁ ($C=(1.34*((X_{\text{coord}_{RDW_1}}-w-A)^2+(Y_{\text{coord}_{RDW_1}}-B)^2)^{1/2})$)	€/kg·km rate ($D=0.1139*C^{0.843}$)	Secondary distribution cost – c_{shj} [€/kg] ($E=D*C$)
	X coordinate (A)	Y coordinate (B)			
ADP ₁	131,116	-237,154	41.72018462	0.004898755	0.20437698
ADP ₂	48,041	-204,049	82.11961096	0.002767392	0.227257147
ADP ₃	100,847	-183,598	44.72164489	0.004620001	0.206614054
ADP ₄	102,108	-198,224	25.36079057	0.007454066	0.189041012
ADP ₅	-75,938	-375,822	326.4862257	0.000864135	0.282128103
ADP ₆	29,379	-319,175	173.7299387	0.001471084	0.255571301
ADP ₇	-63,222	-194,536	231.4147293	0.001155135	0.267315286
ADP ₈	-133,736	-248,635	326.9859552	0.000863021	0.282195727
ADP ₉	-276,214	-304,616	528.4611897	0.000575714	0.304242497

Table 10. Example of a service level origin-destination matrix

	ADP _i														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Scenario 1	1	1	1	1	1	1	1	0	0	0	0	1	0	0	0
Scenario 2	1	1	1	1	1	1	1	1	1	0	0	1	1	0	0
Scenario 3	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1

	ADP _i														
	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Scenario 1	0	0	0	1	0	0	0	0	1	0	0	1	0	0	0
Scenario 2	0	1	0	1	1	0	1	1	1	1	1	1	0	0	0
Scenario 3	1	1	0	1	1	1	1	1	1	1	1	1	1	1	1

Table 11. The outcomes of the implementation of the optimisation model (consider as 100% the overall logistics cost of the base case)

Scenario	Base Case (24-36 hours)	S1	S2	S3
Activated RDW	15	15	14	14
Primary distribution cost [%]	44	43	44	44
Secondary distribution cost [%]	33	31	32	32
Housing cost [%]	9	9	5.5	5.5
Handling cost [%]	14	13	11.5	11.5
Total cost [%]	100	96	93	93

Table 12. The outcomes of the performed sensitivity analysis

Variation	Solution	Overall Logistics Cost [%]	Notes
-5% c_{w_h} & c_{h_h} (RDW _h Kassel)	“new”	92.82	- RDW _h Kassel activated - Computational time*: 2,557 s
	“original”	93	- RDW _h Kassel not activated
-10% c_{w_h} & c_{h_h} (RDW _h Kassel)	“new”	92.68	- RDW _h Kassel activated - Computational time*: 5,632 s
	“original”	93	- RDW _h Kassel not activated
+10% of production relocated from one or more plants to Plant p	“new”	94.42	- RDW _h Kassel activated - Computational time*: 3,041 s
	“original”	94.56	- RDW _h Kassel not activated
+15% of production relocated from one or more plants to Plant p	“new”	94.44	- RDW _h Kassel activated - Computational time*: 2,126 s
	“original”	94.57	- RDW _h Kassel not activated

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

** The model was run on a 1.3 GHz chipset with 512 Mb DDR RAM*

For Peer Review Only


1
2
3 Figure 1. Current configuration of the European Pirelli logistics network
4
5

6
7 Figure 2. LC_p values (in tons) for the Pirelli Tyre case
8
9


10 Figure 3. Secondary distribution cost function for RDW_1
11
12

13
14 Figure 4. NUTS3 areas covered within 24 hours from RDW_1
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

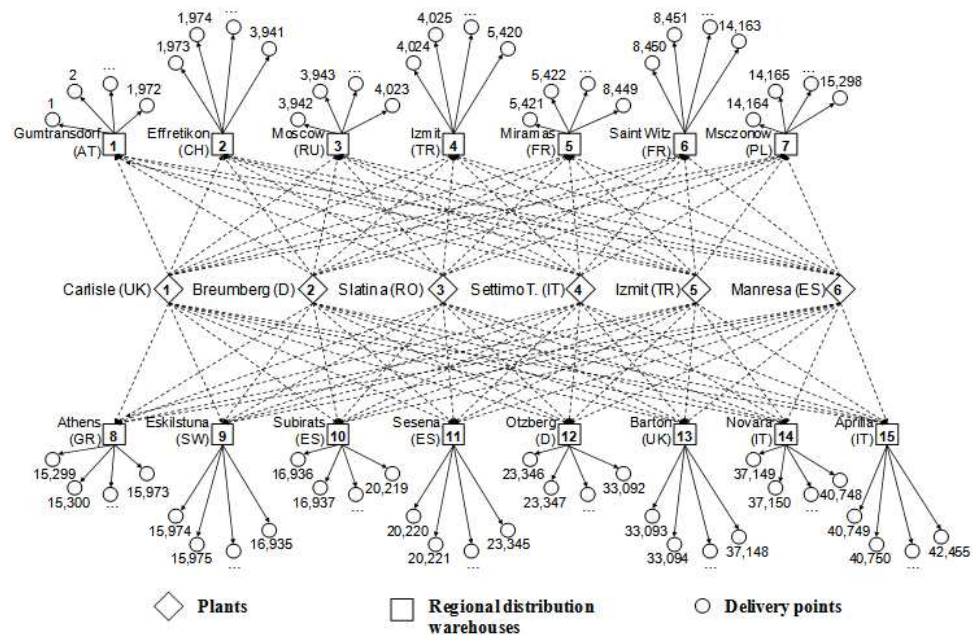

272x175mm (72 x 72 DPI)

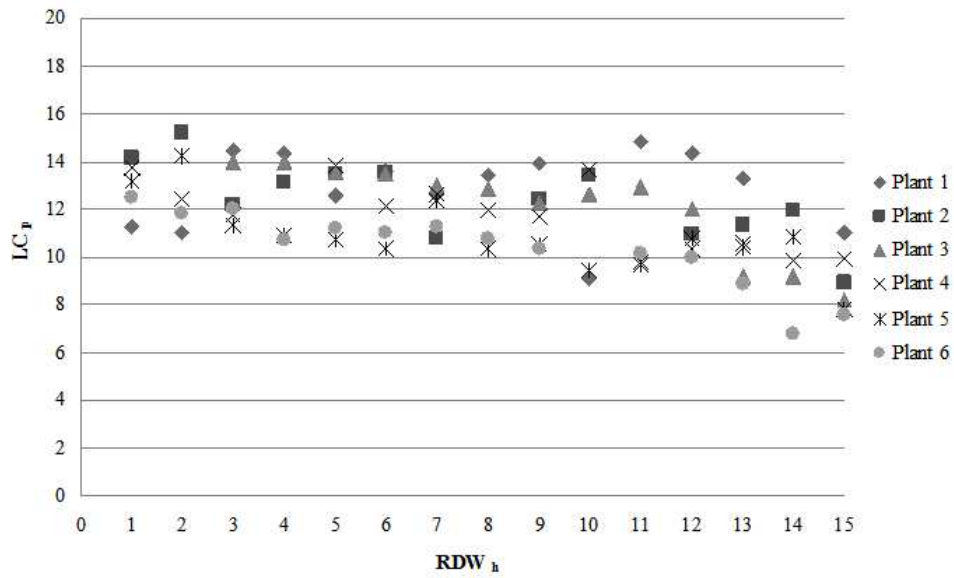


252x147mm (72 x 72 DPI)

Review Only

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

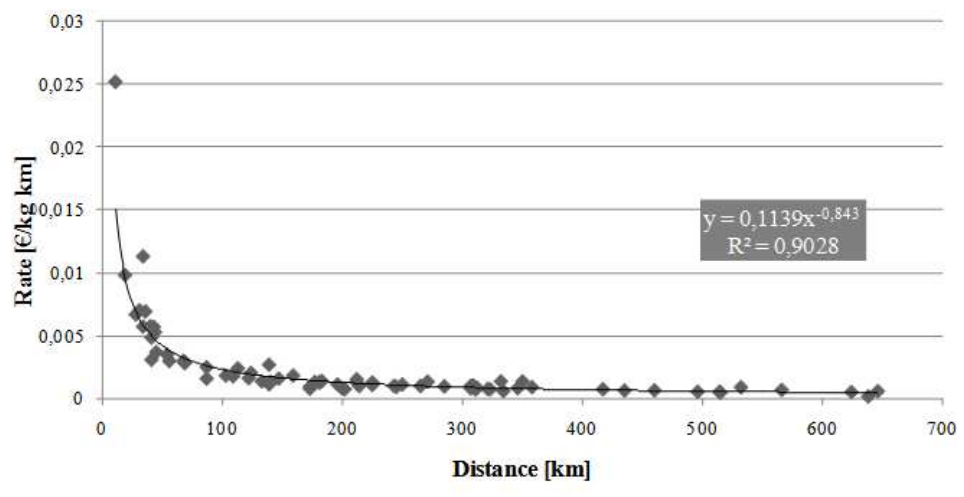

245x126mm (72 x 72 DPI)

Review Only

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60



215x146mm (72 x 72 DPI)