



HAL
open science

(3+1)D printed adiabatic 1-to-M broadband couplers and fractal splitter networks

Adrià Grabulosa, Xavier Porte, Erik Jung, Johnny Moughames, Muamer Kadic, Daniel Brunner

► **To cite this version:**

Adrià Grabulosa, Xavier Porte, Erik Jung, Johnny Moughames, Muamer Kadic, et al.. (3+1)D printed adiabatic 1-to-M broadband couplers and fractal splitter networks. *Optics Express*, 2023, 31 (12), pp.20256-20264. 10.1364/OE.486235 . hal-04172795

HAL Id: hal-04172795

<https://hal.science/hal-04172795>

Submitted on 28 Jul 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

(3+1)D-printed adiabatic 1-to-N broadband couplers

Adrià Grabulosa,¹ Xavier Porte,^{1, a)} Erik Jung,¹ Johnny Moughames,¹ Muamer Kadic,¹ and Daniel Brunner¹
*FEMTO-ST Institute/Optics Department, CNRS & University Bourgogne Franche-Comté,
 15B avenue des Montboucons, Besançon Cedex, 25030, France*

(Dated: 23 August 2022)

We report single-mode 3D optical couplers leveraging adiabatic power transfer towards up to 4 output ports. We use the CMOS compatible additive (3+1)D *flash*-TPP printing for fast and scalable fabrication. Coupling optical losses of such devices are reduced below ~ 0.06 dB by tailoring the coupling and waveguides geometry, and we demonstrate almost octave-spanning broadband functionality from 520 nm to 980 nm.

INTRODUCTION

Low-loss single-mode optical coupling is a fundamental photonic tool, in both, classical and quantum settings. Adiabatic coupling can achieve highly efficient and broadband single-mode coupling using a tapered/inversely-tapered waveguide sequence¹, and it is a widespread technique in current 2D photonic integrated circuits technology^{2,3}. Optical power transfer between the input and output waveguides is achieved through evanescent coupling, where the optical mode adiabatically leaks from the core of the tapering input waveguides through the cladding into the inversely-tapering output waveguides. Furthermore, this principle has been proposed as an efficient-to-integrate scheme for mode-selective coupling⁴ in multi-spatial modes optical communications.

For advantageous scaling of future photonic networks, unlocking the third dimension for integration is essential⁵. Here, we experimentally evaluate different tapering strategies in additively (3+1)D-printed⁶ single-mode couplers with 1 input and up to 4 outputs. We demonstrate that global losses remain ≤ 2 dB for an exceptionally wide wavelengths range almost spanning an octave from 520 nm to 980 nm, with only ~ 0.2 dB at optimal conditions. Crucially, our 3D lithography fabrication technology is additive and CMOS compatible.

3D ADIABATIC COUPLERS

Using the case of 1 to 2 couplers for illustrating the concept, we tapered waveguide cores according to two different strategies as illustrated in Fig. 1 (a), where the left (right) panel shows conical (truncated rod) geometries, respectively. In both, the waveguide cross-section continuously changes along the propagation direction z from an input diameter d through a taper-length l_t , which is intrinsically linked to the beating length $z_b = \lambda/\Delta n^7$. To all output ports we added a straight section $l = 30 \mu\text{m}$ to minimize cross-talk outside the tapered section. In the conical geometry, the waveguide cross-section shrinks at

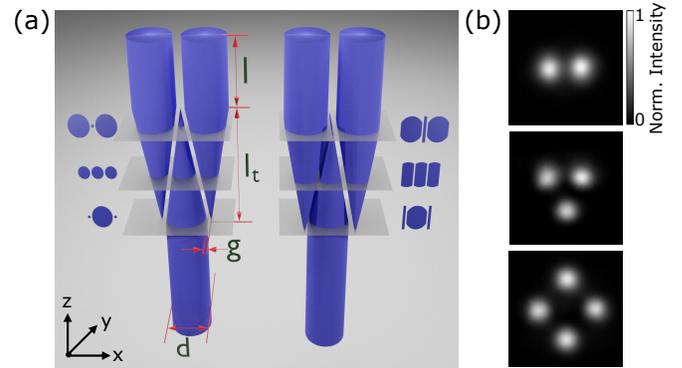


FIG. 1. (a) Design of the conical (left) and truncated rod (right) geometries of (3+1)D *flash*-TPP printed 1 to 2 couplers leveraging adiabatic power transfer. (b) Experimental output intensity profiles of the 1 to 2, 3 and 4 adiabatic couplers with truncated rod geometry.

an equal rate d/l_t along (x, y) . In the truncated rod geometry, the waveguide only shrinks at that rate along x , while along y it retains its original diameter d . The truncated rod design restricts coupling to be parallel to the splitting direction and increases the effective interface-area of the waveguides. To achieve efficient adiabatic overlapping of optical modes, we inversely tapered input and output waveguides with equal taper-rate and therefore identical symmetry in order to match their effective modal index. This approach was used for 1 to 3 and 1 to 4 couplers, too. Figure 1(b) depicts the single-mode output profile intensities of truncated rod adiabatic couplers with 2 (top), 3 (middle) and 4 (bottom) outputs. In the following investigations we consider the truncated rod couplers, which have on average ~ 3 times lower overall losses than the conical couplers, presumably due to the extra directionality and increased effective transfer-area.

FABRICATION

We leveraged rapid fabrication by combining one-photon polymerization (OPP) and two-photon polymerization (TPP) in the (3+1)D *flash*-TPP lithography concept, saving up to ≈ 90 % of fabrication time⁸. We use the commercial 3D direct-laser writing Nanoscribe GmbH (Photonics Professional GT) system and the liquid negative-tone IP-S photoresist for the fabrication. The waveguide cores

^{a)}Electronic mail: javier.portefemto-st.fr

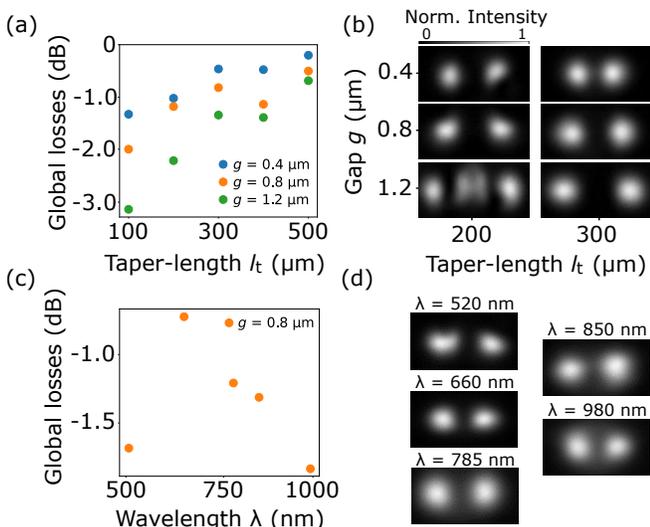


FIG. 2. (a) Global losses of 1 to 2 couplers with truncated rod geometry for gaps $g \in \{0.4, 0.8, 1.2\} \mu\text{m}$ and taper-lengths $l_t \in \{100 : 100 : 500\} \mu\text{m}$. (b) Output intensity profiles of the 1 to 2 adiabatic couplers for taper-length $l_t = 200 \mu\text{m}$ (left) and $l_t = 300 \mu\text{m}$ (right) and gaps $g \in \{0.4, 0.8, 1.2\} \mu\text{m}$ (top to bottom). (c) Global losses versus injection light wavelength λ of the 1 to 2 adiabatic couplers with $l_t = 500 \mu\text{m}$ and $g = 0.8 \mu\text{m}$. (d) Output intensity profiles from (c) over $\Delta\lambda \sim 500 \text{ nm}$.

are printed in a single-step via TPP, with an optimal laser power ($LP = 15 \text{ mW}$) and small hatching distance ($h = 0.4 \mu\text{m}$), to ensure smooth surfaces. Mechanical supports, i.e. the cuboid-surface, are printed with larger hatching distance ($h = 0.8 \mu\text{m}$). The slicing distance is maximized to $s = 1 \mu\text{m}$ since it does not crucially affect optical performance for purely vertical waveguides. After complete-TPP of the IP-S photoresist ($n \approx 1.51$)⁹, the unexposed photoresist is removed following a standard two-step development process. Finally, the entire 3D circuit is UV blanket exposed, polymerizing the unexposed volume inside the photonic chip via OPP with a UV exposure dose of 3000 mJ/cm^2 . Furthermore, we polymerized with a low TPP laser power ($LP = 1 \text{ mW}$) the volume in-between tapers. This provides an auxiliary matrix that improves the stability for complex structures during fabrication without significantly modifying the refractive index contrast ($\Delta n \approx 5 \times 10^{-3}$) between core-cladding waveguides⁸.

RESULTS

We evaluate the performance of the couplers via the global losses, which include injection, coupling and propagation losses. Figure 2(a) shows the global losses of the 1 to 2 adiabatic couplers with truncated rod geometry for different gaps $g \in \{0.4, 0.8, 1.2\} \mu\text{m}$, where we scan taper-length l_t from 100 to 500 μm , and we generally use a diameter of $d = 3.3 \mu\text{m}$. We find optimal coupling behav-

ior for $l_t = 500 \mu\text{m}$ and $g = 0.4 \mu\text{m}$, with total losses of $\sim 0.2 \text{ dB}$, which corresponds to an exceptionally low $\sim 0.06 \text{ dB}$ coupling losses⁸, and output intensities at the two output ports differ only by $\sim 3.4 \%$. From the 1 to 2 output intensity profiles in Fig. 2(b) it is clear that for $l_t = 200 \mu\text{m}$ (left) the outputs profiles are not the fundamental LP_{01} mode, and for $g = 1.2 \mu\text{m}$ (bottom) individual output modes are not sufficiently decoupled. In contrast, we obtain full splitting of LP_{01} single-modes for $l_t = 300 \mu\text{m}$ (right) for all g . Consequently, the adiabatic criterion of our 1 to 2 couplers is fulfilled for a taper-length $l_t \geq 200 \mu\text{m}$, which agrees with the theoretical value of $z_b \approx 132 \mu\text{m}$, at injection wavelength $\lambda = 660 \text{ nm}$ ⁷. The adiabatic criterion was numerically validated by 2D-simulations via COMSOL Multiphysics. There, the fundamental eigenmode is launched at the waveguide's input facet via the *Port* boundary conditions, and then propagates throughout a 2D projection of the splitters from Fig. 1(a) with scattering boundary conditions and $\Delta n \approx 5 \times 10^{-3}$. This further confirms the adiabatic signature of our truncated rod 3D optical splitters. Finally, considering the optimal parameters $l_t = 500 \mu\text{m}$ and $g = 0.4 \mu\text{m}$, we fabricated 1 to 3 and 1 to 4 adiabatic couplers (cf. Fig. 1(b)) with total losses of only $\sim 0.7 \text{ dB}$ and intensity difference between output ports of $\sim 4.6 \%$ ($\sim 6.1 \%$) for 1 to 3 (1 to 4) adiabatic couplers.

A major advantage of adiabatic power transfer compared to interference-based directional couplers is a wavelength-independent splitting of optical signals. We test the broadband functionality of our 1 to 2 adiabatic couplers with $l_t = 500 \mu\text{m}$ by injecting different wavelengths ranging from $\lambda = 520 \text{ nm}$ to $\lambda = 980 \text{ nm}$. Crucially, the bulk absorption of the IP-S photoresist does not play a role on our short relevant length l_t across the entire wavelength range investigated here⁹. According to data shown in Fig. 2(c), global losses remain below $\sim 2 \text{ dB}$ for the 1 to 2 adiabatic couplers over this range almost spanning an octave. For $\lambda \geq 660 \text{ nm}$, global losses start to increase due to lower modal confinement for which larger gap g is required for adiabaticity. At $\lambda = 520 \text{ nm}$, we approach the single-mode cut-off wavelength, i.e. $\sim 480 \text{ nm}$. Higher-order modes are excited for which the evanescent coupling decreases due to reduced modal overlap. Finally, Fig. 2(d) depicts the output intensity profiles of the couplers across this entire range of wavelengths, which clearly show the discussed effects of higher-order modes as well as non-separated single-modes.

CONCLUSIONS

In summary, we have shown the (3+1)D *flash*-TPP fabrication of single-mode 3D optical couplers leveraging adiabatic power transfer between one input and up to 4 output ports. After optimization of the coupling geometry, we obtain $\sim 0.2 \text{ dB}$ ($\sim 0.06 \text{ dB}$) global (cou-

pling) losses and adiabatic broadband functionality over $\Delta\lambda \sim 500$ nm. The scalability of output ports here addressed⁵ can only be achieved by using the three spatial dimensions. This further demonstrates this printing strategy as a powerful tool for complex 3D integrated photonic circuits, particularly towards future integration of parallel optical interconnects.

FUNDING

European Union’s Horizon 2020 (713694); Volkswagen Foundation (NeuroQNet II); Agence Nationale de la Recherche (ANR-17-EURE-0002, ANR-15-IDEX-0003); Region Bourgogne Franche-Comté; French Investissements d’Avenir; French RENATECH network and FEMTO-ST technological facility.

REFERENCES

- ¹G. Son, S. Han, J. Park, K. Kwon, and K. Yu, “High-efficiency broadband light coupling between optical fibers and photonic integrated circuits,” *Nanophotonics*, vol. 7, pp. 1845–1864, oct 2018.
- ²R. Marchetti, C. Lacava, L. Carroll, K. Gradkowski, and P. Minzioni, “Coupling strategies for silicon photonics integrated chips,” *Photon. Res.*, vol. 7, pp. 201–239, Feb 2019.
- ³T. Tsuchizawa, K. Yamada, H. Fukuda, T. Watanabe, J. ichi Takahashi, M. Takahashi, T. Shoji, E. Tamechika, S. Itabashi, and H. Morita, “Microphotonics devices based on silicon microfabrication technology,” *IEEE Journal of Selected Topics in Quantum Electronics*, vol. 11, no. 1, pp. 232–240, 2005.
- ⁴N. Riesen and J. D. Love, “Tapered Velocity Mode-Selective Couplers,” *Journal of Lightwave Technology*, vol. 31, pp. 2163–2169, jul 2013.
- ⁵J. Moughames, X. Porte, M. Thiel, G. Ulliac, L. Larger, M. Jacquot, M. Kadic, and D. Brunner, “Three-dimensional waveguide interconnects for scalable integration of photonic neural networks,” *Optica*, vol. 7, p. 640, jun 2020.
- ⁶X. Porte, N. U. Dinc, J. Moughames, G. Panusa, C. Juliano, M. Kadic, C. Moser, D. Brunner, and D. Psaltis, “Direct (3+1)D laser writing of graded-index optical elements,” *Optica*, vol. 8, p. 1281, oct 2021.
- ⁷A. W. Snyder and J. D. Dove, *Optical Waveguide Theory*. Chapman and Hall, 1983.
- ⁸A. Grabulosa, J. Moughames, X. Porte, and D. Brunner, “Combining one and two photon polymerization for accelerated high performance (3 + 1)d photonic integration,” *Nanophotonics*, vol. 11, no. 8, pp. 1591–1601, 2022.
- ⁹M. Schmid, D. Ludescher, and H. Giessen, “Optical properties of photoresists for femtosecond 3d printing: refractive index, extinction, luminescence-dose dependence, aging, heat treatment and comparison between 1-photon and 2-photon exposure,” *Optical Materials Express*, vol. 9, p. 4564, 12 2019.