



HAL
open science

Homology based algorithm for disaster recovery in wireless networks

Anaïs Vergne, Ian Flint, Laurent Decreasefond, Philippe Martins

► **To cite this version:**

Anaïs Vergne, Ian Flint, Laurent Decreasefond, Philippe Martins. Homology based algorithm for disaster recovery in wireless networks. 2013. hal-00800520v2

HAL Id: hal-00800520

<https://hal.science/hal-00800520v2>

Preprint submitted on 5 Dec 2013 (v2), last revised 21 Mar 2014 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Homology based algorithm for disaster recovery in wireless networks

A. Vergne, I. Flint, L. Decreusefond and P. Martins

Institut Telecom, TELECOM ParisTech, LTCI

Paris, France

Email: avergne, flint, decrease, martins@telecom-paristech.fr

Abstract—In this paper, we present an algorithm for the recovery of wireless networks after a disaster. Considering a damaged wireless network, presenting coverage holes or/and many disconnected components, we propose a disaster recovery algorithm which repairs the network. It provides the list of locations where to put new nodes in order to patch the coverage holes and mend the disconnected components. In order to do this we first consider the simplicial complex representation of the network, then the algorithm adds supplementary vertices in excessive number, and afterwards runs a reduction algorithm in order to reach an optimal result. One of the novelty of this work resides in the proposed method for the addition of vertices. We use a determinantal point process: the Ginibre point process which has inherent repulsion between vertices, and has never been simulated before for wireless networks representation. We compare both the determinantal point process addition method with other vertices addition methods, and the whole disaster recovery algorithm to the greedy algorithm for the set cover problem.

I. INTRODUCTION

Wireless networks are present everywhere, must it be sensor networks or cellular networks. Fields where wireless sensor networks can be used range from battlefield surveillance to target enumeration in agriculture and include environmental monitoring. In most applications, the topology of the network, such as its connectivity and its coverage, is a critical factor. Cellular networks are used for radio communication, where coverage is also a critical factor. Indeed the covered area is often the main characteristic of a cellular network. However such networks are not necessary built with redundancy and can be sensitive to disasters.

In case of a disaster, a wireless network can be seriously damaged: some of its nodes can be completely destroyed. Coverage holes can appear resulting in no signal for communication or no monitoring at all of a whole area, connectivity can be lost between nodes. Paradoxically, reliable and efficient communication and/or monitoring are especially needed in such situations. Therefore solutions for damage recovery for the coverage of wireless networks are much needed. Extensive research on the coverage problem in wireless networks exists: we can cite location-based [8] and range-based [17] methods. However, connectivity based schemes seem of greater interest since they provide an exact mathematical description of coverage without any geographical (location or distance) information. In [10], the authors introduced the Vietoris-Rips complex, based on the proximity graph of a wireless network, as a tool

to compute its topology. Coverage computation via simplicial homology comes down to linear algebra computations. It is for instance used in [5] or in [15] as a tool for a network operator to evaluate the quality of its network.

In this paper, we present a homology based algorithm for disaster recovery of wireless networks. We represent wireless networks with Čech simplicial complexes characterizing their coverage. Given a set of vertices and their coverage radius, our algorithm first adds supernumerary vertices in order to patch every existing coverage hole and connect every components, then runs an improved version of the reduction algorithm presented in [16] in order to reach an optimal result with a minimum number of added vertices. At the end, we obtain the locations in which to put new nodes. For the addition of new vertices, we first compared two usual methods presenting low complexity: grid positioning and uniform positioning. Then, we propose the use of a determinantal point process: the Ginibre point process. This process has the ability to create repulsion between vertices, and therefore has the inherent ability to locate areas with low density of vertices: namely coverage holes. Therefore using this process, we will optimally patch the damaged wireless network. The use and simulation of determinantal point processes in wireless networks is new, and it provides tremendous results compared to classic methods. We finally compared our whole disaster recovery algorithm performance to the classic recovery algorithm performance: the greedy algorithm for the set cover problem.

This is the first algorithm that we know of that adds too many vertices then remove them to reach an optimal result instead of adding the exact needed number of vertices. This, first, allows flexibility in the choice of the new vertices positions, which can be useful when running the algorithm in a real life scenario. Indeed, in case of a disaster, every locations are not always available for installing new nodes and preferring some areas or locations can be done with our algorithm. The originality of our work lies also in the choice of the vertices addition method we suggest. On top of flexibility, our algorithm provides a more reliable repaired wireless network than other algorithms. Indeed, adding the exact needed number of vertices can be optimal mathematically speaking but it is very sensitive to the adherence of the nodes positions chosen by the algorithm. To compare our work to literature, we can see that the disaster recovery problem can be viewed as a set cover problem. It suffices to define the universe as the

area to be covered and the subsets as the balls of radii the coverage radii. Then the question is to find the optimal set of subsets that cover the universe, considering there are already balls centered on the existing vertices. A greedy algorithm can solve this problem as explained in [4]. We can see in [12] that ϵ -nets also provide an algorithm for the set cover problem via a sampling of the universe. We can also cite landmark-based routing, seen in [9] and [3], which, using furthest point sampling, provides a set of nodes for optimal routing that we can interpret as a minimal set of vertices to cover an area.

The remainder of this paper is structured as follows: after a section on related work we present the main idea of our disaster recovery algorithm in Section III using some definitions from simplicial homology. Then in Section IV, we compare usual vertices addition methods. In Section V, we expose the determinantal method for new vertices addition. Section VI is devoted to the reduction algorithm description. Finally in Section VII we compare the performance of the whole disaster recovery algorithm with the greedy algorithm for the set cover problem. We conclude in Section VIII.

II. RECOVERY IN CELLULAR NETWORKS

The first step of recovery in cellular networks is the detection of failures. The detection of the failure of a cell occurs when its performance is considerably and abnormally reduced. In [14], the authors distinguish three stages of cell outage: degraded, crippled and catatonic. This last stage matches with the event of a disaster when there is complete outage of the damaged cells. After detection, compensation from other nodes can occur through relay assisted handover for ongoing calls, adjustments of neighboring cell sizes via power compensation or antenna tilt. In [2], the authors not only propose a cell outage management description but also describe compensation schemes. These steps of monitoring and detection, then compensation of nodes failures are comprised under the self-healing functions of future cellular networks described in [1].

In this work, we are interested in what happens when self-healing is not sufficient. In case of serious disasters, the compensation from remaining nodes and traffic rerouting might not be sufficient to provide service everywhere. In this case, the cellular network needs a manual intervention: the adding of new nodes to compensate the failures of former nodes. However a traditional restoration with brick-and-mortar base stations could take a long time, when efficient communication is particularly needed. In these cases, a recovery trailer fleet of base stations can be deployed by operators [13], it has been for example used by AT&T after 9/11 events. But a question remains: where to place the trailers carrying the recovery base stations. An ideal location would be adjacent to the failed node. However, these locations are not always available because of the disaster, and the recovery base stations may not have the same coverage radii than the former ones. Therefore a new deployment for the recovery base stations has to be decided, in which one of the main goal is complete coverage of damaged area. This becomes a mathematical set

cover problem. It can be solved by a greedy algorithm [4], ϵ -nets [12], or furthest point sampling [9], [3]. But these mathematical solutions provide an optimal mathematical result that do not consider any flexibility at all in the choosing of the new nodes positions, and that can be really sensitive to imprecisions in the nodes positions.

III. MAIN IDEA

A. Simplicial homology

First we need to remind some definitions from simplicial homology for a better understanding of the simplicial complex representation of wireless networks.

When representing a wireless sensor network, one's first idea will be a geometric graph, where sensors are represented by vertices, and an edge is drawn whenever two sensors can communicate with each other. However, the graph representation has some limitations; first of all there is no notion of coverage. Graphs can be generalized to more generic combinatorial objects known as simplicial complexes. While graphs model binary relations, simplicial complexes represent higher order relations. A simplicial complex is a combinatorial object made up of vertices, edges, triangles, tetrahedra, and their n -dimensional counterparts. Given a set of vertices V and an integer k , a k -simplex is an unordered subset of $k+1$ vertices $[v_0, v_1, \dots, v_k]$ where $v_i \in V$ and $v_i \neq v_j$ for all $i \neq j$. Thus, a 0-simplex is a vertex, a 1-simplex an edge, a 2-simplex a triangle, a 3-simplex a tetrahedron, etc.

Any subset of vertices included in the set of the $k+1$ vertices of a k -simplex is a face of this k -simplex. Thus, a k -simplex has exactly $k+1$ $(k-1)$ -faces, which are $(k-1)$ -simplices. For example, a tetrahedron has four 3-faces which are triangles. A simplicial complex is a collection of simplices which is closed with respect to the inclusion of faces, i.e. all faces of a simplex are in the set of simplices, and whenever two simplices intersect, they do so on a common face. An abstract simplicial complex is a purely combinatorial description of the geometric simplicial complex and therefore does not need the property of intersection of faces. For details about algebraic topology, we refer to [11].

B. Algorithm

We consider a damaged wireless network presenting coverage holes with a fixed boundary, in order to know the domain to cover, of which we can see an example in Figure 1.




Fig. 1. A damaged wireless network with a fixed boundary.

We consider as inputs the set of existing vertices: the nodes of a damaged wireless network, and their coverage radii. We also need a list of boundary nodes, these nodes can be fictional, but we need to know the whole area that is to be covered. We restrict ourselves to wireless networks with a fixed communication radius r , but it is possible to build the Čech complex of a wireless networks with different coverage radii using the intersection of different size coverage balls. The construction of the Čech abstract simplicial complex for a fixed radius r is given:

Definition 1 (Čech complex): Given (X, d) a metric space, ω a finite set of N points in X , and r a real positive number. The Čech complex of ω , denoted $\mathcal{C}_r(\omega)$, is the abstract simplicial complex whose k -simplices correspond to $(k + 1)$ -tuples of vertices in ω for which the intersection of the $k + 1$ balls of radii r_i centered at the $k + 1$ vertices is non-empty. The Čech complex characterizes the coverage of the wireless network. The k -th Betti numbers of an abstract simplicial complex X are defined as the number of k -th dimensional holes in X and are computed via linear algebra computations. For example, β_0 counts the number of 0-dimensional holes, that is the number of connected components. And β_1 counts the number of holes in the plane. Therefore the Betti number β_1 of the Čech complex counts the number of coverage holes of the wireless network it represents.

The algorithm begins by adding new vertices in addition to the set of existing vertices presenting coverage holes. We suggest here the use of two usual methods, and the new determinantal addition method. As we can see in Section IV, it is possible to consider any vertices addition methods must they be deterministic or random based: flexibility is one of the greatest advantage of our algorithm. In particular, it is possible to consider a method with pre-defined positions for some of the vertices in real-life scenarii.

For any non-deterministic method, we choose that the number of added vertices, that we denote by N_a , is determined as follows. First, it is set to be the minimum number of vertices needed to cover the whole area minus the number of existing vertices. This way, we take into account the number of existing vertices, that we denote by N_i . Then the Betti numbers β_0 and β_1 are computed via linear algebra thanks to the simplicial complex representation. If there is still more than one connected component, and coverage holes, then the number of added vertices N_a is incremented with a random variable u following an exponential growth:

- $N_a := \lceil \frac{a^2}{\pi r^2} \rceil - N_i$.
- After adding the N_a vertices, if $\beta_0 \neq 1$ or $\beta_1 \neq 0$, Then, $N_a = N_a + u$, and $u = 2 * u$.

The next step of our approach is to run the coverage reduction algorithm from [16] which maintains the topology of the wireless network: the algorithm removes vertices from the simplicial complex without modifying its Betti numbers. At this step, we remove some of the supernumerary vertices we just added in order to achieve an optimal result with a minimum number of added vertices.

We give in Algorithm 1 the outline of the algorithm. The algorithm requires the set of initial vertices ω_i , the fixed coverage radius r , as well as the list of boundary vertices L_b . It is important to note that only connectivity information is needed to build the Čech complex.

Algorithm 1 Disaster recovery algorithm

Require: Set of vertices ω_i , radius r , boundary vertices L_b
 Computation of the Čech complex $X = \mathcal{C}_r(\omega_i)$
 $N_a = \lceil \frac{a^2}{\pi r^2} \rceil - N_i$
 Addition of N_a vertices to X following chosen method
 Computation of $\beta_0(X)$ and $\beta_1(X)$
 $u = 1$
while $\beta_0 \neq 1$ or $\beta_1 \neq 0$ **do**
 $N_a = N_a + u$
 $u = 2 * u$
 Addition of N_a vertices to X following chosen method
 Computation of $\beta_0(X)$ and $\beta_1(X)$
end while
 Coverage reduction algorithm on X
return List L_a of kept added vertices.

IV. VERTICES ADDITION METHODS

In this section, we propose two vertices addition methods. The aim of this part of the algorithm is to add enough vertices to patch the coverage of the simplicial complex, but the less vertices the better since the results will be closer to the optimal solution. We consider grid and uniform positioning which require minimum simulation capacities and are well known in wireless networks management. The grid method is deterministic, so the number of added vertices as well as their position are set. The uniform method is random, the number of added vertices is then computed as presented in Section III.

A. Grid

The first method we suggest ensures perfect coverage: the new vertices are positioned along a square grid in a lattice graph where the distance between two neighboring vertices is $\sqrt{2}r$. The number of vertices is set. Therefore this method is completely independent from the initial configuration. We can see an example of the grid vertices addition method on the damaged network of Figure 1 in Figure 2. Existing vertices are black circles while added vertices are red plusses.

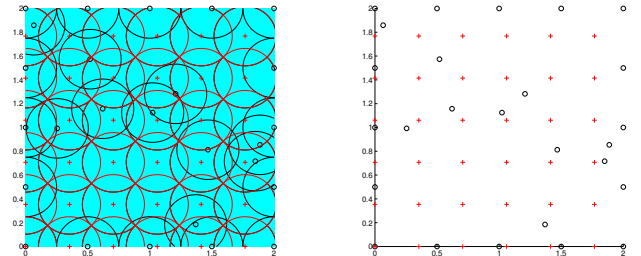


Fig. 2. With the grid addition method.

B. Uniform

Here, the number of added vertices N_a is computed accordingly to the method presented in Section III, taking into account the number of existing vertices N_i . Then the N_a vertices are sampled following a uniform law on the entire domain. An obtained configuration with this method on the network of Figure 1 is shown in Figure 3.

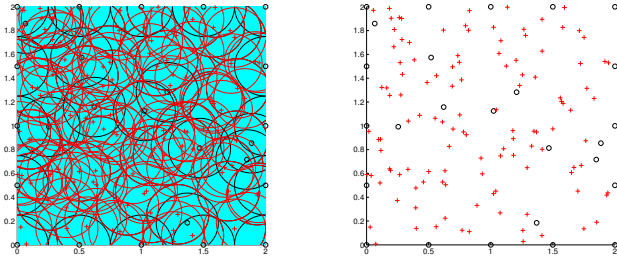


Fig. 3. With the uniform addition method.

C. Comparison

We can compare the vertices addition method presented here along two variables: their complexity and their efficiency. First, we compare the complexities of the two methods. They all are of complexity $O(N_a)$: computations of N_a positions, For the uniform method we have to add the complexity of computing the coverage via the Betti numbers, which is of the order of the number of triangles times the number of edges that is $O((N_a + N_i)^5 (\frac{r}{a})^6)$ for a square of side a according to [6].

To compare the methods efficiency we count the number of vertices each have to add on average to reach complete coverage. The grid method being determinist, the number of added vertices is constant: $N_a = (\lfloor \frac{a}{\sqrt{2}r} \rfloor + 1)^2$ for a Čech complex or $N_a = (\lfloor \frac{a}{2r} \rfloor + 1)^2$ for a Vietoris-Rips complex which is an approximation of the Čech complex easier to simulate. We can see in Table I the mean number of added vertices on 1000 simulations for each method in different scenarii on a square of side $a = 1$ with coverage radius $r = 0.25$, and a Vietoris-Rips complex. Scenarii are defined by the mean percentage of area covered before running the recovery algorithm: if there are many or few existing vertices, and thus few or many vertices to add. We need to note that number of added vertices is computed following our incrementation method presented in Section III and these results only concern the vertices addition methods before the reduction algorithm runs.

% of area initially covered	20%	40%	60%	80%
Grid method	9.00	9.00	9.00	9.00
Uniform method	32.51	29.34	24.64	15.63

TABLE I
MEAN NUMBER OF ADDED VERTICES

The grid method is mathematically optimal for the number of added vertices to cover the whole area, however it is not

optimal in a real life scenario where positions can not be defined with such precision, and any imprecision leads to a coverage hole. This method fares even or better both in complexity and in number of added vertices.

V. DETERMINANTAL ADDITION METHOD

In this section, we present the determinantal method and compare it to the two methods presented in Section IV.

A. Definitions

The most common point process in wireless network representation is the Poisson point process. However in this process, conditionally to the number of vertices, their positions are independent from each other (as in the uniform positioning method presented in Section IV). This independence creates some aggregations of vertices, that is not convenient for our application. That is why we introduce the use of determinantal point processes, in which the vertices positions are not independent anymore. General point processes can be characterized by their so-called Papangelou intensity. Informally speaking, for x a location, and ω a realization of a given point process, that is a set of vertices, $c(x, \omega)$ is the probability to have a vertex in an infinitesimal region around x knowing the set of vertices ω . For Poisson process, $c(x, \omega) = 1$ for any x and any ω . A point process is said to be repulsive (resp. attractive) whenever $c(x, \omega) \geq c(x, \zeta)$ (resp. $c(x, \omega) \leq c(x, \zeta)$) as soon as $\omega \subset \zeta$. For repulsive point process, that means that the greater the set of vertices, the smaller the probability to have an other vertex.

Among repulsive point processes, we are in particular interested in determinantal processes:

Definition 2 (Determinantal point process): Given X a Polish space equipped with the Radon measure μ , and K a measurable complex function on X^2 , we say that N is a determinantal point process on X with kernel K if it is a point process on X with correlation functions $\rho_n(x_1, \dots, x_n) = \det(K(x_i, x_j)_{1 \leq i, j \leq n})$ for every $n \geq 1$ and $x_1, \dots, x_n \in X$.

We can see that when two vertices x_i and x_j tends to be close to each other for $i \neq j$, the determinant tends to zero, and so does the correlation function. That means that the vertices of N repel each other. There exist as many determinantal point processes as functions K . We are interested in the following:

Definition 3 (Ginibre point process): The Ginibre point process is the determinantal point process with kernel $K(x, y) = \sum_{k=1}^{\infty} B_k \phi_k(x) \overline{\phi_k(y)}$, where $B_k, k = 1, 2, \dots$, are k independent Bernoulli variables and $\phi_k(x) = \frac{1}{\sqrt{\pi k!}} e^{-\frac{|x|^2}{2}} x^k$ for $x \in \mathbb{C}$ and $k \in \mathbb{N}$.

The Ginibre point process is invariant with respect to translations and rotations, making it relatively easy to simulate on a compact set. Moreover, the repulsion induced by a Ginibre point process is of electrostatic type. The principle behind the repulsion lies in the probability density used to draw vertices positions. The probability to draw a vertex at the exact same position of an already drawn vertex is zero. Then, the probability increases with increasing distance from every

existing vertices. Therefore the probability to draw a vertex is greater in areas the furthest away from every existing vertices, that is to say in coverage holes. Therefore, added vertices are almost automatically located in coverage holes thus reducing the number of superfluous vertices.

B. Simulation

Using determinantal point processes allows us to not only take into account the number of existing vertices, via the computation of N_a , but we also take into account the existing vertices positions, then every new vertex position as it is added. It suffices to consider the N_i existing vertices as the N_i first vertices sampled in the process, then each vertex is taken into account as it is drawn. The Ginibre process is usually defined on the whole plane thus we needed to construct a process with the same repulsive characteristics but which could be restricted to a compact set. Moreover, we needed to be able to set the number of vertices to draw. Due to space limitations, we will not delve into these technicalities but they are developed in [7]. We can see a realisation of our simulation for the recovery of the wireless network of Figure 1 in Figure 4.

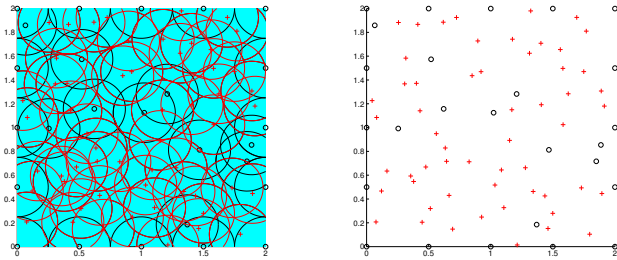


Fig. 4. With the determinantal addition method with a Ginibre basis.

C. Comparison

We now compare the determinantal vertices addition method to the methods presented in Section IV.

As for the complexity, since the determinantal method takes into account the position of both existing vertices and randomly added vertices, it is the more complex. First taking into account the existing vertices positions is of complexity $O(N_i^2)$, then the position drawing with the rejection sampling is of complexity $O(N_a(N_a + N_i))$ at most. Thus we have a final complexity of $O(N_i^2 + N_a^2 + N_a N_i)$. To which we add the Betti numbers computation complexity: $O((N_a + N_i)^5 (\frac{r}{a})^6)$.

We give in Table II the comparison between the mean number of added vertices for the three methods. The simulation parameters being the same as Section IV. The determinantal method provides the best results in all scenarii among the random methods by far. And it is the best method among all for the almost covered scenario.

VI. REDUCTION ALGORITHM

In this section, we recall the steps of the reduction algorithm for simplicial complexes presented in [16]. The algorithm takes as input an abstract simplicial complex: here it is the

% of area initially covered	20%	40%	60%	80%
Grid method	9.00	9.00	9.00	9.00
Uniform method	32.51	29.34	24.64	15.63
Determinantal method	16.00	14.62	12.36	7.79

TABLE II
MEAN NUMBER OF ADDED VERTICES

Čech complex of the wireless network plus the added vertices, and a list of boundary vertices. At this step we have ensured that we have one connected component $\beta_0 = 1$, and no coverage hole $\beta_1 = 0$, via the addition of a sufficient number of vertices.

The first step is to characterize the superfluousness of 2-simplices for the coverage with a degree defined to be the size of the largest simplex a 2-simplex is the face of. Then to transmit the superfluousness of its 2-simplices to a vertex, an index of a vertex is defined to be the minimum of the degrees of the 2-simplices it is a face of. The indices give an order for an optimal removal of vertices: the greater the index of a vertex, the more likely it is superfluous for the coverage of its Čech simplicial complex. In our disaster recovery case, we do not want to remove the remaining vertices of our damaged network. So these remaining vertices are given a negative index to flag them as unremovable, and only the newly added vertices are considered for removing. So, the vertices with the greatest index are candidates for removal: one is chosen randomly. If its removal does not change the homology, then it is effectively removed, otherwise it is flagged as unremovable with a negative index. The algorithm goes on until every remaining vertex is unremovable, thus achieving optimal result. For more information on the reduction algorithm we refer to [16]. We can see in Figure 5 an execution of the reduction algorithm on the intermediate configuration of Figure 4. Removed vertices are represented by blue diamonds.

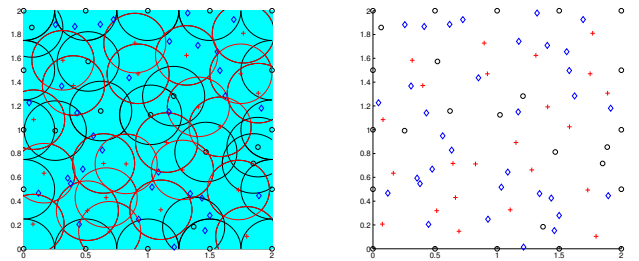


Fig. 5. The reduction algorithm run on the determinantal method example.

VII. PERFORMANCE COMPARISON

We now compare the performance results of the whole disaster recovery algorithm to the most known coverage recovery algorithm: the greedy algorithm for the set cover problem. The greedy algorithm method lays a square grid of parameter $\sqrt{2}r$ for the Čech complex of potential new vertices. Then the first added vertex is the furthest from all

existing vertices. The algorithm goes on adding the furthest potential vertex of the grid from all vertices (existing+added). It stops when the furthest vertex is in the coverage ball of an existing or added vertex. Then for the $(i + 1)$ -th vertex addition, the greedy algorithm computes the distances from all $N_i + i$ existing vertices to all $(\lfloor \frac{a}{\sqrt{2}r} \rfloor + 1)^2 - i$ potential vertices. Therefore the complexity of the greedy algorithm is in $O((N_i + N_a)(\lfloor \frac{a}{\sqrt{2}r} \rfloor + 1)^2)$. For the complexity of our algorithm, we consider first the complexity of building the simplicial complex associated with the network which is in $O((N_i + N_a)^C)$, where C is the clique number. This complexity seems really high since C can only be upper bounded by $N_i + N_a$ in the general case but it is the only way to compute the coverage when vertices position are not defined along a grid. Then the complexity of the coverage reduction algorithm is of the order of $O((1 + (\frac{r}{a})^2)^{N_i + N_a})$ (see [16]). So the greedy algorithm appears less complex than ours in the general case. However when r is small before a or when the dimension is greater than 2, then the power factor becomes $d > 2$ and C is a finite integer, so the trend is reversed.

The numbers of vertices added in the final state both with our recovery algorithm and the greedy algorithm tend to approximatively the same number: the minimum number of vertices required to cover the uncovered area depending on the initial configuration, hence the slight differences. Results pre-

% of area initially covered	20%	40%	60%	80%
Homology algorithm	4.04	3.63	2.85	1.78
Greedy algorithm	3.67	3.37	2.82	1.85

TABLE III
MEAN FINAL NUMBER OF ADDED VERTICES

sented in Table III are simulated in the same conditions as in Section IV and concern the final number of added vertices: the number of added vertices kept after the reduction algorithm, or added with the greedy algorithm. It is important to note that our algorithm with the grid method gives the exact same result as the greedy algorithm, number of added vertices and their positions being exactly the same. The greedy algorithm is optimal, as ours, since it adds the minimum number of vertices. But it is not flexible at all: its success depends highly on the precision of the chosen positions: a coverage hole appears as soon as a vertex is slightly moved. Therefore our algorithm seems more fitted to the disaster recovery case when a recovery network is deployed in emergency both indoor, via Femtocells, and outdoor, via a trailer fleet, where exact GPS locations are not always available, and exact sticking to positioning not always followed.

VIII. CONCLUSION

In this paper, we adopt the simplicial homology representation for wireless networks which characterizes not only the connectivity but also the coverage of a given network. Based on that representation, we write an algorithm which patches coverage holes of damaged wireless networks by giving the positions in which to put new nodes. Our recovery algorithm

first adds enough new nodes to cover the whole domain, then runs a reduction algorithm on the newly added nodes to reach an optimal result. The originality of the algorithm lies in the fact that we do not only add the needed nodes, thus providing a mathematically optimal but not reliable result, but adds too many nodes thus providing a stronger coverage that is less sensitive to the imprecisions of following approximatively GPS locations. Moreover, the vertices addition methods can be chosen and adapted to a particular situation. In this paper we compared the use of classic positioning methods: grid and uniform, to the new determinantal method that is more efficient at positioning new vertices where they are needed.

REFERENCES

- [1] 3GPP. Telecommunications management; self-healing OAM; concepts and requirements. *Tech. Rep.*, 3GPP TS 32.541 v1.6.1, 2010.
- [2] M. Amirijoo, L. Jorgueski, T. Kurner, R. Litjens, M. Neuland, L. Schmelz, and U. Turke. Cell outage management in LTE networks. In *Wireless Communication Systems, 2009. ISWCS 2009. 6th International Symposium on*, pages 600–604, 2009.
- [3] A.Nguyen, N.Milosavljević, Q.Fang, J.Gao, and L.J.Guibas. Landmark selection and greedy landmark-descent routing for sensor networks. In *Proceedings of IEEE INFOCOM 2007*, 2007.
- [4] V. Chvatal. A Greedy Heuristic for the Set-Covering Problem. *Mathematics of Operations Research*, 4(3):233–235, 1979.
- [5] V. de Silva and R. Ghrist. Coordinate-free coverage in sensor networks with controlled boundaries via homology. *International Journal of Robotics Research*, 25, december 2006.
- [6] L. Decreusefond, E. Ferraz, H. Randriambololona, and A. Vergne. Simplicial homology of random configurations. *Advances in Applied Probability*, 2013.
- [7] L. Decreusefond, I. Flint, and A. Vergne. Efficient simulation of the Ginibre process. hal-00869259, Oct. 2013.
- [8] Q. Fang, J. Gao, and L. Guibas. Locating and bypassing routing holes in sensor networks. In *INFOCOM 2004. Twenty-third Annual Joint Conference of the IEEE Computer and Communications Societies*, volume 4, pages 2458 – 2468 vol.4, march 2004.
- [9] Q. Fang, J. Gao, L. Guibas, V. de Silva, and L. Zhang. GLIDER: Gradient landmark-based distributed routing for sensor networks. In *Proc. IEEE Conference on Computer Communications (INFOCOM)*, 2005.
- [10] R. Ghrist and A. Muhammad. Coverage and hole-detection in sensor networks via homology. In *Proceedings of the 4th international symposium on Information processing in sensor networks*, IPSN '05, Piscataway, NJ, USA, 2005. IEEE Press.
- [11] A. Hatcher. *Algebraic Topology*. Cambridge University Press, 2002.
- [12] D. Haussler and E. Welzl. Epsilon-nets and simplex range queries. In *Proceedings of the second annual symposium on Computational geometry*, SCG '86, pages 61–71, New York, NY, USA, 1986. ACM.
- [13] K. Morrison. Rapidly recovering from the catastrophic loss of a major telecommunications office. *Communications Magazine, IEEE*, 49(1):28–35, 2011.
- [14] C. Mueller, M. Kaschub, C. Blankenhorn, and S. Wanke. A cell outage detection algorithm using neighbor cell list reports. In K. Hummel and J. Sterbenz, editors, *Self-Organizing Systems*, volume 5343 of *Lecture Notes in Computer Science*, pages 218–229. Springer Berlin Heidelberg, 2008.
- [15] A. Muhammad and A. Jadbabaie. Decentralized computation of homology groups in networks by gossip. In *American Control Conference, 2007. ACC '07*, pages 3438 –3443, july 2007.
- [16] A. Vergne, L. Decreusefond, and P. Martins. Reduction algorithm for simplicial complexes. In *INFOCOM, 2013 Proceedings IEEE*, pages 475–479, 2013.
- [17] C. Zhang, Y. Zhang, and Y. Fang. Detecting coverage boundary nodes in wireless sensor networks. In *Networking, Sensing and Control, 2006. ICNSC '06. Proceedings of the 2006 IEEE International Conference on*, pages 868 –873, 0-0 2006.