



HAL
open science

Recent advances in the elaboration of superhydrophobic/superoleophobic surfaces by electrodeposition of fluorinated conductive polymers

Thierry Darmanin, Frédéric Guittard

► **To cite this version:**

Thierry Darmanin, Frédéric Guittard. Recent advances in the elaboration of superhydrophobic/superoleophobic surfaces by electrodeposition of fluorinated conductive polymers. 21st Winter Fluorine Conference, American Chemical Society, Division of Fluorine Chemistry, Jan 2013, United States. hal-00846831

HAL Id: hal-00846831

<https://hal.science/hal-00846831>

Submitted on 21 Jul 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

RECENT ADVANCES IN THE ELABORATION OF SUPERHYDROPHOBIC/SUPEROLEOPHOBIC SURFACES BY ELECTRODEPOSITION OF FLUORINATED CONDUCTIVE POLYMERS

Thierry Darmanin, Frédéric Guittard

Université de Nice – Sophia Antipolis & CNRS, Laboratoire Physique de la Matière Condensée (LPMC) - UMR 7336, 28 avenue Valrose, 06108 Nice cedex 2, France
guittard@unice.fr

Obtaining super-phobic surfaces for liquid dewetting, water and oil for example, are of both theoretical and practical interest, as has been reported in recent reviews. On the one hand, the wettability of rough solid surfaces is governed by their roughness / morphology at the nano/micro scale and their low surface energy materials presented at the extreme surface. On the other hand, the spreading ability of liquids is governed by their surface tension. Hence, the control of surface morphology and wettability using liquid probes of various surface tensions is crucial in the development of non-wetting surfaces.

Here, I will present the new advances obtained by our group in the development of superhydrophobic and superoleophobic surfaces by electrodeposition of conductive polymers bearing fluorinated chains [1-4]. This technique is very versatile to produce non-wetting surfaces. Indeed, the surface morphology and as a consequence the surface wettability can be controlled by not only electrochemical parameters but also by tuning the chemical structure of monomers (Fig. 1 shows an example of exceptional example of surface morphology control, from thin fibrils to extremely long fibers, by replacing oxygen atoms by sulfur ones) [1].

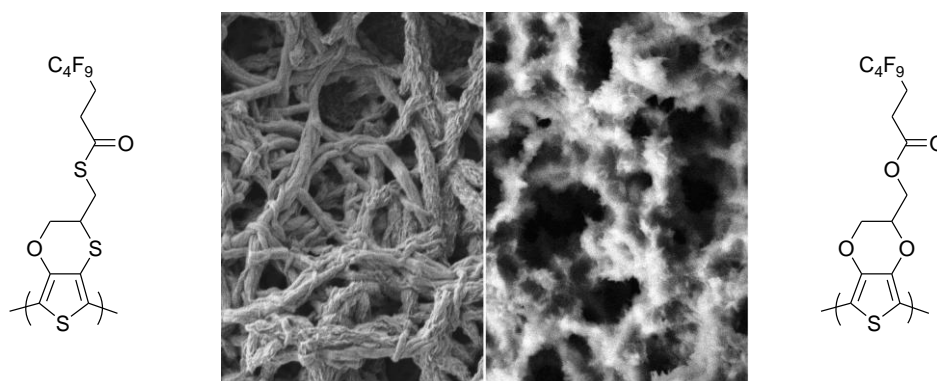


Fig. 1 Surface morphology comparison between two electrodeposited polymers, differing by the substitution of oxygen atoms by sulfur ones, using the same electrochemical conditions.

References

- (1) Darmanin, T.; Guittard, F. *J. Am. Chem. Soc.* **2011**, *133*, 15627– 15634.
- (2) Darmanin, T.; Guittard, F. *J. Am. Chem. Soc.* **2009**, *131*, 7928– 7933.
- (3) Bellanger, H.; Darmanin, T.; Guittard, F. *Langmuir* **2012**, *28*, 186-192.
- (4) Wolfs, M.; Darmanin, T.; Guittard, F. *Macromolecules* **2011**, *44*, 9286– 9294.