



**HAL**  
open science

# Theoretical and numerical investigation of the finite cell method

Monique Dauge, Alexander Düster, Ernst Rank

► **To cite this version:**

Monique Dauge, Alexander Düster, Ernst Rank. Theoretical and numerical investigation of the finite cell method. 2013. hal-00850602v2

**HAL Id: hal-00850602**

**<https://hal.science/hal-00850602v2>**

Preprint submitted on 18 Mar 2014 (v2), last revised 23 Dec 2014 (v3)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Theoretical and numerical investigation of the finite cell method

Monique Dauge<sup>1</sup>, Alexander Düster<sup>2</sup>, and Ernst Rank<sup>3</sup>

<sup>1</sup>Université de Rennes 1, France

<sup>2</sup>Technische Universität Hamburg-Harburg, Germany

<sup>3</sup>Technische Universität München, Germany

March 18, 2014

## Abstract

We present a detailed analysis of the convergence properties of the finite cell method which is a fictitious domain approach based on high order finite elements. It is proved that exponential type of convergence can be obtained by the finite cell method for Laplace and Lamé problems in one, two as well three dimensions. Several numerical examples in one and two dimensions including a well-known benchmark problem from linear elasticity confirm the results of the mathematical analysis of the finite cell method.

## 1 Introduction

The finite cell method (FCM) [26, 14, 15] is a combination of a fictitious domain approach [32, 33, 18, 19, 17] with finite elements of high order [42, 5, 4, 37, 11]. The main idea is to embed the domain of the problem to be solved into a bigger domain that has a simple geometric shape and can therefore be readily meshed. Thanks to the simple shape of the embedding or fictitious domain, mesh generation is dramatically simplified. The geometry of the problem is considered during the integration of the cell matrices, i.e. when computing the stiffness and mass matrices.

In this paper we will consider Neumann boundary conditions at the transition from the physical to the fictitious domain. Our fictitious domain approach relies on the introduction of an indicator function  $\alpha$  which is equal to 1 inside the domain and 0 outside of the domain. In order to avoid conditioning problems,  $\alpha$  is set to a very small value  $\varepsilon$  close to zero outside the domain. In this way the variational formulation is stabilized and the energy contribution of the fictitious domain is weakly penalized, shifting the effort of meshing towards the numerical integration of the cell matrices. Since the quality of the finite cell approximation strongly depends on the accuracy of the numerical integration, an adaptive quadrature scheme is applied to compute the stiffness and mass matrices of cells that are cut by the boundary of the domain or include holes. The adaptive integration can be carried out very generally by applying quadtree (in 2D) and octree (in 3D) space partitioning schemes in a fully automatic, error-controlled fashion [2]. Müller et al. [24] proposed a promising approach that enables the numerical integration of functions that are at least partly defined by the zero iso-contour of a level set function. To this end a solution of a small linear system based on a simplified variant of the moment fitting equations

[41] has to be performed to find the modified weights of Gaussian quadrature scheme. Summarizing, the finite cell method is based on three important ingredients: a fictitious domain approach, high order shape functions and an adaptive integration of the cell matrices. Combining these ingredients allows to achieve an exponential type of convergence when performing a  $p$ -extension of the trial and test functions of the cells.

The FCM has been applied to several problems like linear elasticity in 2D [26] and 3D [14], to shell problems [29] as well as to problems in biomechanics [12, 43, 44] or wave propagation [9, 22, 10]. Non-linear problems such as geometrically nonlinearity [36] or elastoplasticity [1, 3] have been addressed as well. The FCM has also been successfully applied to the numerical homogenization of materials with complicated microstructures [16] or to topology optimization [13, 27] in structural mechanics. Instead of classical hierarchic shape functions [42] NURBS, which have become very popular thanks to the isogeometric analysis [21], can also be successfully used within the FCM, see [35, 30]. Local refinement strategies have been also developed for the FCM and it turned out that the  $hp$ - $d$  method [28, 12] presents a general framework for local improvement of accuracy within the FCM, see [34, 23].

Despite the fact that the FCM has been numerically demonstrated to yield high convergence rates in many different problems, there is still a lack of a thoroughly mathematical analysis of its convergence properties. Thus, this paper is devoted to the analysis of the FCM, proving its capabilities of achieving exponential convergence under conditions, which are similar to those for the  $p$ -version of the finite element method. Here, as already mentioned, we will focus on Neumann boundary conditions at the transition from the physical to the fictitious domain. Dirichlet boundary conditions will be studied in future work.

The layout of the paper is as follows: In Section 2 the setting of the problem is defined and the convergence of the discrete and continuous problem with respect to the penalization parameter  $\varepsilon$  is presented. In Section 3 Céa and Strang lemmas are revisited to check that strict positiveness of the bilinear forms is not necessary. In Section 4 the convergence of the  $p$ -version of finite elements is addressed which is one of the main ingredients of the FCM. Numerical examples for 1D problems are presented in Section 5 and the observed exponential convergence is proved. In Section 6 a two-dimensional benchmark of linear elasticity is studied and it is demonstrated that the exponential convergence can be also obtained in 2D. Finally, a conclusion is drawn in Section 7.

## 2 Neumann condition obtained by penalization

### 2.1 The setting

We consider a bounded domain  $\Omega \subset \mathbb{R}^n$ ,  $n = 1, 2$  or  $3$  with reasonable smoothness assumption ( $\Omega$  can be regular or polyhedral with extension property across its boundary). We assume that the boundary of  $\Omega$  has at least two connected components, so that  $\Omega$  has a finite number of *holes*: The complement domain  $\Omega' := \mathbb{R}^n \setminus \overline{\Omega}$  has one unbounded component  $\Omega'_0$  and a finite number of bounded connected components  $\Omega'_j$ ,  $j = 1, \dots, J$ . We denote by  $\mathcal{H}$  the hole

$$\mathcal{H} = \cup_{j=1}^J \Omega'_j, \quad (2.1)$$

by  $\Gamma$  be the boundary of  $\Omega'_0$ , by  $\Sigma$  the boundary of  $\mathcal{H}$  and by  $\mathcal{D}$  the domain with holes removed

$$\mathcal{D} = \Omega \cup \overline{\mathcal{H}}. \quad (2.2)$$

Note that the boundary of  $\mathcal{D}$  is  $\Gamma$ , the boundary of  $\Omega$  is  $\Sigma \cup \Gamma$ .

The aim is to solve an elliptic equation  $Lu = f$  on  $\Omega$  with Dirichlet conditions on  $\Gamma$  and Neumann conditions on  $\Sigma$  by solving Dirichlet problems on  $\mathcal{D}$ . So  $\mathcal{D}$  plays the role of a fictitious domain.

More specifically, we are given two differential bilinear forms  $b_0$  and  $b_1$  of degree 1 which we assume for simplicity to be real symmetric with constant coefficients (at this point we may consider systems – Lamé – as well). The simplest, typical, example is given by the gradient bilinear form

$$b_0(u, v)(x) = \nabla u(x) \cdot \nabla v(x) + k^2 u(x)v(x) \quad (k \geq 0) \quad \text{and} \quad b_1(u, v)(x) = \nabla u(x) \cdot \nabla v(x), \quad (2.3)$$

while Lamé system corresponds to

$$b_0(u, v) = b_1(u, v) = 2\mu\epsilon(u)(x) : \epsilon(v)(x) + \lambda \operatorname{div} u(x) \operatorname{div} v(x).$$

Let us define variational spaces:

$$V(\Omega) = \{u \in H^1(\Omega) : u = 0 \text{ on } \Gamma\} \quad \text{and} \quad V(\mathcal{D}) = H_0^1(\mathcal{D}), \quad (2.4)$$

and the variational forms

$$a_0(u, v) = \int_{\Omega} b_0(u, v)(x) dx \quad \text{and} \quad a_1(u, v) = \int_{\mathcal{H}} b_1(u, v)(x) dx. \quad (2.5)$$

Let  $f \in L^2(\Omega)$ . We want to solve the variational problem

$$\text{Find } u \in V(\Omega), \quad \forall v \in V(\Omega), \quad a_0(u, v) = \int_{\Omega} f(x)v(x) dx. \quad (2.6)$$

Instead, we solve for small  $\varepsilon > 0$  the following variational problem on  $\mathcal{D}$

$$\text{Find } u_{\varepsilon} \in V(\mathcal{D}), \quad \forall v \in V(\mathcal{D}), \quad a_0(u_{\varepsilon}, v) + \varepsilon a_1(u_{\varepsilon}, v) = \int_{\mathcal{D}} f(x)v(x) dx, \quad (2.7)$$

where the right hand side  $f$  is extended by 0 in the hole  $\mathcal{H}$ . Note that

$$a_0(u, v) + \varepsilon a_1(u, v) = \int_{\Omega} b_0(u, v)(x) dx + \varepsilon \int_{\mathcal{H}} b_1(u, v)(x) dx.$$

For our typical example (2.3), we have

$$a_0(u, v) + \varepsilon a_1(u, v) = \int_{\mathcal{D}} \alpha(x) \nabla u(x) \cdot \nabla v(x) + \alpha_M(x) u(x)v(x) dx, \quad (2.8)$$

where the functions  $\alpha$  and  $\alpha_M$  are defined as follows

$$\alpha(x) = 1 \quad \text{and} \quad \alpha_M(x) = k^2 \quad \text{in } \Omega, \quad \alpha(x) = \varepsilon \quad \text{and} \quad \alpha_M(x) = 0 \quad \text{in } \mathcal{H}.$$

At the discrete level, we replace a FEM discretization of problem (2.6) by a discretization of (2.7): With a finite dimensional approximation  $V^{\text{ap}}(\mathcal{D})$  of  $V(\mathcal{D})$ , and a numerical integration  $\int_{\mathcal{D}|\text{ap}}$  over  $\mathcal{D}$ , the discrete problem with parameter  $\varepsilon$  is

$$\text{Find } u_{\varepsilon}^{\text{ap}} \in V^{\text{ap}}(\mathcal{D}), \quad \forall v \in V^{\text{ap}}(\mathcal{D}), \quad a_0^{\text{ap}}(u_{\varepsilon}^{\text{ap}}, v) + \varepsilon a_1^{\text{ap}}(u_{\varepsilon}^{\text{ap}}, v) = \int_{\mathcal{D}|\text{ap}} f(x)v(x) dx, \quad (2.9)$$

where

$$a_0^{\text{ap}}(u, v) = \int_{\mathcal{D}|\text{ap}} \mathbf{1}_{\Omega}(x) b_0(u, v)(x) dx \quad \text{and} \quad a_1^{\text{ap}}(u, v) = \int_{\mathcal{D}|\text{ap}} \mathbf{1}_{\mathcal{H}}(x) b_1(u, v)(x) dx. \quad (2.10)$$

## 2.2 Convergence of discrete problems with respect to the penalization parameter

Let us consider the finite dimensional space  $V = V^{\text{ap}}(\mathcal{D})$  and the numerical integration  $\int_{\mathcal{D}|_{\text{ap}}}$  as fixed, and let  $\varepsilon$  tend to 0. We prove in Lemma 2.1 that, under a simple assumption, problem (2.9) converges to a limit as  $\varepsilon \rightarrow 0$ . We introduce the kernel of  $a_0^{\text{ap}}$

$$K_0 = \{v \in V : \forall u \in V, a_0^{\text{ap}}(u, v) = 0\}, \quad (2.11)$$

and its orthogonal space

$$K_0^\perp = \{\varphi \in V' : \forall v \in K_0, \langle \varphi, v \rangle = 0\}. \quad (2.12)$$

Here  $\langle \varphi, v \rangle$  denotes the duality pairing between  $V'$  and  $V$ .

We define the operators  $\bar{A}_\ell$  for  $\ell = 0, 1$ :

$$\begin{aligned} \bar{A}_\ell : V &\longrightarrow V' \\ u &\longmapsto (V \ni v \mapsto a_\ell^{\text{ap}}(u, v)), \end{aligned} \quad (2.13)$$

And introduce their restrictions

$$\begin{aligned} A_0 : V &\longrightarrow K_0^\perp \\ u &\longmapsto (V \ni v \mapsto a_0^{\text{ap}}(u, v)), \end{aligned} \quad (2.14)$$

and

$$\begin{aligned} A_1 : V &\longrightarrow K_0' \\ u &\longmapsto (K_0 \ni v \mapsto a_1^{\text{ap}}(u, v)), \end{aligned} \quad (2.15)$$

and, finally, the operator  $A$

$$\begin{aligned} A : V &\longrightarrow K_0^\perp \times K_0' \\ u &\longmapsto (A_0 u, A_1 u). \end{aligned} \quad (2.16)$$

**Lemma 2.1** *In the finite dimensional framework, if  $A_1|_{K_0}$  is bijective, then  $A$  is bijective. Let  $f \in K_0^\perp$ . Then for  $\varepsilon$  small enough, problem (2.9) has a unique solution  $u_\varepsilon$ . Let  $u_0$  be defined as  $A^{-1}(f, 0)$ . Then  $u_\varepsilon$  tends to  $u_0$  in  $V$ , and in any fixed norm  $\|\cdot\|$  on  $V$*

$$\|u_\varepsilon - u_0\| \leq C_A \varepsilon \|f\|.$$

**Proof:**  $A_0$  sends  $V$  into  $K_0^\perp$ , and  $A$  sends  $V$  into  $K_0^\perp \times K_0'$ . These two latter spaces have the same dimension. Since  $A_1|_{K_0}$  is bijective, the kernel of  $A$  is reduced to  $\{0\}$ , hence the bijectivity of  $A$ .

We define recursively:

$$u^{(0)} := u_0 = A^{-1}(f, 0) \quad \text{and} \quad u^{(j)} = -A^{-1}(\bar{A}_1 u^{(j-1)}, 0), \quad j = 1, 2, \dots$$

This makes sense, since by definition  $A_1 u^{(j-1)} = 0$ , hence  $\bar{A}_1 u^{(j-1)}$  belongs to  $K_0^\perp$ .

Then, for  $\varepsilon \leq \varepsilon_0$  with  $\varepsilon_0$  small enough, the series

$$\sum_{j \geq 0} \varepsilon^j u^{(j)}$$

converges in  $V$  and is solution of problem (2.9).

More generally, if the right-hand side is any element  $\varphi$  of  $V'$ , we solve the problem

$$\text{Find } u \in V, \quad \forall v \in V, \quad a_0^{\text{ap}}(u, v) + \varepsilon a_1^{\text{ap}}(u, v) = \langle \varphi, v \rangle, \quad (2.17)$$

by the series

$$\sum_{j \geq -1} \varepsilon^j u^{(j)}$$

with  $u^{(-1)} \in K_0$  the unique solution of

$$\forall v \in K_0, \quad a_1^{\text{ap}}(u, v) = \langle \varphi, v \rangle,$$

$u^{(0)} := A^{-1}(f - \bar{A}_1 u^{(-1)}, 0)$ , and  $u^{(j)}$  for  $j \geq 1$  defined as above.

This proves that the operator  $V \ni u \mapsto (v \mapsto a_0^{\text{ap}}(u, v) + \varepsilon a_1^{\text{ap}}(u, v)) \in V'$  is onto as soon as  $\varepsilon \leq \varepsilon_0$ . Therefore, it is injective. This ends the proof.  $\square$

### 2.3 Convergence of the continuous problem with respect to the penalization parameter

Let us recall that a real symmetric bilinear form  $a$  is said *coercive* on a space  $V$  endowed with a norm  $\|\cdot\|$  if for some positive constant  $c$ , there holds  $a(u, u) \geq c\|u\|^2$  for all  $u \in V$ .

We assume that  $a_0$  is coercive on  $V(\Omega)$ . Then the kernel

$$K_0 := \{v \in V(\mathcal{D}) : \forall u \in V(\mathcal{D}), a_0(u, v) = 0\},$$

is by definition the space of  $v \in H_0^1(\mathcal{D})$  such that for all  $u \in H_0^1(\mathcal{D})$ ,

$$\int_{\Omega} b_0(u, v)(x) dx = 0.$$

Since any function  $u \in V(\Omega)$  can be extended in a function  $\bar{u} \in H_0^1(\mathcal{D})$ , and, conversely, the restriction of any  $v \in H_0^1(\mathcal{D})$  to  $\Omega$  is an element of  $V(\Omega)$ , the coercivity property of  $a_0$  implies that

$$K_0 = \{v \in H_0^1(\mathcal{D}) : v|_{\Omega} = 0\}.$$

Hence  $K_0$  is the space of the extensions by zero to  $\Omega$  of the elements of  $H_0^1(\mathcal{H})$ .

Thus the orthogonal space is

$$K_0^{\perp} = \{\varphi \in H^{-1}(\mathcal{D}) : \forall v \in K_0, \langle \varphi, v \rangle = 0\}.$$

It is the space of the extensions by zero<sup>1</sup> to  $\mathcal{H}$  of the elements of  $V(\Omega)'$ .

We assume that  $a_1$  is coercive on  $H_0^1(\mathcal{H})$  and define the operator  $A$  like in (2.14)–(2.16). Let  $f \in K_0^{\perp}$ . The function  $u^{(0)} = u_0 := A^{-1}(f, 0)$  is by definition the solution of

$$\text{Find } u \in H_0^1(\mathcal{D}) \text{ such that } \forall v \in H_0^1(\mathcal{D}), \quad a_0(u, v) = \langle f, v \rangle \quad \text{and} \quad \forall v \in H_0^1(\mathcal{H}), \quad a_1(u, v) = 0. \quad (2.18)$$

---

<sup>1</sup>The operator of extension by 0 from  $V'(\Omega)$  into  $H^{-1}(\mathcal{D})$  has to be understood as the dual of the restriction operator from  $H_0^1(\mathcal{D})$  onto  $V(\Omega)$ .

Let for  $k = 0, 1$  the interior and boundary operators  $L_k$  and  $B_k$  be such that

$$a_0(u, v) = - \int_{\Omega} L_0 u v \, dx + \int_{\Sigma} B_0 u v \, d\sigma, \quad \forall u, v \in V(\Omega) \text{ such that } L_0 u \in L^2(\Omega), \quad (2.19)$$

$$a_1(u, v) = - \int_{\mathcal{H}} L_1 u v \, dx + \int_{\Sigma} B_1 u v \, d\sigma, \quad \forall u, v \in H^1(\mathcal{H}) \text{ such that } L_1 u \in L^2(\mathcal{H}). \quad (2.20)$$

We can see that  $u_0|_{\Omega}$  is the solution  $u_0^+$  of the mixed Dirichlet (on  $\Gamma$ ) Neumann (on  $\Sigma$ ) problem associated with  $a_0$  on  $\Omega$ , with right-hand side  $f$ , and  $u_0|_{\mathcal{H}}$  is the solution  $u_0^-$  of the Dirichlet problem

$$L_1 u_0^- = 0 \text{ in } \mathcal{H} \quad \text{and} \quad u_0^-|_{\Sigma} = u_0^+|_{\Sigma}.$$

Note that the next term  $u^{(1)} := -A^{-1}(\bar{A}_1 u^{(0)}, 0)$  as defined in the proof of Lemma 2.1 has the following structure. Let  $u_1^+$  and  $u_1^-$  its restriction to  $\Omega$  and  $\mathcal{H}$ , respectively. Then  $u_1^+$  is solution of the mixed problem

$$L_0 u_1^+ = 0 \text{ in } \Omega, \quad u_1^+|_{\Gamma} = 0, \quad \text{and} \quad B_0 u_1^+|_{\Sigma} = B_1 u_0^+|_{\Sigma},$$

and  $u_1^-$  is the solution of the Dirichlet problem

$$L_1 u_1^- = 0 \text{ in } \mathcal{H} \quad \text{and} \quad u_1^-|_{\Sigma} = u_1^+|_{\Sigma}.$$

We have a statement similar to Lemma 2.1

**Lemma 2.2** *In the continuous framework, let  $a_0$  be coercive on  $V(\Omega)$  and  $a_1$  be coercive on  $H_0^1(\mathcal{H})$ . Let  $f \in V(\Omega)'$ . Then for  $\varepsilon$  small enough, the problem*

$$\text{Find } u_{\varepsilon} \in V(\mathcal{D}), \quad \forall v \in V(\mathcal{D}), \quad a_0(u_{\varepsilon}, v) + \varepsilon a_1(u_{\varepsilon}, v) = \langle f, v \rangle$$

*has a unique solution. Let  $u_0$  be the solution of (2.18). Then  $u_{\varepsilon}$  tends to  $u_0$  in  $H^1(\mathcal{D})$ , and*

$$\|u_{\varepsilon} - u_0\|_{H^1(\mathcal{D})} \leq C\varepsilon \|f\|_{V(\Omega)'}$$

**Proof:** It follows the same lines as the proof of Lemma 2.1. Since  $\varphi \mapsto A^{-1}(\varphi, 0)$  is continuous from  $V(\Omega)'$  into  $H^1(\mathcal{D})$ , and  $u^{(j-1)} \mapsto \bar{A}_1 u^{(j-1)}$  is continuous from  $H^1(\mathcal{D})$  into  $V(\Omega)'$ , we have an estimate

$$\|u^{(j)}\|_{H^1(\mathcal{D})} \leq C \|u^{(j-1)}\|_{H^1(\mathcal{D})}, \quad \forall j \geq 1.$$

We deduce the convergence in  $H^1(\mathcal{D})$  of the series  $\sum_{j \geq 0} \varepsilon^j u^{(j)}$  and the estimate of the Lemma.  $\square$

### 3 C ea and Strang lemmas

C ea and Strang lemmas are classical corner stones of FEM analysis, see the monograph [8]. But in general, to our knowledge, they use as an assumption that the bilinear forms involved are coercive. Here we show that we may in a certain amount, replace the assumption of positiveness by a non-negativeness assumption.

**Lemma 3.1 (Céa)** *Let  $a$  be a real symmetric bilinear form, non-negative on the space  $V$ :*

$$\forall u \in V, \quad a(u, u) \geq 0,$$

*defining the semi-norm*

$$|u|_a := a(u, u)^{\frac{1}{2}}.$$

*Let  $V^{\text{ap}}$  be a subspace of  $V$ . Let  $f \in V'$ . We assume that  $u \in V$  and  $u^{\text{ap}} \in V^{\text{ap}}$  satisfy*

$$a(u, v) = \langle f, v \rangle \quad \forall v \in V \quad \text{and} \quad a(u^{\text{ap}}, v^{\text{ap}}) = \langle f, v^{\text{ap}} \rangle \quad \forall v^{\text{ap}} \in V^{\text{ap}}.$$

*Then*

$$|u - u^{\text{ap}}|_a \leq |u - v^{\text{ap}}|_a \quad \forall v^{\text{ap}} \in V^{\text{ap}}. \quad (3.1)$$

**Proof:** We have for all  $v^{\text{ap}} \in V^{\text{ap}}$

$$a(u - u^{\text{ap}}, u - u^{\text{ap}}) = a(u - u^{\text{ap}}, u - v^{\text{ap}} + v^{\text{ap}} - u^{\text{ap}}) = a(u - u^{\text{ap}}, u - v^{\text{ap}}).$$

Inequality (3.1) then follows by Cauchy-Schwartz inequality.  $\square$

The lemma that we present here is known as *first Strang lemma* [8, Thm. 4.1.1] when assorted with the usual coercivity assumptions. We may also refer to original papers by Strang himself [39, 40] where the bases of convergence analysis are laid when *variational crimes* are committed, see also [6, Chap. 10].

**Lemma 3.2 (Strang)** *Let  $a$  be a real symmetric bilinear form, non-negative on the space  $V$ . Let  $V^{\text{ap}}$  be a subspace of  $V$  and let  $a^{\text{ap}}$  be a real symmetric bilinear form, non-negative on  $V^{\text{ap}}$ . Let  $d(f, v)$  be a duality pairing between  $V'$  and  $V$ , and  $d^{\text{ap}}$  be a duality pairing between  $V'$  and  $V^{\text{ap}}$ . We define the semi-norms*

$$|u|_a := a(u, u)^{\frac{1}{2}} \quad \text{and} \quad |u|_{a^{\text{ap}}} := a^{\text{ap}}(u, u)^{\frac{1}{2}}.$$

*We assume that there exists a positive constant  $C_{\text{ap}}$  such that*

$$|v^{\text{ap}}|_a \leq C_{\text{ap}} |v^{\text{ap}}|_{a^{\text{ap}}} \quad \forall v^{\text{ap}} \in V^{\text{ap}}. \quad (3.2)$$

*We assume that  $u \in V$  and  $u^{\text{ap}} \in V^{\text{ap}}$  satisfy, for a given  $f \in V'$*

$$a(u, v) = d(f, v) \quad \forall v \in V \quad \text{and} \quad a^{\text{ap}}(u^{\text{ap}}, v^{\text{ap}}) = d^{\text{ap}}(f, v^{\text{ap}}) \quad \forall v^{\text{ap}} \in V^{\text{ap}}.$$

*Then for all  $v^{\text{ap}} \in V^{\text{ap}}$  the following two inequalities hold:*

$$|u - u^{\text{ap}}|_a \leq (1 + C_{\text{ap}}^2) |u - v^{\text{ap}}|_a + C_{\text{ap}}^2 \left\{ \sup_{w^{\text{ap}} \in V^{\text{ap}}} \frac{(a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}})}{|w^{\text{ap}}|_a} + \sup_{w^{\text{ap}} \in V^{\text{ap}}} \frac{(d - d^{\text{ap}})(f, w^{\text{ap}})}{|w^{\text{ap}}|_a} \right\} \quad (3.3)$$

*and*

$$|u - u^{\text{ap}}|_a \leq (1 + C_{\text{ap}}^2) |u - v^{\text{ap}}|_a + C_{\text{ap}} \left\{ \sup_{w^{\text{ap}} \in V^{\text{ap}}} \frac{(a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}})}{|w^{\text{ap}}|_{a^{\text{ap}}}} + \sup_{w^{\text{ap}} \in V^{\text{ap}}} \frac{(d - d^{\text{ap}})(f, w^{\text{ap}})}{|w^{\text{ap}}|_{a^{\text{ap}}}} \right\} \quad (3.4)$$



**Proof:** Let us choose  $v^{\text{ap}} \in V^{\text{ap}}$ . We write

$$|u - u^{\text{ap}}|_a \leq |u - v^{\text{ap}}|_a + |v^{\text{ap}} - u^{\text{ap}}|_a. \quad (3.5)$$

We set  $w^{\text{ap}} = u^{\text{ap}} - v^{\text{ap}}$ . Then we evaluate  $|v^{\text{ap}} - u^{\text{ap}}|_{a^{\text{ap}}}^2 = a^{\text{ap}}(v^{\text{ap}} - u^{\text{ap}}, v^{\text{ap}} - u^{\text{ap}})$ :

$$|v^{\text{ap}} - u^{\text{ap}}|_{a^{\text{ap}}}^2 = a^{\text{ap}}(u^{\text{ap}}, w^{\text{ap}}) - a(v^{\text{ap}}, w^{\text{ap}}) + (a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}}). \quad (3.6)$$

We note that

$$a^{\text{ap}}(u^{\text{ap}}, w^{\text{ap}}) = d^{\text{ap}}(f, w^{\text{ap}}) = d(f, w^{\text{ap}}) - (d - d^{\text{ap}})(f, w^{\text{ap}}).$$

thus

$$a^{\text{ap}}(u^{\text{ap}}, w^{\text{ap}}) = a(u, w^{\text{ap}}) - (d - d^{\text{ap}})(f, w^{\text{ap}}). \quad (3.7)$$

Combining (3.6) and (3.7):

$$|v^{\text{ap}} - u^{\text{ap}}|_{a^{\text{ap}}}^2 = a(u, w^{\text{ap}}) - a(v^{\text{ap}}, w^{\text{ap}}) - (d - d^{\text{ap}})(f, w^{\text{ap}}) + (a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}}). \quad (3.8)$$

Identity (3.8) implies the inequality

$$|v^{\text{ap}} - u^{\text{ap}}|_{a^{\text{ap}}} |w^{\text{ap}}|_{a^{\text{ap}}} \leq [|u - v^{\text{ap}}|_a |w^{\text{ap}}|_a + |(d - d^{\text{ap}})(f, w^{\text{ap}})| + |(a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}})|]. \quad (3.9)$$

Combining (3.9) with (3.2):

$$|v^{\text{ap}} - u^{\text{ap}}|_a |w^{\text{ap}}|_a \leq C_{\text{ap}}^2 [\text{RHS of (3.9)}]. \quad (3.10)$$

Finally, we deduce (3.3) by dividing (3.10) by  $|w^{\text{ap}}|_a$ , taking the sup in  $w^{\text{ap}} \in V^{\text{ap}}$ , and coming back to (3.5).

The second estimate (3.4) is obtained by dividing (3.9) by  $|w^{\text{ap}}|_{a^{\text{ap}}}$  and using (3.2) next.  $\square$

We can use Lemma 3.2 with  $a = a_0$  or  $a = a_0 + \varepsilon a_1$ , and also take numerical integration into account in  $a^{\text{ap}}$  and  $d^{\text{ap}}$ .

Assuming exact integration, we can also use the lemma with  $a = a_0$ ,  $a^{\text{ap}} = a_0 + \varepsilon a_1$  and  $d = d^{\text{ap}}$ . In this case, the third term in the right-hand side of (3.4) is zero and the second one is the sup for  $w^{\text{ap}} \in V^{\text{ap}}$  of

$$\frac{(a - a^{\text{ap}})(v^{\text{ap}}, w^{\text{ap}})}{|w^{\text{ap}}|_{a^{\text{ap}}}} = \frac{\varepsilon a_1(v^{\text{ap}}, w^{\text{ap}})}{|w^{\text{ap}}|_{a^{\text{ap}}}} \leq \frac{\varepsilon |v^{\text{ap}}|_{a_1} |w^{\text{ap}}|_{a_1}}{(|w^{\text{ap}}|_{a_0}^2 + \varepsilon |w^{\text{ap}}|_{a_1}^2)^{1/2}} \leq \sqrt{\varepsilon} |v^{\text{ap}}|_{a_1}.$$

In this case,  $C_{\text{ap}} = 1$  and (3.4) yields:

**Corollary 3.3** *Under the conditions of Lemma 3.2 with  $a = a_0$  and  $a^{\text{ap}} = a_0 + \varepsilon a_1$ , we assume moreover exact integration ( $d = d^{\text{ap}}$ ). Then we have the estimate*

$$|u - u_\varepsilon^{\text{ap}}|_{a_0} \leq 2|u - v^{\text{ap}}|_{a_0} + \sqrt{\varepsilon} |v^{\text{ap}}|_{a_1} \quad \forall v^{\text{ap}} \in V^{\text{ap}}. \quad (3.11)$$

**Remark 3.4** Under the conditions of Lemma 3.1 with  $a = a_0$  and Lemma 2.1 with  $a_0^{\text{ap}} = a_0$  and  $a_1^{\text{ap}} = a_1$  (i.e., assuming exact integration), we can write for all  $\varepsilon$

$$|u - u_\varepsilon^{\text{ap}}|_{a_0} \leq |u - u_0^{\text{ap}}|_{a_0} + |u_0^{\text{ap}} - u_\varepsilon^{\text{ap}}|_{a_0}.$$

Lemma 3.1 yields that  $|u - u_0^{\text{ap}}|_{a_0}$  is less than  $|u - v^{\text{ap}}|_{a_0}$  for all  $v^{\text{ap}} \in V^{\text{ap}}$  and Lemma 2.1 yields the information that  $|u_0^{\text{ap}} - u_\varepsilon^{\text{ap}}|_{a_0}$  is a  $\mathcal{O}(\varepsilon)$ . But the multiplicative constant in front of  $\varepsilon$  *a priori* depends on the discretization. That is why we cannot improve estimate (3.11) by replacing  $\sqrt{\varepsilon}$  with  $\varepsilon$ , in general. In fact, our numerical experiments also display a  $\sqrt{\varepsilon}$  behavior in the general case.  $\triangle$

## 4 $p$ -version of finite elements

Let  $\mathcal{T}$  be a fixed mesh of the domain  $\mathcal{D}$  and let  $V_p(\mathcal{D})$  be the  $p$ -extension over the mesh  $\mathcal{T}$  with the boundary condition  $v = 0$  on  $\Gamma$ . We denote by

$$\Omega^{\text{ap}} = \text{interior} \left\{ \bigcup_{K \in \mathcal{T} \mid K \cap \Omega \neq \emptyset} \overline{K} \right\} \quad \text{and} \quad \mathcal{H}^{\text{ap}} = \mathcal{D} \setminus \overline{\Omega}^{\text{ap}}. \quad (4.1)$$

We note that  $\Gamma$  is contained in  $\partial\Omega^{\text{ap}}$  and we denote the common boundary  $\partial\Omega^{\text{ap}} \cap \partial\mathcal{H}^{\text{ap}}$  by  $\Gamma^{\text{ap}}$ .

We denote by  $\mathcal{A}(\overline{\mathcal{U}})$  the space of analytic functions up to the boundary of the domain  $\mathcal{U}$ .

**Theorem 4.1** *Let  $a_0$  be coercive on  $V(\Omega)$  and  $a_1$  be coercive on  $H_0^1(\mathcal{H})$ . Let  $f \in \mathcal{A}(\overline{\Omega})$ . Let  $u_0$  be the solution of the mixed problem (2.6). We assume that  $u_0$  admits an analytic extension  $\bar{u}_0 \in \mathcal{A}(\overline{\Omega}^{\text{ap}})$ . For  $\varepsilon > 0$  and any  $p \geq 1$ , let  $u^{\text{ap}}[p, \varepsilon]$  be the solution of problem (2.9) with  $V^{\text{ap}}(\mathcal{D}) = V_p$  and assuming exact integration. Then there exist  $c > 0$  and  $\gamma > 0$  such that for all  $\varepsilon > 0$  small enough and all  $p \geq 1$*

$$\|u_0 - u^{\text{ap}}[p, \varepsilon]\|_{H^1(\Omega)} \leq c(e^{-p\gamma} + \sqrt{\varepsilon}). \quad (4.2)$$

**Proof:** We use Corollary 3.3. By the coercivity assumption on  $a_0$ , we find that the semi-norm  $|\cdot|_{a_0}$  is equivalent to the  $H^1(\Omega)$ -norm. Thus, relying on estimate (3.11), it suffices to find  $v^{\text{ap}} \in V_p$  such that

$$\|u_0 - v^{\text{ap}}\|_{H^1(\Omega)} \leq ce^{-p\gamma} \quad \text{and} \quad \|v^{\text{ap}}\|_{H^1(\mathcal{H})} \leq c. \quad (4.3)$$

Since  $\bar{u}_0 \in \mathcal{A}(\overline{\Omega}^{\text{ap}})$ , the fundamental approximation result of the  $p$ -version [20, 5, 4, 37] provides exponential convergence: We can find  $v_p \in V_p(\Omega^{\text{ap}})$  such that

$$\|\bar{u}_0 - v_p\|_{H^1(\Omega^{\text{ap}})} \leq c_0 e^{-p\gamma}. \quad (4.4)$$

Therefore, in particular,

$$\|v_p\|_{H^{\frac{1}{2}}(\Gamma^{\text{ap}})} \leq c_1. \quad (4.5)$$

There exists  $\tilde{v}_p \in V_p(\mathcal{H}^{\text{ap}})$  such that

$$\tilde{v}_p|_{\Sigma} = v_p|_{\Sigma} \quad \text{and} \quad \|\tilde{v}_p\|_{H^1(\mathcal{H}^{\text{ap}})} \leq c_2. \quad (4.6)$$

We define  $v^{\text{ap}}$  by  $v_p$  on  $\Omega^{\text{ap}}$  and  $\tilde{v}_p$  on  $\mathcal{H}^{\text{ap}}$  and we deduce (4.3) from (4.4)-(4.6).  $\square$

In the case where the grid is matching with the interface  $\Sigma$ , the estimate (4.2) is improved (see also Remark 3.4 on this question — why such an improvement does not hold in the general case).

**Theorem 4.2** *Under the assumptions of Theorem 4.1 we assume moreover that  $\Omega^{\text{ap}} = \Omega$ . Then there exist  $c > 0$  and  $\gamma > 0$  such that for all  $\varepsilon > 0$  small enough and all  $p \geq 1$*

$$\|u_0 - u^{\text{ap}}[p, \varepsilon]\|_{H^1(\Omega)} \leq c(e^{-p\gamma} + \varepsilon). \quad (4.7)$$

**Proof:** Let us choose the degree  $p$ . When the grid is matching the interface  $\Sigma$ , the terms  $u^{(j)}[p]$  of the expansion of  $u^{\text{ap}}[p, \varepsilon]$  in powers of  $\varepsilon$  can be described as discrete FEM solutions: Let  $u_j^+[p]$  and  $u_j^-[p]$  be the restrictions of  $u^{(j)}[p]$  to  $\Omega = \Omega^{\text{ap}}$  and  $\mathcal{H} = \mathcal{H}^{\text{ap}}$ , respectively. For  $j \geq 1$ ,  $u_j^+[p]$  is the discrete solution of the mixed problem in  $\Omega$  with Neumann data on  $\Sigma$  coming from  $u_{j-1}^-[p]$ , and  $u_j^-[p]$  is the discrete solution of the Dirichlet problem in  $\mathcal{H}$  with Dirichlet data on  $\Sigma$  coming from  $u_j^+[p]$ . The uniformity of continuity constants with respect to  $p$  can be deduced.  $\square$

If  $\Omega^{\text{ap}}$  coincides with  $\mathcal{D}$ , we may even have exponential convergence with  $\varepsilon = 0$ :

**Theorem 4.3** *We assume that  $\Omega^{\text{ap}} = \mathcal{D}$  (i.e.,  $\mathcal{H}^{\text{ap}} = \emptyset$ ). Let  $a_0$  be coercive on  $V(\Omega)$ . Let  $f \in \mathcal{A}(\overline{\Omega})$  and let  $u_0$  be the solution of the mixed problem (2.6). We assume that  $u_0$  admits an analytic extension  $\bar{u}_0 \in \mathcal{A}(\overline{\Omega^{\text{ap}}})$ . Let  $u^{\text{ap}}[p]$  be solution of (here we assume exact integration)*

$$\text{Find } u^{\text{ap}} \in V_p(\mathcal{D}), \quad \forall v \in V_p(\mathcal{D}), \quad a_0(u^{\text{ap}}, v) = \int_{\mathcal{D}} f(x)v(x) dx, \quad (4.8)$$

Then there exist  $c > 0$  and  $\gamma > 0$  such that for all  $p \geq 1$

$$\|u_0 - u^{\text{ap}}[p]\|_{H^1(\Omega)} \leq c e^{-p\gamma}. \quad (4.9)$$

**Proof:** This is a consequence of Céa Lemma 3.1 if we have proved that  $u^{\text{ap}}[p]$  does exist. Let us choose the degree  $p$ . It suffices to show that the kernel  $K_0$  defined as

$$K_0 = \{v \in V_p(\mathcal{D}) : \forall u \in V_p(\mathcal{D}), a_0(u, v) = 0\}$$

is reduced to  $\{0\}$ . Let  $v \in K_0$ . Then  $a_0(v, v) = 0$ . Since  $v|_{\Omega}$  belongs to  $V(\Omega)$ , we deduce from the coercivity property of  $a_0$  that  $v|_{\Omega} \equiv 0$ . By assumption any element  $K$  of the mesh  $\mathcal{T}$  has a non-empty intersection with  $\Omega$ . Since  $v$  is a polynomial on  $K$  which is zero on  $K \cap \Omega$ , it is zero over the whole of  $K$ . Hence  $v \equiv 0$ , which ends the proof.  $\square$

The difficulty is that in practice, the assumption  $\bar{u}_0 \in \mathcal{A}(\overline{\Omega^{\text{ap}}})$  has no reason to be satisfied in general because of the possible presence of corner singularities for example. Nevertheless, we will see in Section 6 an example where this assumption is not satisfied, and where pre-asymptotic exponential convergence for  $\varepsilon = 0$  can be observed in an error range which is relevant for engineering practice.

In Theorems 4.1–4.3, we have assumed exact numerical integration. In the FCM, the numerical integration is based on a subpartition of cells, the sub-cells, which are geometrically refined near the boundary  $\Gamma$ , see Figure 15. The numerical integration is exact, except on a set of very fine sub-cells covering  $\Gamma$ ; This latter contribution to the error can be kept exponentially small with respect to  $p$ , see figure 16. The capabilities of  $hp$  quadrature are illustrated by the paper [7].

## 5 1D test problem with Neumann boundary conditions at the hole

### 5.1 Problem definition and exact solution

As the simplest possible model for a hole in 1D, we choose the two component domain

$$\Omega = (-1, -\frac{1}{4}) \cup (\frac{1}{4}, 1). \quad (5.1)$$

Thus, the “hole”  $\mathcal{H}$  is the interval  $(-\frac{1}{4}, \frac{1}{4})$ . The associated fictitious domain  $\mathcal{D}$  is

$$\mathcal{D} = (-1, 1). \quad (5.2)$$

We consider the family of bilinear forms, indexed by the coefficient  $\varepsilon$

$$a_\varepsilon(u, v) = \int_{-1}^{-1/4} u'v' + k^2 uv \, dx + \int_{1/4}^1 u'v' + k^2 uv \, dx + \varepsilon \int_{-1/4}^{1/4} u'v' \, dx. \quad (5.3)$$

Here, the coefficient  $\varepsilon$  inside the hole has been set to zero only for the mass matrix and small for the stiffness matrix. It corresponds to our general setting with

$$b_0(u, v) = u'v' + k^2 uv \quad \text{and} \quad b_1(u, v) = u'v'.$$

The domain  $\Omega$  is symmetric with respect to the origin. We investigate two problems with different symmetry properties: the first one is odd, and the second, even.

The odd problem is described by

$$\begin{cases} -u''(x) + k^2 u(x) = 0, & x \in \Omega \\ u(-1) = -1 \\ u(1) = 1 \\ u'(-\frac{1}{4}) = 0 \\ u'(\frac{1}{4}) = 0 \end{cases} \quad (5.4)$$

with the corresponding exact solution

$$u(x) = \begin{cases} \frac{e^{k(0.5-x)} + e^{kx}}{e^{-0.5k} + e^k} & \text{if } x > 0, \\ -\frac{e^{k(0.5+x)} + e^{-kx}}{e^{-0.5k} + e^k} & \text{if } x < 0. \end{cases} \quad (5.5)$$

The even problem reads

$$\begin{cases} -u''(x) + k^2 u(x) = 0, & x \in \Omega \\ u(-1) = 1 \\ u(1) = 1 \\ u'(-\frac{1}{4}) = 0 \\ u'(\frac{1}{4}) = 0 \end{cases} \quad (5.6)$$

where

$$u(x) = \begin{cases} \frac{e^{k(0.5-x)} + e^{kx}}{e^{-0.5k} + e^k} & \text{if } x > 0 \\ \frac{e^{k(0.5+x)} + e^{-kx}}{e^{-0.5k} + e^k} & \text{if } x < 0 \end{cases} \quad (5.7)$$

denotes the exact solution.

## 5.2 Finite cell approach

The bilinear form (5.3) as described in the previous subsection is discretized by means of the finite cell method. To this end, the fictitious domain  $\mathcal{D}$  is subdivided into a mesh  $\mathcal{T}$  consisting of  $n_c$  cells with the corresponding nodal coordinates denoted as  $X_c, X_{c+1}$  with  $1 \leq c \leq n_c$ . On each cell hierarchic shape functions  $N_i$  based on integrated Legendre polynomials [42, 11] are applied to discretize the trial and test functions. The discretization of the bilinear form results in a matrix composed of two parts: the stiffness matrix and the mass matrix. Since in general the cells do not conform with the geometry, the integrand of the cell stiffness matrix

$$K_{ij}^c = \int_{X_c}^{X_{c+1}} \alpha \frac{dN_i}{dx} \frac{dN_j}{dx} dx = \frac{2}{X_{c+1} - X_c} \int_{-1}^1 \alpha \frac{dN_i}{d\xi} \frac{dN_j}{d\xi} d\xi, \quad i, j = 1, 2, 3, \dots \quad (5.8)$$

and the cell mass matrix

$$M_{ij}^c = \int_{X_c}^{X_{c+1}} \alpha_M k^2 N_i N_j dx = \frac{X_{c+1} - X_c}{2} \int_{-1}^1 \alpha_M k^2 N_i N_j d\xi, \quad i, j = 1, 2, 3, \dots \quad (5.9)$$

might be discontinuous. In (5.8) and (5.9)  $x, \xi$  denote the global and local coordinates, which are related to each other by a linear mapping function. Note, that we distinguish between  $\alpha$  and  $\alpha_M$  that are defined like in (2.8). In (5.8)  $\alpha$  corresponds to Equation (5.3), whereas  $\alpha_M = 0$  in (5.9) assures that inside the hole there is no contribution of the mass matrix. The integration of the cell matrices is carried out by applying a composed Gaussian quadrature. To account for the hole, i.e. the jump of  $\alpha, \alpha_M$ , the corresponding cell is divided for the purpose of (exact) integration into  $n_{sc}$  sub-cells, so that on each sub-cell  $\alpha$  and  $\alpha_M$  are constant. In this way it is possible to perform an exact computation of the stiffness and mass matrix with  $n_G = p + 1$  Gaussian points applied on the sub-cells which are introduced just for integration purposes. Considering a mesh with one cell only, the minimum number of sub-cells needed for an exact integration is  $n_{sc} = 3$ .

## 5.3 Evaluation of the error

In order to quantify the efficiency and accuracy of the finite cell method we briefly present in this section the definition of the error. Thanks to availability of the exact solution, the error

$$e = u - u^{ap} \quad (5.10)$$

of the finite cell approximation can be evaluated directly. In the following we compute the error in the  $H^1$  norm

$$\|e\|_{H^1}^2 = \int_{-1}^{-1/4} (e'^2 + k^2 e^2) dx + \int_{1/4}^1 (e'^2 + k^2 e^2) dx \quad (5.11)$$

by considering the contribution in the domain  $\Omega$  only, i.e. ignoring the results of the finite cell method in the hole  $\mathcal{H}$ . Since the computation of the error in  $H^1$  norm (5.11) involves the integration of non-polynomials a Gaussian quadrature will not yield exact values. Therefore we apply an composed Gaussian quadrature as described in the previous section in order reliably determine the error.

## 5.4 Numerical examples for Neumann boundary conditions at the hole

In the following we present several numerical results obtained with the finite cell method discretizing the problem described in Section 5.1. We choose  $k = 3$  and compute the error in terms of Equation (5.11).

### 5.4.1 Non-matching grid with one cell

First, we choose one finite cell with nodal coordinates  $X_1 = -1$  and  $X_2 = 1$  to discretize the fictitious domain and perform a  $p$ -extension with  $p = 1, 2, 3, \dots, 20$ . In this example,  $\alpha$  and likewise  $\alpha_M$  is set to 0 inside the hole. The integration of the stiffness and mass matrix is carried out exactly. A comparison of the exact solution and the finite cell approximation for  $p = 20$  is given in Figure 1. It can be seen that one cell very accurately represents the exact solution. Note that in the hole the FCM approximation presents a smooth behaviour, connecting the two branches of the exact solution. To quantify the

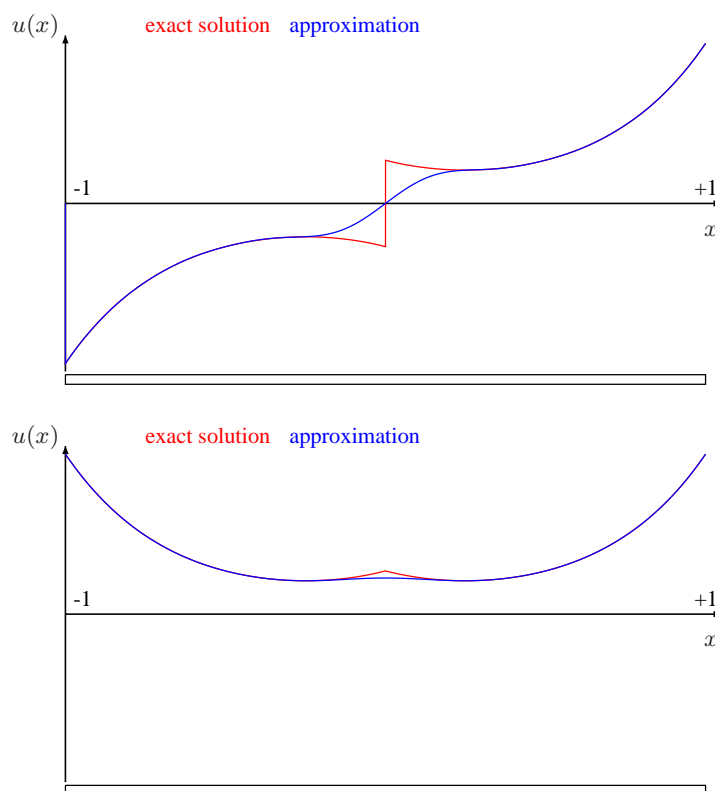


Figure 1: Comparison of exact solution and FCM approximation with one cell and  $p = 20$ ; odd problem (upper part), even problem (lower part)

efficiency more precisely, the error  $\|e\|_{H^1}^2$  of the FCM approximation with  $p = 1, 2, 3, \dots$  is plotted in Figure 2 against the polynomial degree. From this it is evident that an exponential convergence can be obtained although the mesh consisting of one cell only does not conform to the geometry. It is also noted that the convergence of the problem with the even solution is faster.

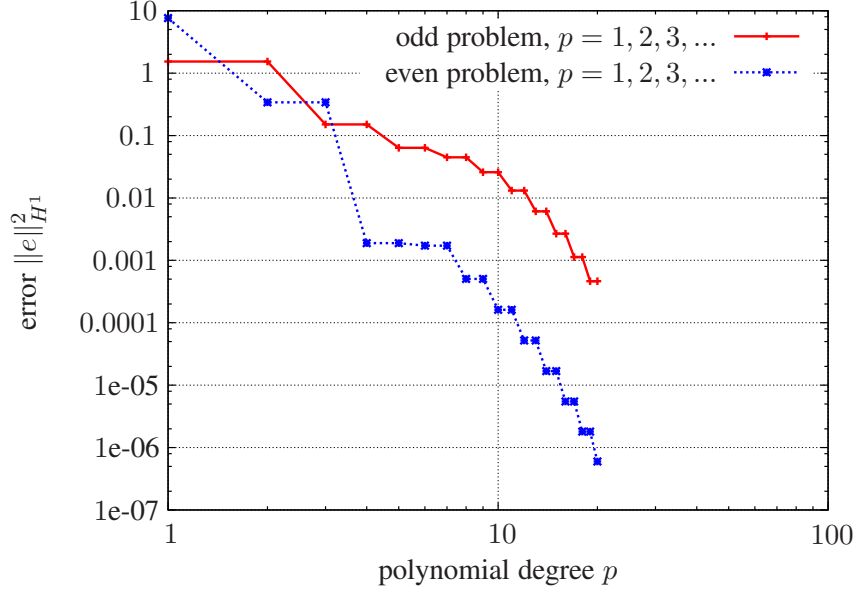


Figure 2:  $p$ -Extension on mesh with one element,  $\varepsilon = 0$ , exact integration

Based on the Céa Lemma 3.1 used with the form  $a_0$ , we prove this exponential convergence if we know the existence of a polynomial  $v_p$  of degree  $\leq p$  such that

$$\|u - v_p\|_{H^1(-1, -\frac{1}{4})} + \|u - v_p\|_{H^1(\frac{1}{4}, 1)} \leq c e^{-p\gamma}. \quad (5.12)$$

**Lemma 5.1** *Let  $\lambda \in (0, 1)$ . Let  $g$  be a function defined and analytic on the union of intervals  $[-1, -\lambda] \cup [\lambda, 1]$ . There exists  $c > 0$  and  $\gamma > 0$  and for all  $p \geq 1$  a polynomial  $v_p \in \mathbb{P}_p(-1, 1)$  such that*

$$\|g - v_p\|_{H^1(-1, -\frac{1}{4})} + \|g - v_p\|_{H^1(\frac{1}{4}, 1)} \leq c e^{-p\gamma}. \quad (5.13)$$

**Proof:** Considering the even and odd parts of  $g$ , we may reduce to the case when  $g$  is either even or odd.

Even case: By the formula  $G(t) = g(\sqrt{t})$  we define an analytic function  $G \in \mathcal{A}[\sqrt{\lambda}, 1]$  such that

$$\forall x \in [-1, -\lambda] \cup [\lambda, 1], \quad g(x) = G(x^2).$$

Let  $p = 2q$  be a positive (even) integer. There exists  $\Phi_q \in \mathbb{P}_q(\sqrt{\lambda}, 1)$  satisfying the estimate

$$\|G - \Phi_q\|_{H^1(\sqrt{\lambda}, 1)} \leq c e^{-q\gamma'}. \quad (5.14)$$

We set  $v_p(x) = \Phi_q(x^2)$  and have proved (5.13) with  $\gamma = \gamma'/2$ .

Odd case: Similarly, by the formula  $G(t) = t^{-1/2}g(\sqrt{t})$  we define an analytic function  $G \in \mathcal{A}[\sqrt{\lambda}, 1]$  such that

$$\forall x \in [-1, -\lambda] \cup [\lambda, 1], \quad g(x) = xG(x^2).$$

Let  $p = 2q + 1$  be a positive (odd) integer. There exists  $\Phi_q \in \mathbb{P}_q(\sqrt{\lambda}, 1)$  satisfying the estimate (5.14). We set  $v_p(x) = x\Phi_q(x^2)$  and have proved (5.13) as before.  $\square$

### 5.4.2 Matching grid with three cells

Next, we consider the odd problem discretized by a mesh with three cells where the layout is such that the hole is precisely covered by one cell. The nodal coordinates  $X_c$  of the mesh correspond to  $\{-1, -0.25, 0.25, 1\}$ . In this case, the integration of the cell matrices can be carried out exactly by a standard Gaussian quadrature with  $n_G = p + 1$  without the necessity of introducing sub-cells. The aim of this example is to consider the influence of the parameter  $\varepsilon$ . In Figure 3 the results of the FCM obtained with  $p = 20$  for two different values of  $\varepsilon$ , i.e.  $\varepsilon = 10^{-01}$  and  $\varepsilon = 10^{-14}$  are presented. Small deviations from the exact solution are observed in the case of  $\varepsilon = 10^{-01}$ . These deviations are due to the fact that a value different from  $\varepsilon = 0$  inside the hole corresponds to a modification of the original problem, replacing the hole by a (very) soft material. Therefore, it can not be expected that a  $p$ -extension of the FCM converges to the exact solution of the problem when  $\varepsilon \neq 0$  inside the hole. In

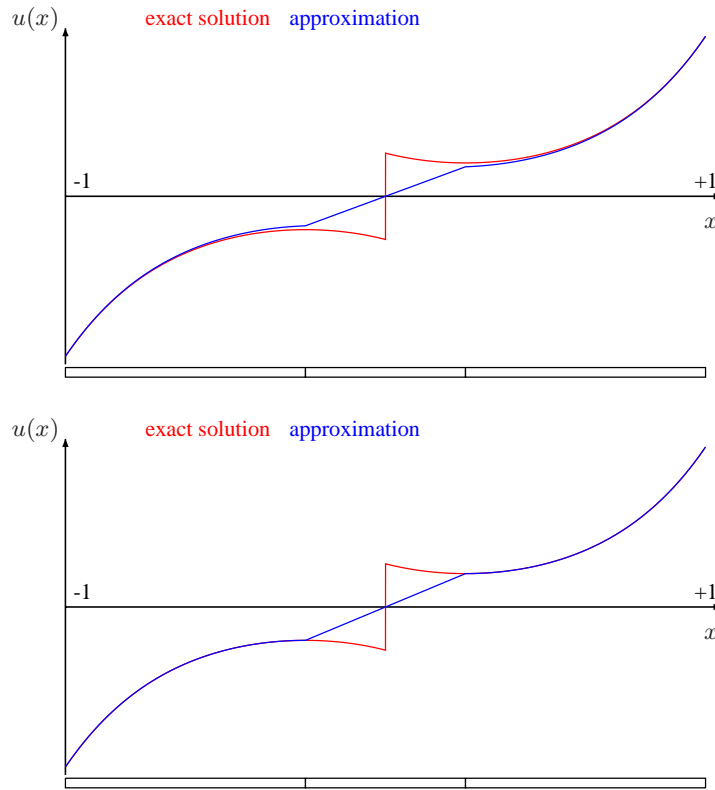


Figure 3: Comparison of exact solution and FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-01}$  (upper part) and  $\varepsilon = 10^{-14}$  (lower part)

order to study the influence of  $\varepsilon$  let us consider the convergence of a  $p$ -extension for different values of  $\varepsilon$  inside the hole, see Figure 4. It can be observed that the error  $\|e\|_{H^1}^2$  converges exponentially down to a certain threshold which depends on the value of  $\varepsilon$ . The smaller we choose  $\varepsilon$  the higher is the achievable accuracy. The influence of  $\varepsilon$  is investigated more systematically in Figure 5, where the error  $\|e\|_{H^1}^2$  is plotted against  $\varepsilon$  obtained with three cells with a polynomial degree of  $p = 20$ . From this it can be observed that a  $p$ -extension on the mesh with three cells, with nodes being aligned to the hole, yields exponential convergence up to the error  $\varepsilon^2$  in quadratic energy. This is in coherence with Theorem 4.2.



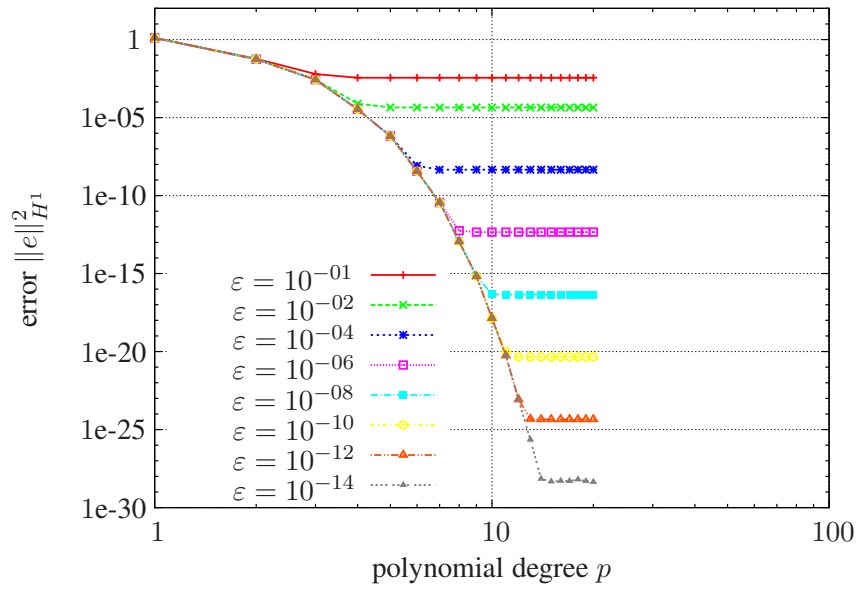


Figure 4:  $p$ -Extension on a mesh with three cells for different values of  $\varepsilon$

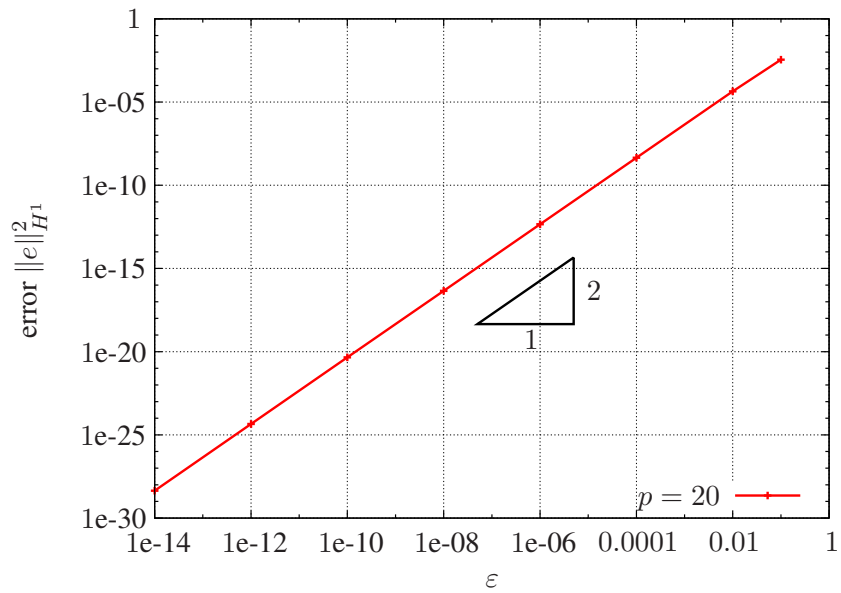


Figure 5: Influence of  $\varepsilon$  on the error

### 5.4.3 Non-matching grid with three cells - case I

Again, we consider a mesh with three cells but this time non-matching with the hole. The nodal coordinates  $X_c$  of the mesh correspond to  $\{-1, -0.3, 0.3, 1\}$ . Therefore the nodes of the middle element are slightly outside of the hole, or in other words the hole is located complete inside the middle element. A comparison of the exact solution with the FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-14}$  is presented in Figure 6. The convergence of a  $p$ -extension applying the FCM for different values of  $\varepsilon$  shows again

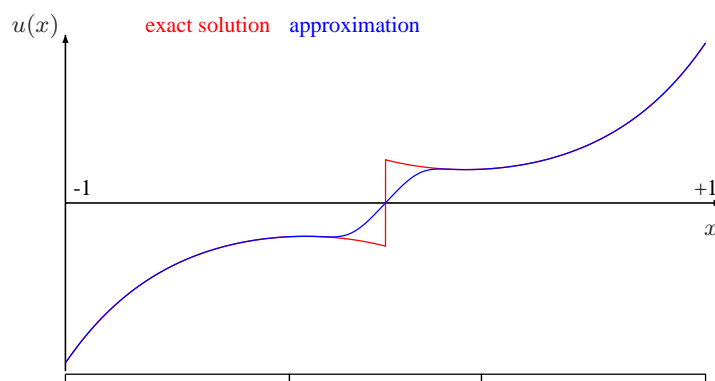


Figure 6: Comparison of exact solution and FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-14}$

an exponential convergence up to a certain threshold depending on the chosen value of  $\varepsilon$ . However, in this example where the grid is not matching with the hole, the convergence is not as fast as in the case of the matching grid. The convergence of the error  $\|e\|_{H^1}^2$  with respect to  $\varepsilon$  is plotted in Figure 8. From

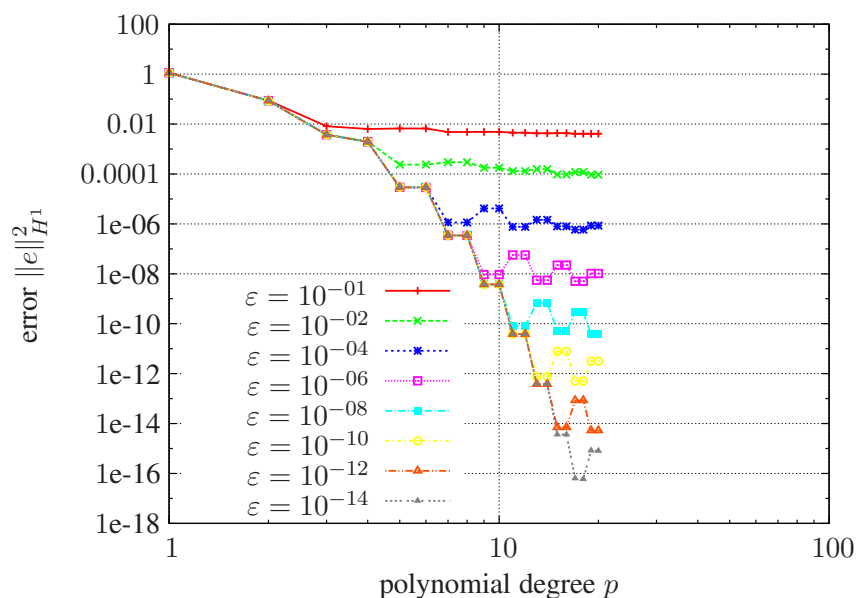


Figure 7:  $p$ -Extension on mesh with three elements for different  $\varepsilon$  values

this it is evident that the error in quadratic energy depends linearly on  $\varepsilon$ . This numerical result is in

coherence with Theorem 4.1.

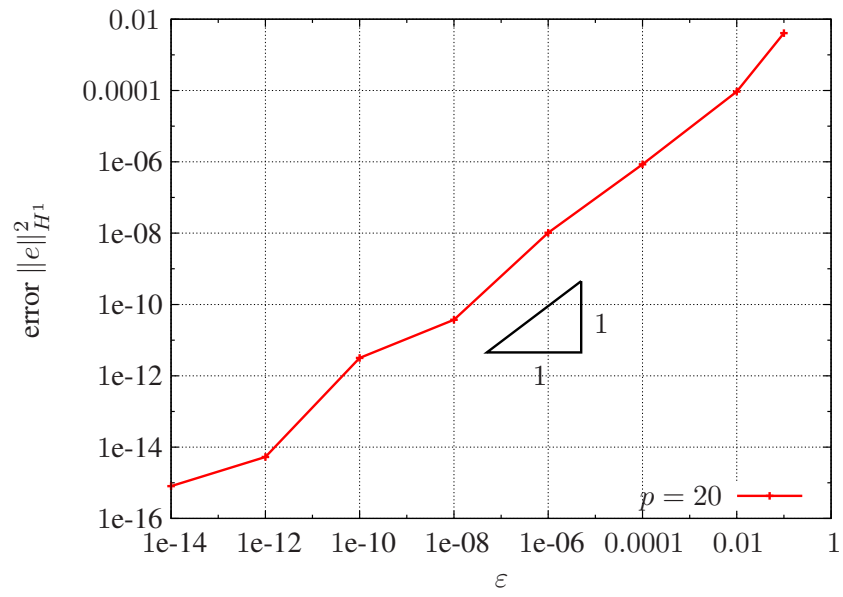


Figure 8: Influence of  $\varepsilon$  on the error

#### 5.4.4 Non-matching grid with three cells - case II

In this example again three cells are used to mesh the fictitious domain resulting in a non-matching grid. However, this time the coordinates  $X_c$  of the cells  $\{-1, -0.2, 0.2, 1\}$  are chosen such that the middle element lies completely inside the hole. The results of the FCM computation with  $p = 20$  and  $\varepsilon = 10^{-14}$  are plotted together with the exact solution in Figure 9. The convergence in terms of the

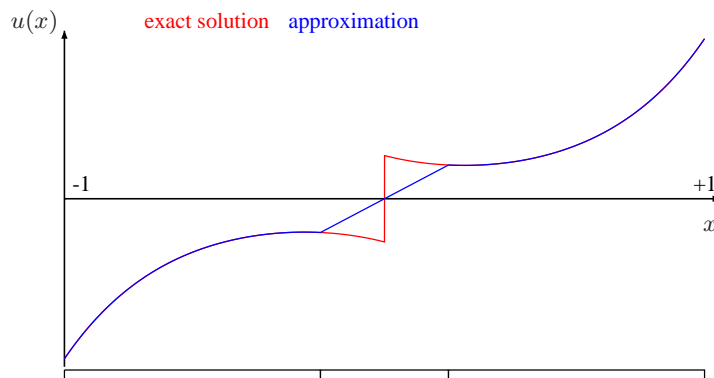


Figure 9: Comparison of exact solution and FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-14}$

error  $\|e\|_{H^1}^2$  of a  $p$ -extension applying the FCM for different values of  $\varepsilon$  is plotted in Figure 10. First of all, we observe a similar behaviour as in the previous example, i.e. an exponential convergence can be obtained which is limited by the value of  $\varepsilon$ . However, increasing the polynomial degree further on can result also in an increase of the error. This effect can be explained by the poor conditioning of the resulting equation system observed by the increase of the number of iterations of the preconditioned conjugate gradient method which is applied to solve the overall equation system. The poor conditioning is due to the fact that one cell is completely inside the hole and therefore almost no stiffness is related to the corresponding degrees of freedom of that element. Increasing the polynomial degree further on deteriorates the situation and therefore round-off error start to accumulate. Considering the scale of the  $y$ -axis of Figure 10 reveals that still very accurate results can be obtained with the FCM. Figure 11 presents, as in the previous examples, the dependency of the error  $\|e\|_{H^1}^2$  on  $\varepsilon$ . Although the conditioning problem interferes this investigation, the numerical results are again in good coherence with Theorem 4.1, stating that the error in quadratic energy converges linearly in  $\varepsilon$ .

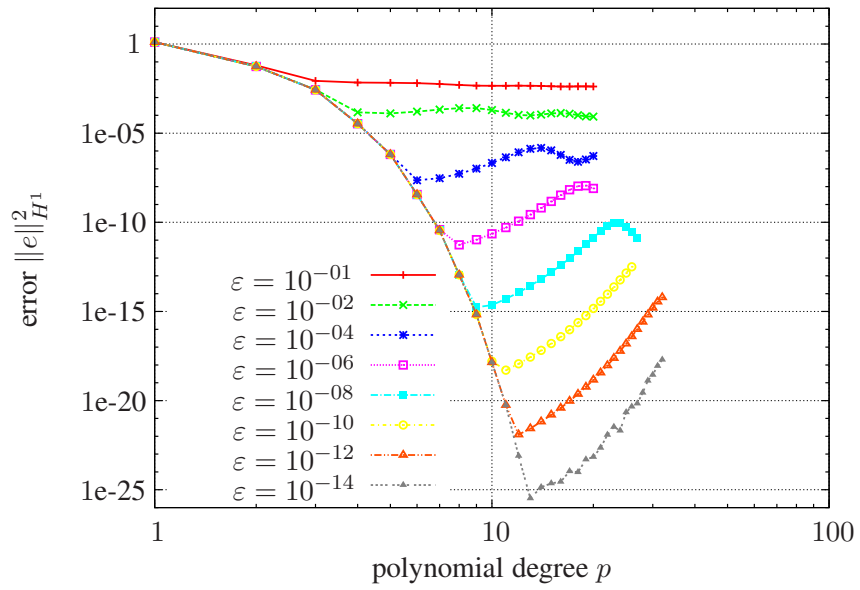


Figure 10:  $p$ -Extension on mesh with three elements for different  $\varepsilon$  values

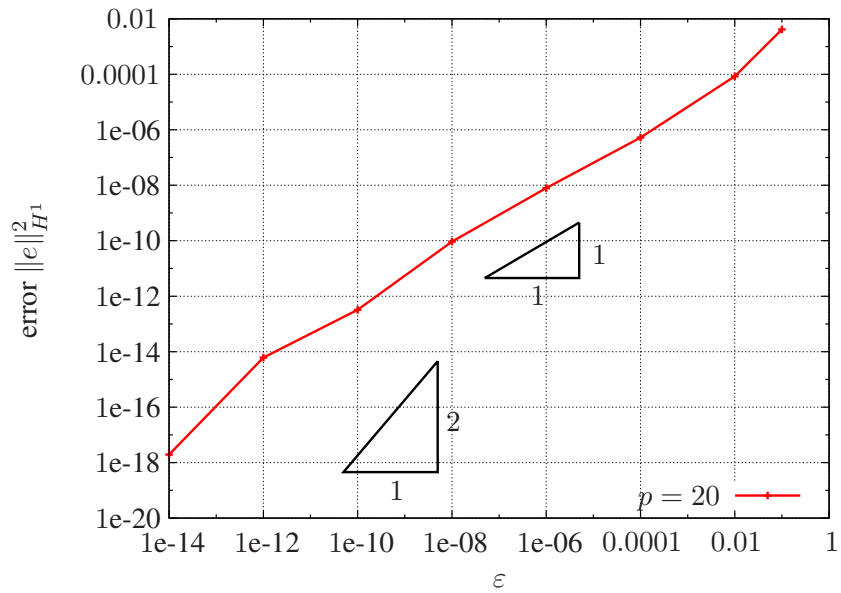


Figure 11: Influence of  $\varepsilon$  on the error

### 5.4.5 Influence of integration error

Next, we consider computations based on a mesh with two equidistant cells, i.e. with nodal coordinates  $X_c$  corresponding to  $\{-1, 0, 1\}$ . A comparison of the exact solution with the FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-14}$  is given in Figure 12. Note, that an exact integration has been carried out by applying a composed Gaussian integration. Since the convergence of the error  $\|e\|_{H^1}^2$  with respect to

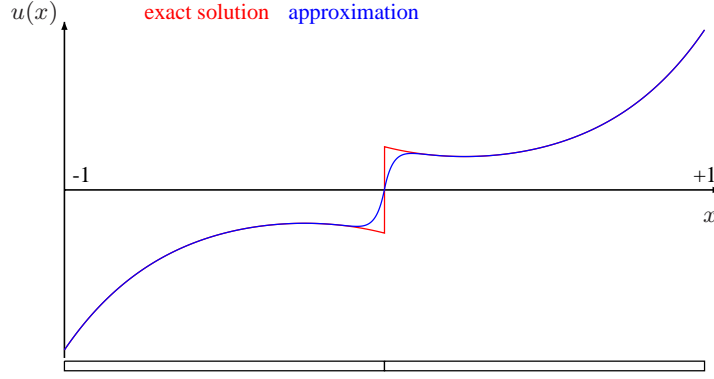


Figure 12: Comparison of exact solution and FCM approximation with  $p = 20$  and  $\varepsilon = 10^{-14}$

a  $p$ -extension and the choice of  $\varepsilon$  is very similar to the results of the non-matching grid with the hole being completely located inside the middle element, see Section 5.4.3, they are not presented here in detail. Summarizing the results, a  $p$ -extension on the (non-matching) mesh with two cells yields an exponential convergence up to the error  $\varepsilon$  in quadratic energy  $\|e\|_{H^1}^2$ .

Since in two and three spatial dimensions an exact integration of the stiffness and mass matrix is in general impossible, we investigate also the influence of the quality of the quadrature. The integration of the matrices of the two equidistant cells can be carried out exactly when applying  $n_{sc} = 4$  uniform sub-cells with  $n_G = p + 1$  Gaussian points on each sub-cell. Here we choose  $n_{sc}$  such that we *cannot* perform an exact integration in order to investigate the influence of the quadrature. We choose  $\varepsilon = 0$  in order to exclude a modelling error and focus only on the influence on the integration. In Figure 13 the convergence of the error  $\|e\|_{H^1}^2$  is plotted as a function of the number of sub-cells  $n_{sc}$  in a double logarithmic style. From the figure it is evident that the convergence is up to  $n_{sc}^{-2}$  in quadratic energy.

Here the size  $L_{sc}$  of the sub-cells is uniform. We notice that the error  $\|e\|_{H^1}$  is proportional to  $L_{sc}$ . In fact, the integration error is concentrated in the two sub-cells which cross  $\Gamma$ . In practice, a geometrical refinement towards  $\Gamma$  is used, so that the size of the sub-cells crossing  $\Gamma$  is very small.

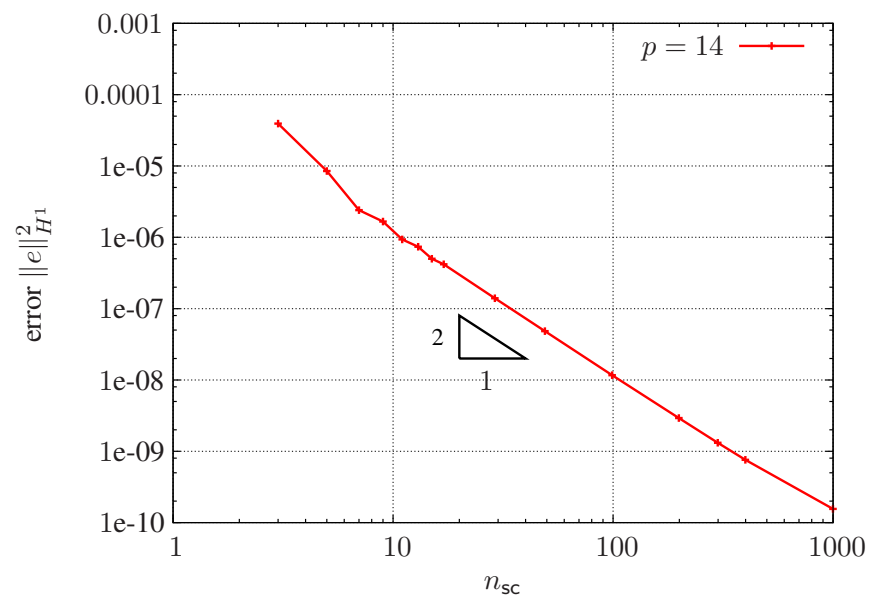


Figure 13: Convergence with respect to the number of sub-cells  $n_{sc}$  each of with  $n_G = p + 1$  Gaussian points

## 6 A 2D benchmark of linear elasticity

Finally, we study a two-dimensional benchmark problem of linear elasticity which was defined in [38] to compare different adaptive finite element strategies. The benchmark problem is a two-dimensional plate under plane strain condition. Due to symmetry it is sufficient to discretize one quarter of the system, see Figure 14. The width and height are  $b = h = 100$  mm and the radius is  $r = 10$  mm. Linear isotropic elasticity with Young's modulus  $E = 206900$  MPa and Poisson's ratio of  $\nu = 0.29$  is assumed. The plate is loaded by a traction of  $p = 450$  MPa. The quantities to be computed are given in Table 1 in which also the reference values are listed. The plate is discretized with  $2 \times 2$  quadrilateral

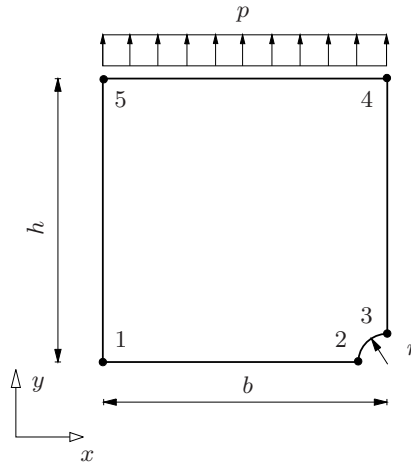


Figure 14: Square plate with a circular hole taking advantage of symmetry

| strain energy             | node 2     |                     | node 4     | node 5     |
|---------------------------|------------|---------------------|------------|------------|
| $\mathcal{U}_{ref}$ [Nmm] | $u_x$ [mm] | $\sigma_{yy}$ [MPa] | $u_y$ [mm] | $u_x$ [mm] |
| 4590.773146               | 0.021290   | 1388.732343         | 0.209514   | 0.076758   |

Table 1: Reference values

cells on which the tensor product space utilizing hierarchic shape functions [42, 11] is used to discretize the trial and test functions. In Figure 15 the FCM grid as well as the sub-cells that are introduced for integration purposes only are presented. The sub-cells are generated in a fully automatic way by means of a space partitioning scheme based on a quadtree. We set  $\varepsilon = 10^{-14}$  inside the hole and the quadtree is refined towards the boundary of the circle. The leafs of the quadtree correspond to the sub-cells that are used for the adaptive quadrature [2]. On each of the sub-cells a Gaussian quadrature is performed to accurately compute the stiffness matrix of the cell that is cut by the circle. As a first result the relative error in energy norm

$$e_{rel} = \sqrt{\frac{|\mathcal{U}_{ref} - \mathcal{U}|}{\mathcal{U}_{ref}}} 100 [\%] \quad (6.1)$$

is plotted in Figure 16 demonstrating clearly the exponential convergence of the  $p$ -extension. Similar to the one-dimensional test example the optimal type of convergence for the FCM performing a  $p$ -extension can be obtained also in the case of holes in two-dimensions. In order not to hinder the optimal



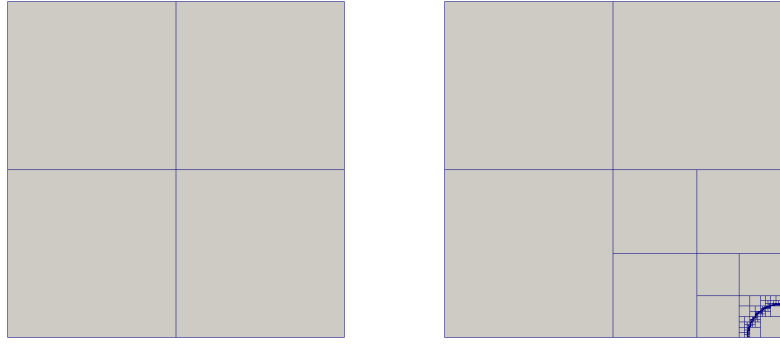


Figure 15: FCM grid with  $2 \times 2$  cells (left) and corresponding sub-cells for integration purposes (right)

convergence rate, the integration of the cell cut by the circle has been carried out with a very high accuracy, demonstrating that the exponential convergence can be observed within a  $p$ -extension from  $p = 1$  up to  $p = 20$ . In practice, however, a finer grid of cells with a moderate polynomial degree of  $p = 6, \dots, 8$  would lead to accuracies which are relevant for engineering decisions. The FCM results for

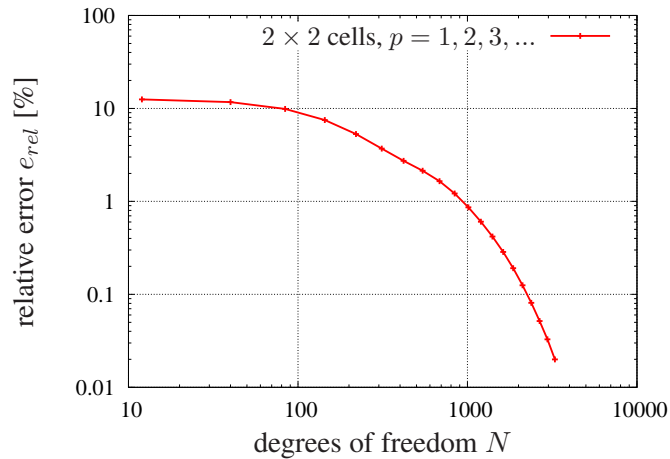


Figure 16: Convergence of the error in energy norm for a  $p$ -extension on  $2 \times 2$  cells

the displacement  $u_y$  at point 4 and the displacement  $u_x$  at point 5 are depicted in Figure 17 showing a fast convergence of the  $p$ -extension also for point-wise quantities like displacements. More challenging than the results at points 4 and 5 are those quantities which are computed directly at the boundary of the hole. Therefore we study also the convergence of the displacement  $u_x$  and stress component  $\sigma_{yy}$  at point 2, see Figure 18. Again, a fast convergence towards the reference values can be observed even for the stress component  $\sigma_{yy}$ .

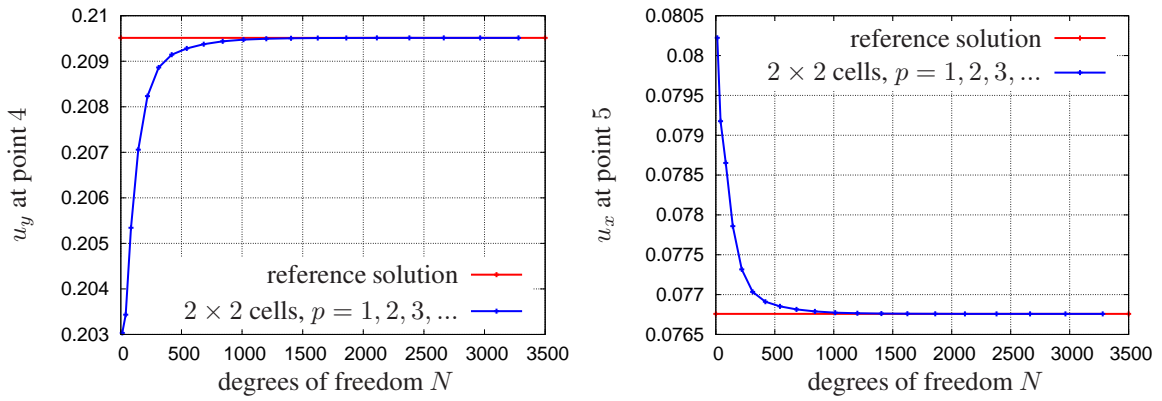


Figure 17: Convergence of the displacement  $u_y$  at point 4 and  $u_x$  at point 5 for a  $p$ -extension on  $2 \times 2$  cells

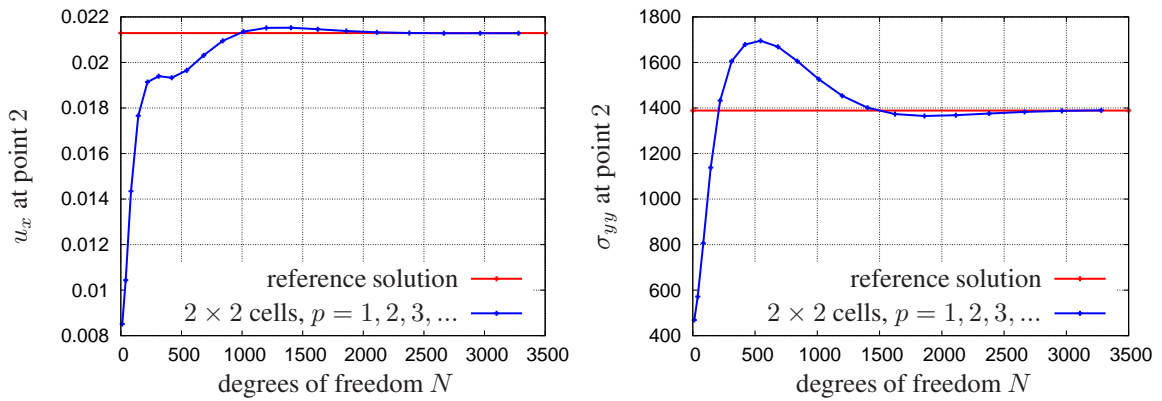


Figure 18: Convergence of the displacement  $u_x$  and stress component  $\sigma_{yy}$  at point 2 for a  $p$ -extension on  $2 \times 2$  cells

## 7 Conclusions

A mathematical analysis of the finite cell method has been presented, proving exponential rate of convergence which has been observed earlier by numerical investigations, only. Necessary smoothness conditions of the exact solution are similar to those which have to be assumed for the classical  $p$ -version of the finite element method. Furthermore, the dependence of an inherent modelling error on the computational scheme's penalization parameter was proved and numerically confirmed. This high order fictitious domain approach thus not only yields significant advantages over FEM concerning engineering applications by virtually relieving from the necessity to generate a finite element mesh, it also guarantees convergence properties, which are unachievable for low order methods.

This paper concentrates on Neumann boundary conditions at the transition from the physical to the fictitious domain. Numerical experiments using Nitsche's method [25] to apply Dirichlet conditions show [36, 31] that also in this case exponential convergence rates can be obtained. A mathematical investigation confirming this observation still has to be done in future work.

## References

- [1] A. ABEDIAN, J. PARVIZIAN, A. DÜSTER, H. KHADEMYZADEH, AND E. RANK, *The Finite Cell Method for Elasto-Plastic Problems*, in Proceedings of the Tenth International Conference on Computational Structures Technology, Civil-Comp Press, 2010.
- [2] ———, *Performance of different integration schemes in facing discontinuities in the finite cell method*, International Journal of Computational Methods, 10 (2013), pp. 1350002/1–24.
- [3] A. ABEDIAN, J. PARVIZIAN, A. DÜSTER, AND E. RANK, *The finite cell method for the  $J_2$  flow theory of plasticity*, Finite Elements in Analysis and Design, 69 (2013), pp. 37–47.
- [4] I. BABUŠKA AND B. Q. GUO, *Approximation properties of the  $h$ - $p$  version of the finite element method*, Comput. Methods Appl. Mech. Engrg., 133 (1996), pp. 319–346.
- [5] I. BABUŠKA AND M. SURI, *The  $p$  and  $h$ - $p$  versions of the finite element method, basic principles and properties*, SIAM Rev., 36 (1994), pp. 578–632.
- [6] S. C. BRENNER AND L. R. SCOTT, *The mathematical theory of finite element methods*, vol. 15 of Texts in Applied Mathematics, Springer, New York, third ed., 2008.
- [7] A. CHERNOV, T. VON PETERSDORFF, AND C. SCHWAB, *Exponential convergence of  $hp$  quadrature for integral operators with Gevrey kernels*, ESAIM Math. Model. Numer. Anal., 45 (2011), pp. 387–422.
- [8] P. G. CIARLET, *The finite element method for elliptic problems*, North-Holland Publishing Co., Amsterdam, 1978. Studies in Mathematics and its Applications, Vol. 4.
- [9] S. DUCZEK, M. JOULAIAN, A. DÜSTER, AND U. GABBERT, *Simulation of Lamb waves using the spectral cell method*, in SPIE Smart Structures and Materials + Nondestructive Evaluation and Health Monitoring, vol. 86951U, International Society for Optics and Photonics, 2013.
- [10] S. DUCZEK, M. JOULAIAN, A. DÜSTER, AND U. GABBERT, *Numerical analysis of Lamb waves using the finite and spectral cell method*, International Journal for Numerical Methods in Engineering, accepted for publication (2014).
- [11] A. DÜSTER, H. BRÖKER, AND E. RANK, *The  $p$ -version of the finite element method for three-dimensional curved thin walled structures*, International Journal for Numerical Methods in Engineering, 52 (2001), pp. 673–703.

- [12] A. DÜSTER, A. NIGGL, AND E. RANK, *Applying the hp-d version of the FEM to locally enhance dimensionally reduced models*, Computer Methods in Applied Mechanics and Engineering, 196 (2007), pp. 3524–3533.
- [13] A. DÜSTER, J. PARVIZIAN, AND E. RANK, *Topology optimization based on the finite cell method*, Proceedings in Applied Mathematics and Mechanics, 10 (2010), pp. 151–152.
- [14] A. DÜSTER, J. PARVIZIAN, Z. YANG, AND E. RANK, *The finite cell method for three-dimensional problems of solid mechanics*, Computer Methods in Applied Mechanics and Engineering, 197 (2008), pp. 3768–3782.
- [15] A. DÜSTER AND E. RANK, *Die Finite Cell Methode - Eine Fictitious Domain Methode mit Finiten-Element Ansätzen hoher Ordnung*, 2 (2011), pp. 6–13.
- [16] A. DÜSTER, H.-G. SEHLHORST, AND E. RANK, *Numerical homogenization of heterogeneous and cellular materials utilizing the finite cell method*, Computational Mechanics, 50 (2012), pp. 413–431.
- [17] R. GLOWINSKI AND Y. KUZNETSOV, *Distributed Lagrange multipliers based on fictitious domain method for second order elliptic problems*, Computer Methods in Applied Mechanics and Engineering, 196 (2007), pp. 1498–1506.
- [18] R. GLOWINSKI, T.-W. PAN, AND J. PÉRIAUX, *A least squares/fictitious domain method for mixed problems and Neumann problems*, in Boundary value problems for partial differential equations and applications, vol. 29 of RMA Res. Notes Appl. Math., Masson, Paris, 1993, pp. 159–178.
- [19] ———, *A fictitious domain method for Dirichlet problem and applications*, Comput. Methods Appl. Mech. Engrg., 111 (1994), pp. 283–303.
- [20] B. Q. GUO, *The h-p version of the finite element method for elliptic equations of order  $2m$* , Numer. Math., 53 (1988), pp. 199–224.
- [21] T. J. R. HUGHES, J. A. COTTRELL, AND Y. BAZILEVS, *Isogeometric analysis: CAD, finite elements, NURBS, exact geometry and mesh refinement*, Computer Methods in Applied Mechanics and Engineering, 194 (2005), pp. 4135–4195.
- [22] M. JOULAIAN, S. DUCZEK, U. GABBERT, AND A. DÜSTER, *Finite and spectral cell method for wave propagation in heterogeneous materials*, Computational Mechanics, under revision (2013).
- [23] M. JOULAIAN AND A. DÜSTER, *Local enrichment of the finite cell method for problems with material interfaces*, Computational Mechanics, 52 (2013), pp. 741–762.
- [24] B. MÜLLER, F. KUMMER, AND M. OBERLACK, *Highly accurate surface and volume integration on implicit domains by means of moment-fitting*, International Journal for Numerical Methods in Engineering, 96 (2013), pp. 512–528.
- [25] J. NITSCHKE, *Über ein Variationsprinzip zur Lösung von Dirichlet-Problemen bei Verwendung von Teilräumen, die keinen Randbedingungen unterworfen sind*, Abhandlungen aus dem Mathematischen Seminar der Universität Hamburg, 36 (1971), pp. 9–15.
- [26] J. PARVIZIAN, A. DÜSTER, AND E. RANK, *Finite cell method – h- and p-extension for embedded domain problems in solid mechanics*, Computational Mechanics, 41 (2007), pp. 121–133.
- [27] ———, *Topology optimization using the finite cell method*, Optimization and Engineering, 13 (2012), pp. 57–78.
- [28] E. RANK, *Adaptive remeshing and h-p domain decomposition*, Computer Methods in Applied Mechanics and Engineering, 101 (1992), pp. 299–313.
- [29] E. RANK, S. KOLLMANNBERGER, C. SORGER, AND A. DÜSTER, *Shell Finite Cell Method: A High Order Fictitious Domain Approach for Thin-Walled Structures*, Computer Methods in Applied Mechanics and Engineering, 200 (2011), pp. 3200–3209.

- [30] E. RANK, M. RUESS, S. KOLLMANNBERGER, D. SCHILLINGER, AND A. DÜSTER, *Geometric modeling, Isogeometric Analysis and the Finite Cell Method*, Computer Methods in Applied Mechanics and Engineering, 249–252 (2012), pp. 104–115.
- [31] M. RUESS, D. SCHILLINGER, Y. BAZILEVS, V. VARDUHN, AND E. RANK, *Weakly enforced essential boundary conditions for NURBS-embedded and trimmed NURBS geometries on the basis of the finite cell method*, International Journal for Numerical Methods in Engineering, 95 (2013), pp. 811–846.
- [32] V. K. SAUL’EV, *A method for automatization of the solution of boundary value problems on high performance computers*, Dokl. Akad. Nauk SSSR 144 (1962), 497–500 (in Russian). English translation in Soviet Math. Dokl., 3 (1963), pp. 763–766.
- [33] ———, *On solution of some boundary value problems on high performance computers by fictitious domain method*, Siberian Mathematical Journal, 4 (1963), pp. 912–925.
- [34] D. SCHILLINGER, A. DÜSTER, AND E. RANK, *The hp-d-adaptive finite cell method for geometrically nonlinear problems of solid mechanics*, International Journal for Numerical Methods in Engineering, 89 (2012), pp. 1171–1202.
- [35] D. SCHILLINGER AND E. RANK, *An unfitted hp adaptive finite element method based on hierarchical B-splines for interface problems of complex geometry*, Computer Methods in Applied Mechanics and Engineering, 200 (2011), pp. 3358–3380.
- [36] D. SCHILLINGER, M. RUESS, N. ZANDER, Y. BAZILEVS, A. DÜSTER, AND E. RANK, *Small and large deformation analysis with the p- and B-spline versions of the finite cell method*, Computational Mechanics, 50 (2012), pp. 445–478.
- [37] C. SCHWAB, *p- and hp-finite element methods, theory and applications in solid and fluid mechanics*, Oxford University Press, 1998.
- [38] E. STEIN, ed., *Error-Controlled Adaptive Finite Elements in Solid Mechanics*, John Wiley & Sons, 2002.
- [39] G. STRANG, *Variational crimes in the finite element method*, in The mathematical foundations of the finite element method with applications to partial differential equations (Proc. Sympos., Univ. Maryland, Baltimore, Md., 1972), Academic Press, New York, 1972, pp. 689–710.
- [40] ———, *Piecewise polynomials and the finite element method*, Bull. Amer. Math. Soc., 79 (1973), pp. 1128–1137.
- [41] Y. SUDHAKAR AND W. A. WALL, *Quadrature schemes for arbitrary convex/concave volumes and integration of weak form in enriched partition of unity methods*, Computer Methods in Applied Mechanics and Engineering, 158 (2013), pp. 39–54.
- [42] B. SZABÓ AND I. BABUŠKA, *Finite element analysis*, John Wiley & Sons, 1991.
- [43] Z. YANG, S. KOLLMANNBERGER, A. DÜSTER, M. RUESS, E. GARCIA, R. BURBKART, AND E. RANK, *Non-standard bone simulation: interactive numerical analysis by computational steering*, Computing and Visualization in Science, 14 (2012), pp. 207–216.
- [44] Z. YANG, M. RUESS, S. KOLLMANNBERGER, A. DÜSTER, AND E. RANK, *An efficient integration technique for the voxel-based Finite Cell Method*, International Journal for Numerical Methods in Engineering, 91 (2012), pp. 457–471.