



# Adaptive mesh refinement strategy for a nonconservative transport problem

Benjamin Aymard, Frédérique Clément, Marie Postel

## ► To cite this version:

Benjamin Aymard, Frédérique Clément, Marie Postel. Adaptive mesh refinement strategy for a non-conservative transport problem. 2013. hal-00865429v1

**HAL Id: hal-00865429**

**<https://hal.science/hal-00865429v1>**

Preprint submitted on 24 Sep 2013 (v1), last revised 19 Jan 2015 (v2)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# ADAPTIVE MESH REFINEMENT STRATEGY FOR A NONCONSERVATIVE TRANSPORT PROBLEM

BENJAMIN AYMARD<sup>1,2,3</sup>, FRÉDÉRIQUE CLÉMENT<sup>3</sup>, MARIE POSTEL<sup>1,2</sup>

**ABSTRACT.** In the framework of transport equations it is usual to need long time simulations, and therefore large physical domains to cover a phenomenon. On the other hand it can happen that only a small time varying portion of the domain is interesting. This motivates the use of adaptivity for the spatial discretization. Biological models involving cell development are often nonconservative to account for cell division. In that case the threshold controlling the spatial adaptivity may have to be time-dependent in order to keep up with the progression of the solution. In this article we tackle the difficulties arising when applying a Multiresolution method to a transport equation with discontinuous fluxes modeling localized mitosis. The analysis of the numerical method is performed on a simplified model and numerical scheme. An original threshold strategy is proposed and validated thanks to extensive numerical tests. It is then applied to a biological model in both cases of distributed and localized mitosis.

## 1. INTRODUCTION

In the framework of transport equations it is usual to need long time simulations, and therefore large physical domains to cover a phenomenon. On the other hand it can happen that only a small time varying portion of the domain is interesting. This motivates the use of adaptivity for the spatial discretization. The Multiresolution (MR) method is specially interesting for hyperbolic system of PDEs because the underlying wavelet theory enables one to control the numerical error induced by the adaptivity with a small parameter  $\varepsilon$  which is explicitly used as a threshold in the algorithm. We refer the reader to [4] for a thorough analysis of the MR method for a scalar hyperbolic equation and to [5, 6] and references therein for applications to more realistic models and set-ups.

In the current work we deal with nonconservative transport equations frequently arising in biological models involving cell dynamics. In these models, which are most of the time 1D, the space variable plays the role of age and marks the progression along the cell cycle. Mitosis is the endpoint of the cell cycle, that gives birth to two daughter cells from one mother cell. From the modeling viewpoint, mitosis can be distributed over the cell cycle thanks to a positive linear source term, amounting to doubling the cell density in a time equivalent to the duration of the cell cycle (see for instance [11]). Another approach treats the mitosis phenomenon more directly, as a localized event at the end of each cell cycle,

---

This work is part of the Inria Large Scale Initiative Action REGATE.

1. UPMC Univ Paris 06, UMR 7598, Laboratoire Jacques-Louis Lions, F-75005, Paris, France

2. CNRS, UMR 7598, Laboratoire Jacques-Louis Lions, F-75005, Paris, France

3. Centre de Recherche Inria Paris-Rocquencourt, Domaine de Voluceau, Rocquencourt, B.P. 105 - F-78153 Le Chesnay, France.

corresponding to a doubling transmission condition which must be satisfied by the cell density at the interface between cell cycles (see for instance [12]). Even on a uniform grid, these discontinuous flux conditions are tricky to handle and require a specific scheme in order to achieve high order of accuracy. We refer the reader to [2] for a complete study of a Finite Volume (FV) scheme well suited to this purpose.

The specific application we have in mind is the numerical calibration of terminal follicular development modeled in [9]. Realistic simulations involve solving simultaneously about twenty coupled PDEs in two space dimensions. The weak structure of the coupling is suited to an efficient implementation on parallel architecture, already described in [1]. Nevertheless one simulation takes several minutes to run and the extensive simulations required to calibrate the model therefore motivate our search for additional reduction of computational costs by using a MR adaptive finite volume strategy. In this paper we address the problem arising from coupling the MR strategy with the FV method designed in [2] in the scalar case and with a single processor architecture, leaving the vector case with parallel implementation to future works. Actually, the main difficulty arising from this coupling is already present in the scalar case, where the resulting adaptive scheme (FVMR) unfortunately exhibits unstable numerical noise, which becomes apparent after long time simulations - let us say more than ten cell cycles. This corresponds to a proliferation ratio of  $2^{10}$  which explains how any numerical error, well within any given tolerance at the beginning of the simulation, can end up having macroscopic consequences on the solution mesh or even its shape (see Figure 14). It is a quite specific set-up, obviously not encountered in all PDEs with discontinuous fluxes. Hopefully they do not all require any particular adaptation of the multiresolution method (see for instance [3] for an example of multiresolution applied to traffic flows). The main object of this article is therefore double : first to fully document the unstable noise appearance when using the standard multiresolution method on such an equation with doubling conditions. This is done in section 2 where we introduce a simple 1D model and detail the elementary numerical steps, showing how they lead to spurious numerical noise. Secondly, we propose a numerical strategy to stop the noise appearance, and then validate it by extensive numerical tests. This numerical validation, exposed in section 3, uses the FVMR method that we also use in the latest section 4 to solve more realistic biological models. Eventually we show that our method correctly handles both types of models - localized or distributed mitosis - with CPU and memory gain between 10 and 20 for an overall relative error remaining below  $10^{-3}$ .

## 2. INVESTIGATION OF NUMERICAL NOISE APPEARANCE

In this section we investigate the circumstances under which numerical noise can appear. For this we consider a simplified 1D problem with piecewise constant speeds. We compute the approximated solution with a simple first order FV scheme. This allows us to perform one time step of the algorithm by hand and completely describe the interaction of the doubling condition with a two-level MR algorithm. We illustrate this example by numerical simulations performed with a method coupling the 2D FV scheme with a mean value MR adaptive strategy.

**2.1. Description of the simplified set-up.** We study the simple case of a 1D transport model with piecewise constant speeds and discontinuous flux conditions

$$(1) \quad \begin{cases} \partial_t \phi(t, x) + \partial_x (g(x) \phi(t, x)) = 0, & \text{for } x \in \mathbb{R}, \ t > 0 \\ \phi(0, x) = \phi_0(x), & \text{for } x \in \mathbb{R}, \end{cases}$$

with  $N$  interfaces numbered from 1 to  $N$  spaced by  $x_s$ . The speeds are constant in each subdomain

$$g(x) = g_{p-1} \text{ for } (p-1)x_s \leq x \leq px_s, \quad p = 1, \dots, N+1.$$

Transmission conditions are defined by

$$(2) \quad g_p \phi(t, px_s^+) = k_p g_{p-1} \phi(t, (p-1)x_s^-)$$

where  $k_p$  is equal to 2 to model a doubling flux interface, or to 1 to model a continuous flux interface.

For the sake of simplicity we first choose  $g_p = 1$  and  $k_p = 2$  for all  $p = 0, \dots, N$  and we apply a doubling condition on the outer boundary

$$\phi(t, 0^+) = 2\phi(t, Nx_s^-).$$

This model is a simple prototype for transport equations modeling cell proliferation with localized mitosis at the end of each cell cycle, which is relevant for the granulosa cells in ovarian follicles [9]. We will also consider an alternative model frequently encountered in the literature (see for instance [11] chapter 3), which consists in distributing the mitosis over the cell cycle duration, with a linear source term

$$(3) \quad \begin{cases} \partial_t \phi(t, x) + \partial_x (g(x) \phi(t, x)) = B \phi(t, x), & \text{for } x \in \mathbb{R}, \ t > 0, \\ \phi(0, x) = \phi_0(x), & \text{for } x \in \mathbb{R}. \end{cases}$$

The coefficient  $B$  in the source term must be such that the averaged total mass is doubled at the end of a cell cycle, which leads to

$$\exp(BT) = 2,$$

where  $T$  is the duration of the cycle.

**2.2. Finite volume discretization on a two-level multiresolution hierarchy.** We start by discretizing the solution on two dyadically embedded levels  $\Delta x_0 = 2\Delta x$  where we denote the meshes on the finer level by

$$\mathcal{D}_{1,k} = [k\Delta x, (k+1)\Delta x],$$

and the meshes on the coarser level by

$$\mathcal{D}_{0,k} = \mathcal{D}_{1,2k} \cup \mathcal{D}_{1,2k+1} = [k\Delta x_0, (k+1)\Delta x_0].$$

In our double index notation  $\ell, k$ , the first number  $\ell$  indicates the level,  $\ell = 0$  for the coarser and  $\ell = 1$  for the finer. We further assume that  $x_s = 2K\Delta x = K\Delta x_0$ , meaning that the doubling interfaces are located between meshes  $\mathcal{D}_{0,P(K-1)}$  and  $\mathcal{D}_{0,P(K)}$  on the coarser level, and between meshes  $\mathcal{D}_{1,2PK-1}$  and  $\mathcal{D}_{1,2PK}$  on the finer level, as illustrated in Figure 1.

The FV approximation of the solution is defined on the finer level by

$$\phi_{1,k}^n \approx \frac{1}{\Delta x} \int_{\mathcal{D}_{1,k}} \phi(n\Delta t, x) dx,$$

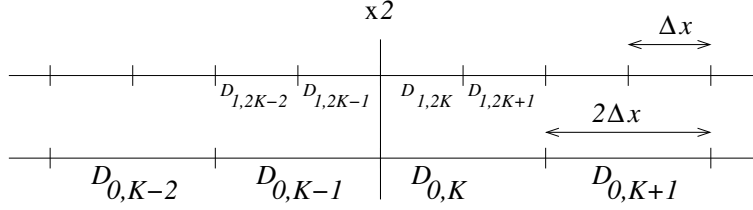


FIGURE 1. Two level discretization with doubling interface located between meshes  $D_{0,K-1}$  and  $D_{0,K}$  on the coarser level, or  $D_{1,2K-1}$  and  $D_{1,2K}$  on the finer level

and the solution on the coarser level is defined as

$$(4) \quad \phi_{0,k}^n = \frac{1}{2} (\phi_{1,2k}^n + \phi_{1,2k+1}^n).$$

Knowing the mean values of the solution on the coarser level, approximated mean values on the finer level can be obtained by local reconstruction. Arbitrary orders of polynomial approximation can be used but we will consider in the sequel only the zeroth order reconstruction, also known as *Haar* reconstruction in the wavelet context

$$(5) \quad \hat{\phi}_{1,2k}^n = \hat{\phi}_{1,2k+1}^n = \phi_{0,k}^n,$$

and the second order reconstruction

$$(6) \quad \begin{aligned} \hat{\phi}_{1,2k}^n &= \frac{1}{8} \phi_{0,k-1}^n + \phi_{0,k}^n - \frac{1}{8} \phi_{0,k+1}^n, \\ \hat{\phi}_{1,2k+1}^n &= -\frac{1}{8} \phi_{0,k-1}^n + \phi_{0,k}^n + \frac{1}{8} \phi_{0,k+1}^n. \end{aligned}$$

We use a FV scheme to compute the numerical solution as

$$(7) \quad \phi_j^{n+1} = \phi_j^n - \frac{\Delta t}{\Delta x_j} (F_{j+1/2}^n - F_{j-1/2}^n),$$

where  $F_{j+1/2}^n$  is the numerical flux at time  $t_n$  through the edge between meshes  $D_j$  and  $D_{j+1}$ , and  $\Delta x_j$  the size of mesh  $D_j$ . A simple upwind order scheme on a uniform grid consists, in this case with unit speed, in taking

$$(8) \quad F_{j+1/2}^n = \begin{cases} \phi_j^n & \text{if } j \neq 0, K-1 \text{ and } 1, 2K-1, \\ \mathbf{2}\phi_j^n & \text{otherwise,} \end{cases}$$

where the factor **2** in bold takes into account the doubling flux condition (2) when  $k_i = 2$ .

We can therefore compute the numerical solution on the finer level as

$$(9) \quad \phi_{1,k}^{n+1} = \begin{cases} (1-\lambda)\phi_{1,k}^n + \lambda\phi_{1,k-1}^n & \text{if } k \neq 2PK, \\ (1-\lambda)\phi_{1,k}^n + \mathbf{2}\lambda\phi_{1,k-1}^n & \text{if } k = 2PK, \end{cases}$$

with

$$\lambda = \frac{\Delta t}{\Delta x},$$

which must satisfy  $0 < \lambda \leq 1$  in order to ensure the stability of the solution. If the solution is smooth enough - with a criterion that we will precise below - we can compute it instead

on the coarser level, using  $\lambda/2$  instead of  $\lambda$

$$(10) \quad \phi_{0,k}^{n+1} = \begin{cases} (1 - \frac{\lambda}{2})\phi_{0,k}^n + \frac{\lambda}{2}\phi_{0,k-1}^n & \text{if } k \neq PK, \\ (1 - \frac{\lambda}{2})\phi_{0,k}^n + \frac{\lambda}{2}2\phi_{0,k-1}^n & \text{if } k = PK. \end{cases}$$

Note that the numerical solution becomes locally small but nonzero, even when starting from a piecewise constant solution: due to the numerical diffusion of the numerical scheme, the solution rapidly becomes nonzero upstream of the initial condition. For instance for the simple scheme (9) we have

$$\begin{aligned} \phi_{1,k}^n &= (1 - \lambda)\phi_{1,k}^{n-1} + \lambda\phi_{1,k-1}^{n-1}, \\ &= (1 - \lambda)^2\phi_{1,k}^{n-2} + 2(1 - \lambda)\lambda\phi_{1,k-1}^{n-2} + \lambda^2\phi_{1,k-2}^{n-2}, \\ &\vdots \\ &= (1 - \lambda)^n\phi_{1,k}^0 + \dots + \lambda^n\phi_{1,k-n}^0. \end{aligned}$$

In the general case with an arbitrary number of levels and arbitrary high dimensions, one time step of the FVMR scheme consists in a loop over levels starting from the finest. For each level, a first loop computes the numerical fluxes between meshes active at the current level using (8), possibly requiring local reconstruction if neighboring meshes entering the flux estimation are coarser than the current level. Then a second loop updates the solution on the meshes of the current level using (7).

Having in mind this algorithm is necessary to correctly handle the cases of neighboring meshes of different sizes

- if the left hand side neighbor of mesh  $\mathcal{D}_{1,2k}$  is the coarser mesh  $\mathcal{D}_{0,k-1}$ , then the solution  $\hat{\phi}_{1,2k-1}^n$  at time  $n$  on mesh  $\mathcal{D}_{1,2k-1}$  must be reconstructed, using (5) or (6), in order to compute  $F_{(1,2k)-1/2}^n$
- if the left hand side neighbor of mesh  $\mathcal{D}_{0,k}$  is the finer mesh  $\mathcal{D}_{1,2k-1}$ , then

$$F_{(0,k)-1/2}^n = F_{(1,2k-1)+1/2}^n = \phi_{1,2k-1}^n$$

has already been computed during the loop on the finer level

- if the right hand side neighbor of mesh  $\mathcal{D}_{1,2k+1}$  is the coarser mesh  $\mathcal{D}_{0,k+1}$ , no reconstruction is required to compute  $F_{(1,2k+1)+1/2}^n$  for the simple first order scheme (8). In the case of a higher order scheme,  $\hat{\phi}_{1,2k+2}^n$  would have to be reconstructed
- if the right hand side neighbor of mesh  $\mathcal{D}_{0,k}$  is the finer mesh  $\mathcal{D}_{1,2k+2}$ , then

$$F_{(0,k)+1/2}^n = F_{(1,2k+2)-1/2}^n = \hat{\phi}_{1,2k+1}^n$$

has already been computed during the loop on the finer level, using reconstructed value  $\hat{\phi}_{1,2k+1}^n$

The choice between the two levels of discretization on a given mesh  $\mathcal{D}_{0,k}$  in the domain is made by comparing the solution on its subdivisions  $\mathcal{D}_{1,2k} \cup \mathcal{D}_{1,2k+1}$  with the solution reconstructed on the same mesh using the values on the coarser grid with formulas (5) or (6). The local smoothness of the solution is indeed measured by the *detail*, defined by

$$(11) \quad d_{1,k}^n = \phi_{1,2k}^n - \hat{\phi}_{1,2k}^n$$

- In the Haar case, a null detail corresponds to a locally constant function

$$\begin{aligned}
 d_{1,k}^n &= \phi_{1,2k}^n - \phi_{0,k}^n \\
 (12) \quad &= \frac{1}{2}(\phi_{1,2k}^n - \phi_{1,2k+1}^n).
 \end{aligned}$$

- In the quadratic basis, a null detail corresponds to a locally quadratic function

$$\begin{aligned}
 d_{1,k}^n &= \phi_{1,2k}^n - \left( \frac{1}{8}\phi_{0,k-1}^n + \phi_{0,k}^n - \frac{1}{8}\phi_{0,k+1}^n \right) \\
 (13) \quad &= -\frac{1}{16}(\phi_{1,2k-2}^n + \phi_{1,2k-1}^n) + \frac{1}{2}(\phi_{1,2k}^n - \phi_{1,2k+1}^n) + \frac{1}{16}(\phi_{1,2k+2}^n + \phi_{1,2k+3}^n).
 \end{aligned}$$

We refer for instance to [10] for the approximation theory results establishing the link between  $d_{1,k}^n$  and the local smoothness of the solution.

In order to monitor the adaptive FV scheme, the absolute value of the details are tested at each time step against a level dependent threshold  $\varepsilon_\ell$

$$(14) \quad \varepsilon_\ell = \varepsilon 2^{\ell-L+1}, \quad \text{for } \ell = 1, \dots, L-1.$$

In the numerical simulations, we refer to the MR threshold to indicate the threshold value on the finest MR level  $\varepsilon = \varepsilon_{L-1}$ . Here in the two level case, if  $|d_{1,k}^n| \geq \varepsilon_1$ , then not only  $\mathcal{D}_{0,k}$  but also the two neighbors  $\mathcal{D}_{0,k-1}$  and  $\mathcal{D}_{0,k+1}$  should be subdivided to compute the solution at the next time step (see Algorithms 1 and 2 for the predictive adaptive grid refinement in the general case with  $L$  multiresolution levels).

**2.3. Explication of the numerical noise appearance.** In this paragraph we describe the mechanism for numerical noise appearance due to the coupling of multiresolution with doubling fluxes

Suppose that  $|d_{K-i}^n| < \varepsilon$ , for  $i \geq 0$  and  $|d_{K+1}^n| \geq \varepsilon$ . Due to the preceding rule, the mesh  $\mathcal{D}_{0,K} = \mathcal{D}_{1,2K} \cup \mathcal{D}_{1,2K+1}$  is subdivided, to account for possible displacement of the singularity (see Algorithm 1). The mesh  $\mathcal{D}_{0,K-1}$  is kept at the coarser level, but the value of the solution on its right subdivision  $\mathcal{D}_{1,2K-1}$ , which enters the FV scheme to advance the solution on  $\mathcal{D}_{1,2K}$ , is available using the prediction operator (6) in the quadratic case.

Let us compute the solution at time  $n+1$  in the neighborhood of the doubling interface (see Figure 1)

$$\begin{aligned}
 \phi_{0,K-1}^{n+1} &= \phi_{0,K-1}^n - \frac{\lambda}{2} \left( \hat{\phi}_{1,2K-1}^n - \phi_{0,K-2}^n \right), \\
 \phi_{1,2K}^{n+1} &= (1-\lambda)\phi_{1,2K}^n + 2\lambda\hat{\phi}_{1,2K-1}^n, \\
 \phi_{1,2K+1}^{n+1} &= (1-\lambda)\phi_{1,2K+1}^n + \lambda\phi_{1,2K}^n, \\
 \phi_{1,2K+2}^{n+1} &= (1-\lambda)\phi_{1,2K+2}^n + \lambda\phi_{1,2K+1}^n, \\
 \phi_{1,2K+3}^{n+1} &= (1-\lambda)\phi_{1,2K+3}^n + \lambda\phi_{1,2K+2}^n.
 \end{aligned}$$

---

**Algorithm 1** Prediction of the set  $\tilde{\Gamma}_\varepsilon^{n+1}$  of significant details at time  $t_{n+1}$  from the details at time  $t_n$ . General case with  $L$  MR levels numbered from the coarsest 0 to the finest  $L-1$

**Require:** The solution is known by its mean values on the coarsest level and the details

$$\{d_{\ell,k}^n\}_{(\ell,k) \in \Gamma_\varepsilon^n}$$

Prediction:

```

for level  $\ell = L-1 \searrow 1$  do
  for  $k = 0 \nearrow N_0 2^{\ell-1}$  do
    if  $(\ell, k) \in \Gamma_\varepsilon^n$  and  $|d_{\ell,k}^n| \geq \varepsilon_\ell$  then
       $(\ell, k+i) \in \tilde{\Gamma}_\varepsilon^{n+1}$  for  $|i| \leq 1$ 
      if  $\ell < L-1$  and  $|d_{\ell,k}^n| \geq 2\varepsilon_\ell$  then
         $(\ell+1, 2k)$  and  $(\ell+1, 2k+1) \in \tilde{\Gamma}_\varepsilon^{n+1}$ 
      end if
    end if
  end for
end for

```

Gradualness:

```

for level  $\ell = L-1 \searrow 1$  do
  for  $k = 0 \nearrow N_0 2^{\ell-1}$  do
    if  $(\ell, k) \in \tilde{\Gamma}_\varepsilon^{n+1}$  then
      for  $|i| \leq 1$  do
         $(\ell-1, \lfloor k/2 \rfloor + i) \in \tilde{\Gamma}_\varepsilon^{n+1}$ 
      end for
    end if
  end for
  for  $k = 0 \nearrow N_0 2^{\ell-1}$  do
    if  $(\ell, k) \in \tilde{\Gamma}_\varepsilon^{n+1} \setminus \Gamma_\varepsilon^n$  then
       $d_{\ell,k}^n = 0$ 
    end if
  end for
end for

```

---

We should now check the smoothness of the solution after this update. Using (13) and (4) we can compute  $d_K^{n+1}$  as

$$\begin{aligned}
 d_{1,K}^{n+1} &= \phi_{1,2K}^{n+1} - \hat{\phi}_{1,2K}^{n+1} \\
 &= \phi_{1,2K}^{n+1} - \left( \frac{1}{8} \phi_{0,K-1}^{n+1} + \phi_{0,K}^{n+1} - \frac{1}{8} \phi_{0,K+1}^{n+1} \right) \\
 &= -\frac{1}{8} \phi_{0,K-1}^{n+1} + \frac{1}{2} (\phi_{1,2K}^{n+1} - \phi_{1,2K+1}^{n+1}) + \frac{1}{16} (\phi_{1,2K+2}^{n+1} + \phi_{1,2K+3}^{n+1}).
 \end{aligned}$$

We plug in the expressions of the solution at time  $n+1$  and obtain

$$\begin{aligned}
 d_K^{n+1} &= -\frac{\lambda}{16} \phi_{0,K-2}^n + \frac{\lambda}{2} (2\hat{\phi}_{1,2K-1}^n - \phi_{1,2K}^n) + \frac{\lambda}{16} (\phi_{1,2K+1}^n + \phi_{1,2K+2}^n) - \frac{1}{8} \phi_{0,K-1}^n \\
 &\quad + \frac{\lambda}{16} \hat{\phi}_{1,2K-1}^n + \frac{1-\lambda}{2} (\phi_{1,2K}^n - \phi_{1,2K+1}^n) + \frac{1-\lambda}{16} (\phi_{1,2K+2}^n + \phi_{1,2K+3}^n).
 \end{aligned}$$



---

**Algorithm 2** Construction of the solution on the adaptive grid  $\tilde{S}^{n+1}$  from the set of significant details  $\tilde{\Gamma}_\varepsilon^{n+1}$

---

**Require:** The solution is known by its mean values on the coarsest grid, and the details for  $(k, \ell) \in \tilde{\Gamma}_\varepsilon^{n+1}$

```

for level  $\ell = 1 \nearrow L - 1$  do
  for  $k = 0 \nearrow N_0 2^{\ell-1}$  do
    if  $(\ell, k) \in \tilde{\Gamma}_\varepsilon^{n+1}$  then
       $\{\mathcal{D}_{\ell,2k}, \mathcal{D}_{\ell,2k+1}\} \in \tilde{S}^{n+1}$  and  $\mathcal{D}_{\ell-1,k} \notin \tilde{S}^{n+1}$ 
      compute  $\phi_{\ell,2k}^n = \hat{\phi}_{\ell,2k}^n + d_{\ell,k}^n$ 
      and  $\phi_{\ell,2k+1}^n = \hat{\phi}_{\ell,2k+1}^n - d_{\ell,k}^n$ 
    end if
  end for
end for

```

---

The effect of the doubling flux on the detail is an additional term

$$(15) \quad d_{1,K}^{n+1} = \hat{d}_{1,K}^{n+1} + \frac{\lambda}{2} \hat{\phi}_{1,2K-1}^n,$$

compared to the detail  $\hat{d}_K^{n+1}$  if no doubling condition is imposed. This means that if the solution is smooth at time  $t_n$ , but the solution is large enough before the doubling interface, then the detail may become significant due to the doubling.

We now explain what happens next, if the detail  $d_{1,K}^{n+1}$  which was negligible at time  $t_n$  becomes larger than the MR threshold  $\varepsilon$  at time  $n + 1$ . In the quadratic case, as described in Algorithm 1, the mesh  $\mathcal{D}_{0,K-1}$  just upstream of the doubling interface should be predictively refined using (6)

$$\begin{cases} \hat{\phi}_{1,2K-2}^{n+1} = \frac{1}{8} \phi_{0,K-2}^{n+1} + \phi_{0,K-1}^{n+1} - \frac{1}{8} \phi_{0,K}^{n+1}, \\ \hat{\phi}_{1,2K-1}^{n+1} = -\frac{1}{8} \phi_{0,K-2}^{n+1} + \phi_{0,K-1}^{n+1} + \frac{1}{8} \phi_{0,K}^{n+1}, \end{cases}$$

where

$$(16) \quad \begin{aligned} \phi_{0,K}^{n+1} &= \frac{1}{2} (\phi_{1,2K}^{n+1} + \phi_{1,2K+1}^{n+1}), \\ &= \frac{1-\lambda}{2} (\phi_{1,2K}^n + \phi_{1,2K+1}^n) + \frac{\lambda}{2} (2\hat{\phi}_{1,2K-1}^n + \phi_{1,2K}^n). \end{aligned}$$

Here again the difference between the values of the solution on the subdivisions, which should be small since the solution is only predictively refined, is enhanced by the value  $\hat{\phi}_{1,2K-1}^n$  upstream of the interface which contributes twice instead of once. We see that in a single time step the doubling condition coupled with the MR, has introduced an oscillation of the order of  $\hat{\phi}_{1,2K-1}^n$ .

Suppose we start from an initial condition localized in the first slab before the first doubling interface, for instance  $\phi_k^0 = \delta_{0,k}$ . After  $M$  time steps ( $M$  depending on  $\varepsilon$  and  $\lambda$ ), the solution is nonzero and smooth for  $k = 0, \dots, M$ . The MR scheme will therefore coarsen the grid in this region.

As the solution is transported over several slabs, its amplitude is doubled at each interface, and depending on its local amplitude we can fall in the situation depicted by (15). Furthermore, another factor of noise appearance is the dependence of the MR threshold level on the discretization level according to the rule (14).

We see from (15) that the decision to refine the mesh after crossing a doubling interface depends not only on the smoothness but also on the local amplitude. Thanks to (14), the same (small) amplitude discretized on a coarse level will be more likely to trigger the refinement, and might even trigger the local refinement on two consecutive levels (see Algorithm 1). We propose an example for such a situation in Appendix B. We describe a situation with three levels of discretization, where the solution has sensibly the same small amplitude but is refined partly on the intermediate level, and partly on the coarsest one. We show that refinement rules together with rules (15) and (14) lead to coarsen the solution wherever it was previously on the intermediate level, and to refine it on the finest level on some locations where it was before on the coarsest one.

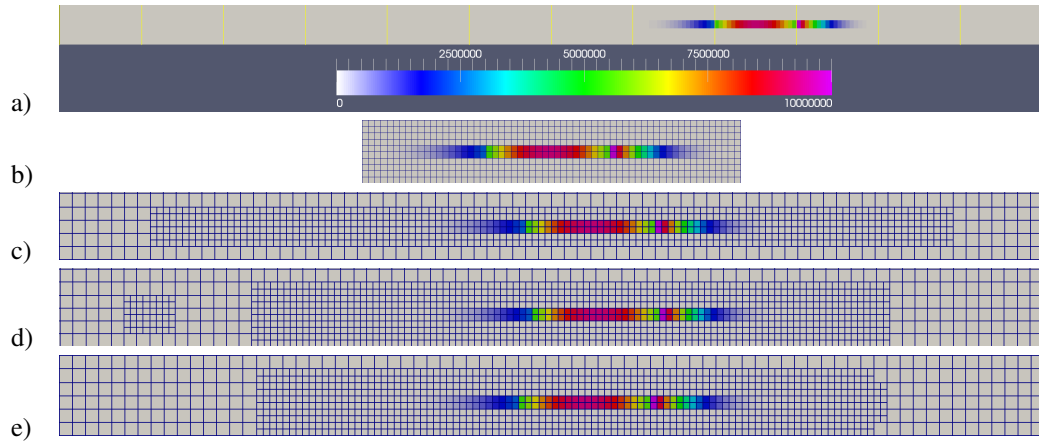


FIGURE 2. Solution at  $t = 20$  on the whole computational domain and color code from 0 to  $10^7$ . Panels from top to bottom: a) finer grid no MR, b) Zoom on the support of the solution, finer grid no MR, c) MR with Haar reconstruction, d) MR with quadratic reconstruction, e) MR with quadratic reconstruction and doubling threshold strategy (18). Notice the presence (in panel d)), or absence (in panel e)) of the spurious noise

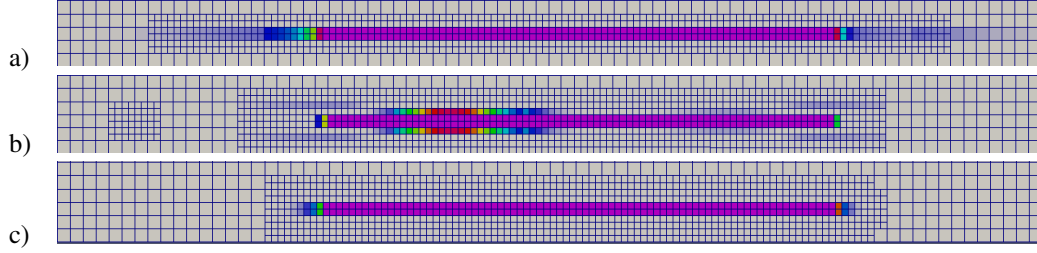


FIGURE 3. Zoom on the support of the solution at  $t = 20$  and computational grid with color code from 0 to 10. From top to bottom a) MR with Haar reconstruction, b) MR with quadratic reconstruction, c) MR with quadratic reconstruction and doubling threshold (18). The thresholding error is more visible in the Haar case (panel a)) than in the quadratic reconstruction (panels b) and c))

At this point we also stress out that the difference between the two wavelets (12) and (13) is quite important, specially if we solve the 1D test case presented above with the 2D FV code. To illustrate this point we perform a simulation on a domain consisting of twelve subdomains of unit width and height with vertical doubling interfaces. The (horizontal) speed is equal to 1. The initial condition is piecewise constant

$$\phi(t = 0, x, y) = \begin{cases} 10 & \text{for } 0 \leq x < 1 \text{ and } 0.2 \leq y < 0.3 \\ 0 & \text{elsewhere} \end{cases}$$

We first use a two level MR hierarchy, with five meshes per subdomain in the  $x$  direction on the coarser level. Figure 2 shows the solution computed at time 20 on the uniform finer grid, which counts ten meshes per subdomain in the  $x$  direction, along with the solution computed with the FVMR algorithm and Haar or quadratic reconstruction. Figure 3 shows the solution with a color code from 0 to 10 corresponding to the initial condition; the spurious noise is visible at this scale. Note that in the Haar case, the upstream amplification (16) does not happen. In the case of the quadratic reconstruction, solving the 1D transport equation (1) with the 2D MR scheme also generates some nonzero solution in the orthogonal direction, which gets progressively amplified by the doubling interfaces. The difference between the panels corresponding to Haar and quadratic prediction highlights the appearance of noise due to the quadratic prediction operator in 2D : the solution becomes nonzero in the transversal direction above and below the support of the initial condition, and also upstream of the support of the solution.

**2.4. Adaptive doubling strategy.** To prevent the formation of this "numerical noise" several strategies can be implemented :

- Forcibly refining the solution on the finest discretization grid in the vicinity of interfaces, without considering its local smoothness. This may become quite greedy and altogether compensate the benefits of the MR strategy.
- Adapting the MR threshold to the average amplitude of the solution. This should be done carefully to avoid rapid changes in the threshold and subsequently rapid

coarsening of the solution. We will document later that the optimal strategy is to adapt the threshold to the total mass of the solution

$$(17) \quad \varepsilon_{t,\ell} = \varepsilon_\ell M(t)$$

where the level dependent  $\varepsilon_\ell$  is defined by (14), with  $\varepsilon$  calibrated for a unit mass solution at initial time.

- Modifying the transmission condition (2) with an adaptive strategy consisting in applying the doubling only if the solution is above a given threshold  $\delta$

$$(18) \quad g_p \phi(t, px_s^+) = \begin{cases} 2g_{p-1} \phi((p-1)x_s^-) & \text{if } |\phi(t, (p-1)x_s^-)| \geq \delta, \\ g_{p-1} \phi((p-1)x_s^-) & \text{otherwise.} \end{cases}$$

In practice  $\delta$  should be chosen close to  $\varepsilon$ , and we will study the relationship more closely in paragraph 3.3.

We also assume that the support of the initial condition is entirely located in the first slab before the first doubling interface. We have actually exemplified in Appendix B that a small and smooth solution lying on both sides of an interface, could right away generate spurious oscillations. Restricting the initial support ensures that no additional oscillations will be created by coupling the MR with the doubling condition. The bottom panels of Figures 2 and 3 display the effect of the adaptive doubling strategy in the case of second order reconstruction, setting the parameter  $\delta$  equal to  $\varepsilon = 10^{-2}$ . The numerical noise has completely disappeared.

**2.5. Formalization in the wavelet framework.** The result (15) also applies to the Haar reconstruction (12). This means that the appearance of the spurious noise is due not only to the discontinuities in the solution induced by the localized doubling, but also to the enhancement of the thresholding error. In particular, even if we modified the prediction scheme in the vicinity of interfaces in order to account for the doubling of the solution, this would not stop the increase of noise.

To formalize this remark, we use the wavelet framework, as described for instance in [4], to express the solution on the finest MR level as

$$\phi_{L-1,k}^n = \sum_{k=0}^{N^0} \phi_{0,k}^n \psi_{0,k} + \sum_{\ell=1}^{L-1} \sum_{k=0}^{N^0 2^{\ell-1}} d_{\ell,k}^n \psi_{\ell,k}$$

where  $\psi_{0,k}$  is the discrete scaling function  $(\psi_{0,k})_j = \delta_{k,j}$  and  $\psi_{\ell,k}$  for  $\ell = 1, L-1$  is the discrete dual wavelet defined as

$$\psi_{\ell,k} = P_{L-1}^{L-2} \dots P_\ell^{\ell-1}(0, \dots, 0, 1, -1, 0, \dots, 0)$$

The prediction operator  $P_\ell^{\ell-1}$  applies formula (6) to the elementary detail vector with 1 at position  $2k$  and -1 at position  $2k+1$ . The adaptive solution after thresholding with the MR threshold  $\varepsilon$  can be expressed as

$$\phi_{L-1,k}^{n,\varepsilon} = \sum_{k=0}^{N^0} \phi_{0,k}^n \psi_{0,k} + \sum_{\ell=1}^{L-1} \sum_{\substack{k=0 \\ |d_{\ell,k}^n| \geq \varepsilon_\ell}}^{N^0 2^{\ell-1}} d_{\ell,k}^n \psi_{\ell,k}.$$

In [7] it is indeed shown that the reconstructed solution on any intermediate level is vitiated by an  $O(\varepsilon)$  perturbation due to MR thresholding and reconstruction, which we can summarize as

$$(19) \quad \hat{\phi}_{\ell,k}^{n,\varepsilon} = \phi_{\ell,k}^n + \varepsilon c_{\ell,k}^n.$$

We apply the adaptive doubling strategy (18) along with the elementary FV scheme (9) generalized to an  $L$  level MR hierarchy with  $\lambda_\ell = 2^{\ell-L+1}\lambda$

$$\phi_{\ell,k}^{n+1,\varepsilon} = \begin{cases} (1 - \lambda_\ell)\phi_{0,k}^n + \lambda_\ell\phi_{0,k-1}^n & \text{if } k \neq PK \text{ or } |\phi_{0,k-1}^n| \leq \delta \\ (1 - \lambda_\ell)\phi_{0,k}^n + \lambda_\ell 2\phi_{0,k-1}^n & \text{if } k = PK \text{ and } |\phi_{0,k-1}^n| > \delta \end{cases}$$

and we see that we have a conditional maximum principle in the sense that

$$(20) \quad \text{if } \phi_{\ell,k}^{n,\varepsilon} \leq \delta \text{ and } \phi_{\ell,k-1}^{n,\varepsilon} \leq \delta \text{ then } \phi_{\ell,k}^{n+1,\varepsilon} \leq \delta.$$

Relations (19) and (20) together show that parameter  $\delta$  should be correctly calibrated in relation with the MR threshold  $\varepsilon$ , to prevent the MR perturbation in (19) from being amplified and becoming the unwanted spurious noise.

### 3. NUMERICAL VALIDATION OF THE ADAPTIVE THRESHOLDS STRATEGIES

In this paragraph we perform numerical tests to validate the adaptive strategies (17) and (18). We then study the relationship between the two thresholds  $\delta$  and  $\varepsilon$ .

**3.1. Effect of the adaptive doubling strategy on the solution.** To justify the doubling strategy designed to tackle the spurious noise introduced by the MR we show the influence of applying (18) instead of (2), independently of the MR, and even of any numerical scheme, by computing the exact solution of the 1D problem (1). As shown in [2], the exact solution for a single interface located at  $x = x_s$  with condition (2) is

$$\phi_1(t, x) = \begin{cases} \phi_0(x - g_0 t) & \text{for } x < x_s, \\ \tilde{\phi}_1(t_s) & \text{for } (x_s - g_1 t) \leq (x - g_1 t) < x_s, \\ \phi_0(x - g_1 t) & \text{for } (x - g_1 t) \geq x_s, \end{cases}$$

where  $\tilde{\phi}_1$  is the trace of the solution on the right of the interface, defined by

$$(21) \quad \tilde{\phi}_1(t) = \frac{1}{g_1} k_1 (g_0 \phi_0(x_s - g_0 t)),$$

and  $t_s$  is the delay after which the effect of interface  $x_s$  is felt at position  $x$  and time  $t$  defined by

$$(22) \quad t_s = t - \frac{(x - x_s)}{g_1}.$$

We now show how the exact solution for a sequence of  $N$  interfaces can be defined recursively. Let us denote by  $\phi_{p-1}(t, x)$  the solution for a sequence of  $p - 1$  interfaces, with  $p > 1$  and add a  $p^{th}$  interface at  $px_s$  with a coefficient  $k_p$  for the transmission condition and a speed  $g_p$  on the right hand side (see Figure 4). For  $x < px_s$  the effect of the  $p^{th}$  interface is not felt and the solution is  $\phi_{p-1}(t, x)$ . For  $x \geq px_s$ , depending on time  $t$ , the effect of the interface is felt or not. If  $(x - px_s) < g_p t$ , events crossing the  $p^{th}$  interface are multiplied by the  $k_p$  coefficient and transported at speed  $g_p$ . The effects of these events are felt at position  $x$  after a delay  $(x - px_s)/g_p$ . If  $(x - px_s) > g_p t$ , the effect of the  $p^{th}$

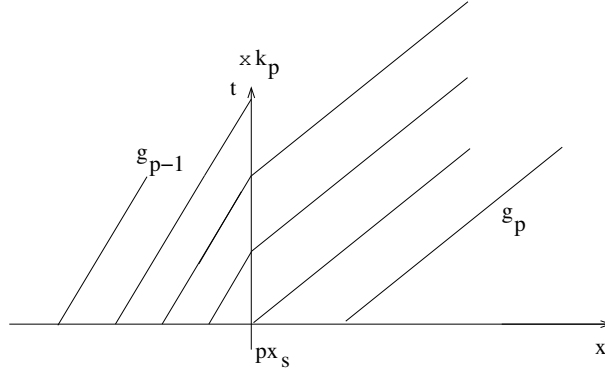


FIGURE 4. Set-up for the  $p^{th}$  interface. The characteristic curves in the right part of the domain transport either the initial condition if they cross the  $x$ -axis or the trace of the solution on the  $px_s$  interface, multiplied by the  $k_p$  coefficient, if they cross the vertical  $x = px_s$  axis

interface is not felt yet and the initial condition defined on  $x > px_s$  is transported at speed  $g_p$ . We eventually have

$$(23) \quad \phi_p(x, t) = \begin{cases} \phi_{p-1}(x, t) & \text{for } x < px_s, \\ \tilde{\phi}_p(t_s^p) & \text{for } (px_s - g_p t) \leq (x - g_p t) < px_s, \\ \phi_0(x - g_p t) & \text{for } x - g_p t \geq px_s, \end{cases}$$

where  $\tilde{\phi}_p$  is the trace of the solution on the right of the  $p^{th}$  interface, defined by

$$(24) \quad \tilde{\phi}_p(t) = \begin{cases} \frac{1}{g_p} k_p g_{p-1} \phi_{p-1}(px_s, t) & \text{if } p > 1 \\ \frac{1}{g_p} k_p g_{p-1} \phi_0(x_s - g_{p-1} t) & \text{otherwise} \end{cases}$$

and  $t_s^p$  is defined by

$$(25) \quad t_s^p = t - \frac{(x - px_s)}{g_p}.$$

We mimic setup (1) by solving equation (23) numerically using recursiveness, with  $g_p = 1$  for all  $p$  and an initial condition  $\phi_0$  defined by

$$(26) \quad \phi_0(x) = \exp(-5(x - 0.5)^2).$$

We also mimic strategy (18), that we plan to apply to our real problem, and use the doubling condition in (24) only if the solution is larger than the doubling threshold  $\delta$ . At each time step, we compute the total mass by numerically integrating the solution over the whole  $x$  abscissa range  $[0, 20]$ . Figure 5 displays the total mass with respect to time, for different values of the threshold parameter  $\delta$

$$M^{\delta, n} = \Delta x \sum_j \phi^\delta(n\Delta t, j\Delta x)$$

along with the exact solution

$$M^n = \Delta x \sum_j \phi(n\Delta t, j\Delta x).$$

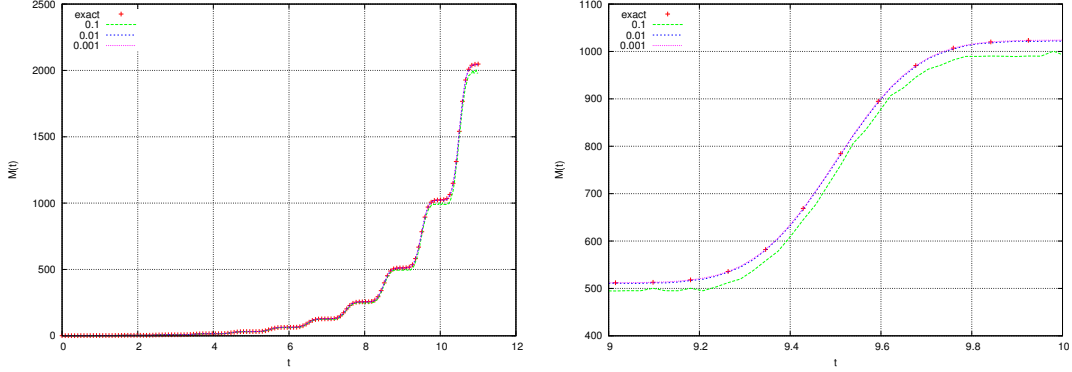


FIGURE 5. Mass with respect to time computed with the recursive definition (23), without and with the doubling strategy (18) for different values of the parameter  $\delta$ . Full time range on the left and zoom on the final region on the right

Figure 6 displays the L1 norm over the time interval of the error between the thresholded and exact masses, normalized by the L1 norm of the mass of the exact solution

$$(27) \quad Err(\delta) = \frac{\sum_n |M^{\delta,n} - M^n|}{\sum_n |M^n|},$$

where  $\phi^\delta$  (respectively  $\phi$ ) is computed on the discrete time-space grid  $\Delta t \times \Delta x$  with (23) and with (respectively without) the adaptive doubling strategy (18). The error is displayed as a function of the threshold parameter  $\delta$ , in logarithmic axes, which highlights its linear dependence onto the threshold. In Figure 6 we also display the error behavior for the same simulation in the case when the parameter  $\delta$  changes with time, which would happen if the MR threshold  $\varepsilon$  followed the time-dependent rule (17). We choose in fact

$$(28) \quad \delta_t = \delta M(t)$$

where  $M(t)$  is the mass of the solution integrated over the whole spatial range, at time  $t$

$$M(t) = \int_0^{N x_s} \phi(t, x) dx$$

These numerical experiments show that whichever the selected thresholding strategy for the MR method, the influence of the adaptive doubling strategy (18) is well controlled by parameter  $\delta$ . Except for the unreasonably large value of  $\delta = 0.1$ , the mass behavior computed with the adaptive doubling strategy is undistinguishable from the exact solution. Both error curves in Figure 6 exhibit a better behavior than the asymptotic  $O(\delta)$ .

In Figure 7 we check that the numerical scheme FVMR described in the previous section correctly reproduces this macroscopic mass behavior. We run a 2D simulation of the 1D simple model (1) and we compare it to case (3) where the doubling is uniformly distributed over the cycle, with a linear birth term amounting to the same overall doubling.

In Figure 8 snapshots of solutions at  $t = 7.48$  and  $t = 8$  are displayed, allowing one to compare at the microscopic level the effect of either applying a doubling condition locally

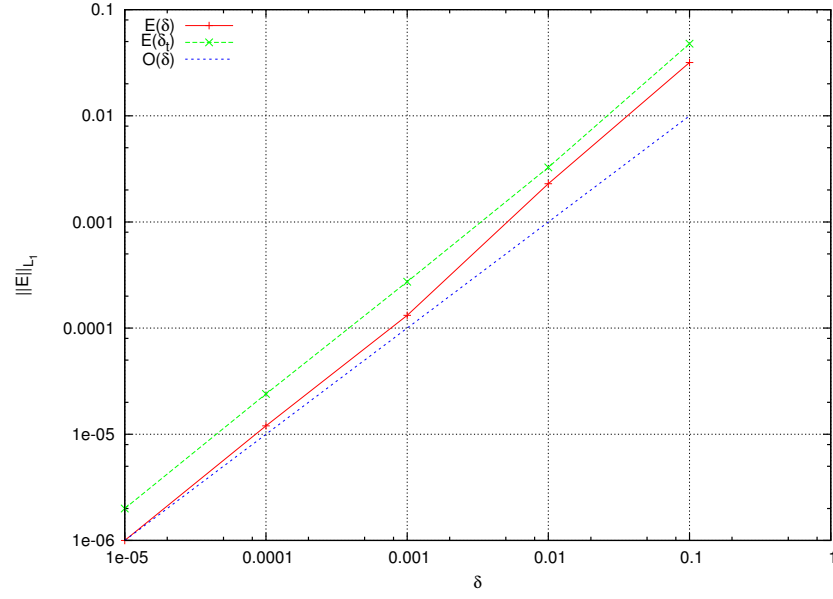


FIGURE 6.  $L_1$  norm error (27) of mass with respect to the parameter  $\delta$  of the doubling strategy (18) with  $(E(\delta_t))$  and without  $(E(\delta))$  time adaptivity (28). The curve  $O(\delta)$  indicates the theoretical asymptotic behavior

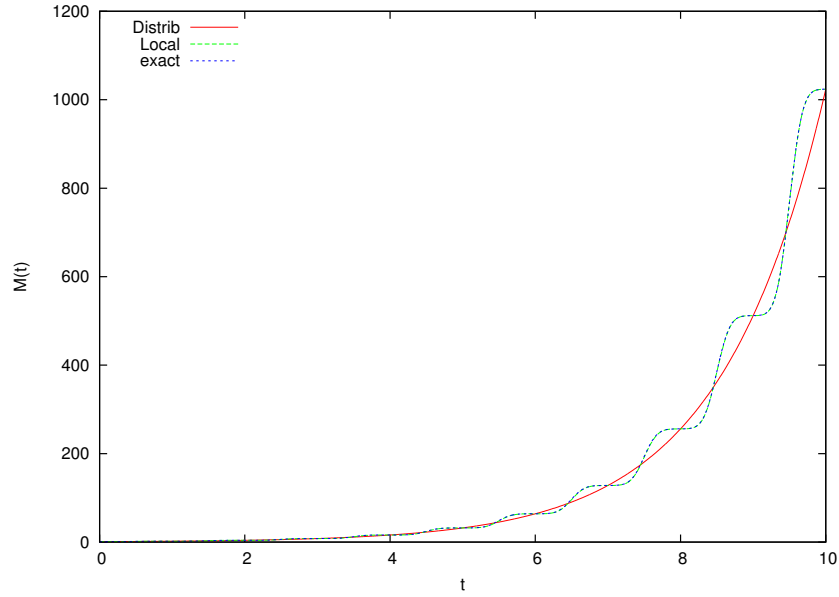


FIGURE 7. Mass over eleven cycles as a function of time for localized and distributed doubling. Third order scheme, four MR levels,  $\varepsilon = 10^{-3}$ . The exact solution (23) is superimposed on the FVMR solution



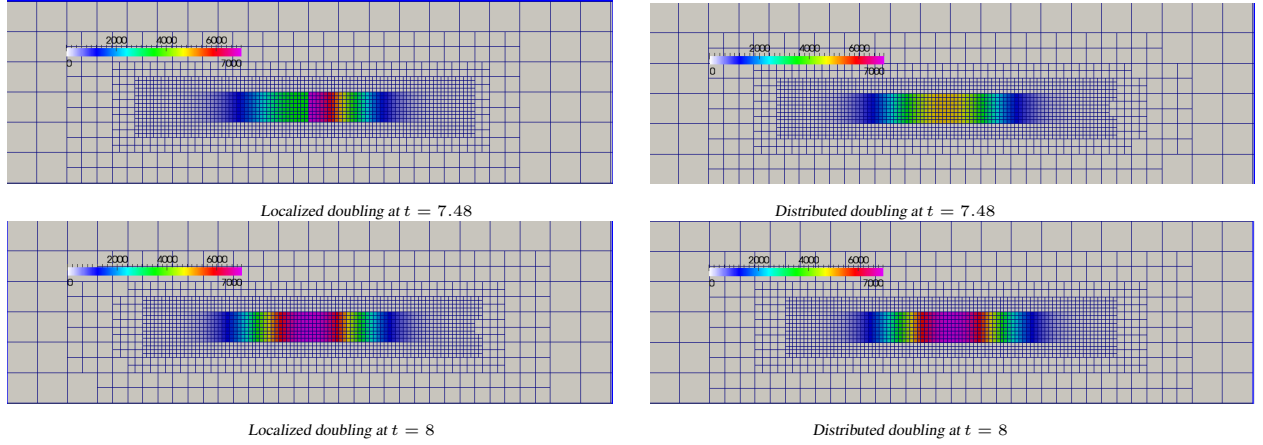


FIGURE 8. Snapshot of the solution at time  $t = 7.48$  (top panels) and  $t = 8$  (bottom panels). Left panels: localized doubling, right panels : distributed gain over the cell cycle

at the end of interface or smoothly distributing proliferation over all the cycle. At both times the solutions sensibly have the same mass, we have selected the snapshot at times when the red and dashed green curves intersect in Figure 7. The top panel, at  $t = 7.48$ , corresponds to a time when the support of the solution is equally distributed on one side and the other of an interface between cell cycles and the induced discontinuity in the solution is clearly visible on the left panel. The bottom panel, at  $t = 8$  corresponds to a time when the support of the solution is well within the same cell cycle, and both solutions do not differ a lot.

**3.2. Time adaptation of the MR threshold  $\varepsilon_t$ .** To study the influence of the time adaptation of the MR threshold  $\varepsilon_t$  (17), we perform different simulations of simple test case (1) with smooth initial condition (26), the third order FV scheme and a 4 level MR hierarchy with the quadratic reconstruction. We test by turns, the time adaptation of the MR threshold (17), and another adaptation of the MR threshold based on the maximum value of the solution

$$(29) \quad \varepsilon_{t,\ell} = \varepsilon_\ell \max_{x,y} |\phi(t, x, y)|.$$

In each case we perform the simulation with or without the adaptive doubling strategy (18). The six possible cases are referred in the graphs with the following legends

	Unconditional doubling (2)		Adaptive doubling (18)	
Constant MR threshold	$\delta = 0$	✗	$\delta = \varepsilon$	+
Adaptive MR threshold (17)	$\delta = 0, \varepsilon_t = \varepsilon M(t)$	□	$\delta = \varepsilon_t = \varepsilon M(t)$	*
Adaptive MR threshold (29)	$\delta = 0, \varepsilon_t = \varepsilon \text{Sup} \Phi (t)$	●	$\delta = \varepsilon_t = \varepsilon \text{Sup} \Phi (t)$	■

TABLE 1. Legend codes for Figures 9 and 15

The  $L^1$ -norm of the relative error at a given time  $t_n = n\Delta t$  is defined as

$$(30) \quad \|E\|_{L^1} = \frac{\sum_{i,j} |\phi_{L-1;i,j}^{\varepsilon,n} - \phi_{L-1;i,j}^n|}{\sum_{i,j} |\phi_{L-1;i,j}^n|},$$

where  $\phi_{L-1;i,j}^n$  is the FV solution at time  $t_n = n\Delta t$  on the finest MR level  $L - 1$  of discretization, with index  $i$  in the  $x$  direction and  $j$  in the  $y$  direction, and  $\phi_{L-1;i,j}^{\varepsilon,n}$  is the adaptive scheme solution, reconstructed at time  $t_n$  on the finest level  $L - 1$ . This error is computed at five different times and displayed in Figure 9 against the MR threshold level  $\varepsilon$  on the left panels, the CPU gain on the center panels, and the memory gain on the right panels. The CPU gain is the ratio of the CPU time for the simulation on the uniform finest grid to the CPU time for the FVMR simulation. The memory gain is the ratio of the number of meshes in the uniform finest grid to the maximum number of meshes in the adaptive grid during the FVMR simulation.

The left panels show that, whichever the thresholding strategy, the asymptotic behavior in  $O(\varepsilon)$  is satisfied. Nevertheless, as time increases, the normalization factors in the adaptive strategies (17) and (29) increase, resulting in more and more distinct curves. The center and right panels allow one to assess the performance of the thresholding strategies with respect to computational costs, in terms of CPU time as well as memory requirement. For early times all strategies seem equivalent, but after ten cycles, the simulations corresponding to constant MR thresholding start having worse performances than those using either of adaptive strategies (17) and (29), which remain basically undistinguishable. The simulation with constant MR thresholding and no doubling adaptation, displayed with x, has the worst performances, because at large times, spurious noise has started to develop, requiring fine mesh discretization and therefore, more memory and more CPU time.

We now validate the adaptive doubling strategy (18) by extensive numerical tests. We compare its efficiency when it is coupled with one or another method of MR thresholding. We also estimate the optimal value for the threshold parameter  $\delta$ .

**3.3. Link between the MR and the doubling thresholds.** In this paragraph we study the relation between the MR threshold parameter  $\varepsilon$  and the threshold  $\delta$  in the adaptive doubling interface (18). Still for 1D test case (1) with the piecewise constant initial condition, we run extensive tests for different values of both thresholds. We also study the influence of the number of levels in the MR hierarchy, the precision of the FV algorithm, and the effect of normalizing the MR threshold by the overall mass of the solution, as it increases with time (see eq. (17)).

Figure 10 displays the  $L_1$  norm of error at final time  $t = 20$ , between the adaptive solution and the solution computed on the uniform finest grid. The adaptive solution is computed with different values of the MR threshold  $\varepsilon$ , fixed once for all times, and for values of the threshold  $\delta$  varying between  $\varepsilon/100$  and  $10\varepsilon$ . For two, three and four levels in the MR hierarchy we display the results in two different fashions : the error as a function of  $\delta$  and the error normalized by  $\varepsilon$  as a function of  $\delta/\varepsilon$ .

For each tested configuration, there is a value of  $\delta$  which minimizes the error. This best values lies between  $0.2\varepsilon$  and  $2\varepsilon$  and increases with  $\varepsilon$ . We also make the same test for four

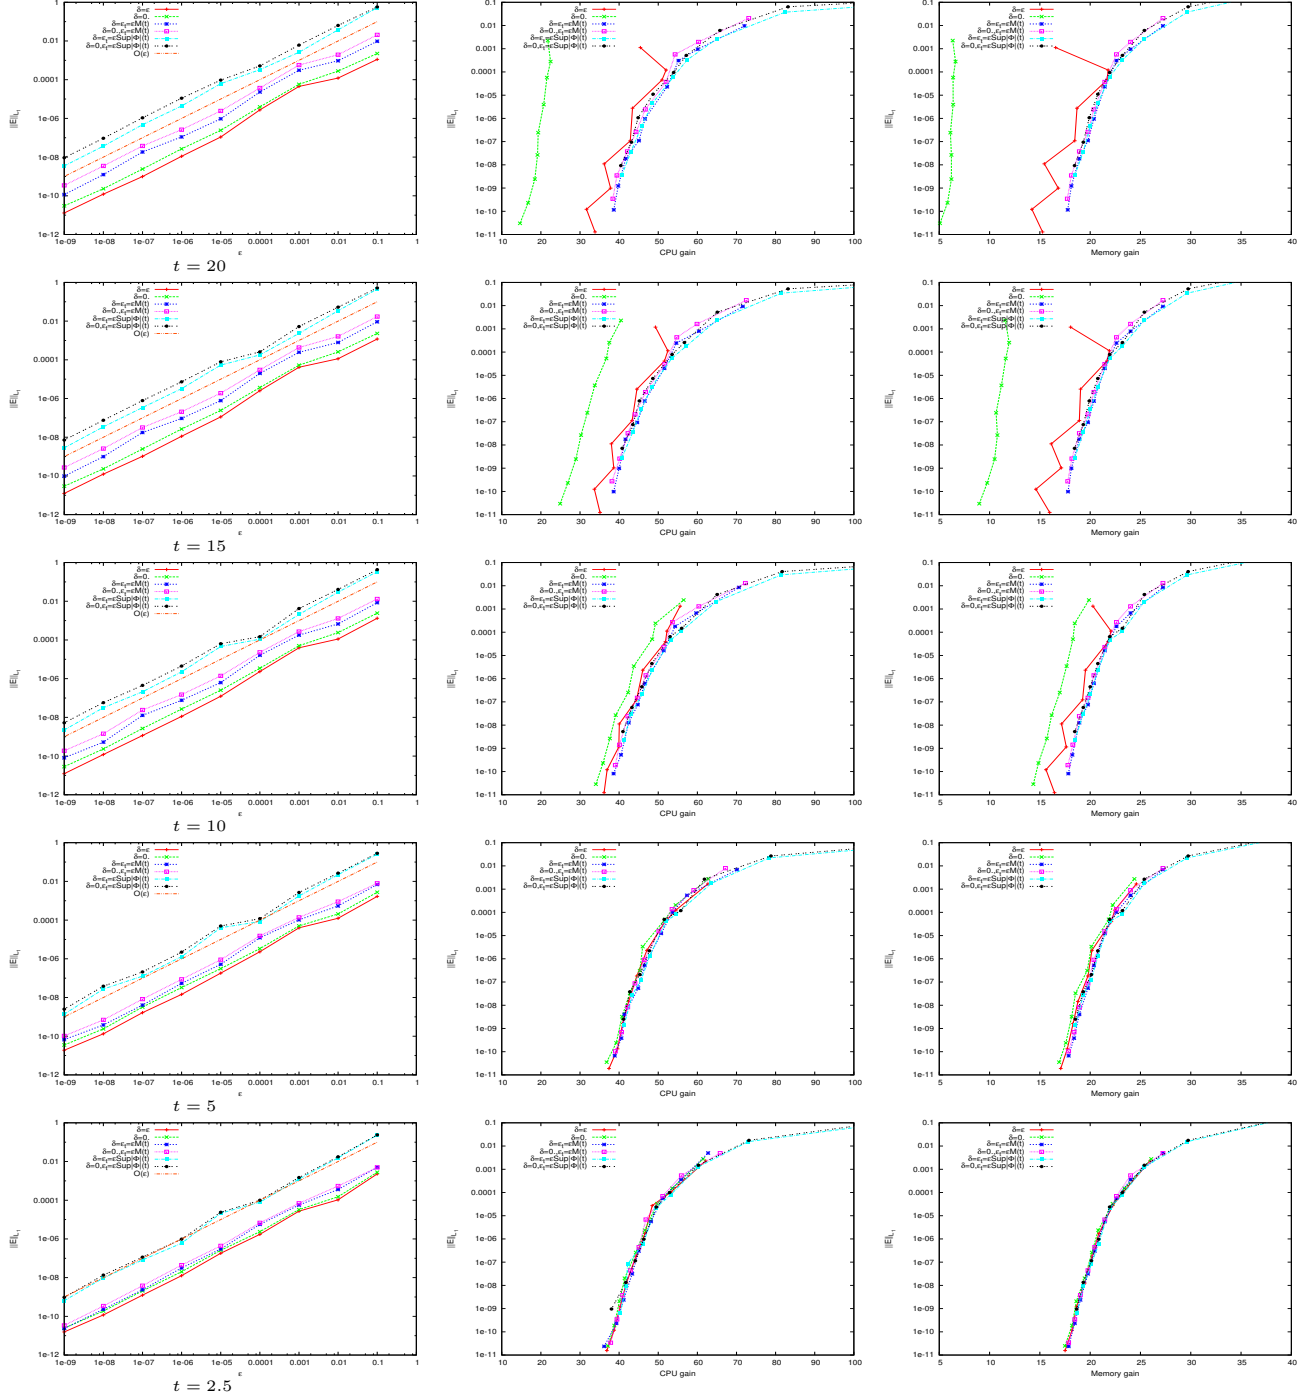


FIGURE 9. L1 norm of relative error (30) at different times, with respect to the MR threshold  $\varepsilon$  (left panel), the CPU gain (center panel) and the memory gain (right panel). Effect of adaptive MR threshold  $\varepsilon_t$  and doubling threshold  $\delta$  in the case of the simple 1D test case, 4 MR levels, third order FV scheme. The line labelled  $O(\varepsilon)$  in the left panel graphs indicates the theoretical asymptotic behavior of the error as a function of  $\varepsilon$ , the complete legend code is described in Table 1

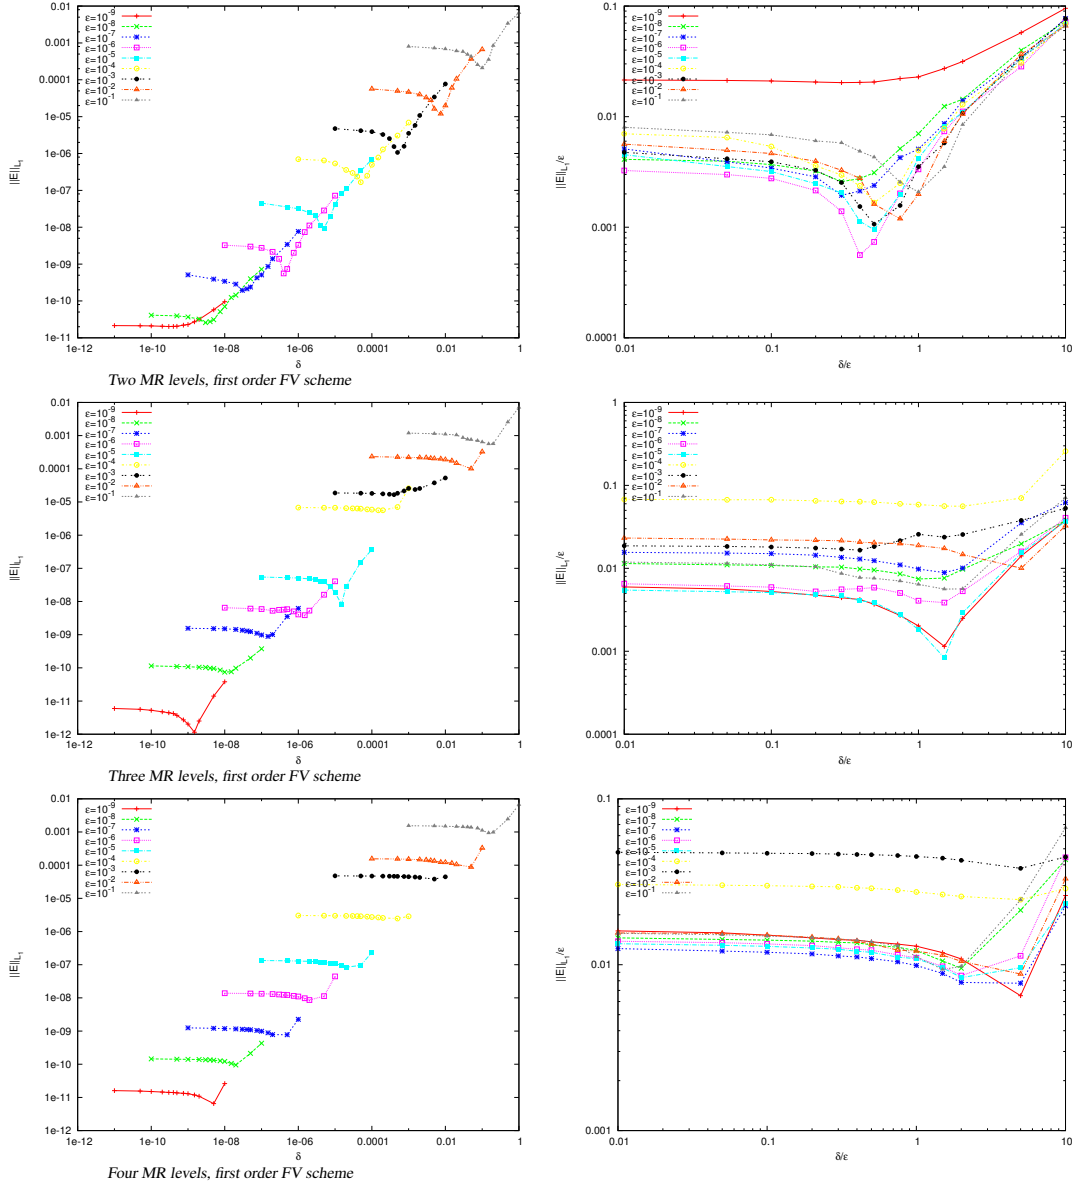


FIGURE 10. Relation between the MR threshold parameter  $\epsilon$  and the threshold  $\delta$  in the adaptive doubling interface (18).  $L_1$  norm of the error with the solution computed on the uniform finest grid at final time. Simple 1D test case (1) with first order FV scheme. Left panels: error as a function of  $\delta$ . Right panels: error/ $\epsilon$  as a function of  $\delta/\epsilon$ , for different numbers of MR levels (top panels:  $L = 2$ , middle panels:  $L = 3$ , bottom panels:  $L = 4$ )

levels and the third order FV scheme. The results are displayed in Figure 11; the value of  $\delta$  minimizing the error is shifted from  $\epsilon$  in the first order case to  $2\epsilon$ .

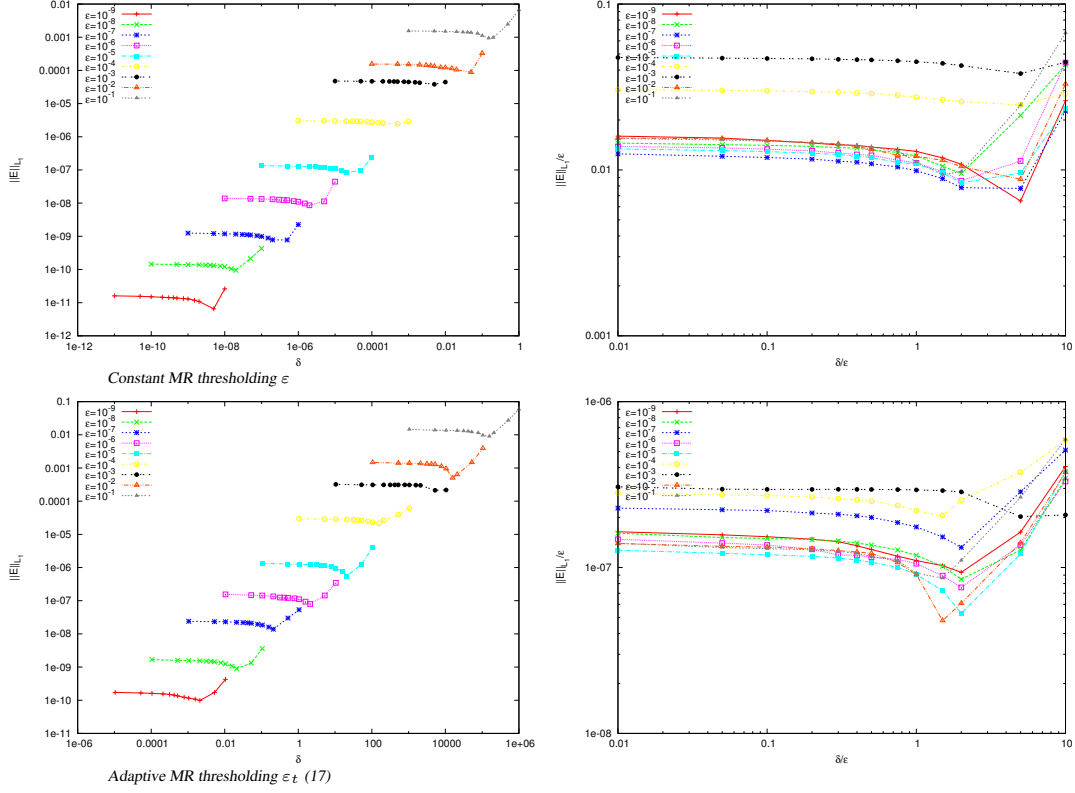


FIGURE 11. Relation between the MR threshold parameter  $\varepsilon$  and the threshold  $\delta$  in the adaptive doubling interface (18).  $L_1$  norm of the error with the solution computed on the uniform finest grid at final time. Simple 1D test case (1), four MR levels, third order FV scheme. Left panels: error as a function of  $\delta$ . Right panels: error/ $\varepsilon$  as a function of  $\delta/\varepsilon$ . Top panels: constant MR threshold  $\varepsilon$ , bottom panels: adaptive MR threshold  $\varepsilon_t$

We then couple the adaptive doubling strategy (18) with the adaptation of the MR threshold to the increasing size of the solution. The same error study as previously is performed, for four MR levels and the third order FV scheme. The results, displayed in the bottom panels of Figure 11, still exhibit that there is an optimal value for  $\delta$ . It seems to be roughly around  $1.5\varepsilon$

After these extensive numerical tests, we are confident that coupling both adaptive thresholds (17) and (18) enables the FVMR strategy to robustly handle doubling flux conditions of type (2).

## 4. APPLICATION TO A BIOLOGICAL MODEL

**4.1. Model and numerical method.** In this section we apply the strategy presented above to the numerical simulation of a biological model dedicated to the cell dynamics in ovarian follicular development introduced in Echenim *et al.* [8] and references therein. The model is multiscale to account for the selection process of ovulatory follicles which involves the cellular, follicular and ovarian levels. At the microscopic level, the granulosa cell population is structured according to the cell age (position within the cell cycle) and the cell maturity (level of sensitivity towards hormonal control). In each ovarian follicle, the granulosa cell population is described by a density function whose changes are ruled by conservation laws. The multiscale structure arises from the formulation of a hierarchical control operating on the aging and maturation velocities as well on the source terms of the conservation law; this control depends on the first moment in the maturity variable of the density. An important feature of the model is that the functional space in cell age  $\times$  cell maturity is subdivided in subdomains corresponding to different cell states: proliferation or differentiation, and sensitivity to FSH. Mitosis is the endpoint of the cell cycle which is completed when the two daughter cells are separated from each other. We refer the interested reader to [2] for a detailed exposition of the motivation underlying the choice of a localized transmission condition of type (2). We also refer the reader to Appendix A for the description of the model in the single follicle case and to [2] for a more general presentation, including a description of the third order numerical scheme designed to handle the discontinuous flux conditions. Here we solely address the coupling of the MR with the FV scheme in the context of a localized or distributed mitosis. Actually we even neglect at this stage the macroscopic scale where the different follicles are coupled through the interaction between the ovaries and the hypothalamus/pituitary complex, former exposed in [1], and only consider the case of a single follicle.

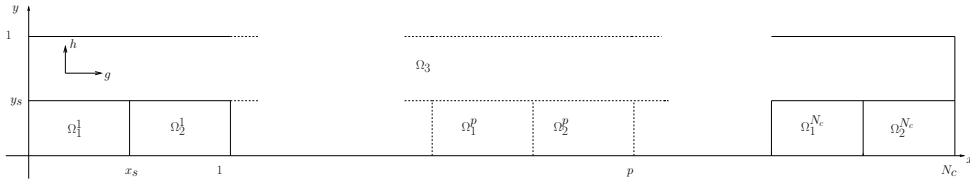


FIGURE 12. *Computational domain for the biological model of follicular development. The cell cycles  $\Omega_1^p \cup \Omega_2^p$ ,  $p = 1, \dots, N_c$  of unit width are periodically reproduced.  $\Omega_1^p$  corresponds to phase G1, while  $\Omega_2^p$  aggregates phases S, G2 and M of the  $p$ th cell cycle*

We use the third order FV scheme designed in [2] and we couple it with the MR strategy on four levels. The domain consists of eight cell cycles with ten meshes in each cycle at the coarsest level in the  $x$  direction, and ten meshes in the  $y$  direction. The CFL number ensuring the stability of the scheme is set to 0.4. The numerical value of the biological constants appearing in definitions 33, 34 and 38 are gathered in Table 2. In the following paragraph we detail a set of numerical experiments which highlight the robustness of our numerical method in this biological setup. We show in particular, that for this standard set of parameters spurious noise will appear at late times of the simulation unless the adaptive strategies presented earlier are used.

Parameter	Description	Value
$U_{\min}$	FSH plasma level (eq. (37)) minimum level	0.075
$U_{\max}$	minimum level	0.15
$c$	slope parameter	2.0
$\bar{M}$	abscissa of the inflection point	4.5
$\bar{\Lambda}$	Apoptosis source term (eq. (35)) intensity factor	1
$\Lambda_w$	half width	0.05
$\bar{\gamma}$	scaling factor	0.1
$y_s$	cellular maturity threshold	0.3
$b_1$	intrafollicular FSH level (eq. (38)) basal level	0.08
$b_2$	exponential rate	2.2482
$b_3$	scaling factor	1450.
$\gamma_1$	Aging function (eq. (33)) rate	0.2
$\gamma_2$	origin	1.0
$c_1$	Maturation function (eq. (34))	0.68
$c_2$		0.08
$\bar{u}$		0.02
$\tau_h$		0.3

TABLE 2. Values of the parameters for the biological model simulations

**4.2. Numerical performances.** The reference solution is computed on the finest level of resolution, comprising 51200 meshes and it takes 540 seconds on a mono processor Apple laptop to reach the final time  $t = 20$ . Snapshots of the solution at representative times are displayed in Figure 13, along with the adaptive mesh corresponding to  $\varepsilon = 0.01$ .

As in the simple test case, we perform simulations with or without time adaptation of the MR threshold (17) and (29), and with or without the adaptive doubling strategy (18). Figure 14 dedicated to snapshots of the solution at  $t = 20$  shows the influence of adaptive thresholds on the spurious noise removal. A zoom of the density computed with the different methods is displayed in the left panels. Both solutions look very similar although if we let the simulation run longer the solution in the bottom panel eventually deteriorates. In the right panels we display the adaptive grid superimposed to the density with a color code adapted to the amplitude of the spurious noise.

We then compute the L1 norm of the relative error (30) as a function of  $\varepsilon$  at different times, corresponding to the snapshots displayed in Figures 13 and 14, with respect to the solution obtained using the uniform finest grid.

In Figure 15 we display the error curves against the MR threshold  $\varepsilon$  (left panel), the CPU gain (center panel) and the memory gain (right panel). The same legend as in Figure 9 is used, and described in Table 1. As in the simple 1D test case, the asymptotic behavior of the error in  $O(\varepsilon)$  is verified, except for extreme values of the threshold parameter  $\varepsilon$ . In the left panels, the error curves corresponding to simulations with the adaptive doubling

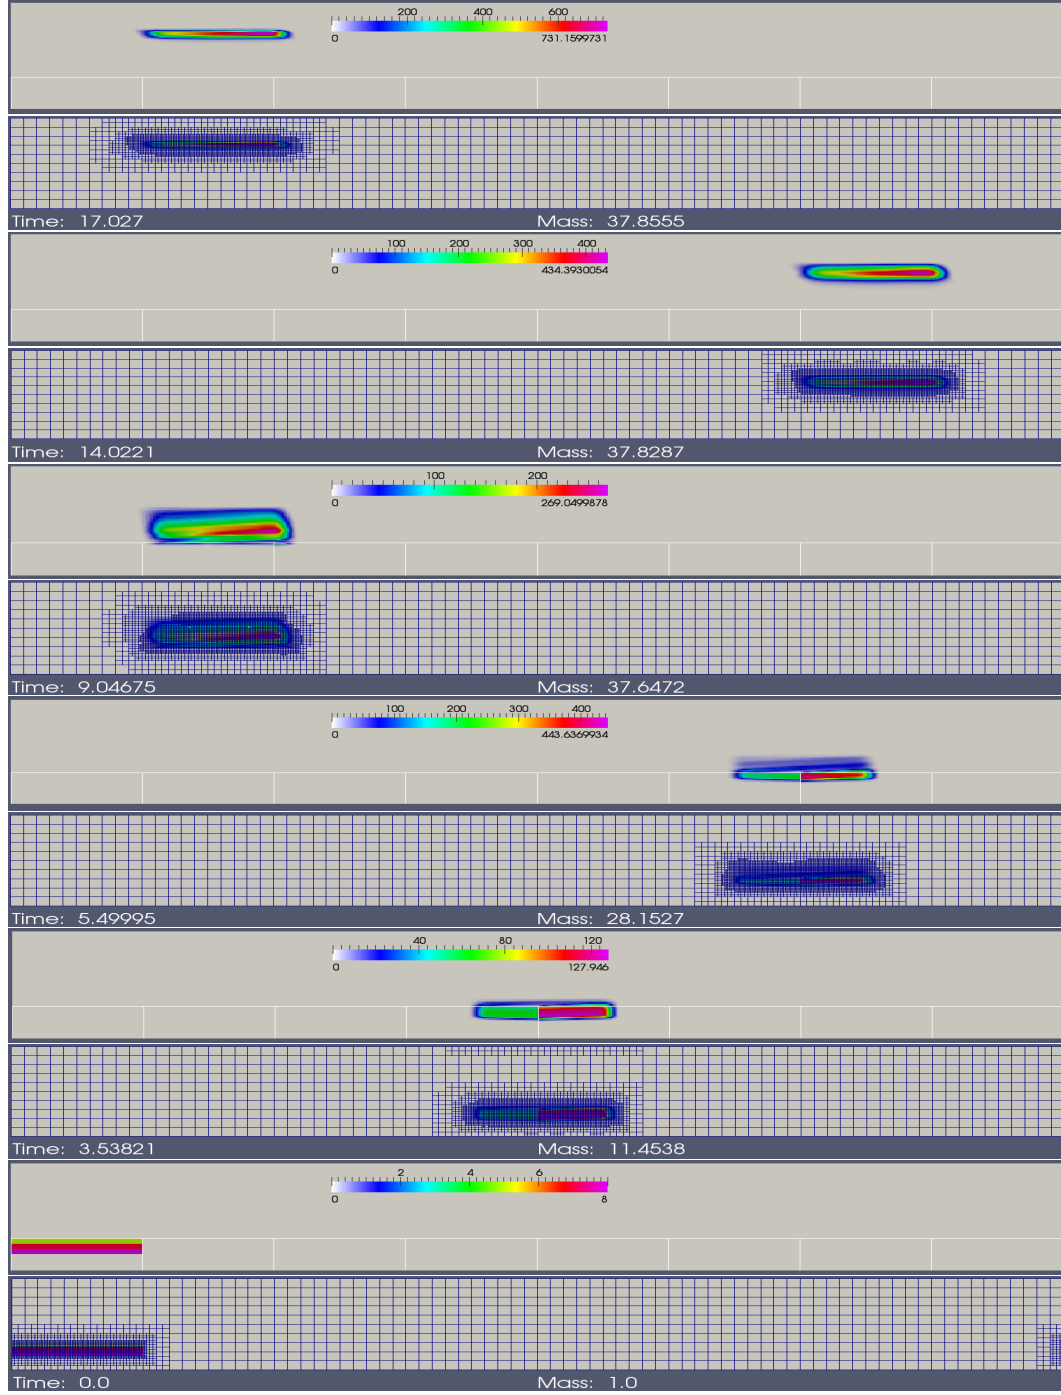


FIGURE 13. Snapshots of the density of granulosa cells computed with the FVMR strategy, adaptive doubling (18) and MR threshold (17), four MR levels, third order scheme,  $\varepsilon = 10^{-2}$ , and biological constants from Table 2. For each time, the adaptive grid is shown below the density, displayed with a time-dependent color code. The boundaries between biological cell cycles are marked with white lines



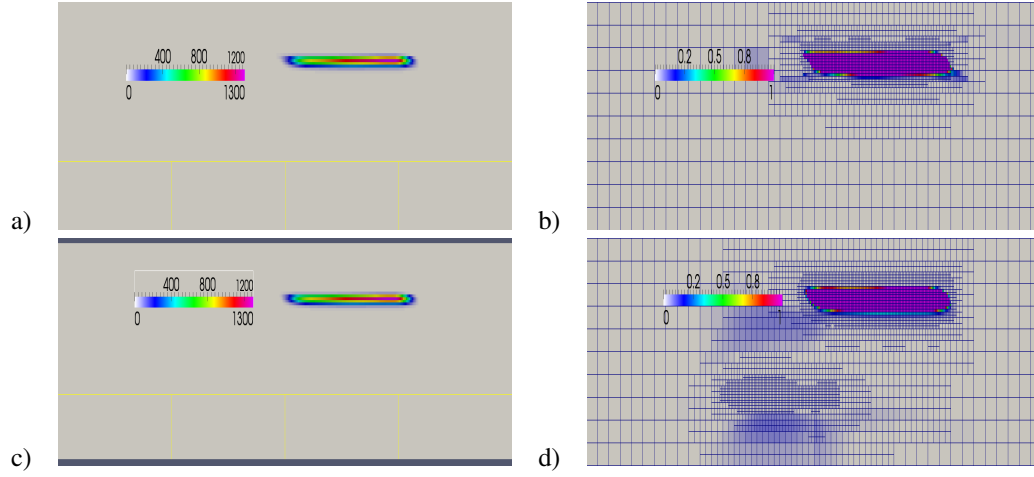


FIGURE 14. Snapshots of the density at final time  $t = 20$ . a-b) with the adaptive doubling (18) and MR threshold strategy (17), c-d) : unconditional doubling and constant MR threshold. b-d) The color code adapted to the initial condition is used in order to highlight the spurious noise. Without the adaptive doubling strategy, the spurious noise appears and triggers additional refinement (bottom part of panel d))

strategy (18) (with red +, blue \* and cyan ■) lie lower than their counterparts without the adaptive doubling strategy (with green ×, pink □ and black ●).

In the center and right panels, the performances of the different algorithms in terms of CPU time and memory requirements are displayed for a given accuracy measured by the relative error (30). The differences between the different strategies are not as spectacular as in the simple test case. Due to the differentiation phenomenon and the associated cell cycle exit, the overall proliferation rate is around 37 at the final time  $t = 20$ , much smaller -by a factor of 200- than in the 1D test case, so that the spurious noise is less important. Nonetheless, for late times, the curves corresponding to the simulation without MR nor doubling threshold adaptation (with green ×) clearly exhibit worse performances than the others. It is also noticeable that as time increases, the range of memory gain shifts to the left. Indeed, the size of the adaptive grid increases, because the density spreads out when it crosses the boundary between the proliferation and differentiation phase. The range of CPU gain also shifts accordingly to the left, since the computing time is directly and almost linearly related to the size of the grid.

The relation between the MR threshold  $\varepsilon$  and the adaptive doubling threshold  $\delta$  is studied in Figure 16, where the relative error with the uniform grid solution is displayed against  $\delta$  for different values of  $\varepsilon$ . Here again an optimal value is clearly visible. The curves in the right panel, where the product  $\varepsilon E(\delta, \varepsilon)$  is displayed against  $\delta/\varepsilon$  are almost all superimposed, except for the two extreme values of  $\varepsilon$ . This corroborates the asymptotic behavior of the MR error in  $O(\varepsilon)$ , which is always verified except if  $\varepsilon$  is too large ( $= 0.1$ ) or too small (in that case the numerical accuracy of the computer penalizes the asymptotic behavior).

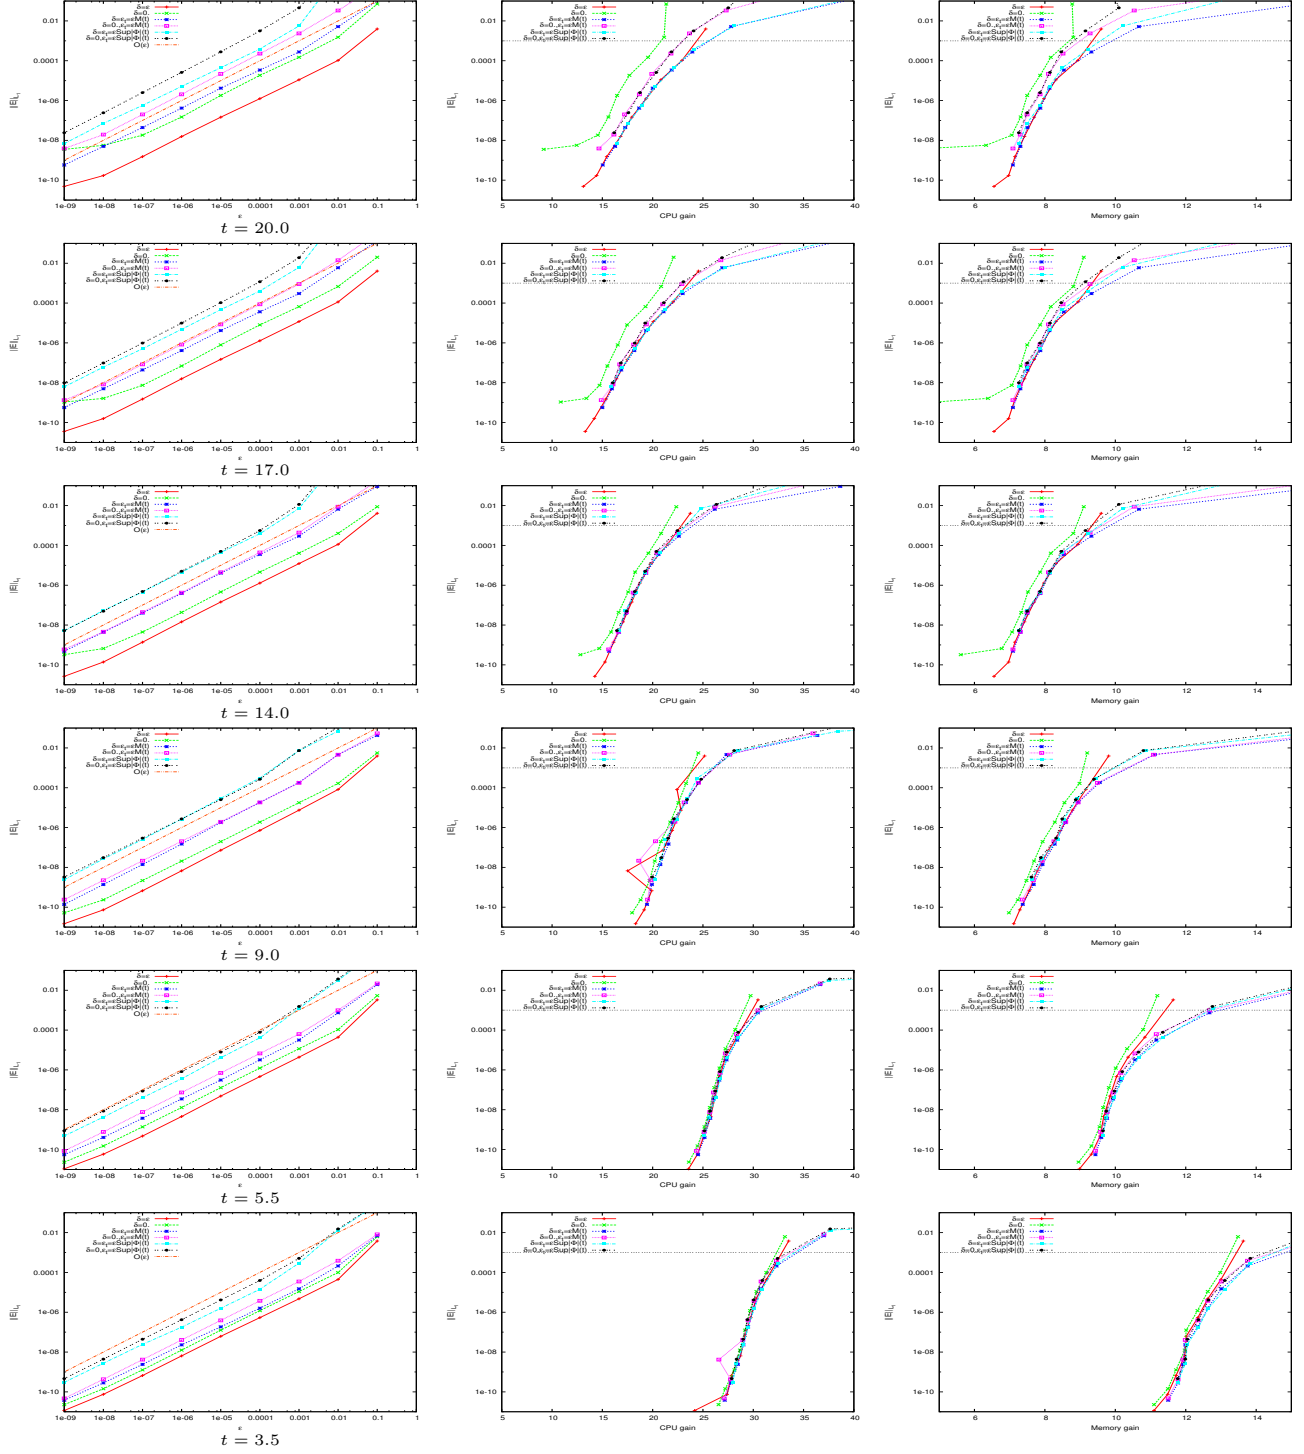


FIGURE 15. L1 norm of relative error (30) at different times, with respect to the MR threshold  $\varepsilon$  (left panel), the CPU gain (center panel) and the memory gain (right panel). Effect of adaptive MR threshold  $\varepsilon_t$  and doubling threshold  $\delta$  in the case of the biological model. The line labeled  $O(\varepsilon)$  in the left panels indicates the theoretical asymptotic behavior of the error as a function of  $\varepsilon$ , the complete legend code is described in Table 1

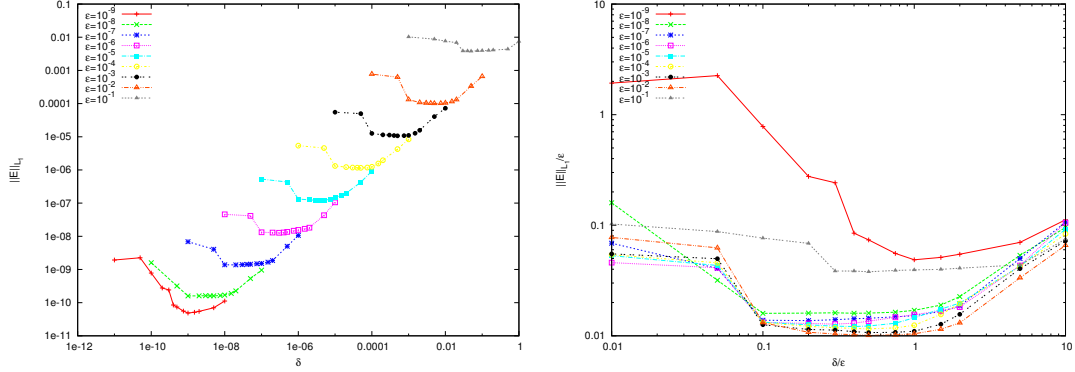


FIGURE 16. Relation between the MR threshold parameter  $\varepsilon$  and the threshold  $\delta$  in the adaptive doubling interface (18).  $L_1$  norm of the error with the solution computed on the uniform finest grid at final time. Biological model, four MR levels, third order FV scheme. Error as a function of  $\delta$  (left), error as a function of  $\delta/\varepsilon$ , error/ $\varepsilon$  as a function of  $\delta/\varepsilon$ , for different values of  $\varepsilon$ . Constant MR threshold  $\varepsilon$

**4.3. Comparison of the two models of mitosis.** We also check the influence of treating the mitosis either in a localized or a distributed manner on the convergence of the MR algorithm with  $\varepsilon$ , this time in the realistic biological context with the 2D dependence of the cell density on age and maturity variables. To make the comparison meaningful, the aging velocity is left constant in time and piecewise constant in age and maturity

$$(31) \quad g(x, y, u) = \begin{cases} \gamma_2 = 1.2 & \text{for } (x, y) \in \Theta_1, \\ 1 & \text{for } (x, y) \in \Theta_2 \cup \Omega_3, \end{cases}$$


instead of using its general closed-loop model formulation (33). We can compute the equivalent distributed linear source term  $B$ , which results in doubling the cell mass after one cell cycle has elapsed

$$B = \frac{2 \ln(2) \gamma_2}{1 + \gamma_2}.$$

In order to reach a realistic mass gain before all cells have left the proliferation stage, we also reduce the time constant of the maturation velocity  $\tau_h = 0.2$ . Figure 17 displays the dependence of the relative error between the adaptive and uniform solutions with respect to the threshold  $\varepsilon$ , the CPU and the memory requirement. The left panels in Figure 17 show that the theoretical behavior in  $O(\varepsilon)$  is observed except for very small values of  $\varepsilon$  where the error estimates reaches the numerical accuracy. The reference solution on the uniform finest grid with 51200 meshes requires 535 seconds of CPU time. The center and right panels show that an average gain of 10 in CPU can be achieved, for a relative error of  $10^{-3}$ , while reducing the memory by a factor of six.

## CONCLUSION

Coupling Multiresolution for adaptive Finite Volume with localized doubling flux conditions results almost systematically in the appearance of spurious numerical noise in long

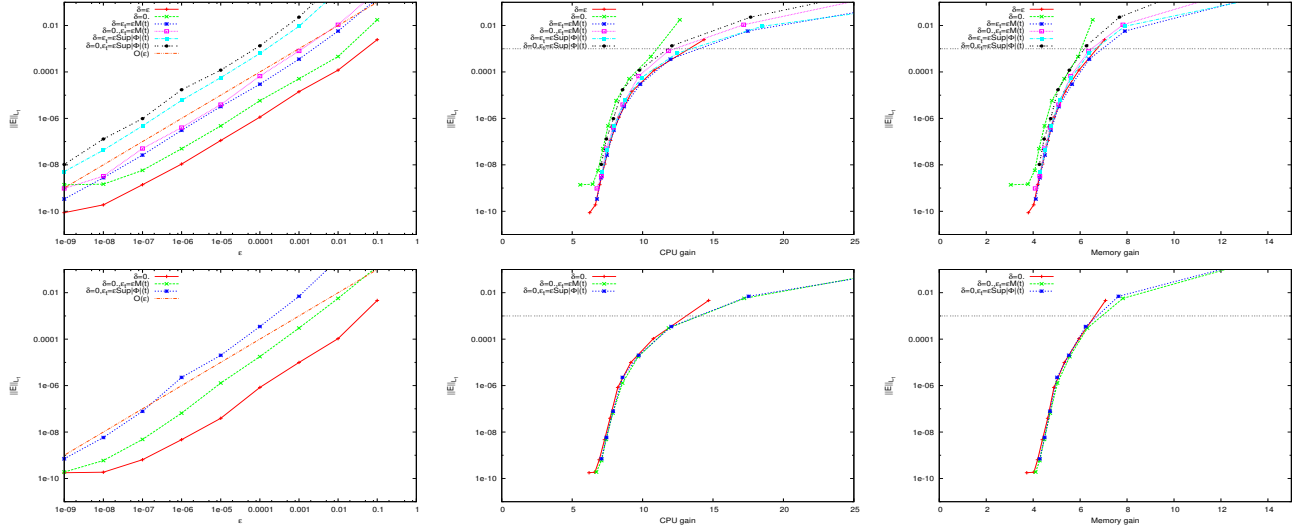

- [7] F. Coquel, M. Postel, and Q. Tran. Convergence of time–space adaptive algorithms for nonlinear conservation laws. *IMA J. Numer. Anal.*, 32:1440–1483, 2012.
- [8] N. Echenim, F. Clément, and M. Sorine. Multiscale modeling of follicular ovulation as a reachability problem. *Multiscale Model. Simul.*, 6(3):895–912, 2007.
- [9] N. Echenim, D. Monniaux, M. Sorine, and F. Clément. Multi-scale modeling of the follicle selection process in the ovary. *Math. Biosci.*, 198(1):57–79, 2005.
- [10] A. Harten. Multiresolution algorithms for the numerical solutions of hyperbolic conservation laws. *Comm. Pure and Applied Math.*, 48:1305–1342, 1995.
- [11] B. Perthame. *Transport Equations In Biology*. Frontiers in Mathematics. Birkhauser Verlag, Basel, 2007.
- [12] P. Shang. Cauchy problem for multiscale conservation laws : Applications to structured cell populations. *J. Math. Anal. Appl.*, 401(2):896–920, 2013. <http://arxiv.org/abs/1010.2132>.

## APPENDIX A. DESCRIPTION OF THE MODEL FOR FOLLICULAR DEVELOPMENT

Since our goal here is the coupling of MR and adaptive doubling strategy the multidimensional aspect of the model is not relevant and we present its scalar version, referring the reader to [2] for instance for a more general presentation. Let us denote  $\phi(t, x, y)$  the density of granulosa cells at time  $t$ , age  $x$  and cell maturity  $y$ . It satisfies the following equation :

$$(32) \quad \frac{\partial \phi(x, y, t)}{\partial t} + \frac{\partial (g(x, y, u(t))\phi(x, y, t))}{\partial x} + \frac{\partial (h(x, y, u(t))\phi(x, y, t))}{\partial y} = -\Lambda(x, y, U(t))\phi(x, y, t),$$

set in the computing domain  $\Omega$  in the  $(x, y)$  plane,

$$\Omega = \{(x, y), 0 \leq x \leq N_c \times D_c, 0 \leq y \leq 1\}$$

where  $N_c$  is the number of cell cycles and  $D_c$  is the duration of one cycle. The domain  $\Omega$  is divided in  $\mathcal{N} = 2N_c + 1$  zones:  $\Omega_1^p, \Omega_2^p$ , for  $p = 1, \dots, N_c$  and  $\Omega_3$ , corresponding to different cell states illustrated in Figure 12 and hence different definitions of the speeds and source terms. Phase  $\Omega_2^p$  in the model aggregates the three latest phases (S, G2, M) of the  $p^{th}$  cell cycle

$$\begin{cases} \Omega_1^p = \{(x, y) \in \Omega, \quad pD_c \leq x \leq (p+1/2)D_c, \quad 0 \leq y \leq y_s\}, & p = 0, \dots, N_c - 1, \\ \Theta_1 = \cup_{p=1}^{N_c} \Omega_1^p \\ \Omega_2^p = \{(x, y) \in \Omega, \quad (p+1/2)D_c \leq x \leq (p+1)D_c, \quad 0 \leq y \leq y_s\}, \\ p = 0, \dots, N_c - 1, & \Theta_2 = \cup_{p=1}^{N_c} \Omega_2^p \\ \Omega_3 = \{(x, y) \in \Omega, \quad y_s \leq y\}. \end{cases}$$

Each cell cycle consists of the  $\Omega_1^p \cup \Omega_2^p$  subdomain and  $\Theta_i$  for  $i = 1, 2$  denotes the disconnected union of the  $N_c$  corresponding phases  $\Omega_p^i$ , for  $p = 1, \dots, N_c$ .

The aging function  $g$  appearing in (32) is defined by

$$(33) \quad g(x, y, u) = \begin{cases} \gamma_1 u + \gamma_2 & \text{for } (x, y) \in \Theta_1 \\ 1 & \text{for } (x, y) \in \Theta_2 \cup \Omega_3 \end{cases}$$

where  $\gamma_1, \gamma_2$  are real positive constants that may depend on the follicle  $f$ .

The maturation function  $h$  is defined by

$$(34) \quad h(x, y, u) = \begin{cases} \tau_h(-y^2 + (c_1 y + c_2)(1 - \exp(\frac{-u}{\bar{u}}))) & \text{for } (x, y) \in \Theta_1 \cup \Omega_3 \\ 0 & \text{for } (x, y) \in \Theta_2 \end{cases}$$

where  $\tau_h$ ,  $c_1$ ,  $c_2$  and  $\bar{u}$  are real positive constants that may depend on the follicle  $f$ . The source term, that represents cell loss through apoptosis, is defined by

$$(35) \quad \Lambda(x, y, U) = \begin{cases} \bar{\Lambda} \exp(-(\frac{(y - y_s)^2}{\bar{\gamma}}))(1 - U) \chi_{\{|y - \gamma_s| \leq \Lambda_w\}}(y) & \text{for } (x, y) \in \Theta_1 \cup \Omega_3 \\ 0 & \text{for } (x, y) \in \Theta_2 \end{cases}$$

where  $\bar{\Lambda}$ ,  $y_s$  and  $\bar{\gamma}$  are real positive constants, and  $\chi_E(y)$  is the characteristic function of subset  $E$ .

The equations in the PDE system (32) are linked together through the argument  $u(t)$  appearing in the speeds  $g(x, y, u)$  and  $h(x, y, u)$  and the argument  $U(t)$  appearing in the source term  $\Lambda(x, y, U)$ .  $U(t)$  and  $u(t)$  represent respectively the plasma FSH level and the locally bioavailable FSH level and depend on the first maturity moment of the density

$$(36) \quad M(t) = \int_0^1 \int_0^{N_c D_c} y \phi(x, y, t) dx dy.$$

The plasma FSH level  $U(t)$  showing up in the arguments of the source term in (32) is defined by

$$(37) \quad U(t) = U_{\min} + \frac{U_{\max} - U_{\min}}{1 + \exp(c(M(t) - \bar{M}))},$$

where  $U_{\min}$ ,  $c$  and  $\bar{M}$  are real positive constants. The locally bioavailable FSH level  $u(t)$  showing up in the arguments of the speeds in (32) is defined by

$$(38) \quad u(t) = \min \left( b_1 + \frac{\exp(b_2 M(t))}{b_3}, 1 \right) U(t)$$

where  $b_1$ ,  $b_2$  and  $b_3$  are real positive constants.

The precise definition of the required transmission conditions along the successive cell cycles of the domain has been formulated in [12]. For each cycle  $p = 1, \dots, N_c$ ,

- the flux on the  $x$ -axis is continuous on the interface between  $\Omega_1^p$  and  $\Omega_2^p$

$$(39) \quad \phi(t, x^+, y) = (\gamma_1 u + \gamma_2) \phi(t, x^-, y), \quad x = (p - 1/2)D_c, \quad 0 \leq y \leq y_s.$$

- The flux is doubling on the interface between  $\Omega_2^p$  and  $\Omega_1^{p+1}$ , which accounts for the birth of two daughter cells from one mother cell at the end of each cell cycle

$$(40) \quad (\gamma_1 u + \gamma_2) \phi(t, x^+, y) = 2\phi(t, x^-, y), \quad x = pD_c, \quad 0 \leq y \leq y_s.$$

- A homogeneous Dirichlet condition holds to the north of the interface between  $\Omega_2^p$  and  $\Omega_3$

$$(41) \quad \phi(t, x, y_s^+) = 0, \quad (p - 1/2)D_c \leq x \leq pD_c.$$

## APPENDIX B. EXAMPLE OF SPURIOUS NUMERICAL NOISE APPEARANCE

We show on a simple example that spurious noise can appear due to doubling transitions and requires refinement on the finest model, while the real discontinuities get smoothed out by the numerical scheme diffusion.

Suppose for instance that at time  $t_n$  the solution is locally almost piecewise constant, with a

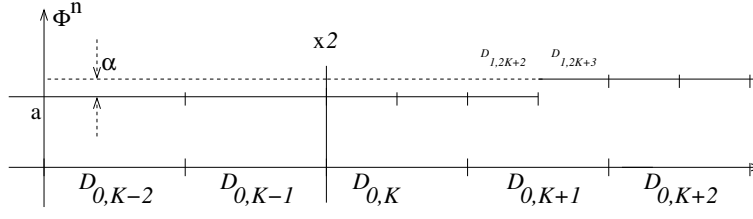


FIGURE 18. Setup for Appendix B. Three level discretization with doubling interface located between meshes  $\mathcal{D}_{0,K-1}$  and  $\mathcal{D}_{0,K}$  on the coarsest level. At time  $t_n$  the solution is piecewise constant with a discontinuity of size  $\alpha$  located between meshes  $\mathcal{D}_{1,2K+2}$  and  $\mathcal{D}_{1,2K+3}$ , resulting in a gradually adaptive grid

small discontinuity in the mesh  $\mathcal{D}_{0,K+1}$  requiring both this mesh and its immediate neighbors to be subdivided, as in Figure 18. To fix ideas, denote by  $\alpha = 4\varepsilon/3$  the size of the discontinuity

$$\begin{aligned} \phi_{0,K-i}^n &= a, \text{ for } i \geq 1 \\ \phi_{1,2K}^n &= \phi_{1,2K+1}^n = \phi_{1,2K+2}^n = a \\ \phi_{1,2K+3}^n &= \phi_{1,2K+4}^n = \phi_{1,2K+5}^n = a + \alpha \\ \phi_{0,K+i}^n &= a + \alpha, \text{ for } i \geq 3 \end{aligned}$$

The details at time  $n$  can be computed

$$\begin{aligned} d_{1,K}^n &= \phi_{1,2K}^n - \left( \frac{1}{8} \phi_{0,K-1}^n + \phi_{0,K}^n - \frac{1}{8} \phi_{0,K+1}^n \right) \\ &= a - \left( \frac{1}{8} a + a - \frac{1}{8} \frac{a + a + \alpha}{2} \right) = \frac{\alpha}{16} \\ d_{1,K+1}^n &= \phi_{1,2K+2}^n - \left( \frac{1}{8} \phi_{0,K}^n + \phi_{0,K+1}^n - \frac{1}{8} \phi_{0,K+2}^n \right) \\ &= a - \left( \frac{1}{8} a + \frac{a + a + \alpha}{2} - \frac{1}{8} (a + \alpha) \right) = \frac{3}{8} \alpha \\ d_{1,K+2}^n &= \phi_{1,2K+4}^n - \left( \frac{1}{8} \phi_{0,K+1}^n + \phi_{0,K+2}^n - \frac{1}{8} \phi_{0,K+3}^n \right) \\ &= a + \alpha - \left( \frac{1}{8} \frac{a + a + \alpha}{2} + a + \alpha - \frac{1}{8} (a + \alpha) \right) = \frac{-\alpha}{16} \end{aligned}$$

We have tested these details against the level dependent threshold (14) and we have found

$$\begin{aligned} |d_{1,K}^n| &= |d_{1,K+2}^n| < \varepsilon_1, \\ \varepsilon_1 &\leq |d_{1,K+1}^n| < \varepsilon_2, \end{aligned}$$

justifying the discretization on the coarsest and intermediate levels. Let us now update the solution at the next time step, using  $\lambda/2 = \Delta t / \Delta x_1$  on the intermediate level and  $\lambda/4 = \Delta t / \Delta x_0$  on the coarsest one (note that to update the solution on mesh  $(1, 2K)$

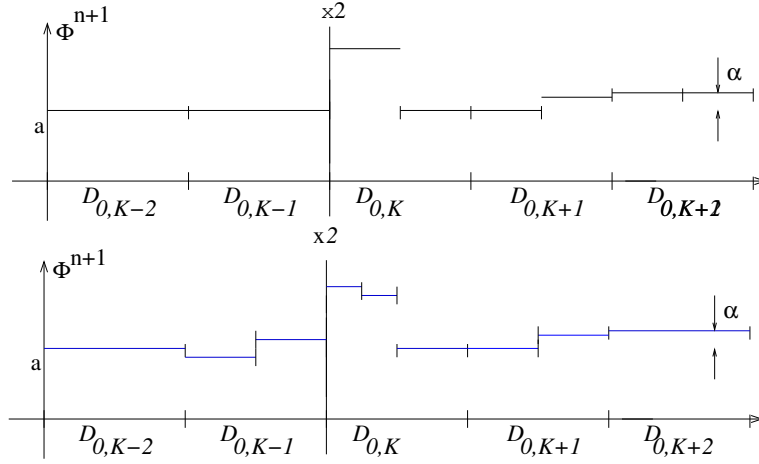


FIGURE 19. Discrete solution in example B. Top panel: updated solution at time  $t_{n+1}$  with formula (42). Bottom panel: solution computed with detail thresholding (43) according to Algorithms 1 and 2

we will need to reconstruct the solution on its neighbor  $\hat{\phi}_{1,2K-1}^n = a$ ). We obtain the following values, also sketched out in the top panel of Figure 19

$$(42) \quad \begin{cases} \phi_{0,K-i}^{n+1} = \phi_{0,K-1}^{n+1} = \phi_{0,K-1}^n - \frac{\lambda}{4}(\phi_{0,K-1}^n - \phi_{0,K-2}^n) = a \\ \phi_{1,2K}^{n+1} = \phi_{1,2K}^n - \frac{\lambda}{2}(\phi_{1,2K}^n - 2\phi_{1,2K-1}^n) = a + \lambda a \\ \phi_{1,2K+1}^{n+1} = \phi_{1,2K+1}^n - \frac{\lambda}{2}(\phi_{1,2K+1}^n - \phi_{1,2K}^n) = a \\ \phi_{1,2K+2}^{n+1} = \phi_{1,2K+2}^n - \frac{\lambda}{2}(\phi_{1,2K+2}^n - \phi_{1,2K+1}^n) = a \\ \phi_{1,2K+3}^{n+1} = \phi_{1,2K+3}^n - \frac{\lambda}{2}(\phi_{1,2K+3}^n - \phi_{1,2K+2}^n) = a + \alpha(1 - \frac{\lambda}{2}) \\ \phi_{1,2K+5}^{n+1} = \phi_{1,2K+4}^{n+1} = \phi_{1,2K+4}^n - \frac{\lambda}{2}(\phi_{1,2K+4}^n - \phi_{1,2K+3}^n) = a + \alpha \\ \phi_{0,K+i}^{n+1} = \phi_{0,K+3}^{n+1} = \phi_{0,K+3}^n - \frac{\lambda}{4}(\phi_{0,K+3}^n - \phi_{0,K+2}^n) = a + \alpha \end{cases}$$

From these updated values we compute the averaged values on the coarsest level

$$\begin{aligned} \phi_{0,K}^{n+1} &= \frac{a + \lambda a + a}{2} = a + a \frac{\lambda}{2} \\ \phi_{0,K+1}^{n+1} &= \frac{a + a + \alpha(1 - \frac{\lambda}{2})}{2} = a + \frac{\alpha \lambda}{2 \cdot 2} \\ \phi_{0,K+2}^{n+1} &= a + \alpha \end{aligned}$$

and the details at time  $n+1$

$$\begin{aligned} d_{1,K}^{n+1} &= \phi_{1,2K}^{n+1} - \left( \frac{1}{8}\phi_{0,K-1}^{n+1} + \phi_{0,K}^{n+1} - \frac{1}{8}\phi_{0,K+1}^{n+1} \right) \\ &= a + \lambda a - \left( \frac{1}{8}a + a + a \frac{\lambda}{2} - \frac{1}{8}(a + \frac{\alpha \lambda}{2 \cdot 2}) \right) = \frac{\lambda a}{2} + \frac{\alpha \lambda}{32} \\ d_{1,K+1}^{n+1} &= \phi_{1,2K+2}^{n+1} - \left( \frac{1}{8}\phi_{0,K}^{n+1} + \phi_{0,K+1}^{n+1} - \frac{1}{8}\phi_{0,K+2}^{n+1} \right) \\ &= a - \left( \frac{1}{8}(a + a \frac{\lambda}{2}) + a + \frac{\alpha \lambda}{2 \cdot 2} - \frac{1}{8}(a + \alpha) \right) = -\frac{a \lambda}{16} - \frac{\alpha \lambda}{4} + \frac{\alpha}{8} \end{aligned}$$



$$\begin{aligned}
d_{1,K+2}^{n+1} &= \phi_{1,2K+4}^{n+1} - \left( \frac{1}{8}\phi_{0,K+1}^{n+1} + \phi_{0,K+2}^{n+1} - \frac{1}{8}\phi_{0,K+3}^{n+1} \right) \\
&= a + \alpha - \left( \frac{1}{8}(a + \frac{\alpha\lambda}{2}) + a + \alpha - \frac{1}{8}(a + \alpha) \right) = \frac{-\alpha\lambda}{32} + \frac{\alpha}{8}
\end{aligned}$$

If we use  $\lambda = 1/2$  and the value  $\alpha = 4\varepsilon/3$  we obtain

$$\begin{aligned}
d_{1,K}^{n+1} &= \frac{-a}{32} \\
d_{1,K+1}^{n+1} &= \frac{a}{4} + \frac{\varepsilon}{48} \\
d_{1,K+2}^{n+1} &= \frac{7\varepsilon}{48}
\end{aligned}$$

we see that as soon as

$$4\frac{47}{48}\varepsilon \leq a < 16\varepsilon$$

for instance say  $a = 4\varepsilon$  we have

$$(43) \quad \begin{cases} \varepsilon_2 \leq |d_{1,K}^{n+1}|, \\ |d_{1,K+1}^{n+1}| < \varepsilon_1, \\ |d_{1,K+2}^{n+1}| < \varepsilon_1, \end{cases}$$

meaning that meshes  $\mathcal{D}_{1,2K}$  and  $\mathcal{D}_{1,2K+1}$  have to be subdivided on the finest level while subdivisions  $\mathcal{D}_{0,K+1}$  and  $\mathcal{D}_{0,K+2}$  have to be aggregated again. The resulting reconstructed solution, obtained after applying Algorithms 1 and 2, is sketched out in bottom panel of Figure 19. This is of course a theoretical situation but it shows nevertheless how some spurious structure requiring fine meshes may appear in an upstream region and be well detached from the support of the genuine solution.