



On the accuracy of equivalent roughness height formulas in practical applications

B. Camenen, M. Larson

► To cite this version:

B. Camenen, M. Larson. On the accuracy of equivalent roughness height formulas in practical applications. *Journal of Hydraulic Engineering*, 2013, 139 (3), p. 331 - p. 335. 10.1061/(ASCE)HY.1943-7900.0000670 . hal-00920719

HAL Id: hal-00920719

<https://hal.science/hal-00920719>

Submitted on 19 Dec 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

On the accuracy of equivalent roughness height formulas in practical applications

Benoît Camenen^{*†} and Magnus Larson[‡]

1 Abstract

2 This paper presents a discussion on the application and accuracy of rough-
3 ness height formulas from a practical point of view. Such formulas have been
4 proposed to describe the equivalent roughness height for plane bed condi-
5 tions based on the Shields parameter. The application of these relationships
6 requires an iterative solution technique. However, as this note demonstrates,
7 the roughness estimates are not always reliable since the application of the
8 formulas yield large discrepancies in the results.

^{*}Corresponding author, benoit.camenen@irstea.fr

[†]IRSTEA, UR HHLY, Hydrology-Hydraulics Research Unit, 3 bis quai Chauveau, CP
220, F-69336 Lyon cedex 09, France

[‡]Dept. of Water Resources Eng., Lund University, Box 118, S-221 00 Lund, Sweden,
E-mail: magnus.larson@tvrl.lth.se

9 **Keywords**

10 Roughness height, friction factor, plane bed, sheet flow, experimental data,
11 predictive formula, iterative formula.

12 **Introduction**

13 Estimating bedload transport is of great importance for engineering design
14 and morphodynamic modelling; yet bedload transport rate predictions are
15 based on insufficient understanding of the resistance to flow in alluvial chan-
16 nels. Although the roughness height or resistance coefficient are quite dif-
17 ficult to estimate, they remain fundamental parameters in bed shear stress
18 and sediment transport calculations. Total resistance to the flow in a river
19 includes grain resistance, bedform resistance, resistance due to lateral and
20 vertical channel irregularities, as well as dissipation due to the solid trans-
21 port (Recking et al., 2008). Meyer-Peter and Müller (1948) introduced a lin-
22 ear decomposition of the total resistance coefficient, which may be rewritten
23 as a linear decomposition of the total bed roughness (Soulsby, 1997; Came-
24 nen et al., 2006).

25 Excluding form drag, the value of the equivalent roughness height k_s still
26 varies considerably depending on the configuration of the grains forming the
27 bed roughness or the dissipation due to sediment transport. If k_s is generally
28 assumed to be proportional to a characteristic bed grain size (Bathurst,

1985), several authors showed a significant increase in k_s when bedload transport occurs, even for coarse sediments (Campbell et al., 2005; Recking et al., 2008). This increase in roughness is often explained for fine sediments by the dissipation of energy in the sheet flow layer that appears for large Shields parameter values (dimensionless bed shear stress defined such as $\theta = RI/[(s - 1)d_{50}]$, with R : hydraulic radius, I : energy slope, s : relative density of the sediment to the fluid, and d : grain size). Sediments move collectively along the bottom mainly in a layer and $k_s \approx \delta_s$, where δ_s is the thickness of the sheet flow layer (Wilson, 1989). This movement induces an effective roughness ratio k_s/d , where d is the grain size diameter, up to 50 (Wilson, 1966; Nnadi and Wilson, 1992; Sumer et al., 1996). Based on a large data set, Recking et al. (2008) found a significant difference in the fit of a logarithmic law for the friction coefficient depending on the presence of sediment movement, which can be described in terms of a roughness, such as the k_s/d -ratio, that varies from approximately 1 for a fixed bed to 3 for a moderate sediment transport rate.

Generally, this phenomenon was expressed using a Shields parameter value θ over a critical value for the upper plane bed regime, where k_s is not only a function of the median grain size d_{50} but also of θ (Wilson, 1966; Nnadi and Wilson, 1992; Yalin, 1992; van Rijn, 1993; Sumer et al., 1996; Bayram et al., 2003; Camenen et al., 2006) or of bedload transport rate, if the latter is assumed to be directly related to the Shields parameter (Meyer-Peter

and Müller, 1948). Most of the formulas were validated for fine sediments and high shear stresses. Sumer et al. (1996) observed that the roughness height may be a function of a dimensionless settling velocity $\varpi_s = W_s/u_*$ (where W_s is the settling velocity and u_* the shear velocity). Camenen et al. (2006) also showed that large values on the effective roughness ratio k_s/d_{50} can be observed for lower values of the Shields parameter. They proposed a new relationship for the critical Shields parameter for the upper plane regime, which is a function of a dimensionless settling velocity $W_{s*} = [(s - 1)^2/(g\nu)]^{1/3}W_s$ (where g the acceleration due to gravity, and ν the kinematic viscosity of the fluid) and a Froude number $Fr = U_c/\sqrt{gh}$ (where U_c the steady current velocity and h the water depth). Then, for a low Froude number and coarse sediment, large effective roughness ratios are also observed. The flow seems to be affected by the bed load transport for these particular cases as much as in the sheet flow transport cases.

However, one important aspect of these previous studies is that all the equations presented in Camenen et al. (2006) have been fitted knowing the total shear stress, since it is directly computed from energy slope measurements. Therefore, in practical applications, as the total Shields parameter is an unknown, these relationships induce an iterative method for the computation of the roughness height and the total Shields parameter. Two main problems may occur: (1) a solution does not always exist depending on the proposed equation (or more than one solution exist), and (2) the

73 iterative approach in itself induces a large discrepancy in the results. The
74 main objective of the present study is to highlight these problems induced by
75 the iterative method. Although similar problems occur for oscillatory flows
76 (Camenen et al., 2009), this paper is dealing with unidirectional flows only.
77 As a consequence, this paper corresponds to an extension to Camenen et al.
78 (2006) dealing with the application of the previously proposed formulas.

79 **Iterative calculation of the roughness height**

80 Since experimental data implicate a relationship where roughness height is
81 a function of the total shear stress, an iterative calculation is needed to
82 compute the roughness. Indeed, from a practical point of view, the Shields
83 parameter θ is an unknown.

84 **Iterative procedure**

The iterative solution can be expressed using the relationship for the friction coefficient (see Eq. 12 in Camenen et al., 2006) and the definition of the Shields parameter (see Eq. 2 in Camenen et al., 2006). Assuming the hydraulic radius R , median grain size d_{50} , relative density of sediments s , and depth averaged velocity U_c as input parameters, the only unknown parameter to estimate the Shields parameter is the roughness height k_s or roughness length $z_0 = k_s/30$. Thus, the Shields parameter can be expressed

as a function of k_s/d_{50} :

$$\theta = F\left(\frac{k_s}{d_{50}}\right) = \left[\frac{\kappa}{(R+z_0)/R \ln((R+z_0)/z_0) - 1}\right]^2 \frac{U_c^2}{(s-1)gd_{50}} \quad (1)$$

Employing the relationships proposed by different authors (Wilson, 1966; Yalin, 1992; van Rijn, 1993; Sumer et al., 1996; Bayram et al., 2003; Camenen et al., 2006), which can be expressed as $k_s/d_{50} = f(\theta)$, equation 1 can easily be solved using an iterative technique. The function f may often be written according to:

$$\frac{k_s}{d_{50}} = f(\theta) = a_1 + a_2\theta^b \quad (2)$$

where a_1 , a_2 and b are constants ($0 \leq a_1 \leq 5$, $1 \leq b \leq 2.5$ and a_2 varies with b and authors; b can also be a function of the settling velocity, shear velocity or/and the Froude number).

The iterative procedure may be summarized as follows:

- fix a first value for k_s : $k_{s,p1} = \alpha d_{50}$ ($\alpha = 2$ may be used assuming skin roughness),
- compute θ_p using Eq. 1 with $k_s = k_{s,p1}$,
- compute a new value for k_s : $k_{s,p2}$ using Eq. 2 with $\theta = \theta_p$,
- while $|1 - k_{s,p1}/k_{s,p2}| > \epsilon$, fix $k_{s,p1} = k_{s,p2}$ and iterate the previous two operations

Of course, the choice of α and ϵ ($\epsilon = 0.01$ was used) may slightly influence the results.

Graphical interpretation of the iterative procedure

It is also possible to graphically represent this iterative procedure. Fig. 1 presents curves of the effective roughness ratio plotted against the total Shields parameter obtained from various equations $k_s/d_{50} = f(\theta)$ and the equation $k_s/d_{50} = F^{-1}(\theta)$ (represents calculation of k_s/d_{50} from the total Shields parameter, see Eq. 1) for two particular cases: figure (a) corresponds to an experimental case from Smart (1984); figure (b) corresponds to an experimental case from Nnadi and Wilson (1992).

Fig. 1 here

In Fig. 1, it can be seen that both functions $f(\theta)$ and $F^{-1}(\theta)$ are increasing functions of θ , but $f(\theta)$ is a convex function, whereas $F^{-1}(\theta)$ is a concave function. In general, this means that either two solutions coexist (*cf.* Fig. 1(a)) or no solution exists (*cf.* Fig. 1(b) for the Sumer *et al.* formula). Another observation is that the similar slopes of these curves ($f(\theta)$ and $F^{-1}(\theta)$) close to the intersection points induces large uncertainties (*cf.* Fig. 1(a) for the formula proposed by Camenen *et al.* or (b) for all formulas). This effect is not as strong for the Wilson formula since the power on θ is not as large as for the other equations (1 compared to 1.5 or 2.5). The iterative method will never induce a better result compared to the fitted curve because the two curves f and F^{-1} are increasing functions of θ . In Fig. 2 are two different situations presented that illustrates this point:

118 1. A slight underestimation is observed using the fitted curve. The ex-
119 perimental point is E_1 with the coordinates $(\theta_1, (k_s/d_{50})_{1e})$. The esti-
120 mated value of (k_s/d_{50}) from the fitted curve is such that $(k_s/d_{50})_{1p} <$
121 $(k_s/d_{50})_{1e}$ (point P_1). From the iterative method (point I_1), the pre-
122 dicted value of θ is necessarily smaller ($\theta_{1i} < \theta_1$). Thus, $(k_s/d_{50})_{1i} <$
123 $(k_s/d_{50})_{1p} < (k_s/d_{50})_{1e}$.

124 2. A slight overestimation is observed using the fitted curve. The ex-
125 perimental point is E_2 with the coordinates $(\theta_2, (k_s/d_{50})_{2e})$. The esti-
126 mated value of (k_s/d_{50}) from the fitted curve is such that $(k_s/d_{50})_{2p} >$
127 $(k_s/d_{50})_{2e}$ (point P_2). From the iterative method, the predicted value
128 of θ is necessarily larger ($\theta_{2i} > \theta_2$). Thus, $(k_s/d_{50})_{2i} > (k_s/d_{50})_{2p} >$
129 $(k_s/d_{50})_{2e}$.

130 *Fig. 2 here*

131 In conclusion, it appears that the iterative method is not very accurate
132 from a practical point of view. A solution does not always exist, and most
133 of the time, two solutions coexist. If there is an error between the data and
134 the fitted curve, it will necessarily be larger after employing the iterative
135 method.

136 Results obtained from the iterative methods

137 Prediction of the roughness height

In order to discuss the iterative method, several empirical formulas for Eq. 2 presented in Camenen et al. (2006) were tested using the same data set for plane bed conditions also introduced in Camenen et al. (2006). In Table 1 are the predictions of equivalent roughness height within a factor of 2 ($P2$ in %) and 5 ($P5$ in %) of the measured values presented for the different formulas, as well as the mean value (mr) and standard deviation (sr) of the ratio $r = k_{s,pred}/k_{s,expe}$. The term “ Er_{log} ” (logarithmic error index, in %) is defined as,

$$Er_{log} = \frac{100}{n} \sum_1^n \left| \log \left[\frac{(k_s/d_{50})_{pred}}{(k_s/d_{50})_{expe}} \right] \right| \quad (3)$$

138 in which n denotes the number of observations. When no solution existed,
139 a value $k_s/d_{50} = 250$ (maximum roughness height ratio observed exper-
140 imentally) was chosen, and when several solutions coexisted, the small-
141 est value was chosen. As a comparison, results using the grain related
142 roughness ($k_s = 2d_{50}$) and a recently published formula by Rickenmann
143 and Recking (2011) are also presented ($U_c/u_* = 4.416(R/d_{84})^{1.904}\{1 +$
144 $[R/(1.283d_{84})]^{1.618}\}^{-1.083}$).

145 *Tab. 1 here*

146 Although good agreement is found towards the data using the exper-
147 imental total shear stress values, the iterative solution for a pair (k_s, θ)

induces large discrepancies in the results. As a matter of fact, the accuracy of the results ($P2$) drops with 10% to 30% depending on the formula used (*cf.* table 1 and Fig. 3). A large increase in Er_{log} and sr is also observed for all the formulas. It clearly appears that the discrepancy of the iterative methods depends mainly on the value of the coefficient b proposed in each formula ($b = 1.0$ for the Wilson formula, $b = 2.5$ for the Sumer *et al.* formula and $b = 1.7$ for the Bayram *et al.* and Camenen *et al.* formulas). Indeed, the larger the coefficient b is, the closer are the two slopes of the functions $F^{-1}(\theta)$ and $f(\theta)$, and the larger the uncertainties induced by the iterative solution. As a result, the obtained k_s/d_{50} values often correspond to the minimum value imposed by the formula (skin roughness). This observation is clearly confirmed by the graphs in Fig. 3. It also explains the relatively better results observed for the Sumer *et al.* formula since there is a higher minimum value ($k_s/d_{50} = 4.5$) when $\varpi = W_s/u_* \leq 0.9$ ($u_* = \sqrt{\tau/\rho}$ is the shear velocity, where τ is the bottom shear stress and ρ the density of the fluid). In Fig. 3, it appears that the Sumer *et al.* and Bayram *et al.* formulas yield unrealistic results corresponding to their minimum value (2 or 4.5 for the Sumer *et al.* formula depending on ϖ) for most of the cases. If the Camenen *et al.* formula yields the best result using the measured Shields parameter, the obtained result from the iterative solution is quite poor and it yields large uncertainties. As many of the experimental cases correspond to a roughness height close to the skin roughness height

170 ($k_s \approx 2d_{50}$), to use the skin roughness height yields nearly as good result as
171 the more complex formulas. The Rickenmann and Recking formula yields
172 slightly better results but very similar as for the skin roughness. No formula
173 gives good predictions for the roughness height when $k_s > 10d_{50}$, but the
174 Wilson formula yields much better results than the other formulas. Finally,
175 the Wilson formula (with a minimum value k_s/d_{50}) produces the best results
176 among the studied formulas, although the scatter is significant.

177 *Fig. 3 here*

178 **Prediction of the total Shields parameter**

179 A comparison between the predicted and the observed value of the Shields
180 parameter shows similar results. A quite large discrepancy is observed for
181 the prediction of the total Shields parameter whatever formula used. Even
182 the Wilson formula, which seems to yield slightly better results for the es-
183 timation of the roughness height, does not produce any improvement for
184 the estimation of the total Shields parameter. The Wilson, Bayram *et al.*,
185 and Camenen *et al.* formulas yield overestimations with relatively large dis-
186 persion in the predictions. The Sumer *et al.* formula, since it gives values
187 for k_s/d_{50} between 2 and 5, presents slightly better results compared to the
188 other formulas. Finally, it appears that using the skin Shields parameter
189 (or the Rickenmann and Recking formula) yields predictions, which are as
190 good as using the other studied formulas, apart for the large values on the

191 Shields parameter, which are underestimated.

192 *Tab. 2 here*

193 Conclusions

194 Many formulas have been proposed to estimate the roughness height in the
195 case of plane beds. All the previous authors proposed equations assuming
196 that the total Shields parameter is already known. Although these formulas
197 present interesting results for the understanding of the physics, and reveal
198 the main factors governing roughness, they are not applicable from an engi-
199 neering point the view. The iterative formulas resulting from these equations
200 yields very large scatter in the results. Finally, the use of the skin Shields
201 parameter produces nearly as good results, apart for large values of the total
202 Shields parameter, which are underestimated. There is thus a strong need
203 for a new method to correctly predict the total Shields parameter for the
204 upper regime where the roughness height is no more a function of the grain
205 size only ($k_s/d_{50} > 5$).

206 Acknowledgments

207 This work was in part conducted under the Inlet Modeling System Work
208 Unit of the Coastal Inlets Research Program, U.S. Army Corps of Engineers,
209 and in part (B.C.) under the sponsorship of the Japanese Society for the

210 Promotion of Sciences.

211 Notation

212 The following symbols and subscripts are used in this paper:

a_1, a_2, b : constants depending on authors for the function f ,

d, d_{50}, d_{84} : sand diameter, median sand diameter and diameter for which 84% of
sediment by weight is smaller, respectively,

Er_{log} : logarithm error index (in %),

f : empirical functions used to estimate k_s/d_{50} ,

F : function of k_s/d_{50} used to calculate the Shields parameter,

Fr : Froude number,

g : acceleration due to gravity ($g = 9.81$ m/s),

213

h : water depth,

I : energy slope,

k_s : roughness height,

mr, sr : mean value and standart deviation ,

$P_{1.2}, P_2, P_5$: predictions within a factor of 1.2, 2 and 5, respectively (in %) of the
measured values,

R : hydraulic radius,

s : relative density of the sediment to the fluid ($s = 2.65$ for silica in water),

- u_* : friction velocity,
- U_c : depth-averaged velocity,
- W_s : settling velocity,
- W_{s*} : nondimensionnal settling velocity ($W_* = (s - 1)^{2/3} / (g\nu)^{1/3} W_s$).
- z_0 : roughness lenght ($z_0 = k_s/30$),
- α : constant used for the first estimation of k_s in the iterative procedure,
- κ : von Karman constant ($\kappa = 0.41$),
- ν : kinematic water viscosity ($\nu = 10^{-6} \text{ m}^2/\text{s}$),
- θ : total Shields parameter due to steady current,
- ϖ_s : suspension parameter ($\varpi_s = W_s/u_*$).

References

- Bathurst, J. C., 1985. Flow resistance estimation in mountain rivers. J. Hydraulic Eng. 111, 625–643.
- Bayram, A., Camenen, B., Larson, M., 2003. Equivalent roughness under sheet flow conditions. In: Proc. Coastal Sediments'03. ASCE, Clearwater Beach, Florida, USA, (CD ROM).
- Camenen, B., Bayram, A., Larson, M., 2006. Equivalent roughness height for plane bed under steady flow. J. Hydraulic Eng. 132 (11), 1146–1158.
- Camenen, B., Larson, M., Bayram, A., 2009. Equivalent roughness height for plane bed under oscillatory flow. Estuarine, Coastal & Shelf Science

225 81, 409–422.

226 Campbell, L., McEwan, I., Nikora, V., Pokrajac, D., Gallagher, M., Manes,
227 C., 2005. Bed-load effects on hydrodynamics of rough-bed open-channel
228 flows. J. Hydraulic Eng. 131 (7), 576–585.

229 Meyer-Peter, E., Müller, R., 1948. Formulas for bed-load transport. In: IInd
230 IAHR Congress. Stockholm, Sweden, pp. 39–64.

231 Nnadi, F. N., Wilson, K. C., 1992. Motion of contact-load particules at high
232 shear stress. J. Hydraulic Eng. 118 (12), 1670–1684.

233 Recking, A., Frey, P., Paquier, A., Belleudy, P., Champagne, J. Y., 2008.
234 Feedback between bed load transport and flow resistance in gravel and
235 cobble bed rivers. Water Resources Res. 44 (W05412), 1–21.

236 Rickenmann, D., Recking, A., 2011. Evaluation of flow resistance in
237 gravel-bed river through a large field data set. Water Resources Res.
238 47 (W07538), 1–22.

239 Smart, G. M., 1984. Sediment transport formula for steep channels. J. Hy-
240 draulic Eng. 111 (3), 267–276.

241 Soulsby, R. L., 1997. Dynamics of marine sands, a manual for practical
242 applications. Thomas Telford, London, UK, ISBN 0-7277-2584 X.

- 243 Sumer, B. M., Kozakiewicz, A., Fredsøe, J., Deigaard, R., 1996. Velocity and
244 concentration profiles in the sheet-flow layer of movable bed. J. Hydraulic
245 Eng. 122 (10), 549–558.
- 246 van Rijn, L. C., 1993. Principles of sediment transport in rivers, estuaries
247 and coastal seas. Aqua Publications, The Netherlands.
- 248 Wilson, K. C., 1966. Bed-load transport at high shear stress. J. Hydraulic
249 Division 92 (11), 49–59.
- 250 Wilson, K. C., 1989. Mobile bed friction at high shear stress. J. Hydraulic
251 Eng. 115 (6), 825–830.
- 252 Yalin, M. S., 1992. River mechanics. Pergamon Press, Oxford.

Table 1: Prediction of the equivalent roughness height within a factor of 2 and 5 of the measured values together with a logarithmic error index, and the mean value and standard deviation of the ratio $r = k_{s,pred}/k_{s,expe}$ for the studied formulas (R. & R.: Rickenmann & Recking) and all data, and data where $(k_s/d_{50})_{expe} > 10$ (influence of the iterative method on the results).

	all data									
	experimental value of θ					iterative method				
Author(s)	<i>P2</i>	<i>P5</i>	<i>Er_{log}</i>	<i>mr</i>	<i>sr</i>	<i>P2</i>	<i>P5</i>	<i>Er_{log}</i>	<i>mr</i>	<i>sr</i>
$k_s = 2d_{50}$	41	73	49	-0.3	0.57			—		
R. & R.	41	81	44	-0.03	0.55			—		
Wilson	57	90	33	0.01	0.45	44	76	50	0.08	0.67
Sumer <i>et al.</i>	54	87	34	-0.09	0.50	45	79	46	-0.09	0.62
Bayram <i>et al.</i>	57	88	34	-0.02	0.47	39	74	53	0.09	0.72
Camenen <i>et al.</i>	74	97	23	-0.01	0.30	36	66	61	-0.01	0.81
	data where $(k_s/d_{50})_{expe} > 10$									
	experimental value of θ					iterative method				
Author(s)	<i>P2</i>	<i>P5</i>	<i>Er_{log}</i>	<i>mr</i>	<i>sr</i>	<i>P2</i>	<i>P5</i>	<i>Er_{log}</i>	<i>mr</i>	<i>sr</i>
$k_s = 2d_{50}$	0	0	120	-1.2	0.23			—		
R. & R.	0	2	80	-0.8	0.25			—		
Wilson	52	70	47	-0.4	0.55	33	53	69	-0.5	0.71
Sumer <i>et al.</i>	29	60	64	-0.6	0.57	4	36	85	-0.8	0.57
Bayram <i>et al.</i>	46	67	52	-0.5	0.54	9	31	91	-0.4	0.54
Camenen <i>et al.</i>	68	96	27	-0.2	0.29	11	30	93	-0.6	0.83

Table 2: Prediction of total Shields parameter within a factor of 1.2 and 2 of the measured values together with a logarithmic error index, and the mean value and standard deviation of the ratio $r = \theta_{pred}/\theta_{expe}$ for the studied formulas (and the skin Shields parameter, as well as the Rickenmann & Recking formula) and all data.

Author(s)	$P1.2$	$P2$	Er_{log}	mr	sr
skin Shields parameter	30	75	22	-0.14	0.28
Rickenmann & Recking	28	80	20	-0.04	0.27
Wilson	31	75	31	0.08	0.68
Sumer <i>et al.</i>	32	78	27	-0.01	0.59
Bayram <i>et al.</i>	30	73	38	0.14	0.77
Camenen <i>et al.</i>	27	67	41	0.07	0.83

(a) (b)

Fig. 1a Fig. 1b

Figure 1: Graphical illustration of the iterative method for two specific cases (experimental data from Smart (a) and Nnadi & Wilson (b)).

Figure 2: Graphical illustration of the iterative method for the two main situations.


experimental value of θ iterative method


(a)	Fig. 3a1	Fig. 3a2
(b)	Fig. 3b1	Fig. 3b2
(c)	Fig. 3c1	Fig. 3c2


Figure 3: Effect on the results using an iterative method for the Wilson (a) (with a minimum value of $k_s/d_{50} = 2$), Sumer *et al.* (b), and Camenen *et al.* (c) formulas.


253 List of Figures


254	1	Graphical illustration of the iterative method for two specific	
255		cases (experimental data from Smart (a) and Nnadi & Wilson	
256		(b)).	19
257	2	Graphical illustration of the iterative method for the two main	
258		situations.	19
259	3	Effect on the results using an iterative method for the Wilson	
260		(a) (with a minimum value of $k_s/d_{50} = 2$), Sumer <i>et al.</i> (b),	
261		and Camenen <i>et al.</i> (c) formulas.	19

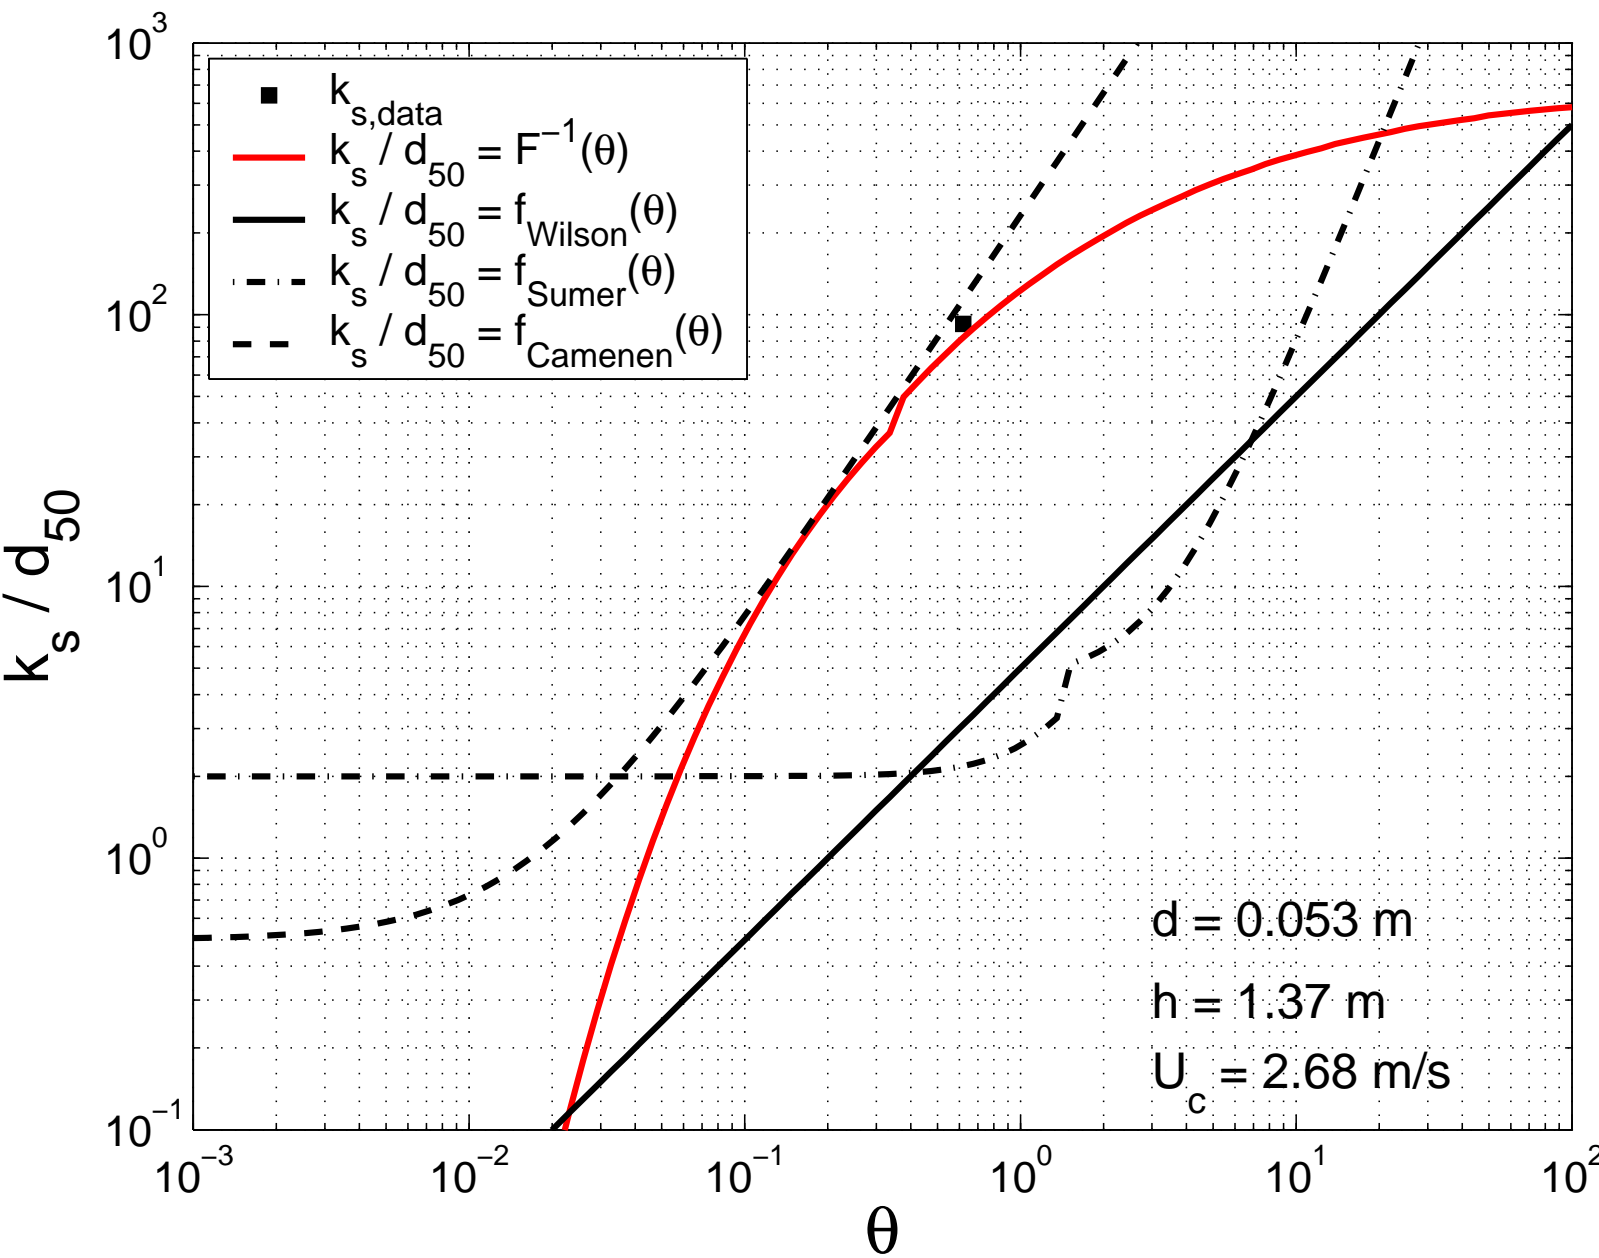


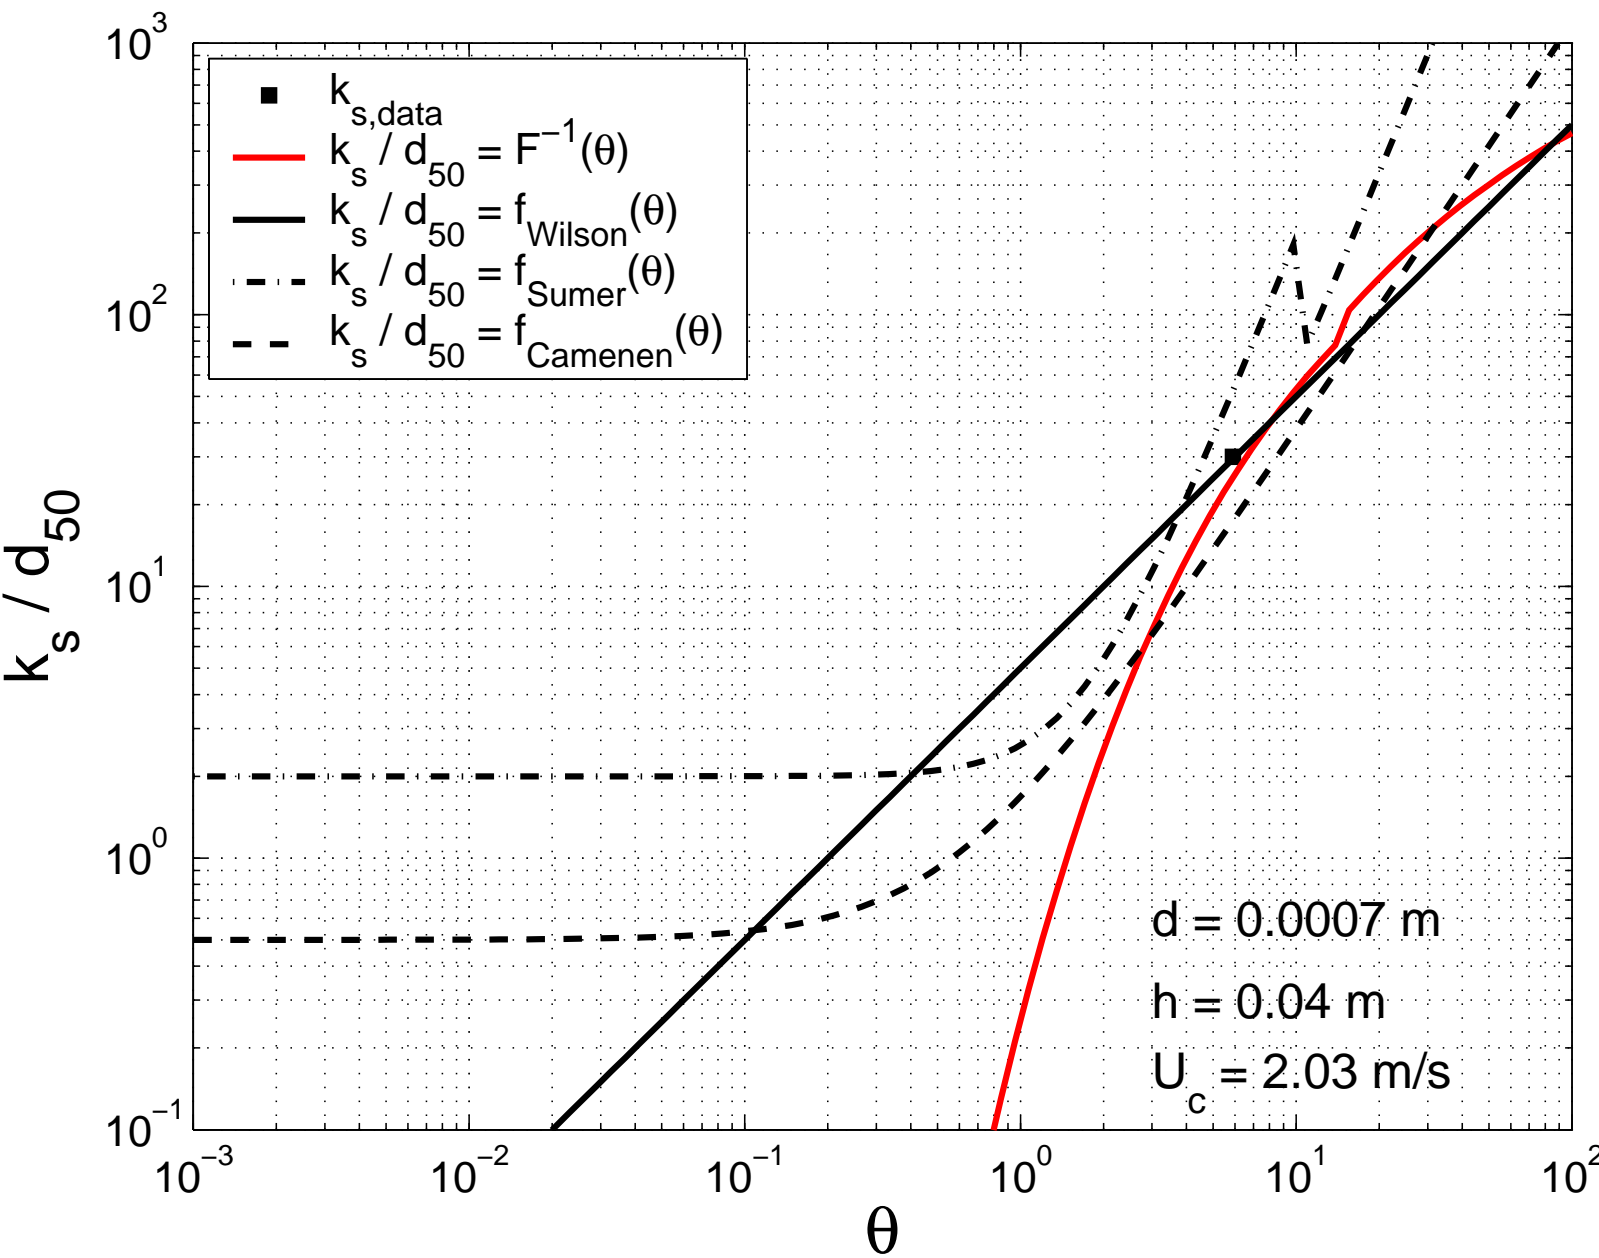


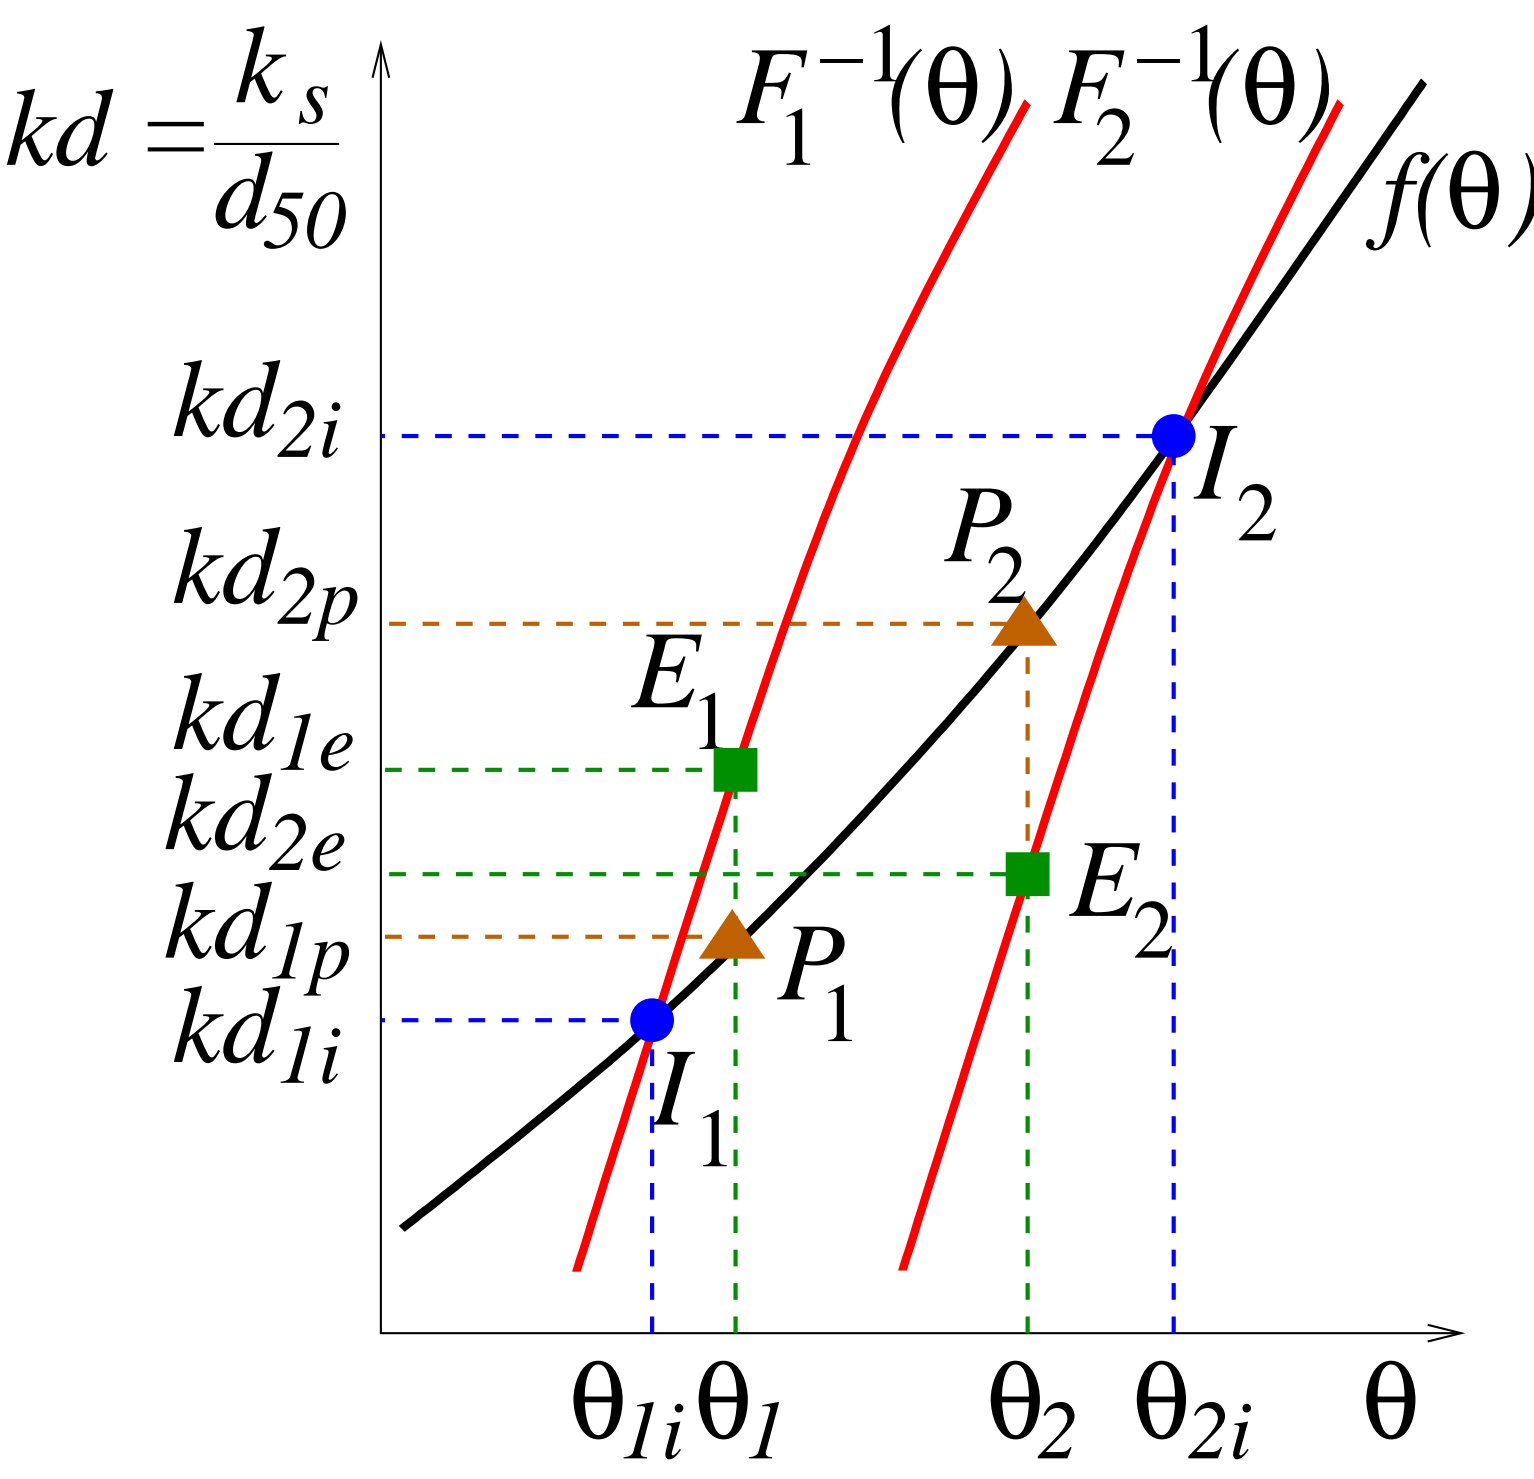


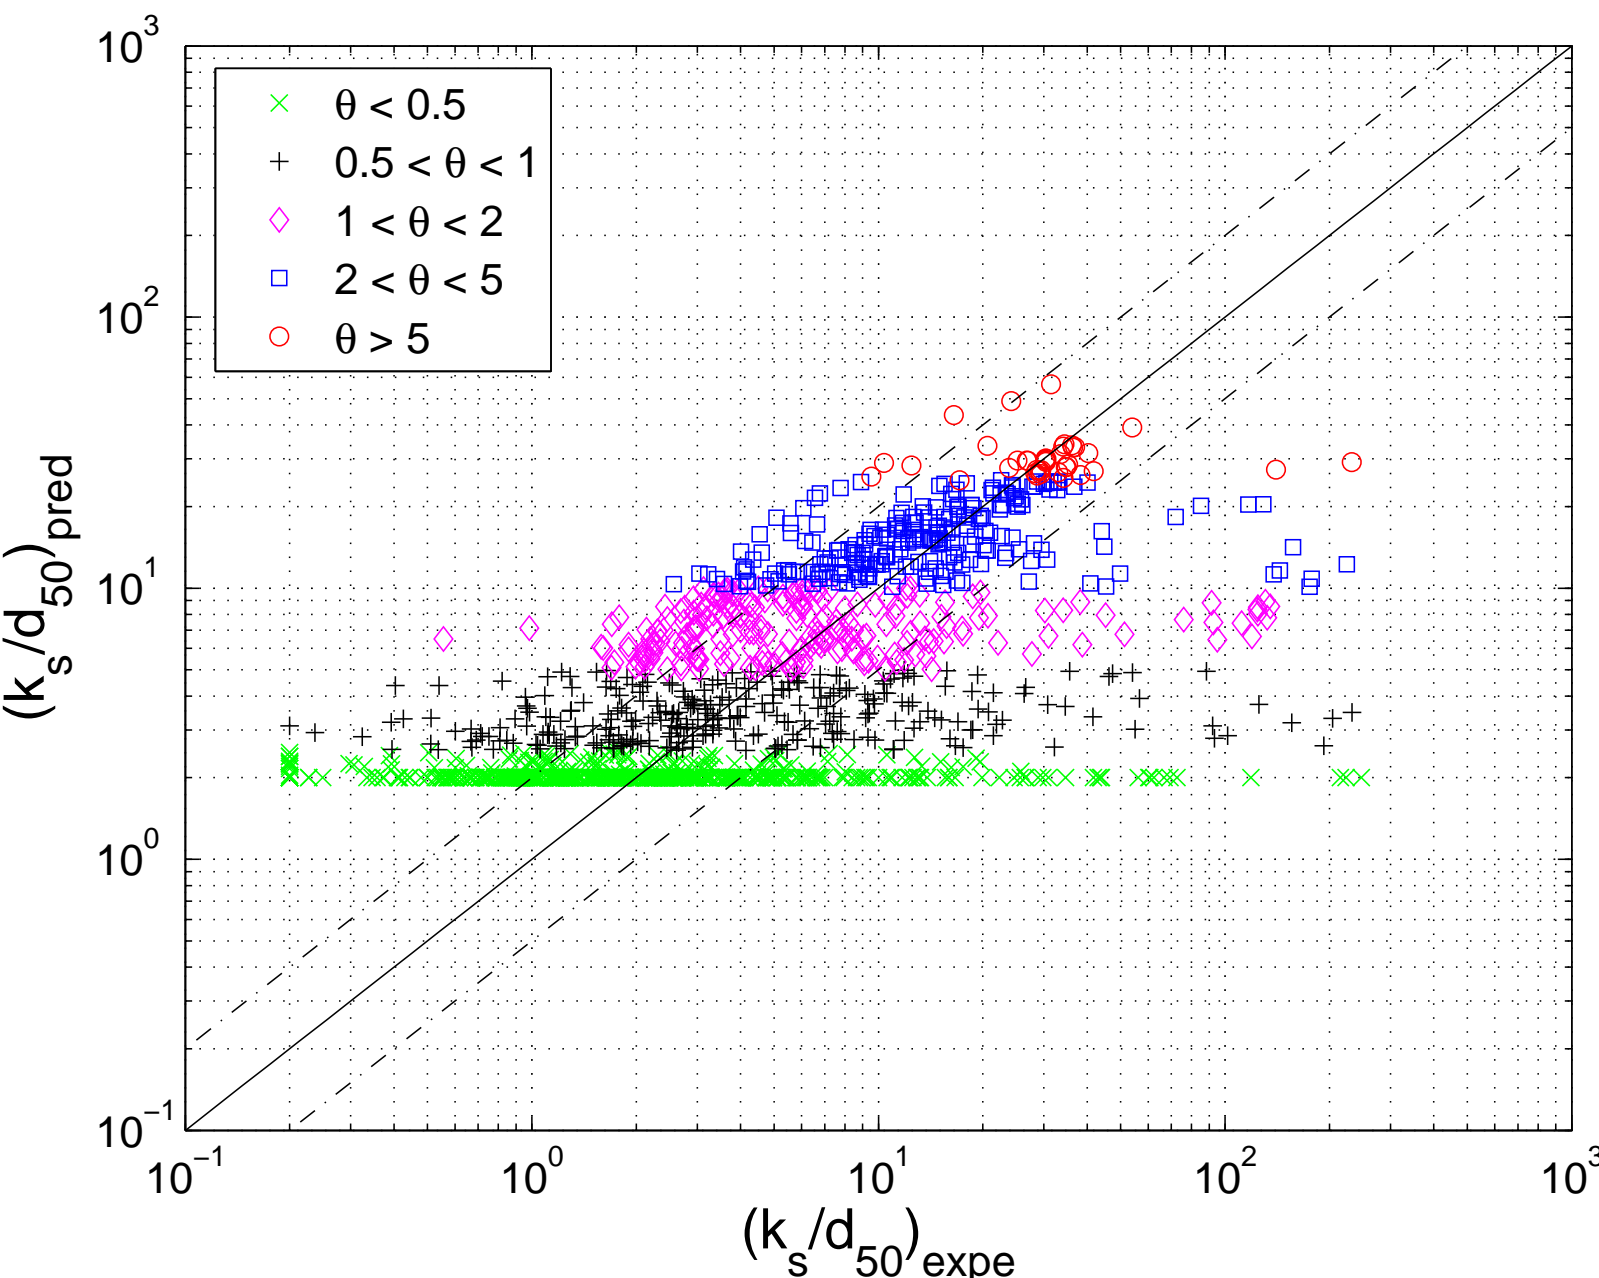


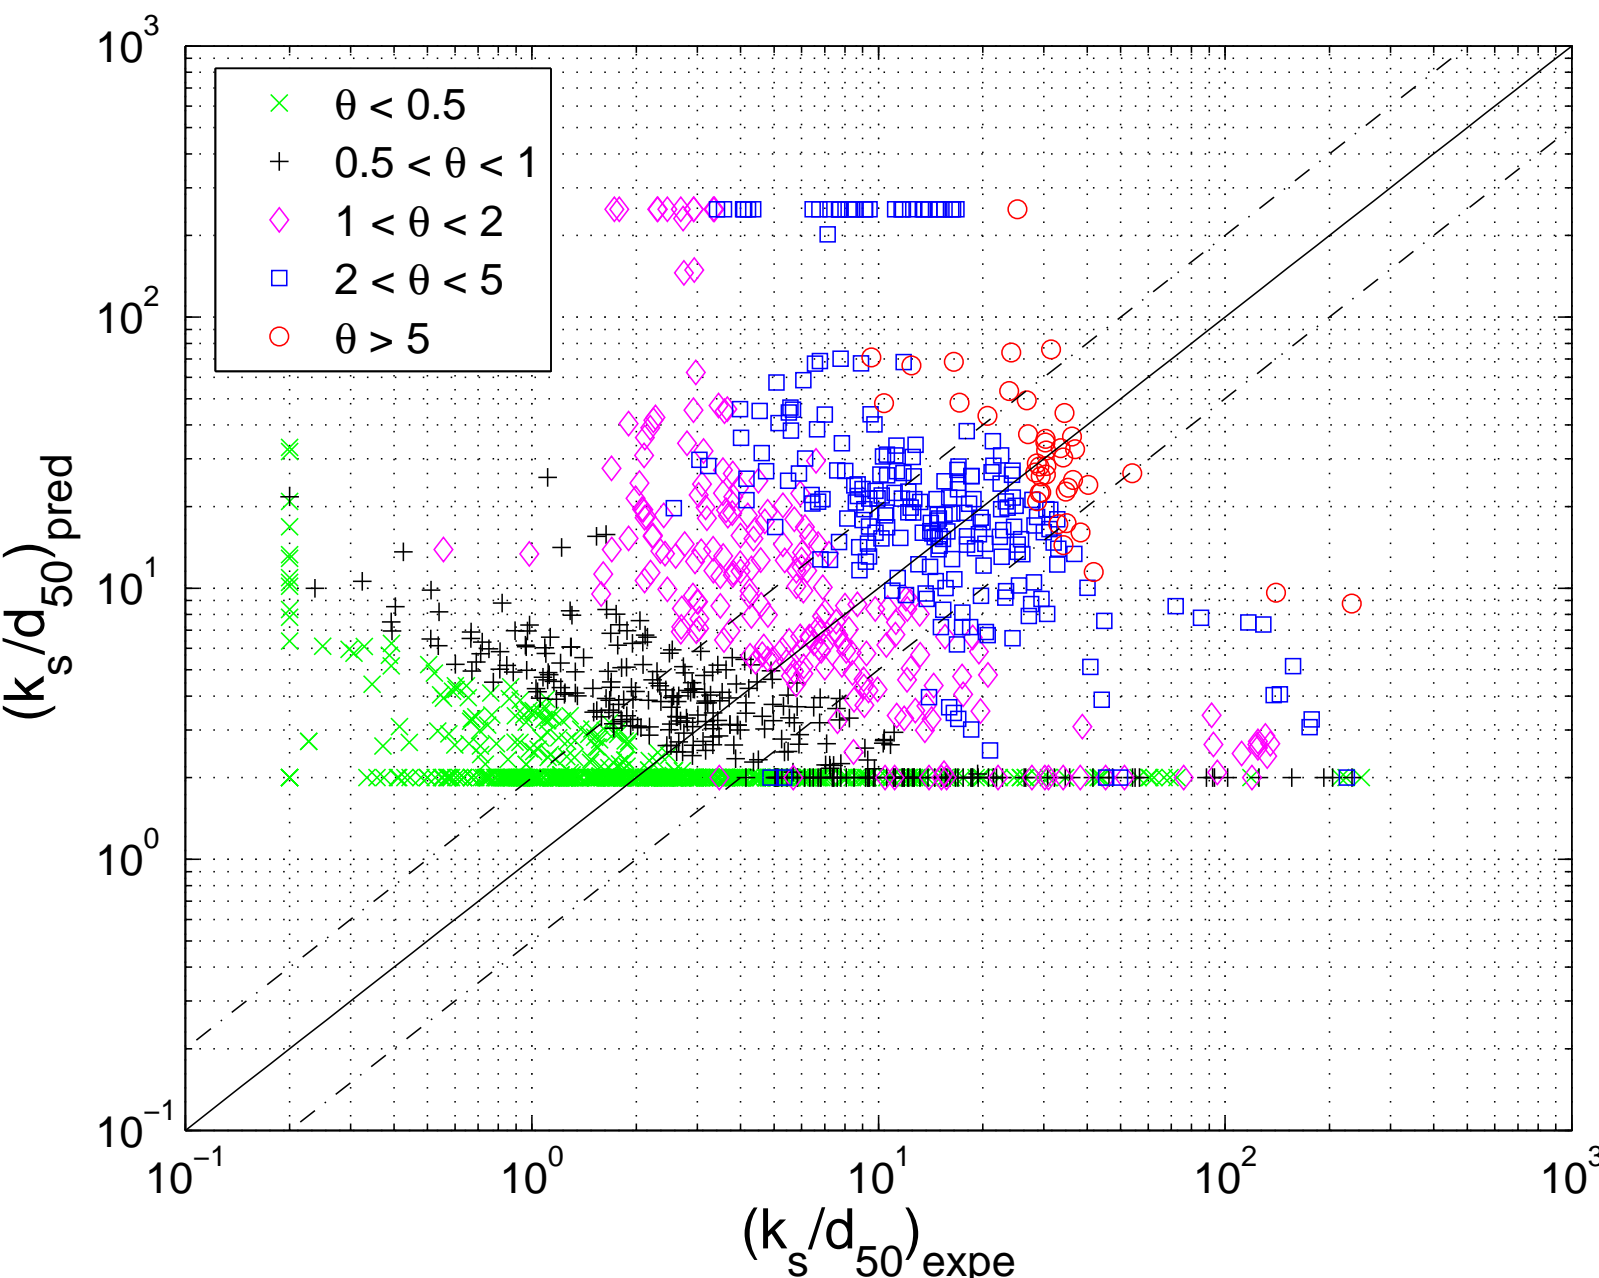

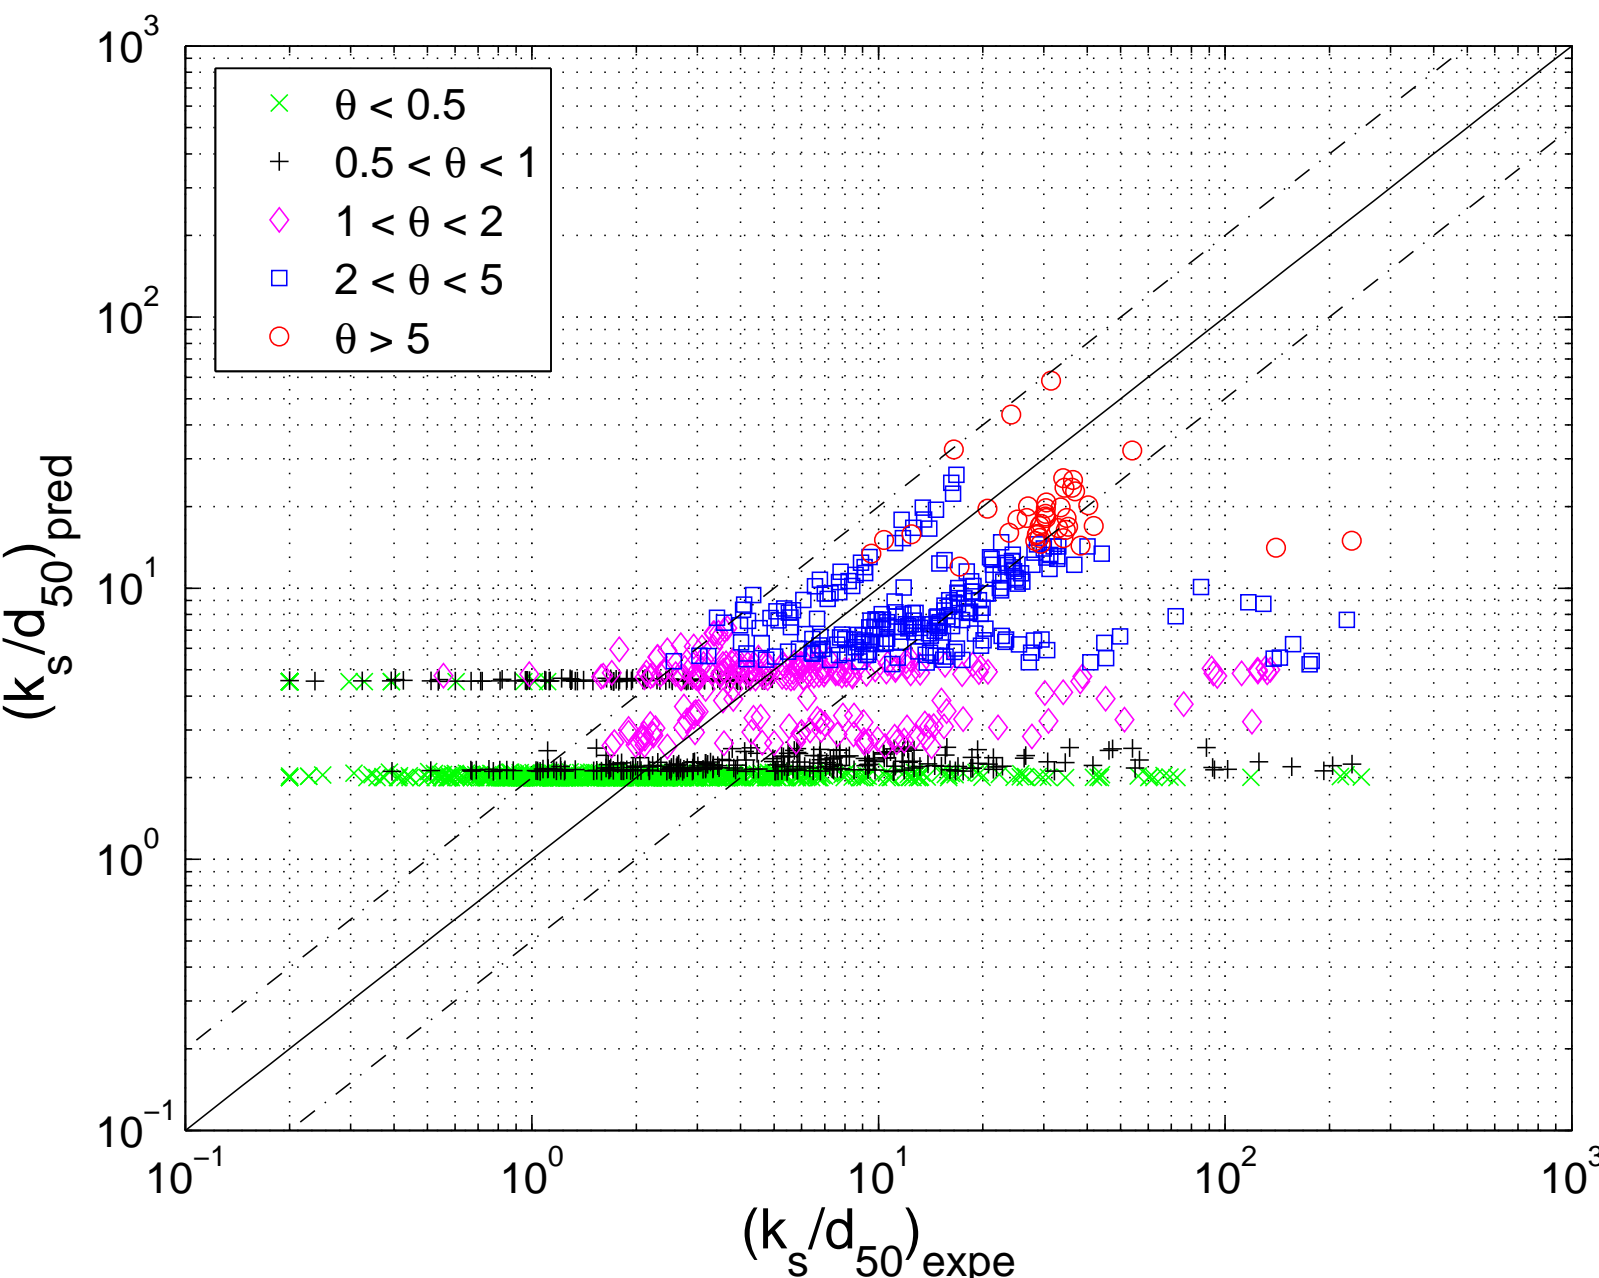

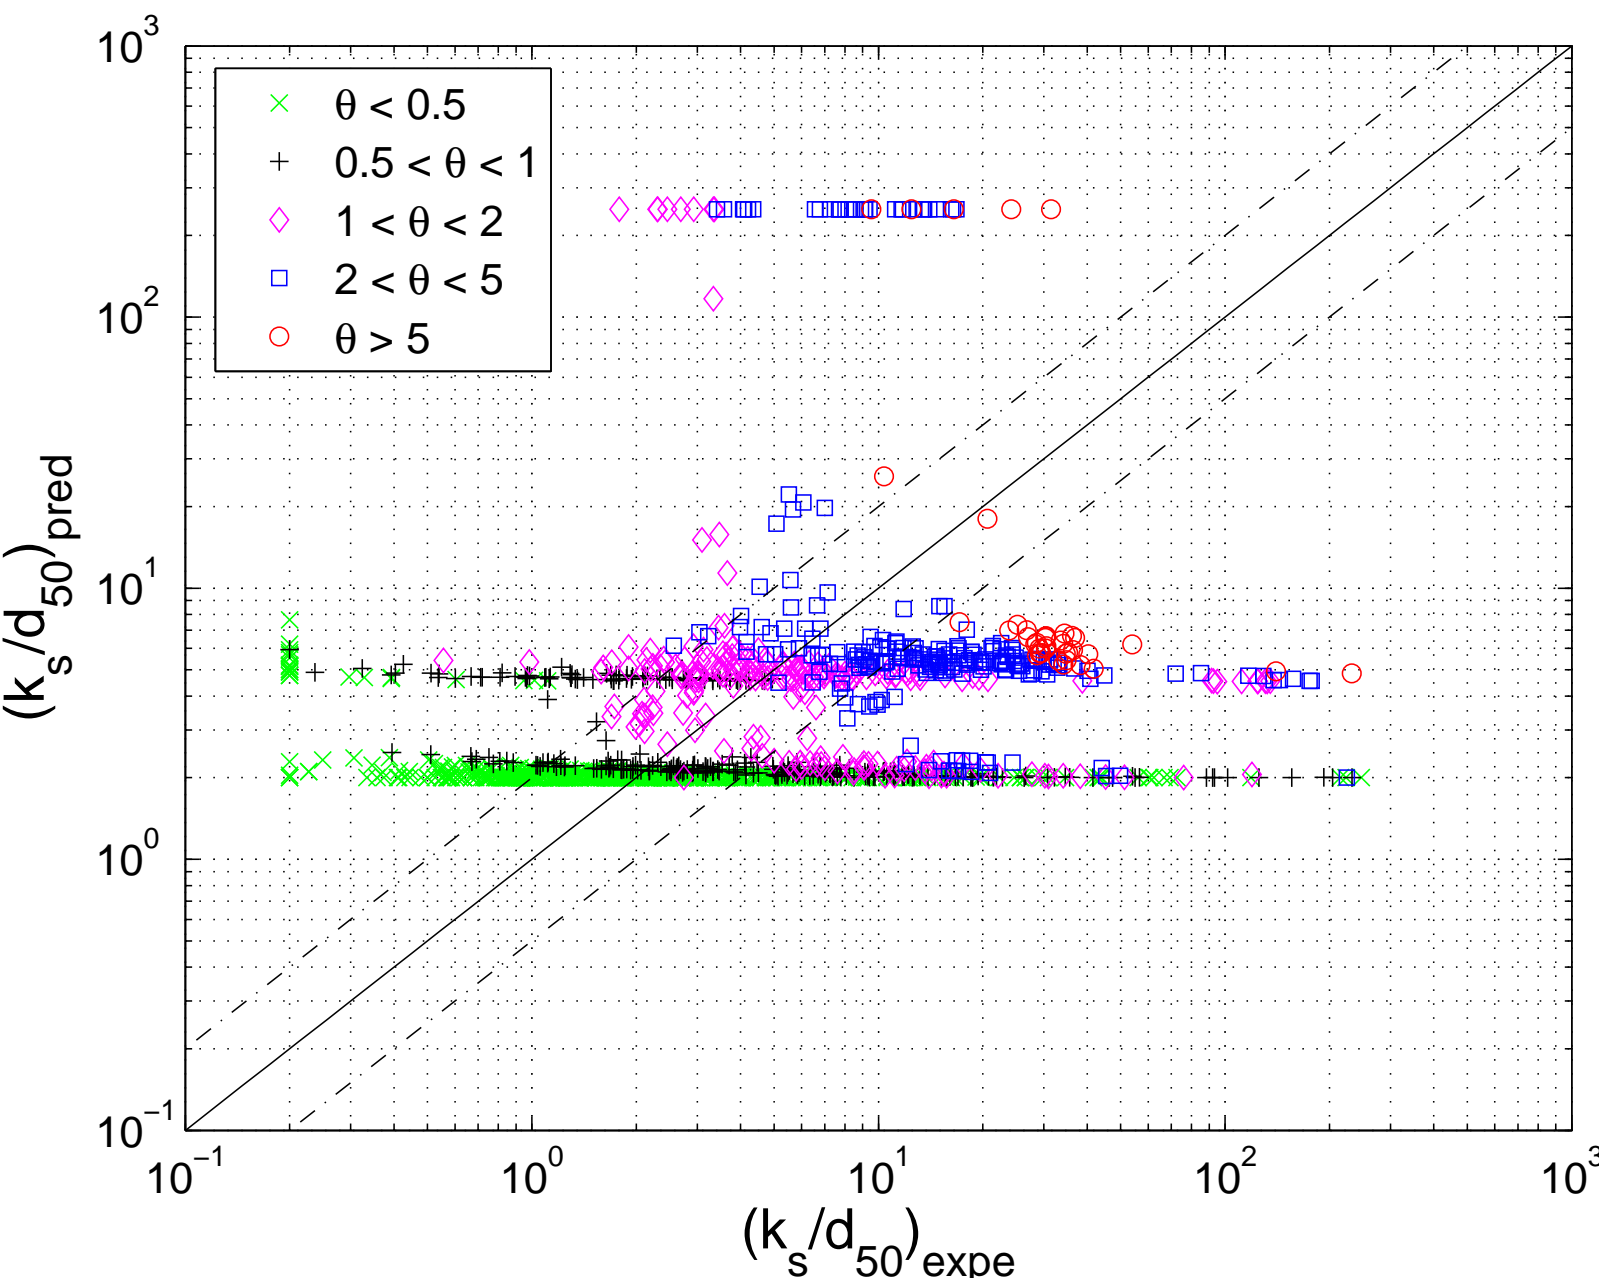

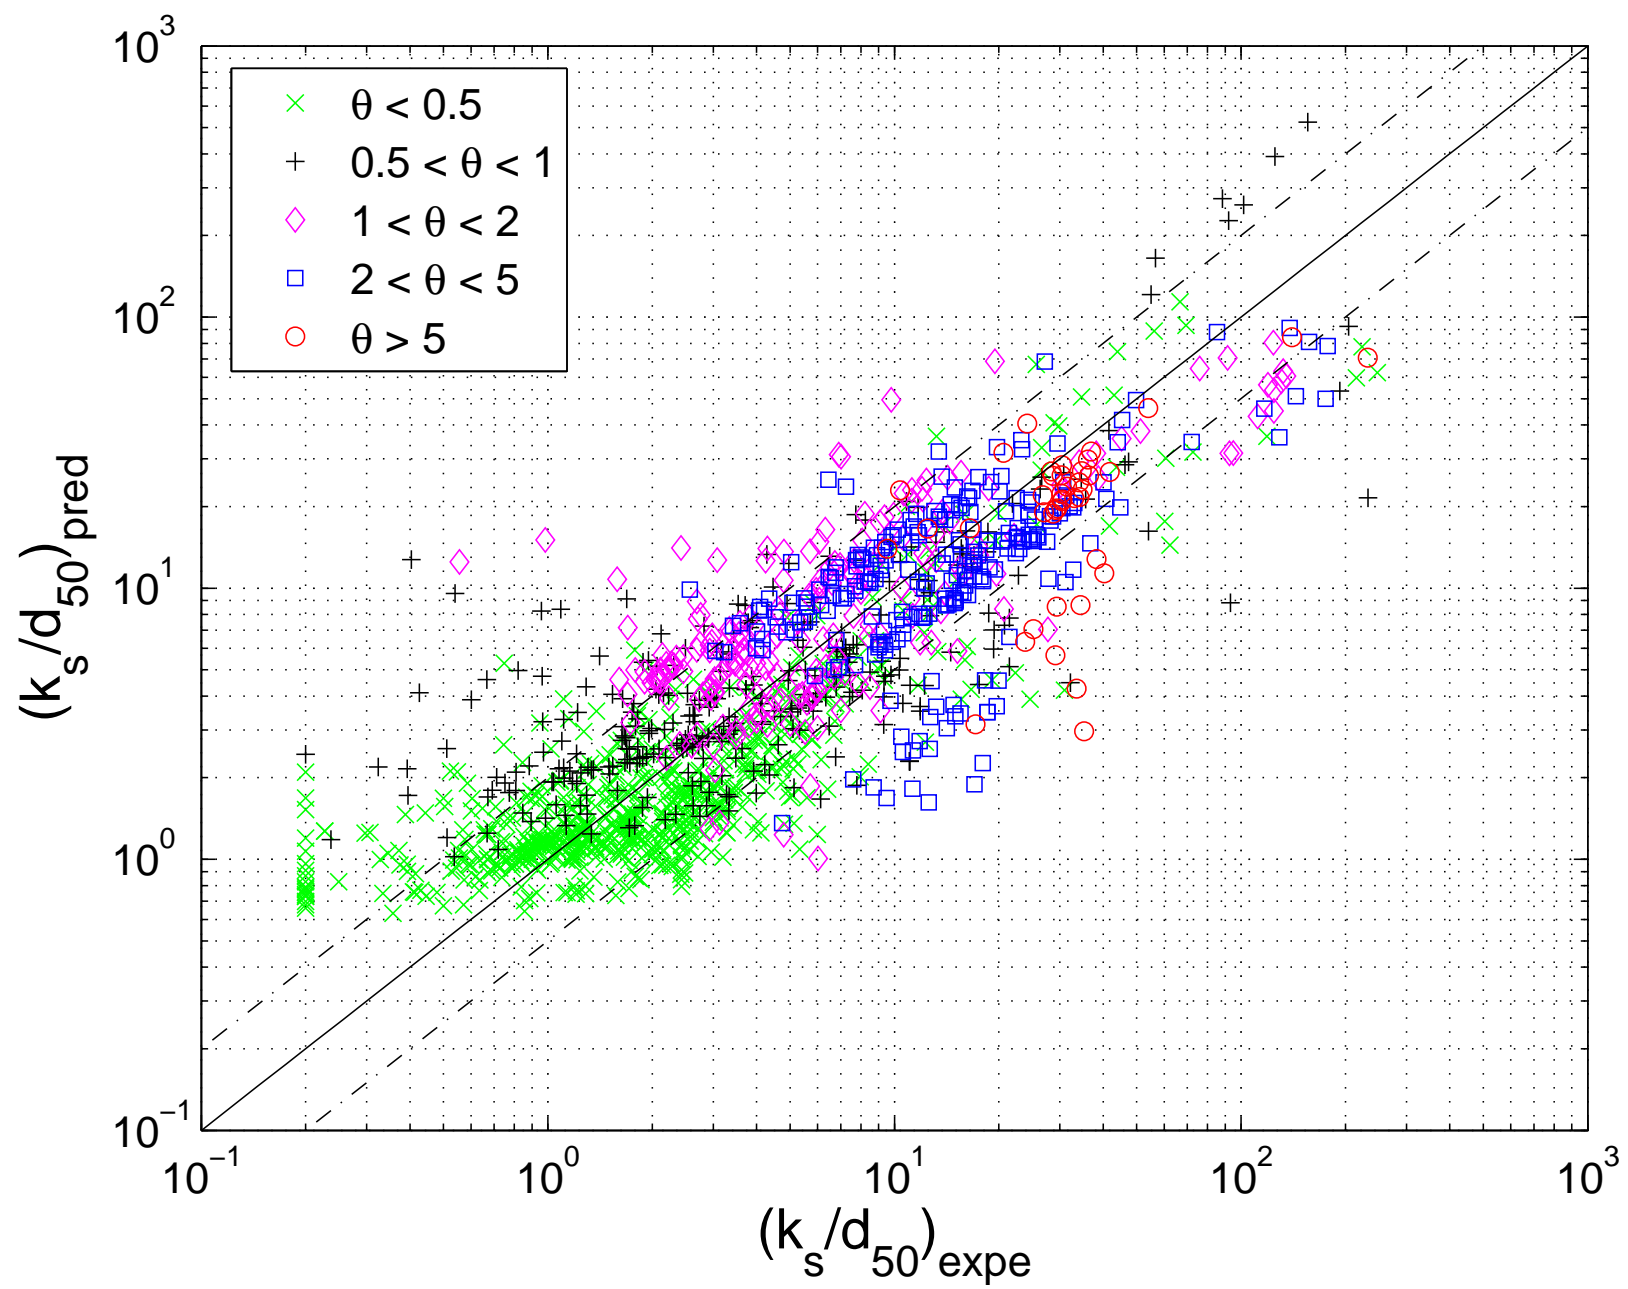

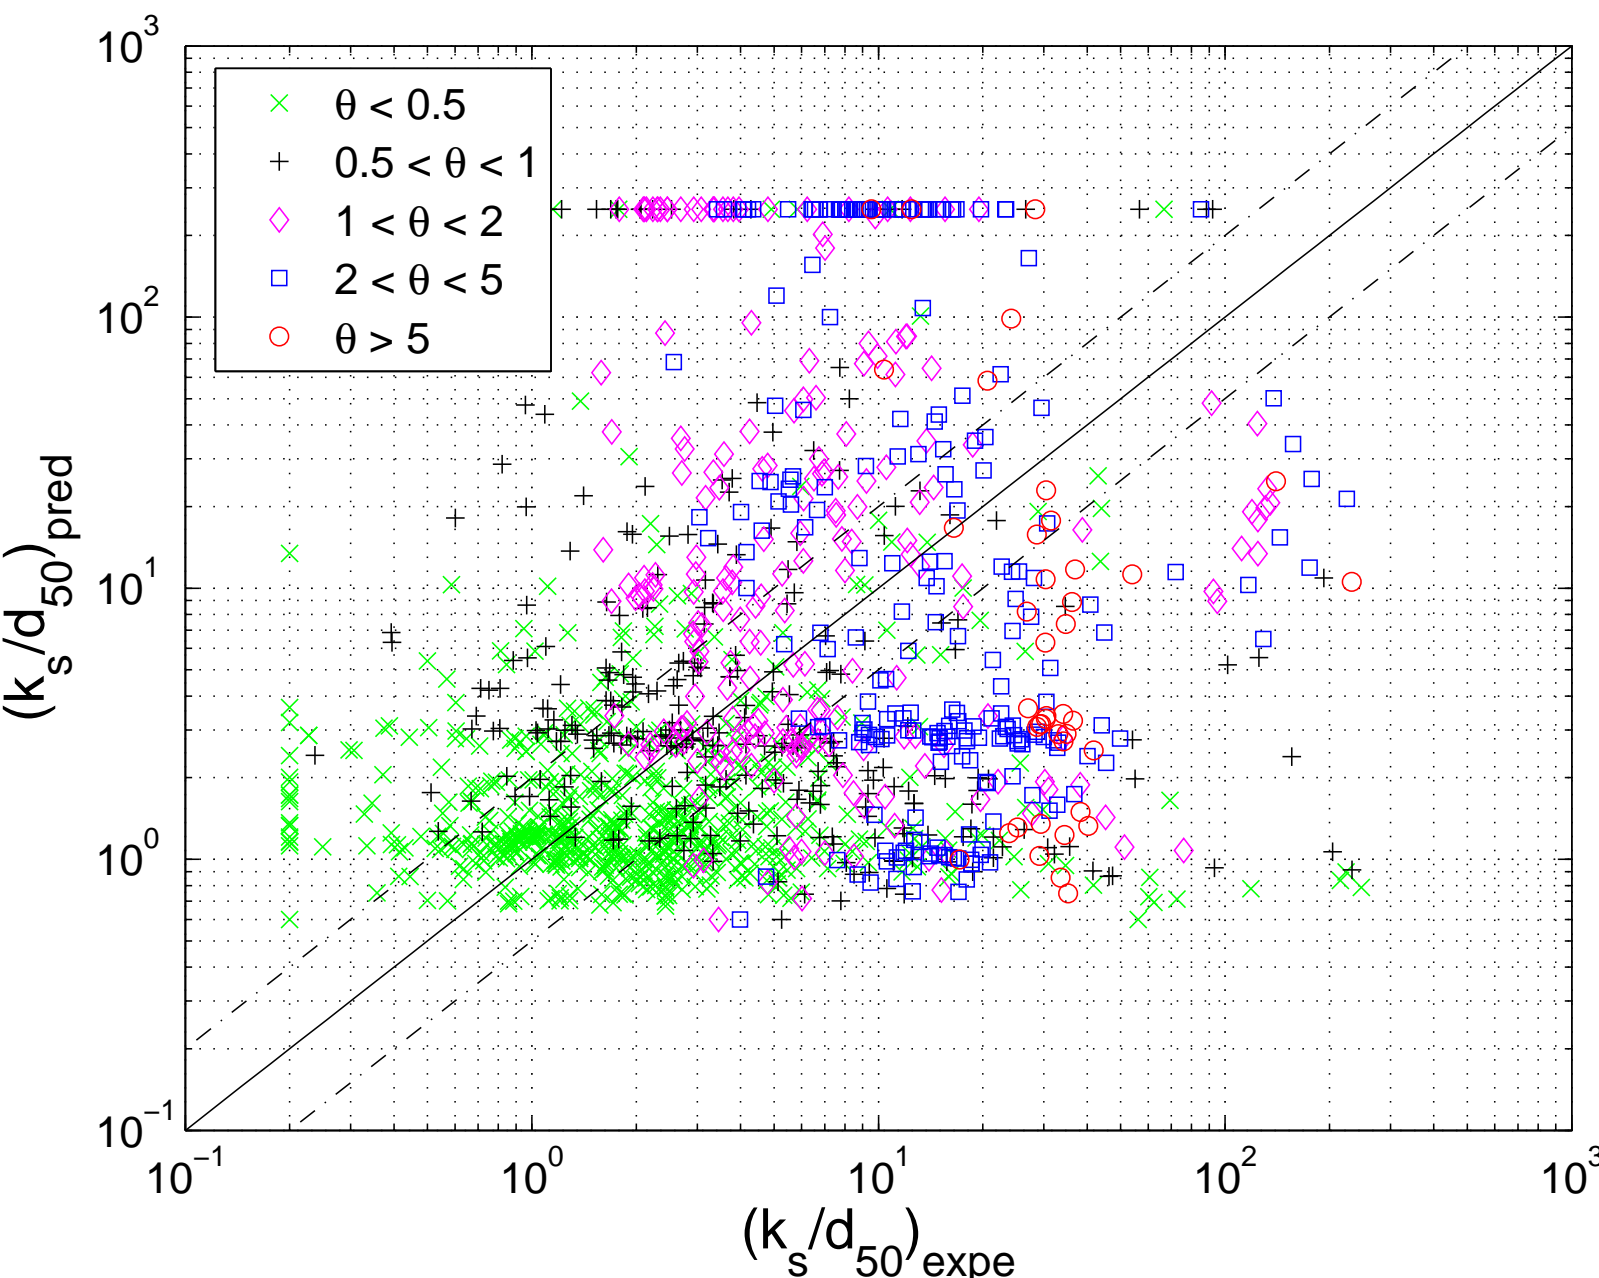



COPYRIGHT TRANSFER AGREEMENT

Manuscript Number:

HYENG 7789

Type:

Technical Note

Publication Title:

On the accuracy of equivalent roughness height formulas in practical applications

Manuscript Authors:

B. CAMENEN, M. LARSON

Corresponding Author, Name and Address:

Benoit CAMENEN, 14421, Iskra
3 bis rue Chauveau CP220 F-69336 Lyon Cedex 05

This form *must* be returned with your final manuscript to: American Society of Civil Engineers, Journals Production Services Dept., 1801 Alexander Bell Drive, Reston, VA 20191-4400.

The author(s) warrant(s) that the above cited manuscript is the original work of the author(s) and has never been published in its present form.

The undersigned, with the consent of all authors, hereby transfers, to the extent that there is copyright to be transferred, the exclusive copyright interest in the above-cited manuscript (subsequently called the "work"), in this and all subsequent editions of this work, and in derivatives, translations, or ancillaries, in English and in foreign translations, in all formats and media of expression now known or later developed, including electronic, to the American Society of Civil Engineers, subject to the following:

* The undersigned author and all coauthors retain the right to revise, adapt, prepare derivative works, present orally, or distribute the work provided that all such use is for the personal noncommercial benefit of the author(s) and is consistent with any prior contractual agreement between the undersigned and/or coauthors and their employer(s).

* In all instances where the work is prepared as a "work made for hire" for an employer, the employer(s) of the author(s) retain(s) the right to revise, adapt, prepare derivative works, publish, reprint, reproduce, and distribute the work provided that such use is for the promotion of its business enterprise and does not imply the endorsement of ASCE.

* No proprietary right other than copyright is claimed by ASCE.

* An author who is a U.S. Government employee and prepared the above-cited work does not own copyright in it. If at least one of the authors is not in this category, that author should sign below. If all the authors are in this category, check here ☐ and sign here: . Please return this form by mail.

SIGN HERE FOR COPYRIGHT TRANSFER (Individual Author or Employer's Authorized Agent (work made for hire))

Print Author's Name:

CAMENEN Benoit

Signature of Author (in ink):

Print Agent's Name and Title:

Signature of Agency Rep. (in ink):

Date:

9th Dec 2011

Note: If the manuscript is not accepted by ASCE or is withdrawn prior to acceptance by ASCE, this transfer will be null and void and the form will be returned to the author.

* Failure to return this form will result in the manuscript's not being published.

Please complete and save this form then email it with each manuscript submission.

Note: The worksheet is designed to automatically calculate the total number of printed pages when published in ASCE format.

Journal Name:		Manuscript # (if known):	
Author Full Name:		Author Email:	

The maximum length of a technical paper is 10,000 words and word-equivalents or 8 printed pages. A technical note should not exceed 3,500 word-equivalents in length or 4 printed pages. Approximate the length by using the form below to calculate the total number of words in the text, adding it to the total number of word-equivalents of the figures and tables to obtain a grand total of words for the paper/note to fit ASCE format. Overlength papers must be approved by the editor; however, valuable overlength contributions are not intended to be discouraged by this process.

1. Estimating Length of Text

A. Fill in the four numbers (highlighted in green) in the column to the right to obtain the total length of text.
NOTE: Equations take up a lot of space. Most computer programs don't count the amount of space around display equations. Plan on counting 3 lines of text for every simple equation (single line) and 5 lines for every complicated equation (numerator and denominator).

Estimating Length of Text	
Count # of words in 3 lines of text:	35
Divided by 3	3
Average # of words per line	12
Count # of text lines per page	18
# of words per page	210.00
Count # of pages (don't add references & abstract)	11
Title & Abstract	500
Total # refs	0
Length of Text is	2810
	249
	3059
	3

2. Estimating Length of Tables

A. First count the longest line in each column across adding two characters between each column and one character between each word to obtain total characters.

1-column table = up to 60 characters wide	2-column table = 61 to 120 characters wide
-------------------------------------------	--------------------------------------------

B. Then count the number of text lines (include footnote & titles)

1-column table = up to 60 characters wide by: 17 lines (or less) = 158 word equiv. up to 34 lines = 315 word equiv. up to 51 lines = 473 word equiv. up to 68 text lines = 630 word equiv.	2-column table = 61 to 120 characters wide by: 17 lines (or less) = 315 word equiv. up to 34 lines = 630 word equiv. up to 51 lines = 945 word equiv. up to 68 text lines = 1260 word equiv.
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

C. Total Characters wide by Total Text lines = word equiv. as shown in the table above. **Add word equivalents** for each table in the column labeled "Word Equivalents."

3. Estimating Length of Figures

A. First reduce the figures to final size for publication.

Figure type size can't be smaller than 6 point (2mm).

B. Use ruler and measure figure to fit 1 or 2 column wide format.

1-column fig. = up to 3.5 in.(88.9mm)	2-col. fig. = 3.5 to 7 in.(88.9 to 177.8 mm) wide
---------------------------------------	---------------------------------------------------

C. Then use a ruler to check the height of each figure (including title & caption).

1-column fig. = up to 3.5 in.(88.9mm) wide by: up to 2.5 in.(63.5mm) high = 158 word equiv. up to 5 in.(127mm) high = 315 word equiv. up to 7 in.(177.8mm) high = 473 word equiv. up to 9 in.(228.6mm) high = 630 word equiv.	2-column fig. = 3.5 to 7 in.(88.9 to 177.8 mm) wide by: up to 2.5 in.(63.5mm) high = 315 word equiv. up to 5 in.(127mm) high = 630 word equiv. up to 7 in.(177.8mm) high = 945 word equiv. up to 9 in.(228.6mm) high = 1260 word equiv.
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

D. Total Characters wide by Total Text lines = word equiv. as shown in the table above. **Add word equivalents** for each table in the column labeled "Word Equivalents."

Total Tables/Figures:	1421
Total Words of Text:	3059

(word equivalents)

Total words and word equivalents:	4480
printed pages:	4

Estimating Length of Tables & Figures		
Tables	Word Equivalents	Figures
Table 1	317	Figure 1
2	158	2
3	0	3
4	0	4
5	0	5
6	0	6
7	0	7
8	0	8
9	0	9
10	0	10
11	0	11
12	0	12
13	0	13
14	0	14
15	0	15
Please double-up tables/figures if additional space is needed (ex. 20+21).		16
		17
		18
		19
		20 and 21

=====

wo-column

) words and
ext and
iat.
cedure.

subtotal
plus headings
TOTAL words
printed pages

<u>Figures:</u>
Word Equivalents
158
158
630
0
0
0
0
0
0
0
0
0
0
0
0
0
0
0
0
0
0
0

Ref.: Ms. No. HYENG-7789

"On the application of the equivalent roughness height formulas" by Benoît Camenen
& Magnus Larson

Answer to the last request by editor and associate editor

A copy of a double-spaced list of figure captions is provided on a separate page latex format as requested. The presentation of the figure disposition and caption is still kept (previous page) in order to better understand the link between eps files provided and figures.