



**HAL**  
open science

## Threshold sensor for high-doses of radiation

Izabela Augustyniak, Pawel Knapkiewicz, Jan Dziuban, Michal Olszacki, A. Tchkalov, Patrick Pons

► **To cite this version:**

Izabela Augustyniak, Pawel Knapkiewicz, Jan Dziuban, Michal Olszacki, A. Tchkalov, et al.. Threshold sensor for high-doses of radiation. Int. Conf. On Mixed design of Integrated Circuits and Systems (MIXDES), Jun 2014, Lublin, Poland. pp.MIXDES Proceedings. hal-01024223

**HAL Id: hal-01024223**

**<https://hal.science/hal-01024223>**

Submitted on 15 Jul 2014

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Threshold sensor for high-doses of radiation

I. Augustyniak, P. Knapkiewicz, J. Dziuban  
Faculty of Microsystem Electronics and Photonics  
Wrocław University of Technology  
Wrocław, Poland  
izabela.augustyniak@pwr.wroc.pl  
M. Olszacki  
National Centre for Nuclear Research, Otwock, Poland  
michal.olszacki@ncbj.gov.pl

A. Tchkalov  
National Technical University of Ukraine “Kiev Polytechnic  
Institute”, Kiev, Ukraine  
tchkalov@gmail.com  
P. Pons  
Laboratory for Analysis and Architecture of Systems,  
National Centre for Scientific Research, Toulouse, France  
ppons@laas.fr

**Abstract**—MEMS threshold sensor for high-doses of radiation (above 10 kGy) has been design and development. In the sensor, small portion of high density polyethylene (HDPE) is trapped inside silicon-glass MEMS hermetically sealed structure. When the sensor is exposed to ionizing radiation, HDPE degrades and releases atomic hydrogen. The resulting pressure of hydrogen destroys thin silicon membrane of the sensor. The proper parameters of the silicon membrane of the sensor have been selected by simulations in ANSYS software.

**Keywords**— MEMS sensor, radiation sensor, modeling of silicon membrane

## I. INTRODUCTION

High doses of radiation ( $>10$  kGy) can be found in nuclear power plants, storage of spent nuclear fuel, nuclear waste disposal site as well as after nuclear accidents. High radiation doses are also observed in experimental infrastructures for example LHC where level of radiation is low but long term doses are high, above 10 kGy.

Measurement of high radiation doses may be estimated post factum by family of passive thermo- and photoluminescence indicators or hydrogen pressure dosimeters. In situ measurements have been up-to-day obtained only for low or medium doses by solid-state MOS based sensors.

MEMS sensor for measurements of high-doses of radiation, above 10 kGy has been shown. In the sensor, small portion of high density polyethylene (HDPE) is trapped inside silicon-glass MEMS hermetically sealed structure (Fig. 1a). When the sensor is exposed to ionizing radiation, HDPE degrades and releases atomic hydrogen proportional to radiation dose. This radiolysis phenomenon of polymers has been described in details in previous work [1]. The pressure inside the chamber increase and membrane of known mechanical properties is destroyed under the influence of the growing pressure corresponds to the absorbed radiation dose (Fig. 1b).

The sensors have been irradiated by highly energetic (6 MeV) electron beam with doses above 10 kGy (in National Centre for Nuclear Research, Otwock, Poland). Blow-up effects proportional to irradiation doses have been observed.

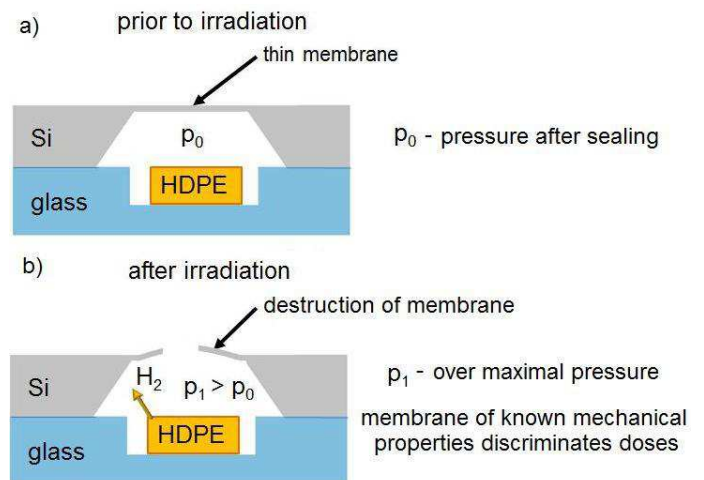


Fig. 1 Principle of operation: (a) sensor before irradiation; (b) sensor after irradiation

## II. RESULTS

Blow-up parameters of several silicon membranes for set pressure have been selected by modeling in ANSYS simulation software. The first tests of the sensor in laboratory conditions have been made. More details and up-dated results of experiments will be shown in the full paper.

## ACKNOWLEDGMENT

This research was co-financed by European Union under the MNT-ERA.NET, project DOSIMEMS and a Marie Curie International Research Staff Exchange Scheme Fellowship within the 7th European Community Framework Programme – Project EduMEMS no. 269295.

## REFERENCES

- [1] M. Olszacki, M. Matusiak, I. Augustyniak, P. Knapkiewicz, J. Dziuban, P. Pons, E. Debourg, „ Measurement of the high gamma radiation dose using the MEMS based dosimeter and radiolysis effect, Proceedings MicroMechanics Europe Workshop 2013, pp. 31-35.