



HAL
open science

Thermal behavior of silicon carbide/carbon tribological tests

Stéphanie Lafon-Placette, Karl Delbé, Hélène Weleman, Jean Denape, Marc Ferrato

► **To cite this version:**

Stéphanie Lafon-Placette, Karl Delbé, Hélène Weleman, Jean Denape, Marc Ferrato. Thermal behavior of silicon carbide/carbon tribological tests. International Symposium on Aircraft Materials ACMA 2014, Apr 2014, Marrakech, Morocco. pp. 46-47. hal-01025525

HAL Id: hal-01025525

<https://hal.science/hal-01025525>

Submitted on 18 Jul 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Open Archive TOULOUSE Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible.

This is an author-deposited version published in : <http://oatao.univ-toulouse.fr/>
Eprints ID : 11903

To cite this version : Lafon-Placette, Stéphanie and Delbé, Karl and Weleman, Hélène and Denape, Jean and Ferrato, Marc Thermal behavior of silicon carbide/carbon tribological tests. (2014) In: International Symposium on Aircraft Materials ACMA 2014, 23 April 2014 - 26 April 2014 (Marrakech, Morocco).

Any correspondence concerning this service should be sent to the repository administrator: staff-oatao@listes-diff.inp-toulouse.fr

Thermal behavior of silicon carbide/carbon tribological tests

Stéphanie Lafon-Placette †, Karl Delbé †, H el ene Wellemane †, Jean Denape †,
Marc Ferrato *

† Universit e de Toulouse ; ENIT ; LGP (Laboratoire G enie de Production),
47 avenue d'Azereix, B.P. 1629, 65016 Tarbes, France

* BOOSTEC,
Zone industrielle, 65460 Bazet, France

Keywords: Silicon carbide, Carbon, Friction, Thermal behavior

During friction, the materials in contact undergo a thermal field that can accelerate their deterioration or promote the creation of protective layers [1]. Silicon carbide/carbon dry contact often experiences these phenomena through an oxidation process and a material transfer [2].

Three carbon samples were used in this study. The first grade was a carbon-graphite with no impregnation. The two following grades were all impregnated, first by antimony and at last, PTFE. Graphite, PTFE and antimony are commonly known as solid lubricant thanks to their accommodation mechanisms. The PTFE is a non-adhesive material due to its low surface energy, antimony is a ductile metal and can deform easily while graphite shows a lamellar structure leading to the cleavage of its layers in conditions of gaseous atmospheres or humidity [3].

The silicon carbide was a pressureless sintered silicon carbide supplied by BOOSTEC. It shows high mechanical properties, high Young Modulus and high hardness, and a high thermal conductivity ($180 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$).

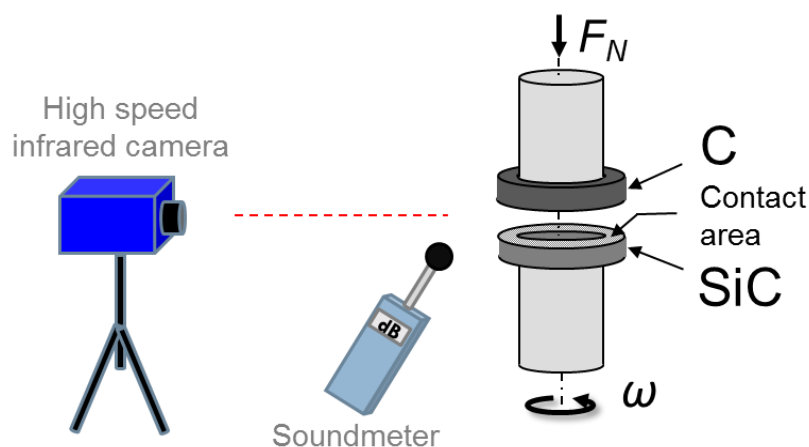


Figure 1 Schematic of the tribotests

Experiments were carried out under dry friction using a ring-on-ring tribometer at ambient temperature (*Figure 1*). Three contact pressures (0.1, 0.5 and 1 MPa) were tested for a sliding speed of 0.5 m/s during two hours. An infrared camera was focused on the samples in order to assess the thermal field in the system with a thermal resolution of 20 mK. The maximum acquisition frequency (150 Hz for full frame) and a uniform and constant value of emissivity corresponding to carbon (0.98) have been considered. A sound level meter recorded the noise emission for each couple.

Tested carbon showed a higher wear rate than silicon carbide (*Figure 2*). The non-impregnated carbon wear volume was about 160 mm³. It was decreased by using impregnants to a value below 50 mm³. Friction coefficients (COF) were also affected by impregnations. While antimony stabilized the interface to the same mean value of friction coefficient, PTFE reduced it to 0.1.

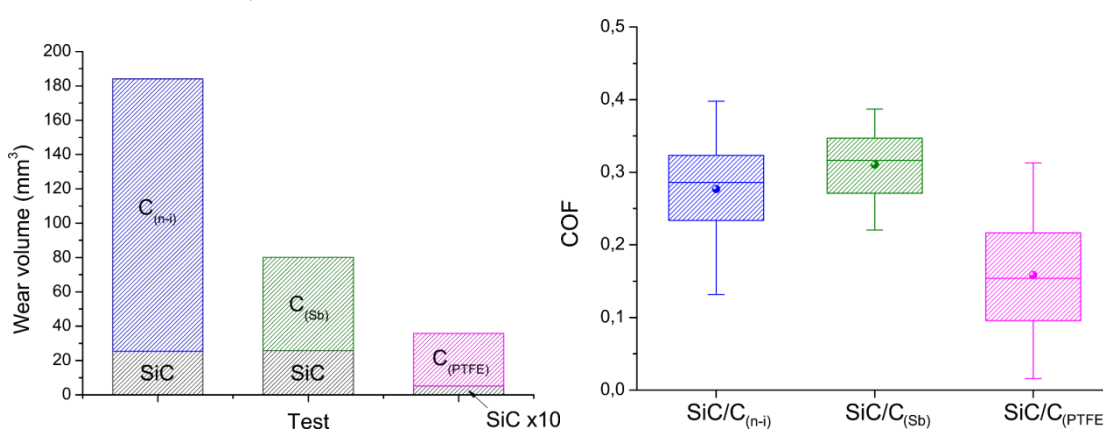


Figure 2 Wear volumes (left) and friction coefficients (right) at 1 MPa and 0.5 m/s.

SEM imaging, EDS analyses and Raman spectroscopy revealed the presence of a third body on both surfaces. This third body, circulating between the two counter-parts, is mainly composed of amorphous carbon and oxidized particles.

Finally, energetic flows were identified and a wear mechanism for the silicon carbide/carbon dry contact is proposed, with respect to the concept of the third body approach [4].

References

- [1] J. Denape and N. Laraqi, "Aspect thermique du frottement: mise en évidence expérimentale et éléments de modélisation," *Mécanique & Industries*, vol. 1, no. 6, pp. 563-579, 2000.
- [2] P. Déprez, P. Hivart, J. F. Coutouly and E. Debarre, "Friction and Wear Studies Using Taguchi Method: Application to the Characterization of Carbon-Silicon Carbide Tribological Couples of Automotive Water Pump Seals," *Advances in Materials Science and Engineering*, 10 pages, 2009.
- [3] H. Zaidi, D. Paulmier, A. Jeanmaire and H. Nery, "Behaviour of graphite in friction under various environments: Connection with the surface reactivity," *Surface Science*, Vols. 251- 252, pp. 778-781, 1991.
- [4] M. Godet, "The third-body approach: A mechanical view of wear," *Wear*, vol. 100, pp. 437-452, 1984.