



HAL
open science

Recycling of carbon fiber. identification of bases for a synergy between recyclers and designers.

Stéphane Pompidou, Marion Princaud, Nicolas Perry, Dimitri Leray

► To cite this version:

Stéphane Pompidou, Marion Princaud, Nicolas Perry, Dimitri Leray. Recycling of carbon fiber. identification of bases for a synergy between recyclers and designers.. ASME 2012 11th Biennial Conference on Engineering Systems Design and Analysis, Jul 2012, Nantes, France. pp.551-560, 10.1115/ESDA2012-82106 . hal-01069686

HAL Id: hal-01069686

<https://hal.science/hal-01069686>

Submitted on 10 Nov 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Science Arts & Métiers (SAM)

is an open access repository that collects the work of Arts et Métiers ParisTech researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <http://sam.ensam.eu>
Handle ID: <http://hdl.handle.net/10985/7796>

To cite this version :

Stéphane POMPIDOU, Marion PRINCAUD, Nicolas PERRY, Dimitri LERAY - Recycling of carbon fiber. identification of bases for a synergy between recyclers and designers. - In: ASME 2012 11th Biennial Conference on Engineering Systems Design and Analysis, France, 2012-07-03 - ASME Digital Collection - 2012

Any correspondence concerning this service should be sent to the repository

Administrator : archiveouverte@ensam.eu

RECYCLING OF CARBON FIBER. IDENTIFICATION OF BASES FOR A SYNERGY BETWEEN RECYCLERS AND DESIGNERS

Stéphane POMPIDOU

Univ. Bordeaux, I2M, UMR 5295

F-33400 Talence

France

s.pompidou@i2m.u-bordeaux1.fr

Marion PRINÇAUD

Univ. Bordeaux, I2M, UMR 5295

F-33400 Talence

France

m.princaud@i2m.u-bordeaux1.fr

Nicolas PERRY

Arts et Métiers ParisTech, I2M, UMR 5295

F-33400 Talence

France

n.perry@i2m.u-bordeaux1.fr

Dimitri LERAY

Univ. Bordeaux, I2M, UMR 5295

F-33400 Talence

France

dimitri.leray@u-bordeaux1.fr

ABSTRACT

In order to decrease both energy consumption and CO₂ emissions, the automotive, aeronautics and aerospace industries aim at making lighter vehicles. To achieve this, composite materials provide good opportunities, ensuring high material properties and free definition of geometry. As an example, for cold applications, the use of carbon fiber/thermoset composites is ever increasing, in spite of a high fiber price. But in a global and eco-friendly approach, the major limitation for their use remains their potential recyclability. Recycling a composite means having a recycling technology available, getting a dismantle solution and an access for the product, and disposing identification plus selection possibilities to the materials. Thus, carbon fibers recovery (*i.e.* recycling and re-processing) would both help design engineers to balance energy efficiency and cost, and open new opportunities for developing second-life composites, dedicated to the manufacture of medium or low loaded parts (non-structural in many cases).

A first section presents an overview of composite recycling possibilities. Indeed, environmentally and economically, composite incineration is not attractive (even with an energetic valorization), let-alone burying. Reuse and recycling thus remain the two most interesting options.

Aeronautics offers a high potential in terms of fiber deposit. In southwest France, composites recycling will increase in terms of quantity due to dismantling platforms TARMAC (dedicated to civil aircraft applications) and P2P (for

the disassembly of ballistic weapons). In addition, from a technical point of view, and even if end-of-life solutions for composites still remain under development, solvolysis (*i.e.* water under supercritical conditions) already offers the opportunity to recover carbon fibers. The resulting recycle retains up to 90 percent of the fiber's mechanical properties.

A second part will explore the recycling to design issue (*i.e.* how recycling processes have to balance the previous aspects of the end-of-life proposal).

The recycler clearly becomes a new supplier in the carbon fiber lifecycle, by revalorizing wastes with alternatives to burning. Moreover, increasing carbon fiber shelf life reduces its product life impact. Finally, promoting carbon fiber end-of-life would ensure to link aeronautics, automotive, and leisure and sports industries; but one can create demand for recycled reinforcement, by packaging it in useful and attractive forms for those end-users (*e.g.* pseudo-continuous fiber, felt, strips, bands, patches, etc.).

These sections will be enlightened by several examples from collaborations between I2M and local industries.

NOMENCLATURE

1G : first generation material

2G : second generation material

CF : carbon fiber
CFRC : carbon fiber reinforced composite
ELV : end-of-life vehicle
EoL : end-of-life
 n : number of lifecycles
 nG : n^{th} generation material
 r : radius (cylindrical coordinate)
r- : recycled
rCFRC : recycled carbon fiber reinforced composite
RM : raw material
WEEE : waste electrical and electronic equipment
 z : ordinate (cylindrical coordinate)
 θ : angle (cylindrical coordinate)

INTRODUCTION

In the present context of sustainable development, where the anthropic impacts on the environment and the finitude of fossil and mineral resources must be taken into account, manufacturers aim to promote and develop both production fields and products. Composites, that provide good opportunities for combining high modulus materials with free definition of geometry, are no exception. Among them, carbon fiber reinforced composites (CFRCs) (1) and more specially thermoset matrix based composites are currently used by the aerospace, aeronautics and automotive industries, for cold applications. They also become more and more used in the leisure and sports field.

High-tech industries are very strict on the quality of materials, and few already integrate recycled material, even without loss of technical properties (*e.g.* recycled aluminum). On the contrary, industries involving a wider audience in leisure and sports field may include these recycled materials in order to make it a selling point.

In addition, regulations are steadily increasing the recycling rate to be achieved by products. It becomes necessary to take into account the end-of-life (EoL) of carbon fiber/thermoset composites by (i) avoiding landfill or energy recovery (*i.e.* incineration), and (ii) exploring the carbon fiber recovery *via* new stakeholders in leisure and sports fields.

In this paper, we will first focus on the recycling of CFRCs, with a particular attention on the current limitations and legislations in force and those to come. We will see that up today, the recycling of CFRCs especially concerns the fiber itself. In the second part, we will study the possibilities of recovery and the improvement expected for the recycling of CFRCs. Lastly, two examples of integration of recycled fibers in sport products will be shown.

THE RECYCLING OF CFRCs

Legislation in force for composites

Composites are not differentiated within legislation. Their EoL is indirectly involved in the waste electrical and electronic equipment directive (WEEE) (2) and in the legislation for landfill of wastes (3). Composites are also mentioned in the REACH legislation (*Registration, evaluation, authorization and restriction of chemicals*) (4) as soon as they contain some toxic or harmful substances such as flame-retardants, currently used in aeronautics.

Only the legislations on end-of-life vehicles (ELVs) mention composites recycling. Indeed, the rate of reuse and recovery should reach 95% in 2015, and 85% for reuse and recycling, in average weight per vehicle and per year, according to the European directive “VHU 2000/53” (5).

European directives about WEEE and end-of-life thus force industries to seek new methods of recovery for composite parts. In this context, composites recycling will increase in terms of quantity due to the creation of dismantling platforms. As local examples, in southwest France, the TARMAC platform (acronym for *Tarbes advanced recycling & maintenance aircraft Company*) is dedicated to civil aircraft applications in collaboration with EADS-Airbus and EADS-Sogerma. They mainly focus on reuse and certification of replacement parts in aircraft maintenance. Also, the P2P platform (in the Bordeaux area) deals with the disassembly of ballistic weapons.

Thereafter, we will especially focus on carbon fiber (*e.g.* ex-PAN T800, T300, etc.) and thermoset matrix (*e.g.* epoxy) based composites, currently used by aeronautics and aerospace industries (*e.g.* Safran-Snecma Propulsion Solide, EADS Astrium Space Transportation, etc.). Lastly, one must notice that several types of materials are concerned (involving raw materials: RM), from unused fiber or pre-pregs, to composite offcuts and life-ending composites.

Assessment of CFRC recycling

A deeper study of the composites end-of-life is really needed. Landfill and energetic valorization are the oldest options for composites EoL. Knowing that CFRCs are made with non-renewable materials and that they are quite expensive (*e.g.* carbon pre-preg: approx. $180 \text{ €}\cdot\text{kg}^{-1}$), giving them a new life by recycling is a better option both economically and environmentally. Recycling a composite means having a recycling technology available, getting a dismantle solution and an access for the product, and disposing identification plus selection possibilities to the materials. Thus, carbon fibers recovery (*i.e.* recycling and re-processing) would both help design engineers to balance energy efficiency and cost, and open new opportunities for developing second-life composites, dedicated to the manufacture of medium or low loaded parts (non-structural in many cases).

Several techniques exist in order to recycle CFRCs (6), (7):

- Mechanical recycling consists in grinding fiber and matrix. This technique makes no distinction between composites containing varying ratios of matrix and fibers. It's cheap but very aggressive for the carbon fibers (8), (9), as it requires the destruction into simpler components used in various sectors. The ground material is reincorporated as filler (powder) or used in a chopped strand mat (short fibers). A last option consists in their use as a mineral phase in concrete. The mechanical recycling consists merely in a material valorization.
- The thermic recycling can be led by oxidation in fluidized bed, by pyrolysis, or by treatment in molten salt bath (10). Pyrolysis is the technique that is the more used at the present time.
- The chemical recycling (based on the matrix solvolysis by water under supercritical conditions) includes all methods of cold recycling (temperature lower than 450°C, and pressure around 250 bar, depending on the matrix polymerization degree), with the use of chemicals (10).

Each technique presents advantages and drawbacks (Table 1) (10). But the main limitation for the use of recycled CFRCs (rCFRCs) remains in the fiber length. In this way, rCFRCs are mainly used as ground material forms in the building and civil engineering (11). They are also integrated in non-structural parts (*e.g.* as filler) in the automotive industry. But obviously, the main advantage of a reinforcement recovery is then completely lost. On the other hand, the chemical method gives the opportunity to recover quite long carbon fibers and to preserve mechanical properties. The fiber length thus directly depends on both size of the to-recycle piece (unused pre-preg, offcut or used composite) and dimension of the solvolysis reactor (12). Furthermore, the resulting recycle retains up to 90 percent of the fiber's mechanical properties. In some cases, the method enhances the electrical properties of the carbon recycle because the latter can deliver a performance close or superior to the initial material (13). Nevertheless, the economic viability of the chemical recycling solution including chemical processes has yet to be demonstrated and validated on an industrial scale (11).

In such cases, second use of composite fibers will be dedicated to the manufacture of medium or low-loaded parts (non-structural in many cases). Indeed, the recycled fibers and reprocessed semi-products must reach the full acceptance and the trust of users, *i.e.* designers, who are not already keen on integrating rCFRCs when high mechanical properties are needed (*e.g.* in high-tech industries). Nevertheless, foreseen markets exist: automotive (in semi-structural parts) (Table 2) and leisure and sports industries (10). For all these reasons, it is necessary to improve the carbon fibers recycling processes and to create demand for rCFRCs, by packaging them in a form useful or attractive to end-users. For example, cheap materials with very good properties could find larger applications than composites today. Moreover, these materials, resulting from a reprocessing path, are more environmental-friendly, and possess the potential of a new recycling loop.

Towards a CFRCs partial recycling choice: design of a recycling line for carbon fibers

The Mechanics Institute of Bordeaux (I2M Bordeaux) was involved in the RECCO projects (acronym for *Recycling carbon fiber reinforced composites*) alongside a consortium of rocket manufacturers (EADS-Astrium Space Transportation, Safran-Snecma Propulsion Solide, etc.) in order to manage the end of life of composite structures. The final goal was to validate an industrial solution and an industrial demonstrator for composite recycling. The solvolysis process has been chosen for removing the thermoset matrix. Thanks to this, the lifecycle of the carbon fibers is extended by the CF regeneration that allows the cycle to be closed (Figure 1).

Let's focus on the fiber carbon life. The first generation (1G) composite is made by the association of new carbon reinforcement (1G CF) and an epoxy matrix. At the composite end-of-life, the solvolysis process leads to the fiber recovery. It may be noticed that today, matrix is lost, but it can be recovered in a parallel process in order to provide heat for another solvolysis. The recovered fiber (2G CF) can thus be used to process a second composite (2G composite).

Assuming the absolute recyclability of the fiber, this representation can be generalized to an nG carbon fiber. Thus, the composite based on this reinforcement will be called nG composite.

In reality today, product lifecycles from different industries are not connected and the carbon reinforcement is at best promise to an energetic valorization (dotted line on Figure 2). Considering the aeronautics, automotive and leisure and sports industries, products lifecycles work in closed system (*i.e.* there are no interactions between them), but not necessarily in closed lifecycle (maybe except for the automotive industry that allows the use of ground composites). We propose to link these three industries by improving CFRCs' end-of-life. As soon as an industry does accept rCFRCs from another one, they are linked together. Specialists of the EoL have opportunities to improve a material usually non upgradable in a new potential source of raw material.

Taking into account the limitations previously listed (length of the recovered fiber, designers' reluctances, etc.), the complete CF lifecycle can be drawn as in Figure 2 diagram. It is a cylindrical representation of the successive integrations of the (recycled) CF in different product lifecycles. Only the main steps of each lifecycle are displayed:

- integration of the raw materials (in particular carbon reinforcement);
- design, process and production of the composite;
- product distribution and transport;
- use and maintenance;
- and product end-of-life.

Process	Advantages	Drawbacks	
Mechanical	<ul style="list-style-type: none"> • Recovery of both fibers and resin ⁽⁶⁾ • No use or production of hazardous materials 	<ul style="list-style-type: none"> • Significant degradation of mechanical properties ⁽⁶⁾ • Unstructured, coarse and non-consistent fiber architecture ⁽¹⁴⁾ • Limited possibilities for re-manufacturing 	
Thermic	Pyrolysis	<ul style="list-style-type: none"> • High retention of mechanical properties • Potential to recover chemical feedstock from the resin ⁽¹⁵⁾ 	<ul style="list-style-type: none"> • Possible deposition of char on fiber surface ^{(16), (17)} • Sensitivity of properties of recycled fibers to processing parameters ⁽¹⁶⁾ • Environmentally hazardous off-gases ⁽¹⁸⁾
	Fluidized bed	<ul style="list-style-type: none"> • High tolerance to contamination ^{(6), (19)} • No presence of residual char on fiber surface ⁽²⁰⁾ • Well established and documented process 	<ul style="list-style-type: none"> • Strength degradation between 25% and 50% ⁽²¹⁾ • Fiber length degradation ^{(21), (22)} • Unstructured (“fluffy”) fiber architecture ^{(23), (21), (24)} • Impossibility for material-recovery from resin ^{(19), (25)}
Chemical	<ul style="list-style-type: none"> • Very high retention of mechanical properties and fiber length ^{(9), (26), (27)} • High potential for material-recovery from resin ⁽²⁸⁾ 	<ul style="list-style-type: none"> • Common reduced adhesion to polymeric resins ⁽²⁶⁾ • Low contamination tolerance ^{(28), (29)} • Reduced scalability of most methods ^{(24), (28)} • Possible environmental impact if hazardous solvents are used ⁽⁷⁾ 	

Table 1. Summary analysis of different recycling processes (quote from the table by Pimenta *et al.* (10))

Type of rCFRC	Possible processes		Foreseen markets for rCFRC	Examples of current solutions with virgin materials
	Recycling	Manufacturing		
Low-reinforced	<ul style="list-style-type: none"> • Pyrolysis • Fluidized bed • Chemical 	<ul style="list-style-type: none"> • BMC compression • Compression molding of non-woven mats 	<ul style="list-style-type: none"> • Automotive semi-structural parts • Equipment housing 	<ul style="list-style-type: none"> • Car door panel ⁽³⁰⁾ • Carburator housing ⁽³¹⁾ • Car headlamp reflectors ⁽³²⁾ • Fridge handler ⁽³³⁾
Medium reinforced	<ul style="list-style-type: none"> • Pyrolysis • Fluidized bed • Chemical 	<ul style="list-style-type: none"> • Compression molding of non-woven mats 	<ul style="list-style-type: none"> • Automotive non-critical structures • Aircraft interiors 	<ul style="list-style-type: none"> • Car rear wing ⁽³⁴⁾ • Car decklid ⁽³⁵⁾ • Aircraft seat structure ⁽²¹⁾ • Aircraft overhead bin ⁽²¹⁾
Aligned	<ul style="list-style-type: none"> • Pyrolysis • Chemical 	<ul style="list-style-type: none"> • Compression molding of aligned mats • Lay-up of aligned pre-pregs 	<ul style="list-style-type: none"> • Automotive non-critical structures • Aircraft interiors • Wind turbine non-critical structures 	<ul style="list-style-type: none"> • Car roof shell ⁽³⁴⁾ • Wind turbine non-critical layers ⁽³⁶⁾
Woven	<ul style="list-style-type: none"> • Pyrolysis (pre-preg rolls) 	<ul style="list-style-type: none"> • Resin infusion • RTM 	<ul style="list-style-type: none"> • Automotive structures • Wind-turbine structures 	<ul style="list-style-type: none"> • Car body panels ⁽³⁴⁾ • Wind turbine non-critical layers ⁽³⁶⁾

Table 2. Potential structural applications for rCF/thermoset matrix composites (quote from the table by Pimenta *et al.* (10))

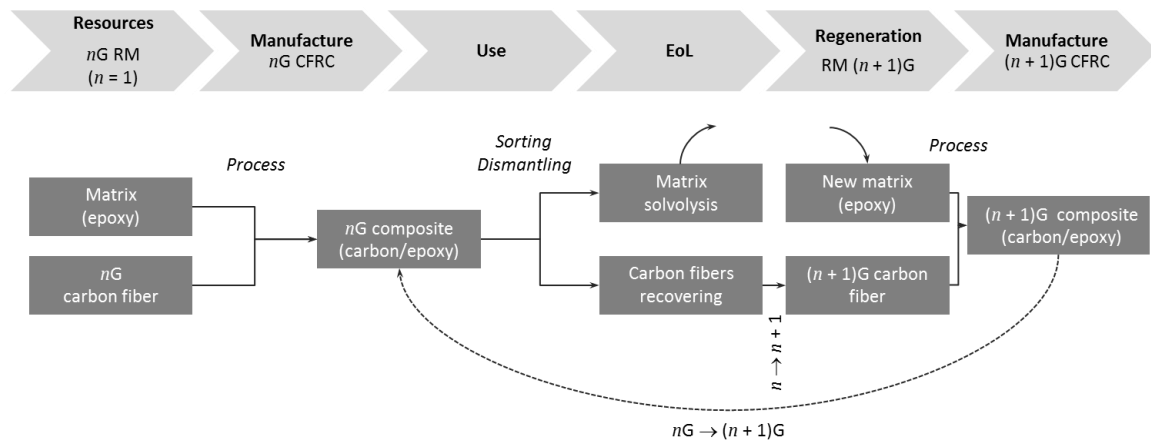


Figure 1. Lifecycle of a CFRC, from resources to the carbon fiber regeneration

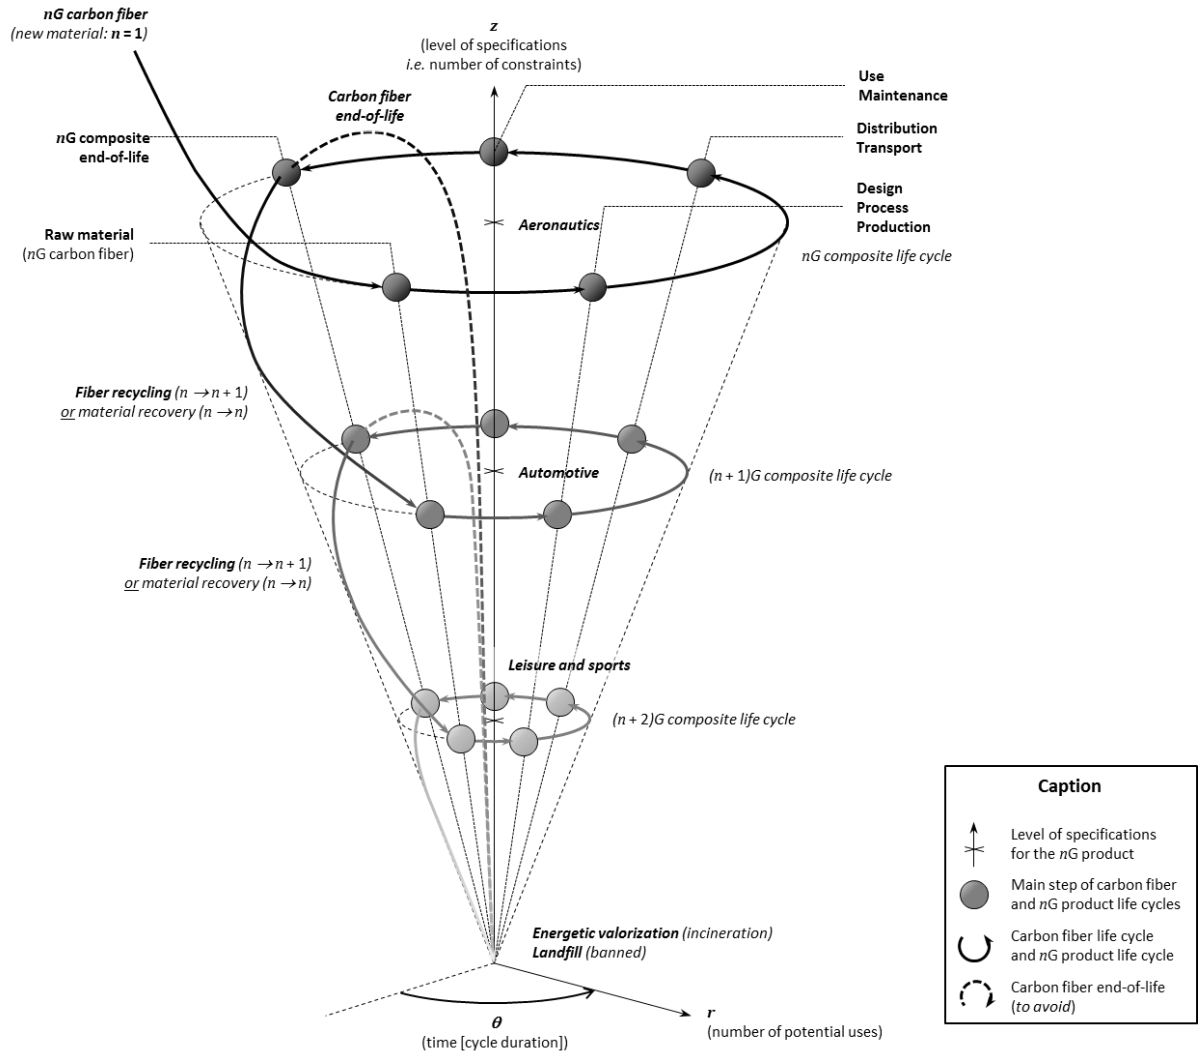


Figure 2. Cylindrical representation of the CF lifecycle. Integration of the (r)CF in successive product lifecycles, depending on their level of specifications (*i.e.* number of constraints). The radius r of each lifecycle depends on the number of potential uses for the (r)CF. θ is time (modulo the cycle duration)

The ordinate of each lifecycle depends on the level of specifications (*i.e.* number of constraints) of the composite. Three examples are chosen ($n \in [1;3]$), assuming integrations in, first, aeronautics, then automotive, and finally leisure and sports industries. It might be noticed that, even if leisure and sports industry has been placed under automotive, it might be at the same ordinate regarding level of use constraints.

The radius r of each cycle is linked to the number of potential uses for the (r)CF, *i.e.* particularly to the fiber length (or the nature of the semi-product) and its mechanical properties. Lastly, the angle θ represents time modulo the n^{th} cycle duration.

Based on this lifecycle and on the team expertise, each recycling step can be detailed and a recycling line for carbon fiber can be designed. An arborescent representation detailing possible processes is given in Figure 3. The nG product is

- sorted. Indeed, it is impossible to recycle different types of matrix simultaneously; moreover, specific coatings like metallic cladding for electric behavior, are also not compatible with some recycling processes;
- dismantled (all metallic insert have to be extracted) and cut (*i.e.* adapted to the recycling process reactor);
- and, lastly, solvolysed.

Thus, the carbon fabric is unwoven. I2M has developed a prototype device for this purpose. The fibers are hackled, possibly mixed (depending on available CFs, or on the quality of the chosen reinforcement for the $(n+1)G$ material), and reinforced to be integrated more easily in the next recycling stage (*e.g.* pre-preg). Depending on the $(n+1)G$ composite elaboration process (RTM, infusion, etc.), fibers can be spun, then rewoven or knit, or made available as pre-preg strips, to finally process the composite.

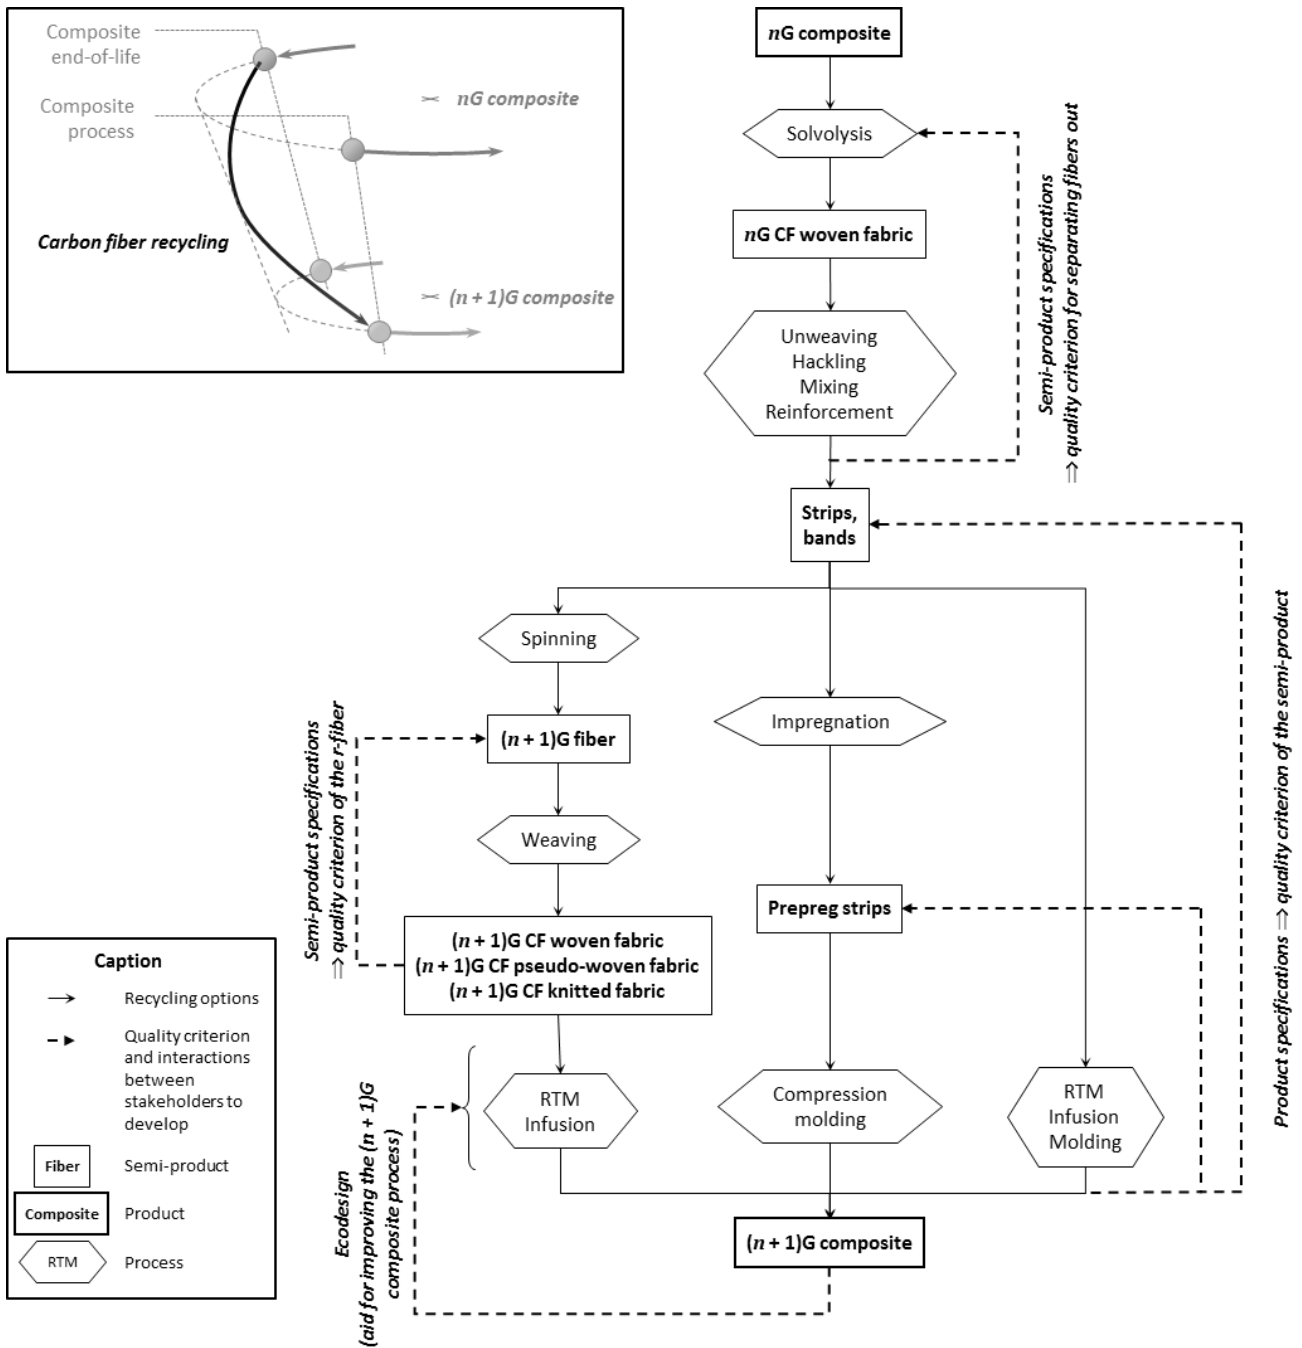


Figure 3. Recycling line of a carbon fiber/thermoset matrix composite (detail of Figure 2) and its arborescent representation. The former shows the interactions between stakeholders and the associated quality criteria to develop.

The interactions between stakeholders and the associated quality criteria will be developed below.

DEVELOPMENT OF A CFRC RECYCLING NETWORK

Development of a CFRC recycling network is needed. First, we face a growth in deposit that cannot be kept nor incinerated. Moreover, CFRCs are expensive; used CFRCs could be a valuable resource by being recycled. Getting a

longer fiber allows more potential uses in a new life. We will focus on this thematic.

In order to improve the carbon fibers end-of-life, we propose a methodology based on those stages:

1. Definition of the requirements;
2. Identification of the actors;
3. Identification of possible interactions between stakeholders.

Definition of the requirements

As widely discussed above, the main objective is to develop a viable recycling line for CFRCs. It will be based on a recycling process that allows longer CFs to be recovered. We now explore opportunities to improve the fiber end-of-life.

Identification of the actors for the recycling line

Protagonists of the CFRC recycling network can be clearly identified (Figure 4). The suppliers are the manufacturers of the 1G carbon fiber and the epoxy matrix. The three main designers of these supplies are the aeronautics, automotive and leisure and sports industries. Customers should be either industrialists or individuals. Specialists of the EoL are pullers, dismantlers and recyclers.

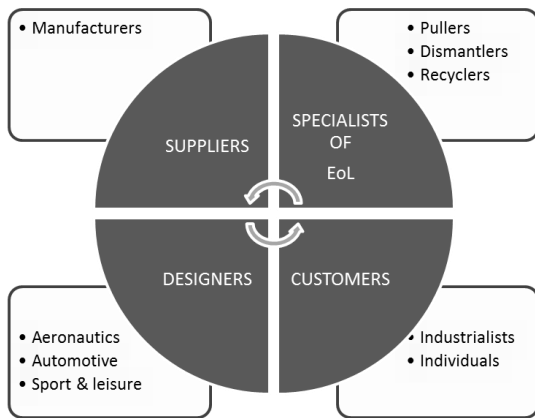


Figure 4. Actors of the CFRC recycling network

Identification of possible interactions between the actors

The Figure 5 corresponds to the Figure 2 seen from above. The lifecycles of each of the three industries are linked by an exchange of carbon fibers at the end-of-life stage. The stakeholders (suppliers, designers, customers and recyclers) and their interactions are highlighted (a summary is given in Table 3).

- Suppliers adapt their offer from the designer's needs (market research). They should also be related to recyclers who have

to take into account the specifications and cost of the raw materials.

- Designers are getting information from customers with market research; they choose suppliers according to raw materials specifications and cost.
- Customers decide to buy or not the product, according to multicriteria decisions; they are related to recyclers by legislation (for industrials) or thanks to environmental awareness (for individuals).
- Recyclers are those collecting used CFRCs, whose deposit must be taken into account, as it is becoming stable in terms of source of supply. They then become the new suppliers in the carbon fiber lifecycle, by revalorizing wastes with alternatives to burning. They choose the appropriate recycling process in order to propose a material adapted to the (n+1) designer's needs.

We now aim at focusing on links between customers and recyclers. A sorting and collection network has to be developed to feed a recycling line at an industrial scale. It is important that the network be placed in a local or regional area. Indeed, industrials are no more the only ones getting involved in the cycle; leisure and sports customers can take place without too much effort. By developing a local network, the problem usually raised by collection will be avoided.

At the same time, we hope to promote discussion between designers and recyclers in order to innovate in the definition of new recycled composite products. This means that information and skills from both sectors will be shared. However, it also implies that materials and mechanical knowledge have to be developed for both designers and recyclers. Therefore, it is necessary to include a third party in the discussion: experts in material and mechanical characterization.

Lastly, in the carbon fiber recycling line, discussions between stakeholders must be improved by defining semi-products specifications and formalizing those interactions by quality criteria (dotted lines in Figure 3). The latter are based on the processes efficiency.

Examples of applications. Demonstrators processed in the Mechanics Institute of Bordeaux (I2M Bordeaux)

It is possible to develop specific markets that would use recycled carbon fibers, even if they are marginal. Leisure and sports certainly propose the most important niche markets that could make the use of rCFRCs more effective. Two examples are chosen among the demonstrators processed at the Mechanics Institute of Bordeaux, within the context of the RECCO projects (37).

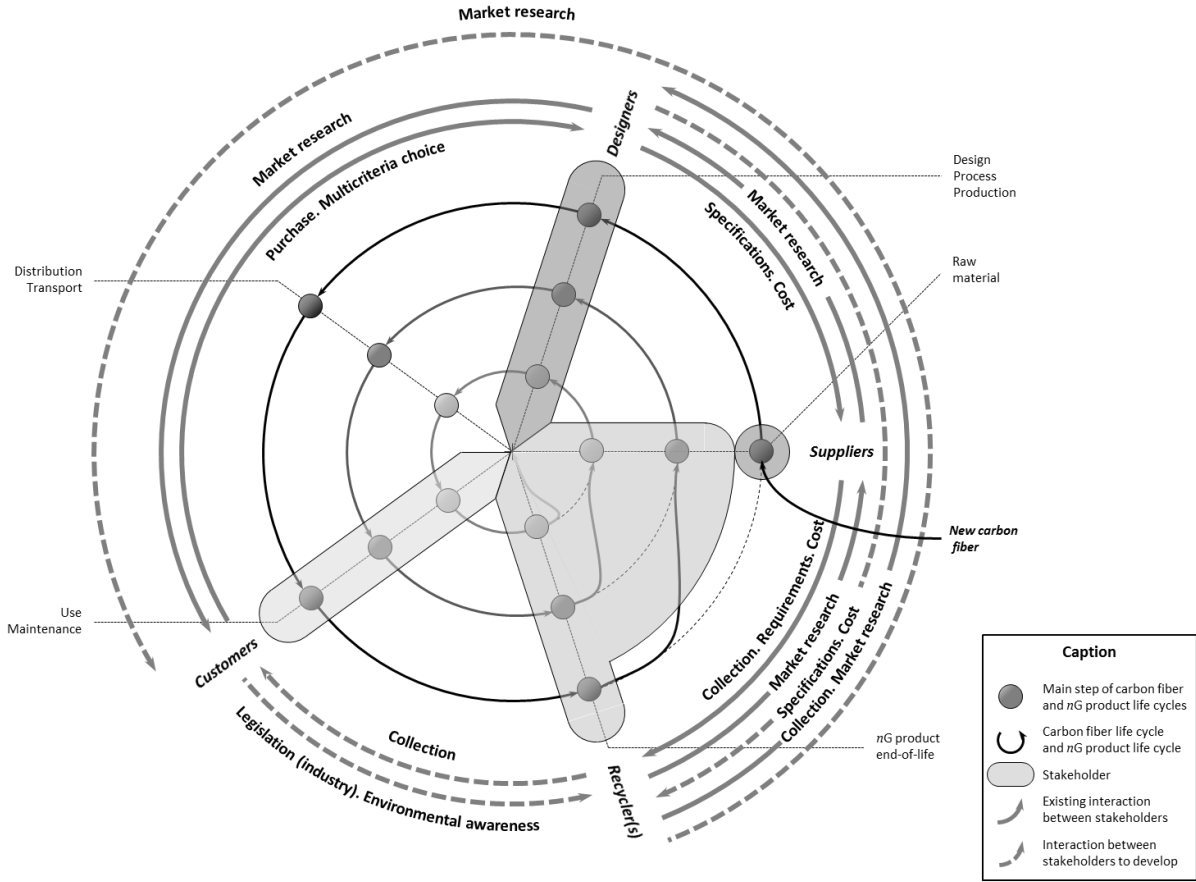


Figure 5. Figure 2 seen from above. Highlight of the stakeholders (suppliers, designers, customers and recyclers) and their interactions. Note that the recyclers become new suppliers in the CF lifecycle.

	Suppliers	Designers	Customers	Recyclers
	↓	↓	↓	↓
Suppliers	n/a	Specifications Cost	∅	Market research
Designers	Market research	n/a	Purchase Multicriteria choice	Collection Market research
Customers	∅	Market research	n/a	Collection Market research
Recyclers	Collection Specifications Cost	Specifications Cost	Legislation (industries) Environmental awareness	n/a

Table 3. Interactions between stakeholders (∅: no interaction). (Interactions to be developed are set in bold and italic type)

Rooryck has created a startup focused on high quality composite products for the equestrian field. He wanted his company and its products to stand out from the competition with larger groups, integrating a strong sense of respect for the environment. The use of recycled carbon fiber presented a great opportunity to meet this goal. An equestrian gaiter that protects

horses' tendons (Figure 6) has been processed. The same mass (approx. 130 g) and a stiffness equivalent to the mass-market gaiters have been reached. The appearance of the 2G gaiter is very different from the mass-product one but very attractive, because of its uniqueness.



Figure 6. Gaiter for horse

Desired characteristics: aspect, lightness and impact strength

We now have the hope to attract the interest of designers of composite visible parts that may include a low-cost carbon fiber with a unique aspect. Moreover, as recycled fiber absorbs more matrix than the 1G reinforcement, it creates a sandwich material which gives a greater thickness to the 2G product. Thus, even if the stiffness of the recycled fiber was inferior to that of a 1G CF, the stiffness of the product containing recycled fiber would be increased. This feature allows the use of a smaller amount of recycled carbon fiber for the same product. Thus the use of recycled products for flexibility and/or aspect will certainly prove very economical due to both the low price of the recycled fiber and the possibility of using less material. In addition, contact molding showed no particular difficulty to use realigned 1G CF patches, which validates the processability of using recycled fiber in this process.



Figure 7. Natec pedal crank

Desired characteristics: specific stiffness and equivalent mass to the classic one (approx. 185 g)

To enhance the quality of the recycled carbon fiber, an application has been sought with a more general public target, and submitted to mechanical stresses, with an attractive form and a high-performance product. Natec manufactures one of the lightest racing bike pedal board in the world. A crank has been processed with recycled carbon fibers (Figure 7). It shows a very acceptable aspect. Its mass is 187g versus 163g for the 1G mass-product. It has been shown that the use of recycled fibers was simpler than the use of carbon woven fabric. Finally, no fiber displacement has been observed during the process; this perfectly validates the possibility of using 2G fibers by compression molding.

CONCLUSION AND PERSPECTIVES

The recycling of CFRCs is a quite recent problematic, due to the increase in their use. As a consequence, the legislations in force barely cite composite materials; they are simply mentioned in the WEEE and ELVs directives. As a consequence, both industrialists and individuals have yet to become aware of the usefulness of CFRCs recycling. However, a recycling network, capable of processing the CFRC recycling (and not only an energetic valorization) tends to develop.

We have spotlighted that the improvement of local or regional sorting and dismantling platforms remains necessary. Based on the solvolysis process, the recycling is thus achievable. But a sorting and collection network must be developed to feed the recycling line at an industrial scale. All the stakeholders to involve in this line already exist; we now aim to link them. Promoting discussion between designers and recyclers in order to innovate in the definition of new recycled composite products will induce the creation of exchange platforms, allowing information from both sectors to be shared. However, it also implies that materials and mechanical knowledge have to be developed for both designers and recyclers. Therefore, it is necessary to include a third party in the discussion: experts in material and mechanical characterization. Lastly, promoting carbon fiber end-of-life would reinforce the link between aeronautics, automotive, and leisure and sports industries; but one can create demand for recycled reinforcement, by packaging it in useful and attractive forms for those end-users. Lastly, the leisure and sports industries seem to already propose the most important niche markets that could make the use of rCFRCs to come into effect.

REFERENCES

1. PIÑERO-HERNANZ, R., et al., et al. Chemical recycling of carbon fibre reinforced composites in nearcritical and supercritical water. *Composites Part A: Applied Science and Manufacturing* 39 (3), pp. 454-461. 2008.
2. EUROPEAN PARLIAMENT et EUROPEAN COUNCIL. Directive 2008/34/EC of the European Parliament and of the Council of 11 March 2008 amending Directive 2002/96/EC on waste electrical and electronic equipment (WEEE), as regards the implementing powers conferred on the Commission. *L 81/65*, 20.3.2008. 2008.

3. **THE COUNCIL OF THE EUROPEAN UNION.** Council Directive 1999/31/EC of 26 April 1999 on the landfill of waste. *Official Journal of the European Communities*, L 18 2/1, 16.7.1999. 1999.
4. **PARLIAMENT EUROPEAN et COUNCIL.** Corrigendum to Directive 2006/121/EC of the European Parliament and of the Council of 18 December 2006 amending Council Directive 67/548/EEC. *on the approximation of laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances in order to adapt it to Regulation (EC) No 1907/2006.* concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) and establishing a European Chemicals Agency (OJ L 396, 30.12.2006) : s.n., 2006.
5. **CONSEIL DE L'UNION EUROPÉENNE et PARLEMENT EUROPEEN.** Directive 2000/53/ce du Parlement Européen et du Conseil du 18 septembre 2000 relative aux véhicules hors d'usage. *Journal officiel des Communautés européennes*, L 269/34, 21.10.2000. 2000.
6. **PICKERING, S.J.** Recycling technologies for thermoset composite materials-current status. *Composites Part A: Applied Science and Manufacturing* 37 (8), pp. 1206-1215. 2006.
7. **LIU, Y., et al., et al.** Recycling of Carbon/Epoxy Composites. *Journal of Applied Polymer Science* 94 (5), pp. 1912-1916. 2004.
8. **MANTAUX, O., et al., et al.** Recycling study of end of life products made of ABS resin. *Journal of Materials and Science & Technology*, Vol. 20, Suppl.1. 2004.
9. **MANTAUX, O., AYMONIER, C. et ANTAL, M.** 2009, Recycling of carbon fibre reinforced composite materials with super-critical water dissolution. *16e Journées Nationales Composites Proceeding, Toulouse.* juin 2009.
10. **PIMENTA, S. et PINHO, S.T.** Recycling carbon fibre reinforced polymers for structural applications: Technology review and market outlook. *Waste Management* 31 (2), pp. 378-392. 2011.
11. **KRAWCZAK, P.** Recyclage des composites. *Techniques de l'ingénieur, AM5895, 18p., 10 juil. 2011.* 2011.
12. **GALET, C.** Recyclage des déchets contenant des fibres de carbone issus de l'industrie des composites. *Projet RECYCARB, COMPOSITEC, Novembre 2006, 59p.* 2006.
13. **PERRY, N., et al., et al.** Composite eco-design. *IFIP AMPS 2010 Conference, Como, Italia.* 2010.
14. **PALMER, J., et al., et al.** Successful closed-loop recycling of thermoset composites. *Composites Part A* 40, 490-498. 2009.
15. **CUNLIFFE, A.M., JONES, N. et WILLIAMS, P.T.** Pyrolysis of composite plastic waste. *Environ. Technol.* 24, 653-663. 2003.
16. **MEYER, L.O., SCHULTE, K. et GROVE-NIELSEN, E.** CFRP-recycling following a pyrolysis route: process optimization and potentials. *J. Compos. Mater.* 43, 1121-1132. 2009.
17. **WONG, K.H., et al., et al.** Compression moulding of a recycled carbon fibre reinforced epoxy composite. *In: SAMPE'09 Conference. SAMPE, Baltimore, MD, USA.* 2009a.
18. **ALSOP, S.H.** Pyrolysis off-gas processing. *In: SAMPE'09 Conference. SAMPE, Baltimore, MD, USA.* 2009.
19. **PICKERING, S.J.** Carbon fibre recycling technologies: what goes in and what comes out? *In: Carbon Fibre Recycling and Reuse 2009 Conference, IntertechPira, Hamburg, Germany.* 2009c.
20. **JIANG, G., et al., et al.** Surface characterisation of carbon fibre recycled using fluidised bed. *Appl. Surf. Sci.* 254, 2588-2593. 2008c.
21. **WONG, K.H., et al., et al.** Preliminary feasibility study of reinforcing potential of recycled carbon fibre for flame-retardant grade epoxy composite. *In: Composites Innovation 2007 – Improved Sustainability and Environmental Performance, NetComposites, Barcelona, Spain.* 2007b.
22. **TURNER, T.A., PICKERING, S.J. et WARRIOR, N.A.** Development of high value composite materials using recycled carbon fibre. *In: SAMPE'09 Conference. SAMPE, Baltimore, MD, USA.* 2009.
23. **PICKERING, S.J., TURNER, T.A. et WARRIOR, N.A.** Moulding compound development using recycled carbon fibres. *In: SAMPE Fall Technical Conference. SAMPE, Dallas, USA.* 2006a.
24. **WARRIOR, N.A., TURNER, T.A. et PICKERING, S.J.** AFRECAR and HIRECAR Project results. *In: Carbon Fibre Recycling and Reuse 2009 Conference, IntertechPira, Hamburg, Germany.* 2009.
25. **PICKERING, S.J., et al., et al.** A fluidized bed process for the recovery of glass fibres from scrap thermoset composites. *Compos. Sci. Technol.* 60, 509-523. 2000d.
26. **JIANG, G., et al., et al.** Characterisation of carbon fibres recycled from carbon fibre/epoxy resin composites using supercritical n-propanol. *Compos. Sci. Technol.* 69, 192-198. 2009b.
27. **NAKAGAWA, M., SHIBATA, K. et KURIYA, H.** Characterization of CFRP using recovered carbon fibers from waste CFRP. *In: Second International Symposium on Fiber Recycling, The Fiber Recycling 2009 Organizing Committee, Atlanta, Georgia, USA.* 2009.
28. **MARSH, G.** Carbon recycling: a soluble problem. *Reinf. Plast.* 53, 22-23. and 25-27. 2009.
29. **GOSAU, J.M., WESLEY, T.F. et ALLRED, R.E.** Carbon fiber reclamation from state-of-the-art 2nd generation aircraft composites. *In: SAMPE'09 Conference. SAMPE, Baltimore, MD, USA.* 2009.
30. **MENZOLIT.** Menzolit BMC 0400 Data Sheet. Menzolit GmbH. Available online at: www.menzolit.com/templates/rhuk_solarflare_ii/pdf/list_bmc/BMC_0400.pdf (last accessed December 2011). 2004a.
31. —. Menzolit BMC 1400 Data Sheet. Menzolit GmbH. Available online at: www.menzolit.com/templates/rhuk_solarflare_ii/pdf/list_bmc/BMC_1400.pdf (last December 2011). 2004b.
32. **BMCI.** BMC 304 Data Sheet. Bulk Molding Componds Inc. Available online at: www.bulkmolding.com/datasheets/informational/BMC_304.pdf (last accessed December 2011). 2010a.
33. —. BMC 310 Data Sheet. Bulk Molding Componds Inc. Available online at: www.bulkmolding.com/datasheets/informational/BMC_310.pdf (last accessed December 2011). 2010b.
34. **LEXUS.** Lexus LFA Press Information 2009. Toyota (GB) PLC – Lexus Division. Available online at: www.toyota.co.jp/en (last accessed July 2010). 2009.
35. **MENZOLIT.** Menzolit SMC 1800 Data Sheet. Menzolit GmbH. Available online at: www.menzolit.com/templates/rhuk_solarflare_ii/pdf/list_smc/SMC_1800.pdf (last accessed December 2011). 2008c.
36. **KONG, C., BANG, J. et SUGIYAMA, Y.** Structural investigation of composite wind turbine blade considering various load cases and fatigue life. *Energy* 30, 2101-2114. 2005.
37. **MANTAUX, O. et LERAY, D.** Rapport final – projet RECCO 2010 – partie valorisation I2M MPI. *Final report, 26p., 10 juin 2010.* 2010.