



Fuzzy Reliability Assessment of Systems with Multiple Dependent Competing Degradation Processes

Yan-Hui Lin, Yan-Fu Li, Enrico Zio

► To cite this version:

Yan-Hui Lin, Yan-Fu Li, Enrico Zio. Fuzzy Reliability Assessment of Systems with Multiple Dependent Competing Degradation Processes. IEEE Transactions on Fuzzy Systems, 2015, 23 (5), pp.1428-1438. 10.1109/TFUZZ.2014.2362145 . hal-01090162

HAL Id: hal-01090162

<https://hal.science/hal-01090162>

Submitted on 3 Dec 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Fuzzy Reliability Assessment of Systems with Multiple Dependent Competing Degradation Processes

Yan-Hui Lin, Yan-Fu Li, *Member, IEEE* and Enrico Zio, *Senior Member, IEEE*

Abstract—Components are often subject to multiple competing degradation processes. For multi-component systems, the degradation dependency within one component or/and among components need to be considered. Physics-based models (PBMs) and multi-state models (MSMs) are often used for component degradation processes, particularly when statistical data are limited. In this paper, we treat dependencies between degradation processes within a piecewise-deterministic Markov process (PDMP) modeling framework. Epistemic (subjective) uncertainty can arise due to the incomplete or imprecise knowledge about the degradation processes and the governing parameters: to take into account this, we describe the parameters of the PDMP model as fuzzy numbers. Then, we extend the finite-volume (FV) method to quantify the (fuzzy) reliability of the system. The proposed method is tested on one subsystem of the residual heat removal system (RHRS) of a nuclear power plant, and a comparison is offered with a Monte Carlo (MC) simulation solution: the results show that our method can be most efficient.

Index Terms—Multiple dependent competing degradation processes, piecewise-deterministic Markov process (PDMP), epistemic uncertainty, fuzzy set theory, fuzzy reliability, finite-volume (FV) method.

I. INTRODUCTION

INDUSTRIAL components are often subject to multiple competing degradation processes, whereby any of them may cause failure [1]. For multi-component systems, the dependency between degradation processes within one component (e.g. the wear of rubbing surfaces influenced by the environmental stress shock within a micro-engine [2]), or/and the degradation dependency among components (e.g. the degradation of the pre-filtrations stations leading to a lower performance level of the sand filter in a water treatment plant [3]) need to be considered.

Physics-based models (PBMs) [4-7] and multi-state models

(MSMs) [8-11] are two modeling frameworks that can be used for describing the evolution of degradation in structures and components. The former uses physics knowledge that is implemented into mathematical equations for an integrated mechanistic description of the component behavior given the underlying degradation mechanisms (e.g. shocks, fatigue, wear, corrosion, etc.). The latter generally uses degradation and/or failure data from historical field collection or degradation tests, or material science knowledge (e.g. multi-state physics model [12]) to describe the degradation processes by a finite number of states of degradation severity and a set of transition rates (estimated from historical data) between the different degradation states.

To treat degradation dependencies in a system whose components are modeled by these two types of models, a piecewise-deterministic Markov process (PDMP) approach was employed in our previous work [13]. Monte Carlo (MC) simulation methods [14, 15] can be used to solve PDMP, since the analytical solution is difficult to obtain due to the complex behavior of the system, resulting in the stochasticities of MSMs and time-dependent evolutions of PBMs. However, the major shortcoming is that MC can be quite time-consuming [16]. The finite-volume (FV) scheme studied by Coccozza-Thivent et al. [17] and Eymard et al. [18] appears to be more efficient, leading to comparable results as MC simulation with acceptable computing time [16].

Epistemic (subjective) uncertainty [19] can affect the analysis due to the incomplete or imprecise knowledge about the degradation processes of the components [20, 21]. For PBMs, the parameters (e.g. wear coefficient) and influencing factors (e.g. temperature and pressure) may be unknown [22] and elicited from expert judgment [23]; for MSMs, the state performances may be poorly defined due to the imprecise discretization of the underlying continuous degradation processes [24] and the transition rates between states may be difficult to estimate statistically due to insufficient data, especially for those highly reliable critical components (e.g. valves and pumps in nuclear power plants or aircrafts, etc.) [25].

In literature, fuzzy reliability has been studied by many researchers to account for imprecision and uncertainty in the system model parameters. Tanaka et al. [26] have proposed the fuzzy fault tree for the fuzzy reliability assessment of binary-state systems and Singer [27] has assigned fuzzy

The work was supported by Electricité de France Contract No.8610-5910112096.

Y.H.Lin and Y.F.Li are with the Chair on Systems Science and the Energetic Challenge, European Foundation for New Energy-Electricité de France, Ecole Centrale Paris-Supelec, 91192 Gif-sur-Yvette, France (e-mail: yanhui.lin@ecp.fr; yanfu.li@ecp.fr; yanfu.li@supelec.fr)

E. Zio is with the Chair on Systems Science and the Energetic Challenge, European Foundation for New Energy-Electricité de France, Ecole Centrale Paris-Supelec, 91192 Gif-sur-Yvette, France, and also with the Politecnico di Milano, 20133 Milano, Italy (e-mail: enrico.zio@ecp.fr; enrico.zio@supelec.fr; enrico.zio@polimi.it)

probabilities to the basic events. Dunyak et al. [28] have proposed another fuzzy extension to assign fuzzy probability to all events, which is consistent with the calculations from fuzzy fault trees. Ding et al. [20] have developed fuzzy multi-state systems (FMSS) models by considering the steady state probabilities, or/and steady state performance levels of a component as fuzzy numbers. Ding and Lisnianski [29] have proposed the fuzzy universal generating function (FUGF) for the quantification of the fuzzy reliability of FMSS. Later, Li et al. [30] have developed a random fuzzy extension of the universal generating function and Sallak et al. [31] have employed Dempster–Shafer theory to quantify the fuzzy reliability of MSS. Liu et al. [24] have proposed a fuzzy Markov model with fuzzy transition rates for FMSS when the steady fuzzy state probabilities are not available. To the knowledge of the authors, none of the previous studies has considered epistemic uncertainty in PDMP system models.

The contributions of the paper are twofold. First, we employ fuzzy numbers to represent various epistemic uncertainties in multiple dependent competing degradation processes modeled by PDMP. Second, we extend the FV scheme for the quantification of PDMP under epistemic uncertainty instead of using time-consuming MC simulation methods [32, 33]. The reminder of the paper is structured as follows. Section 2 introduces the PDMP for multiple dependent competing degradation processes. Section 3 presents the FV scheme for PDMP. Section 4 presents the PDMP under uncertainty and the extended FV scheme for system reliability quantification. Section 5 presents a case study on one subsystem of the residual heat removal system (RHRS) [34] of a nuclear power plant. Section 6 presents numerical results and analysis. Section 7 concludes the work.

II. PDMP FOR SYSTEMS DEGRADATION CONSIDERING DEPENDENCY

The following assumptions are made on the multiple dependent competing degradation processes of a system [13]:

- The system consists of two groups of components: the first group contains M components, $\vec{L} = (L_1, L_2, \dots, L_M)$, whose degradation processes are modeled by PBMs; the second group contains N components, $\vec{K} = (K_1, K_2, \dots, K_N)$, whose degradation processes are modeled by MSMs including MSPM.
- All degradation processes of the system follow the PDMP, taking into account the degradation dependency of components within each group and between the groups.
- For a generic component $L_m, m = 1, 2, \dots, M$, of the first group, d_{L_m} time-dependent continuous variables are used to describe the degradation process; the variables vector $\vec{X}_{L_m}(t) = (\vec{X}_{L_m}^D(t), \vec{X}_{L_m}^P(t))$ contains (1) non-decreasing degradation variables $\vec{X}_{L_m}^D(t)$ (e.g. crack length) and (2) physical variables $\vec{X}_{L_m}^P(t)$ (e.g. velocity and force), whose evolution in time is described by a set

of first-order differential equations mathematically representing the underlying physical processes. The component L_m fails when one variable of the first type $x_{L_m}^i(t) \in \vec{X}_{L_m}^D(t)$ reaches or exceeds its corresponding failure threshold, denoted by $x_{L_m}^{i*}$; the set of failure states of L_m is denoted by $\mathcal{F}_{L_m}$.

- For a generic component $K_n, n = 1, 2, \dots, N$, in the second group, its discrete degradation state space is denoted by $S_{K_n} = \{0_{K_n}, 1_{K_n}, \dots, d_{K_n}\}$, ranging from perfect functioning state ‘ d_{K_n} ’ to complete failure state ‘0’. The component is functioning or partially functioning in all generic intermediate states. The transition rates between two different degradation states are used to describe the speed of reaching another degradation state. The performance level of one component (e.g. vibration of the valve due to degradation) at each degradation state and the impact on the other components are considered as deterministic. The failure state set of K_n is denoted by $\mathcal{F}_{K_n} = \{0_{K_n}\}$.

The degradation condition of the whole system is, then, represented as follows:

$$\vec{Z}(t) = \begin{pmatrix} \vec{X}_{L_1}(t) \\ \vec{X}_{L_2}(t) \\ \vdots \\ \vec{X}_{L_M}(t) \\ (Y_{K_1}(t), Y_{K_2}(t), \dots, Y_{K_N}(t)) \end{pmatrix} = \vec{X}(t) \quad \vec{Y}(t) \quad (1)$$

$E = \mathbb{R}^{d_L} \times S$

where $Y_{K_n}(t), n = 1, 2, \dots, N$ denotes the degradation state of component K_n at time t , E is a hybrid space of $\mathbb{R}^{d_L} \times S$ ($d_L = d_{L_1} + d_{L_2} + \dots + d_{L_M}$) and $S(S = S_{K_1} \times S_{K_2} \times \dots \times S_{K_N})$.

The evolution of the degradation processes $\vec{Z}(t)$ involves the stochastic behavior of $\vec{Y}(t)$ and the deterministic behavior of $\vec{X}(t)$, between two consecutive jumps of $\vec{Y}(t)$, given $\vec{Y}(t)$. Let $\vec{Y}_k \in S, k \in \mathbb{N}$ denote the state of the N components in the second group after k transitions (a transition occurs as long as any one of the N components changes its state) and $T_k \in \mathbb{R}^+, k \in \mathbb{N}$ denote the time of arrival at state $\vec{Y}_k$. $\vec{Y}(t)$ is written as follows:

$$\vec{Y}(t) = \vec{Y}_k, \forall t \in [T_k, T_{k+1}] \quad (2)$$

The probability that $\vec{Y}(t)$ will step to state $\vec{j}$ from state $\vec{i}$ in the next infinitesimal time interval $[T_n, T_n + \Delta t]$, given $(\vec{Z}(t))_{0 \leq t \leq T_n}$, is as follows:

$$\begin{aligned} & P[\vec{Y}_{n+1} = \vec{j}, T_{n+1} \in [T_n, T_n + \Delta t] | (\vec{Z}(t))_{0 \leq t \leq T_n}, \vec{\theta}_K] \\ &= P[\vec{Y}_{n+1} = \vec{j}, T_{n+1} \in [T_n, T_n + \Delta t] | \vec{Z}(T_n) = (\vec{X}(\vec{T}_n), \vec{i}), \vec{\theta}_K] \\ &= \lambda_{\vec{i}}(\vec{j}, \vec{X}(\vec{T}_n) | \vec{\theta}_K) \Delta t, \\ & \quad \forall n \geq 0, \vec{i}, \vec{j} \in S, \vec{i} \neq \vec{j} \end{aligned} \quad (3)$$

where $\vec{\theta}_K$ represents the external influencing factors of the components in the second group and the related coefficients to the transition rates, $\lambda_{\vec{i}}(\vec{j}, \vec{X}(\vec{T}_n) | \vec{\theta}_K)$ represents the corresponding transition rate. The evolution of $\vec{X}(t)$, when $t \in [T_k, T_{k+1}], k \in \mathbb{N}$, is deterministically described by a set of

differential equations as follows:

$$\begin{aligned} \vec{X}(t) = \begin{pmatrix} \vec{X}_{L_1}(t) \\ \vec{X}_{L_2}(t) \\ \vdots \\ \vec{X}_{L_M}(t) \end{pmatrix} &= \begin{pmatrix} \vec{f}_{L_1}^{\vec{Y}_k}(\vec{X}(t), t | \vec{\theta}_{L_1}) \\ \vec{f}_{L_2}^{\vec{Y}_k}(\vec{X}(t), t | \vec{\theta}_{L_2}) \\ \vdots \\ \vec{f}_{L_M}^{\vec{Y}_k}(\vec{X}(t), t | \vec{\theta}_{L_M}) \end{pmatrix} \\ &= \vec{f}_L^{\vec{Y}_k}(\vec{X}(t), t | \vec{\theta}_L) \end{aligned} \quad (4)$$

where $\vec{f}_{L_m}^{\vec{Y}_k}, m = 1, 2, \dots, M$ are the set of physics equations, given the influence of the degradation state $\vec{Y}_k$ of the second group components, $\vec{\theta}_{L_m}, m = 1, 2, \dots, M$ represents the external influencing factors of the component L_m and the physical parameters used in the physics equations. Mathematically, the dependency within each group and between two groups is treated in the framework of a piecewise-deterministic Markov process (PDMP) modeling, where the physics equations in the first group, denoted by $\vec{f}_L^{\vec{Y}_k}(\vec{X}(t), t | \vec{\theta}_L)$, are dependent on the states ($\vec{Y}_k$) of the components in the second group and the transition rates in the second group, denoted by $\lambda_i(\vec{j}, \vec{X}(t) | \vec{\theta}_K)$, are dependent on the evolution of the variables ($\vec{X}(t)$) in the first group.

The reliability of the system at time t is defined as follows:

$$R(t) = P[\vec{Z}(s) \notin \mathcal{F}, \forall s \leq t] \quad (5)$$

where $\mathcal{F} = \mathcal{F}_{\vec{X}} \times \mathcal{F}_{\vec{Y}} \subseteq E$ denotes the space of the failure states of $\vec{Z}(t)$, where $\mathcal{F}_{\vec{X}}$ denotes the sub-space of the states of $\vec{X}(t)$ and $\mathcal{F}_{\vec{Y}}$ denotes the sub-space of the states of $\vec{Y}(t)$. Let $p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K), \vec{x} \in \mathbb{R}^{d_L}, \vec{i} \in S$ denote the probability density function (PDF) of processes $(\vec{X}(t), \vec{Y}(t))_{t \geq 0}$ being in state $(\vec{x}, \vec{i})$ at time t , which satisfies:

$$\int_{\mathbb{R}^{d_L}} \sum_{\vec{i} \in S} p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) d\vec{x} = 1 \quad (6)$$

The reliability of the system can be calculated as:

$$R(t) = \int_{\vec{x} \notin \mathcal{F}_{\vec{X}}} \sum_{\vec{i} \notin \mathcal{F}_{\vec{Y}}} p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) d\vec{x} \quad (7)$$

The PDF $p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ obeys the Chapman-Kolmogorov equation [35] as follows:

$$\begin{aligned} \frac{\partial}{\partial t} p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) &= \\ \sum_{\vec{j} \neq \vec{i}} \lambda_{\vec{j}}(\vec{i}, \vec{x} | \vec{\theta}_K) p_t(\vec{x}, \vec{j} | \vec{\theta}_L, \vec{\theta}_K) &- \lambda_{\vec{i}}(\vec{x} | \vec{\theta}_K) p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) \\ - \text{div} \left(\vec{f}_L^{\vec{i}}(\vec{x}, t | \vec{\theta}_L) p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) \right) & \end{aligned} \quad (8)$$

where $\lambda_{\vec{i}}(\vec{x} | \vec{\theta}_K) = \sum_{\vec{j} \neq \vec{i}} \lambda_{\vec{j}}(\vec{j}, \vec{x} | \vec{\theta}_K)$ is the transition rate departing from the state $\vec{i}$. Among the right-hand parts of equation (8), the first two terms are due to the stochastic behavior of processes $\vec{Y}(t)$: the first term accounts for the transition of processes $\vec{Z}(t)$ into state $(\vec{i}, \vec{x})$, the second term accounts for the transition of processes $\vec{Z}(t)$ out of state $(\vec{i}, \vec{x})$; the last term is due to the deterministic behavior of processes

$\vec{X}(t)$, which represents the volume density of the outward flux of the probability field around the point $(\vec{i}, \vec{x})$. Given the initial probability distribution of the system $p_0(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$, its evolution in time and that of the system reliability can be obtained solving equations (8) and (7), respectively.

A challenging problem is to calculate the probability density function $p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$, because the analytical solution is difficult to obtain due to the complex behavior of the processes [14, 15]. MC simulation methods can be applied for such numerical computations, but the major shortcoming is that they are typically time-consuming [16]. FV methods is an alternative that can lead to comparable results as MC simulation, but within a more acceptable computing time [16].

III. FINITE-VOLUME SCHEME FOR PDMP

Instead of directly solving the probability density function $p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ through the Chapman-Kolmogorov equation (8), an approximate solution can be obtained by the FV scheme by discretizing the state space of the continuous variables and the time space of PDMP. The approximated solution converges towards the accurate solution under certain conditions. Here, we employ an explicit FV scheme to PDMP, developed by Coccozza-Thivent et al. [17].

A. Assumptions

This approach can be applied under the following assumptions [17]:

- The transition rates $\lambda_{\vec{i}}(\vec{j}, \cdot | \vec{\theta}_K), \forall \vec{i}, \vec{j} \in S$ are continuous and bounded functions from $\mathbb{R}^{d_L}$ to $\mathbb{R}^+$.
- The physics equations $\vec{f}_L^{\vec{i}}(\cdot, \cdot | \vec{\theta}_L), \forall \vec{i} \in S$ are continuous functions from $\mathbb{R}^{d_L} \times \mathbb{R}^+$ to $\mathbb{R}^{d_L}$ and locally Lipschitz continuous.
- The physics equations $\vec{f}_L^{\vec{i}}(\cdot, t | \vec{\theta}_L), \forall \vec{i} \in S$ are sub-linear, i.e. there are some $V_1 > 0$ and $V_2 > 0$ such that
- $\forall \vec{x} \in \mathbb{R}^{d_L}, t \in \mathbb{R}^+ \left| \vec{f}_L^{\vec{i}}(\vec{x}, t | \vec{\theta}_L) \right| \leq V_1 (\|\vec{x}\| + |t|) + V_2$
- The functions $\text{div}(\vec{f}_L^{\vec{i}}(\cdot, \cdot | \vec{\theta}_L)), \forall \vec{i} \in S$ are almost everywhere bounded in absolute value by some real value $D > 0$ (independent of i).

B. Numerical scheme

For the ease of notation, first we let $\vec{g}^{\vec{i}}(\cdot, \cdot): \mathbb{R}^{d_L} \times \mathbb{R} \rightarrow \mathbb{R}^{d_L}$ denote the solution of

$$\begin{aligned} \frac{\partial}{\partial t} \vec{g}^{\vec{i}}(\vec{x}, t | \vec{\theta}_L) &= \vec{f}_L^{\vec{i}}(\vec{g}^{\vec{i}}(\vec{x}, t | \vec{\theta}_L), t | \vec{\theta}_L), \\ \forall \vec{i} \in S, \vec{x} \in \mathbb{R}^{d_L}, t \in \mathbb{R} \end{aligned} \quad (9)$$

with

$$\vec{g}^{\vec{i}}(\vec{x}, 0 | \vec{\theta}_L) = \vec{x}, \forall \vec{i} \in S, \vec{x} \in \mathbb{R}^{d_L} \quad (10)$$

and $\vec{g}^i(\vec{x}, t | \vec{\theta}_L)$ is the result of the deterministic behavior of $\vec{X}(t)$ after time t , starting from the point $\vec{x}$ while the processes $\vec{Y}(t)$ hold on state $\vec{i}$.

The state space $\mathbb{R}^{d_L}$ of continuous variables $\vec{X}(t)$ is divided into an admissible mesh $\mathcal{M}$, which is a family of measurable subsets of $\mathbb{R}^{d_L}$ ($\mathcal{M}$ is a partition of $\mathbb{R}^{d_L}$) such that [17]:

- (1) $\bigcup_{A \in \mathcal{M}} A = \mathbb{R}^{d_L}$.
- (2) $\forall A, B \in \mathcal{M}, A \neq B \Rightarrow A \cap B = \emptyset$.
- (3) $m_A = \int_A d\vec{x} > 0, \forall A \in \mathcal{M}$, where m_A is the volume of grid A .
- (4) $\sup_{A \in \mathcal{M}} \text{diam}(A) < +\infty$ where $\text{diam}(A) = \sup_{\vec{x}, \vec{y} \in A} |\vec{x} - \vec{y}|$.

Additionally, the time space $\mathbb{R}^+$ is divided into small intervals $\mathbb{R}^+ = \bigcup_{n=0,1,2,\dots} [n\Delta t, (n+1)\Delta t[$ by setting the time step $\Delta t > 0$ (the length of each interval).

The numerical scheme aims at giving an approximate value for the probability density function $p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ on each $\{i\} \times [n\Delta t, (n+1)\Delta t[\times A, \forall i \in S, n \in \mathbb{N}, A \in \mathcal{M}$ denoted by $p_n(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$, by assuming that:

$$p_t(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) = p_n(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K), \quad \forall \vec{i} \in S, \vec{x} \in A, t \in [n\Delta t, (n+1)\Delta t[\quad (11)$$

Given the initial probability density function $p_0(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ of the system at time $t = 0$, $p_0(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K), \forall \vec{i} \in S, A \in \mathcal{M}$ can be obtained as:

$$p_0(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) = \int_A p_0(\vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) d\vec{x} / m_A \quad (12)$$

Then, $p_{n+1}(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K), \forall \vec{i} \in S, A \in \mathcal{M}, n \in \mathbb{N}$ can be calculated considering the deterministic evaluation of $\vec{X}(t)$ and the stochastic evolution of $\vec{Y}(t)$ based on $p_n(\mathcal{M}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ by the Chapman-Kolmogorov forward equation [36], as follows:

$$p_{n+1}(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) = \frac{1}{1 + \Delta t b_A^{\vec{i}}} \widehat{p_{n+1}}(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) + \Delta t \sum_{\vec{j} \in S} \frac{a_A^{\vec{j}\vec{i}}}{1 + \Delta t b_A^{\vec{j}}} \widehat{p_{n+1}}(A, \vec{j} | \vec{\theta}_L, \vec{\theta}_K) \quad (13)$$

where

$$a_A^{\vec{j}\vec{i}} = \int_A \lambda_{\vec{j}}(\vec{i}, \vec{x} | \vec{\theta}_K) d\vec{x} / m_A, \quad \forall \vec{i} \in S, A \in \mathcal{M} \quad (14)$$

is the average transition rate from state $\vec{j}$ to state $\vec{i}$ for grid A ,

$$b_A^{\vec{i}} = \sum_{\vec{j} \neq \vec{i}} a_A^{\vec{j}\vec{i}}, \quad \forall \vec{j} \in S, A \in \mathcal{M} \quad (15)$$

is the average transition rate out of state $\vec{i}$ for grid A ,

$$\widehat{p_{n+1}}(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K) = \frac{\sum_{B \in \mathcal{M}} m_{BA}^{\vec{i}} p_n(B, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)}{m_A}, \quad \forall \vec{i} \in S, A \in \mathcal{M} \quad (16)$$

is the approximate value for probability density function on $\{i\} \times [(n+1)\Delta t, (n+2)\Delta t[\times A$ according to the deterministic evaluation of $\vec{X}(t)$,

$$m_{BA}^{\vec{i}} = \int_{\{\vec{y} \in B | \vec{g}^i(\vec{y}, \Delta t | \vec{\theta}_L) \in A\}} d\vec{y}, \quad \forall \vec{i} \in S, A, B \in \mathcal{M} \quad (17)$$

is the volume of the part of grid B , which will enter grid A after time Δt according to the deterministic evaluation of $\vec{X}(t)$.

The first term of the right-hand parts of equation (13)

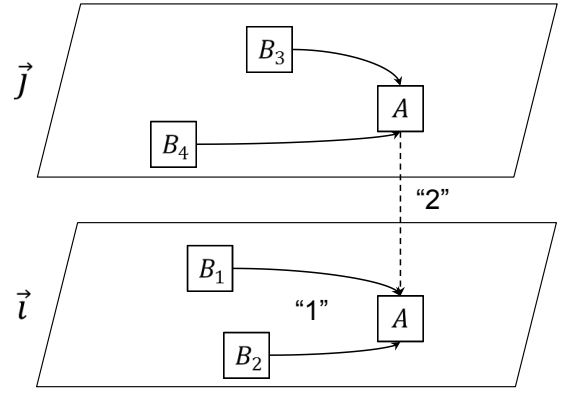


Fig.1. The evolution of degradation processes during $[n\Delta t, (n+1)\Delta t]$.

accounts for the situation that processes $\vec{Y}(t)$ hold on state $\vec{i}$ during time $[n\Delta t, (n+1)\Delta t]$, represented by “1” in an illustrated example in $\mathbb{R}^2$ (Fig. 1), where $\frac{1}{1 + \Delta t b_A^{\vec{i}}}, \forall \vec{i} \in S, A \in \mathcal{M}$ is the approximated probability that no transition happens from state $\vec{i}$ for grid A and the second term of the right-hand parts of equation (13) accounts for the situation that processes $\vec{Y}(t)$ step to state $\vec{i}$ from another state $\vec{j}$ at time $(n+1)\Delta t$, represented by “2” in an illustrated example in $\mathbb{R}^2$ (Fig. 1), where $a_A^{\vec{j}\vec{i}} \Delta t, \forall \vec{i}, \vec{j} \in S, A \in \mathcal{M}$ is the transition probability from state $\vec{j}$ to state $\vec{i}$ for grid A (B_1, B_2, B_3 and B_4 are the grids of which some parts will enter grid A according to the deterministic evaluation of $\vec{X}(t)$ at time $(n+1)\Delta t$).

The approximated solution $p_n(A, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ weakly converges towards the unique solution of equation (8) when $\Delta t \rightarrow 0$ and $|\mathcal{M}|/\Delta t \rightarrow 0$ where $|\mathcal{M}| = \sup_{A \in \mathcal{M}} \text{diam}(A)$ [17].

IV. PDMP UNDER UNCERTAINTY

Fuzzy set theories and techniques introduced by Zadeh [37, 38] have been employed in reliability models under epistemic uncertainty when the crisp values are insufficient to capture the actual behavior of components. In this work, the following assumptions are made to extend the previous PDMP model with the consideration of epistemic uncertainty:

- The values of the external influencing factors and physical parameters $\vec{\theta}_L$ in the physics equations $\vec{f}_L^i(\vec{x}, t | \vec{\theta}_L), \forall \vec{i} \in S, \vec{x} \in \mathbb{R}^{d_L}$ and equations $\vec{g}^i(\vec{x}, t | \vec{\theta}_L), \forall \vec{i} \in S, \vec{x} \in \mathbb{R}^{d_L}, t \in \mathbb{R}$ for the deterministic processes $\vec{X}(t)$ can be fuzzy numbers, denoted by $\vec{\theta}_L$.
- The values of the external influencing factors and the related coefficients $\vec{\theta}_K$ in the transition rates for the stochastic processes $\vec{Y}(t)$ between two different states $\lambda_{\vec{i}}(\vec{j}, \vec{x} | \vec{\theta}_K), \forall t \in \mathbb{R}^+, \vec{x} \in \mathbb{R}^{d_L}, \vec{i}, \vec{j} \in S, \vec{i} \neq \vec{j}$ can be fuzzy numbers, denoted by $\vec{\theta}_K$.

The values of the probability density function $p(t, \vec{x}, \vec{i} | \vec{\theta}_L, \vec{\theta}_K)$ and reliability function $R(t)$ have,

therefore, changed from crisp values to fuzzy numbers, denoted by $\tilde{p}(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)$ and $\tilde{R}(t)$ respectively. In the next section, we extend the approach presented in Section 2 to quantify the dependent degradation processes modeled by PDMP under uncertainty.

A. Quantification of PDMP under uncertainty

Let $[\tilde{a}]_\alpha = [\underline{a}_\alpha, \bar{a}_\alpha]$ denote the α -cut of a fuzzy number $\tilde{a}$, where $\underline{a}_\alpha$ and $\bar{a}_\alpha$ are the bounds; then, the α -cut of $\tilde{p}(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)$, $\forall \vec{t} \in S, \vec{x} \in \mathbb{R}^{d_L}, t \in \mathbb{R}$ can be obtained based on the extension principle [38] as:

$$[\tilde{p}(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)]_\alpha = \left[\min_{\substack{\vec{\theta}_L \in [\vec{\theta}_L]_\alpha \\ \vec{\theta}_K \in [\vec{\theta}_K]_\alpha}} p(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K), \max_{\substack{\vec{\theta}_L \in [\vec{\theta}_L]_\alpha \\ \vec{\theta}_K \in [\vec{\theta}_K]_\alpha}} p(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K) \right] \quad (18)$$

The approximate solution for $[\tilde{p}(t, \vec{x}, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)]_\alpha$, $\forall \vec{t} \in S, \vec{x} \in A, t \in [n\Delta t, (n+1)\Delta t[$ denoted by $\tilde{p}_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)$ can be obtained by varying $\vec{\theta}_L$ in $[\vec{\theta}_L]_\alpha$ and $\vec{\theta}_K$ in $[\vec{\theta}_K]_\alpha$ as follows:

$$[\tilde{p}_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)]_\alpha = \left[\min_{\substack{\vec{\theta}_L \in [\vec{\theta}_L]_\alpha \\ \vec{\theta}_K \in [\vec{\theta}_K]_\alpha}} p_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K), \max_{\substack{\vec{\theta}_L \in [\vec{\theta}_L]_\alpha \\ \vec{\theta}_K \in [\vec{\theta}_K]_\alpha}} p_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K) \right] \quad (19)$$

where $p_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)$ is obtained by eq. (13) through the FV scheme. Then, the parametric programming algorithms [24] can be applied to find the fuzzy probability in eq. (19).

The approximate solution for the α -cut of fuzzy reliability $\tilde{R}(t)$ of the system at time $t \in [n\Delta t, (n+1)\Delta t[$ can, then, be obtained as follows:

$$[\tilde{R}(t)]_\alpha = \sum_{A \in \mathcal{M}} \sum_{\vec{t} \in \mathcal{F}_{\vec{Y}}} [\tilde{p}_n(A, \vec{t} | \vec{\theta}_L, \vec{\theta}_K)]_\alpha \int_{\{\vec{x} \in A | \vec{x} \notin \mathcal{F}_{\vec{X}}\}} d\vec{x} \quad (20)$$

In most cases, the original $R(t)$ is monotonic with $\vec{\theta}_L$ and $\vec{\theta}_K$; then, we can directly obtain that instead of using eq. (19):

$$[\tilde{R}(t)]_\alpha = \left[\sum_{A \in \mathcal{M}} \sum_{\vec{t} \in \mathcal{F}_{\vec{Y}}} p_n(A, \vec{t} | \underline{\vec{\theta}_L}_\alpha, \underline{\vec{\theta}_K}_\alpha) \int_{\{\vec{x} \in A | \vec{x} \notin \mathcal{F}_{\vec{X}}\}} d\vec{x}, \sum_{A \in \mathcal{M}} \sum_{\vec{t} \in \mathcal{F}_{\vec{Y}}} p_n(A, \vec{t} | \bar{\vec{\theta}_L}_\alpha, \bar{\vec{\theta}_K}_\alpha) \int_{\{\vec{x} \in A | \vec{x} \notin \mathcal{F}_{\vec{X}}\}} d\vec{x} \right] \quad (21)$$

V. ILLUSTRATIVE CASE

The illustrative case refers to one important subsystem of a residual heat removal system (RHRS) consisting of a centrifugal pump and a pneumatic valve. The definition of the system has been provided by Électricité de France (EDF). The degradation model of the pump is a modified MSM from the one originally supplied by EDF, while that of the valve is a PBM developed by Daigle and Goebel [4]. Upon discussion with the experts, a degradation dependency between the two components has been considered, as follows: the degradation of the pump will cause it to vibrate [39] which, in turn, will lead the valve to vibrate and therefore aggravate the degradation processes of the latter [40].

Given its series logic structure, the subsystem is considered failed when one of the two components is failed.

A. Centrifugal pump

The multi-state model of the degradation processes of the centrifugal pump is a continuous-time homogeneous Markov chain with constant transition rates as shown in Fig. 2.

There are four degradation states for the pump, from the perfect functioning state '3' to the complete failure state '0'. Due to the degradation, the pump can vibrate when it reaches the degradation states '2' and '1'. The intensity of the vibration of the state '2' is assigned as 'smooth' and that of the state '1' is assigned as 'rough' by the experts. Let $Y_p(t)$ denote the degradation state of the pump at time t and $S_p = \{0, 1, 2, 3\}$ denote the degradation states set. The pump is functioning until it reaches the complete failure state '0'; λ_{32} , λ_{21} and λ_{10} are the transition rates of the degradation process.

B. Pneumatic valve

The simplified scheme of the pneumatic valve is shown in Fig. 3.

The pneumatic valve is a normally-closed and gas-actuated valve with a linear cylinder actuator. Top chamber and bottom chamber are separated by the piston, and are connected to a top pneumatic port and a bottom pneumatic port, respectively. The position of the piston between fully closed position '0' and fully open position ' x_s ' can be controlled by regulating the pressure of the pneumatic ports to fill or evacuate the two chambers. A return spring is linked with the piston to ensure that the valve will close when pressure is lost, due to the spring force.

There are several common degradation mechanisms of the valve (e.g. sliding wear, internal leaks, external leaks, etc.). In this case study, as degradation mechanism we have chosen the external leak at the actuator connections to the bottom pneumatic port due to corrosion and other environmental factors, for two reasons: 1) it is more significant than the other degradation mechanisms according to the results shown in [4]; 2) the uncertainty associated with the wear coefficient estimated from a limited amount of data should be taken into account. The leak will lead the valve to be more difficult to




Fig. 2. Degradation processes of the pump.

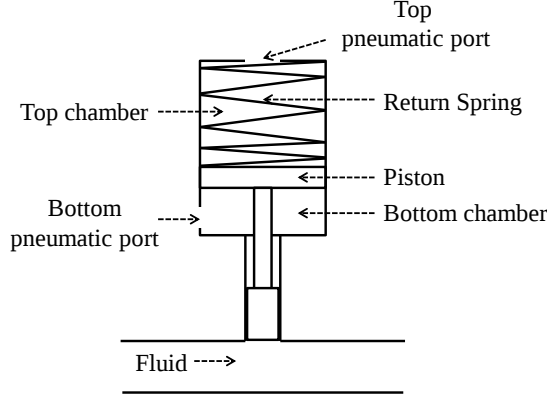


Fig. 3. Simplified scheme of the pneumatic valve [4].

open but easier to close. The threshold of the area of leak hole D_b^* is defined as the value above which ($D_b(t) > D_b^*$) the valve cannot reach the fully open position within the 15s time limit from the fully closed position, after an opening command is executed.

Let $D_b(t)$ denote the area of the leak hole at the bottom pneumatic port at time t , the development of the leak size is described by:

$$\dot{D}_b(t) = \omega_b (1 + \beta_{Y_p(t)}) \quad (22)$$

where ω_b is the original wear coefficient and where $\beta_{Y_p(t)}$ is the relative increment of the developing rate of the external leak at the bottom pneumatic port caused by the vibration of the pump at the degradation state '2' or '1' (if we ignore the degradation dependency, then $\beta_{Y_p(t)} = 0$).

The function command of the valve cycle is a 30s-periodic-signal and the valve is commanded to open in the first half-period and to close in the second half by changing the pressure of the top bottom pneumatic port $u_t(t)$ and that of the bottom pneumatic port $u_b(t)$ (opening command: $u_t(t) = P_{atm}$ and $u_b(t) = P_{sup}$; closing command: $u_t(t) = P_{sup}$ and $u_b(t) = P_{atm}$). At the beginning, the valve is set to the fully closed position.

Let $x(t)$ denote the position of the valve at time t , whose evolution in time is described by the following equations:

$$\ddot{x}(t) = a(t) \quad (23)$$

where

$$a(t) = \frac{1}{m} [(p_b(t) - p_t(t))A_p - mg +$$

$$-k(x(t) + x_0) - rv(t) + F_c(x(t))] \quad (24)$$

is the valve acceleration, where

$$p_b(t) = \frac{m_b(t)R_gT}{V_{b0} + A_p x(t)} \quad (25)$$

is the gas pressure of the bottom of the piston,

$$p_t(t) = \frac{m_t(t)R_gT}{V_{t0} + A_p(x_s - x(t))} \quad (26)$$

is the gas pressure of the top of the piston and where

$$m_t(t) = m_t(0) + \int_0^t f_g(u_t(t), p_t(t), A_s) dt$$

$$\text{with } m_t(0) = \frac{P_{sup}(L_s A_p + V_{t0})}{R_g T} \quad (27)$$

and

$$m_b(t) = m_b(0) + \int_0^t f_g(u_b(t), p_b(t), A_s) dt$$

$$+ \int_0^t f_g(P_{atm}, p_b(t), D_b(t)) dt$$

$$\text{with } m_b(0) = \frac{P_{atm} V_{b0}}{R_g T} \quad (28)$$

are respectively the masses of the gas in the top chamber and bottom chamber at time t , and where

$$f_g(p_1, p_2, A) = \begin{cases} \varepsilon P C_s A \sqrt{\frac{\gamma}{z R_g T} \left(\frac{2}{\gamma+1}\right)^{\frac{\gamma+1}{\gamma-1}}}, & \text{if } \delta \leq \left(\frac{2}{\gamma+1}\right)^{\frac{\gamma}{\gamma-1}} \\ \varepsilon P C_s A \sqrt{\frac{\gamma}{z R_g T} \left(\frac{2}{\gamma-1}\right) (\delta^{\frac{2}{\gamma}} - \delta^{\frac{\gamma+1}{\gamma}})}, & \text{if } \delta > \left(\frac{2}{\gamma+1}\right)^{\frac{\gamma}{\gamma-1}} \end{cases}$$

$$\text{with } \begin{cases} P = \max(p_1, p_2) \\ \delta = \frac{\min(p_1, p_2)}{\max(p_1, p_2)} \\ \varepsilon = \text{sgn}(p_1 - p_2) \end{cases} \quad (29)$$

defines the gas flow through an orifice, and

$$F_c(x(t)) = \begin{cases} k_c(-x(t)), & \text{if } x(t) < 0 \\ 0, & \text{if } 0 \leq x(t) \leq L_s \\ -k_c(x(t) - x_s), & \text{if } x(t) > L_s \end{cases} \quad (30)$$

is the contact force exerted on the piston by the flexible seals.

The parameters definitions and values (except for ω_b and $\beta_{Y_p(t)}$) of the valve are presented in Table I.

With the given values, the threshold of the area of leak hole $D_b^* = 1.06e - 5 \text{ m}^2$ (maximum damage) can be calculated: once exceeded, the valve will not reach the fully open position within the 15s limit, as shown in Fig. 4.

C. PDMP for the system under uncertainty

The degradation processes of the whole system are modeled by PDMP as follows:

$$\vec{Z}(t) = \begin{pmatrix} D_b(t) \\ Y_p(t) \end{pmatrix} \in \mathbb{R}^+ \times S_p \quad (31)$$

TABLE I
PARAMETER DEFINITIONS AND VALUES

Parameter – Definition	Value
g – acceleration due to gravity	9.8 m/s
P_{sup} – supply pressure	5.27e6 Pa
P_{atm} – atmospheric pressure	1.01e5 Pa
m – mass of the moving parts of the valve	50 kg
r – coefficient of kinetic friction	6.00e3 Ns/m
k – spring constant	4.80e4 N/s
k_c – large spring constant associated with the flexible seals	1.00e8 N/s
x_0 – amount of spring compression when the valve is closed	0.254 m
x_s – fully open position of the valve	0.1 m
A_p – surface area of the piston	8.10e-3 m ²
V_{t0} – minimum gas volume of the top chamber	8.11e-4 m ³
V_{b0} – minimum gas volume of the bottom chamber	8.11e-4 m ³
R_g – gas constant for the pneumatic gas	296 J/K/kg
T – ideal gas temperature	293 K
γ – ratio of specific heats	1.4
z – gas compressibility factor	1
A_s – orifice area of the pneumatic port	1.00e-5 m ²
C_s – flow coefficient	0.1

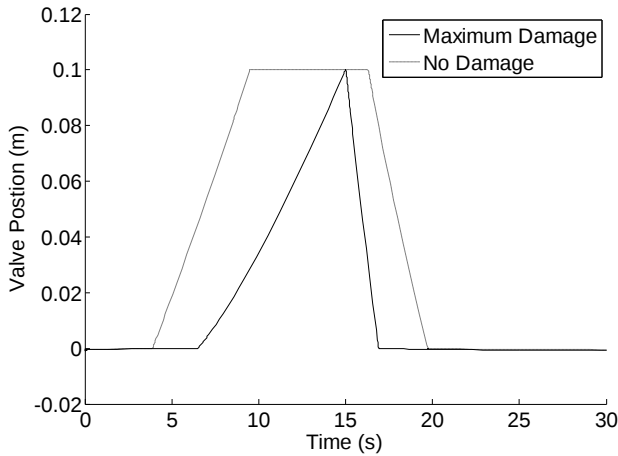


Fig. 4. Valve behavior with different sizes of the external leak.

The space of the failure states of $\vec{Z}(t)$ is $\mathcal{F} = \mathcal{F}_{D_b} \times \mathcal{F}_{Y_p} = [D_b^*, +\infty) \times \{0\}$. We have $\vec{\theta}_L = (\omega_b, \beta_{Y_p(t)})$ and $\vec{\theta}_K = (\lambda_{32}, \lambda_{21}, \lambda_{10})$ which are the uncertain parameters due to the fact that their values are estimated from insufficient degradation data or elicited from expert judgment. Epistemic uncertainty associated to them, hence, needs to be taken into account and a proper mathematical representation of uncertainty of this nature is by fuzzy numbers (FNs). We choose triangular fuzzy numbers (TFNs) [41] to represent the uncertain parameters because their boundary values and most probable or most advisable values are considered easier to be elicited from experts than other FN types and they are widely used to represent uncertain parameters in reliability engineering [20, 24, 29, 41]. However, the proposed framework is generally suitable for fuzzy numbers with other

TABLE II
THE VALUES OF THE FUZZY PARAMETERS IN PDMP

Parameter	Value
$\vec{\omega}_b$	(9e-9, 1e-8, 1.1e-8) m ² /s
$\vec{\beta}_2$	(9%, 10%, 11%)
$\vec{\beta}_1$	(18%, 20%, 22%)
$\vec{\lambda}_{32}$	(2.7e-3, 3e-3, 3.3e-3) s-1
$\vec{\lambda}_{21}$	(2.7e-3, 3e-3, 3.3e-3) s-1
$\vec{\lambda}_{10}$	(2.7e-3, 3e-3, 3.3e-3) s-1

types of membership functions. The values of $\vec{\omega}_b$, $\vec{\beta}_{Y_p(t)}$, $\vec{\lambda}_{32}$, $\vec{\lambda}_{21}$ and $\vec{\lambda}_{10}$ are shown in Table II. The fuzzy numbers are assigned by considering a relative uncertainty of $\pm 10\%$ of the original parameters values.

The initial state of the system is assumed as follows:

$$\vec{Z}_0 = \begin{pmatrix} D_b(0) \\ Y_p(0) \end{pmatrix} = \begin{pmatrix} 0 \\ 3 \end{pmatrix}$$

which means that the two components are both in their perfect state. The initial PDF of the processes $(D_b(t), Y_p(t))_{t \geq 0}$, $p_0(x, i | \vec{\theta}_L, \vec{\theta}_K)$, hence equals to 1 if $(x, i) = (0, '3')$ and to 0 otherwise.

VI. RESULTS

A MC-based approach [33] can also be used to quantify the epistemic uncertainty, in alternative to the fuzzy arithmetic operations and fuzzy parameter programming procedure. The comparisons between the results of the reliability of the system at cut level $\alpha = 1$, i.e. without fuzziness in the parameters values, over a time horizon 1000s calculated by MC simulation and the FV scheme are shown in Fig. 5 and Fig. 6. In order to better understand the differences presented in Fig. 5 and Fig. 6, we have added below each original Figure one extra Figure, zooming on the time horizon between 800 s and 900 s to illustrate the results obtained by different methods. For the FV scheme, the state space $\mathbb{R}^+$ of $D_b(t)$ has been divided into an admissible mesh $\mathcal{M} = \bigcup_{n=0,1,2,\dots} [n\Delta x, (n+1)\Delta x[$ where $\Delta x = 1e-8 \text{ m}^2/\text{s}$ and the time space $\mathbb{R}^+$ into small intervals $\mathbb{R}^+ = \bigcup_{n=0,1,2,\dots} [n\Delta t, (n+1)\Delta t[$ by setting the time step $\Delta t = 1 \text{ s}$. All the experiments were carried out in MATLAB on a PC with an Intel Core 2 Duo CPU at 1.97 GHz and a RAM of 1.95 GB. The MC simulation method with 105 and 106 replications (named MC1 and MC2, respectively), and the proposed FV scheme are applied for the fuzzy reliability assessment of the system. The average computation time of MC1 and MC2 is respectively 0.94 s and 9.40 s, while that of the FV scheme is 0.20 s. The system reliability decreases more rapidly after around 885 s, because at that time the valve could fail, corresponding to the situation when the pump steps to the state '1' very quickly and stays there until the valve fails.

The quantitative comparison of the results over a time horizon 1000 s is shown in Table III. Compared with the results of MC2, the mean absolute relative difference (MARD) of the results of MC1 is 0.40%, while that of the results of the FV scheme is 0.17%. It is observed that the results of the FV

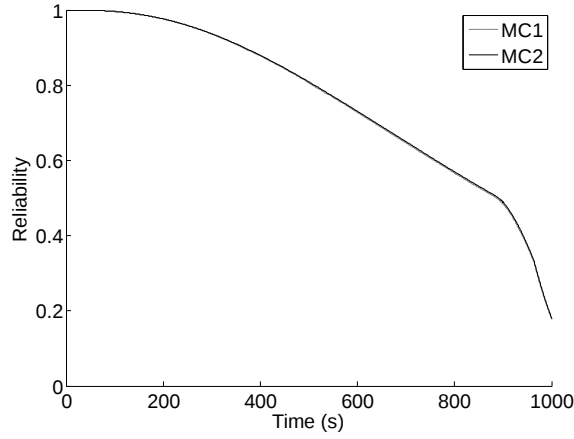


Fig. 5. Fuzzy reliability at cut level $\alpha = 1$ (no fuzziness) obtained by MC1 and MC2.

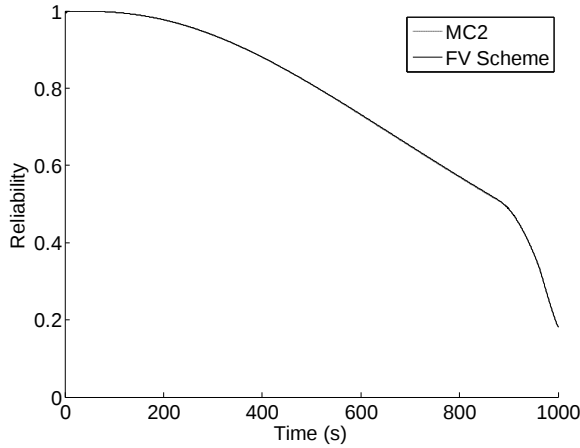


Fig. 6. Fuzzy reliability at cut level $\alpha = 1$ (no fuzziness) obtained by MC2 and FV scheme.

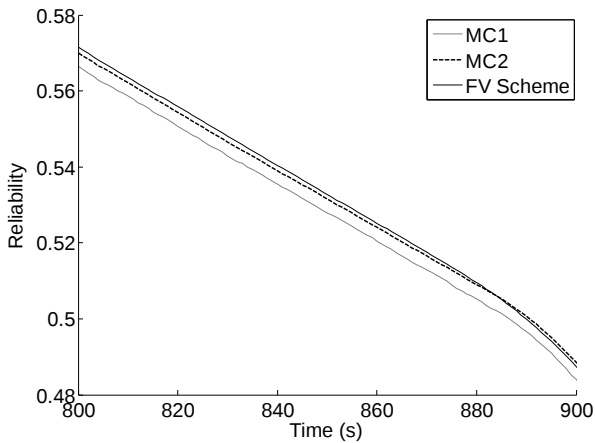


Fig. 7. Fuzzy reliability at cut level $\alpha = 1$ (no fuzziness) obtained by MC1, MC2 and FV scheme of time horizon between 800 s and 900 s.

scheme are closer to those of MC2, which is more accurate than that of MC1 because of the larger number of simulations.

TABLE III
THE VALUES OF THE FUZZY PARAMETERS IN PDMP

Method	MC2	MC1	Relative difference	FV scheme	Relative difference
Time					
100s	0.9965	0.9966	0.01%	0.9964	-0.01%
200s	0.9769	0.9766	-0.03%	0.9773	0.04%
300s	0.9372	0.9364	-0.09%	0.9379	0.07%
400s	0.8799	0.8780	-0.22%	0.8805	0.07%
500s	0.8094	0.8063	-0.38%	0.8102	0.10%
600s	0.7305	0.7283	-0.30%	0.7321	0.22%
700s	0.6496	0.6469	-0.42%	0.6513	0.26%
800s	0.5696	0.5664	-0.56%	0.5714	0.32%
900s	0.4873	0.4839	-0.70%	0.4874	0.02%
1000s	0.1801	0.1778	-1.28%	0.1811	0.56%

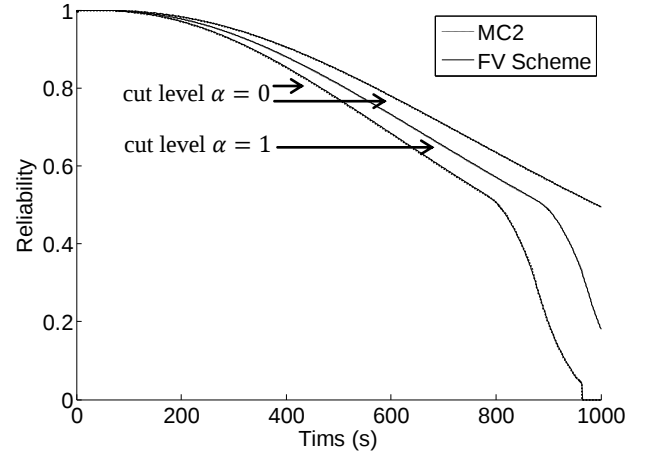


Fig. 8. Fuzzy reliability at cut levels $\alpha = 0$ and $\alpha = 1$ obtained by MC2 and FV scheme.

The results of the fuzzy reliability of the system at cut levels $\alpha = 0$ and $\alpha = 1$ over a time horizon 1000 s obtained by MC2 and FV scheme are shown in Fig. 8. The lower bound of the fuzzy reliability of the system at cut level $\alpha = 0$ decreases more sharply after around 790 s, earlier than the fuzzy reliability at $\alpha = 1$. It is seen that the system fails after around 964 s, because at that time the valve is completely failed. The upper bound of the fuzzy reliability at $\alpha = 0$ does not experience a rapid decrease because the valve is mostly functioning over the time horizon.

The membership function of fuzzy reliability $\tilde{R}(t)$ at mission time $t = 800$ s at different cut levels $\alpha \in [0, 1]$ obtained by MC simulation methods and FV scheme are illustrated in Fig. 9 and Fig. 10 (we have uniformly chosen 51 points in $[0, 1]$ with a step equal to 0.02 assigned to α). The average computation times of MC1 and MC2 are 20.19 s and 201.94 s respectively, while that of FV scheme is 15.91 s.

The quantitative comparison of the results of the membership functions obtained by the MC simulation methods and FV scheme is shown in Table IV. Compared with the results of MC2, the MARD of the results of MC1 is 0.38% while that of the FV scheme is 0.27%.

The above results show that the FV scheme achieves comparable results as MC2, with less computational burden.

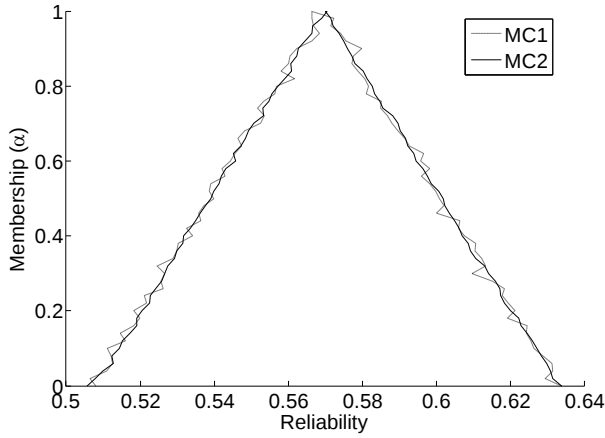


Fig. 9. Membership function of fuzzy reliability $\tilde{R}(t)$ at mission time $t = 800$ s obtained by MC1 and MC2.

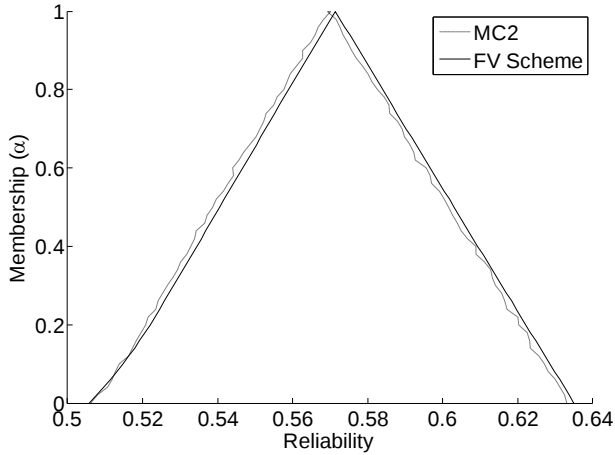


Fig. 10. Membership function of fuzzy reliability $\tilde{R}(t)$ at mission time $t = 800$ s obtained by MC2 and FV scheme.

VII. CONCLUSION

In system reliability modeling, it is important to be able to describe multiple dependent degradation processes, while including the uncertainty in their quantitative evaluation. In this work, we have considered the degradation dependencies

among different system components and within one component in the framework of PDMP modeling. Both PBMs and MSMs are used to describe the components degradation behavior. Epistemic Uncertainty due to the incomplete or imprecise knowledge about the degradation processes and the governing parameters is included by describing the model parameters as fuzzy numbers. For the calculation of the system (fuzzy) reliability, the FV method has been extended and shown to lead to comparable results as MC simulation, but with reduced computing time.

In future research, it will be interesting to consider the situation when aleatory uncertainty is associated with the parameters in the PDMP model.

ACKNOWLEDGMENT

The authors would like to thank Mrs. Dominique VASSEUR, Mr. Antoine DESPUJOLS and Mr. Emmanuel ARDILLON from the Department Industrial Risks Management (MRI), Electricité de France R&D for their insightful comments.


REFERENCES

- [1] Y. Wang and H. Pham, "Modeling the dependent competing risks with multiple degradation processes and random shock using time-varying copulas," *Reliability, IEEE Transactions on*, vol. 61, pp. 13-22, 2012.
- [2] J. Lei, F. Qianmei, and D. W. Coit, "Reliability and Maintenance Modeling for Dependent Competing Failure Processes With Shifting Failure Thresholds," *Reliability, IEEE Transactions on*, vol. 61, pp. 932-948, 2012.
- [3] N. Rasmekomen and A. K. Parlikad, "Maintenance Optimization for Asset Systems With Dependent Performance Degradation," *Reliability, IEEE Transactions on*, vol. 62, pp. 362 - 367, 2013.
- [4] M. Daigle and K. Goebel, "A model-based prognostics approach applied to pneumatic valves," *International Journal of Prognostics and Health Management*, vol. 2, p. 008, 2011.
- [5] M. Daigle and K. Goebel, "Multiple damage progression paths in model-based prognostics," in *Aerospace Conference, 2011 IEEE*, 2011, pp. 1-10.
- [6] E. Keedy and Q. Feng, "A physics-of-failure based reliability and maintenance modeling framework for stent deployment and operation," *Reliability Engineering & System Safety*, vol. 103, pp. 94-101, 2012.
- [7] S. Reggiani, S. Poli, M. Denison, E. Gnani, A. Gnudi, G. Baccarani, et al., "Physics-Based Analytical Model for HCS Degradation in STI-LDMOS Transistors," *Electron Devices, IEEE Transactions on*, vol. 58, pp. 3072-3080, 2011.
- [8] O. Chrysosaphinou, N. Limnios, and S. Malefaki, "Multi-state reliability systems under discrete time semi-Markovian hypothesis," *Reliability*,

TABLE IV
COMPARISON OF THE RESULTS OF THE MEMBERSHIP FUNCTION OBTAINED BY MC SIMULATION METHODS AND FV SCHEME

Method Cut level	MC2	MC1	Relative difference (Minimum/Maximum)	FV scheme	Relative difference (Minimum/Maximum)
$\alpha = 0$	[0.5062, 0.6330]	[0.5086, 0.6340]	0.47% / 0.16%	[0.5057, 0.6350]	-0.10% / 0.32%
$\alpha = 0.1$	[0.5137, 0.6271]	[0.5111, 0.6260]	-0.51% / 0.18%	[0.5148, 0.6285]	0.21% / 0.22%
$\alpha = 0.2$	[0.5209, 0.6203]	[0.5181, 0.6218]	-0.54% / 0.24%	[0.5220, 0.6221]	0.21% / 0.29%
$\alpha = 0.3$	[0.5266, 0.6141]	[0.5249, 0.6095]	-0.32% / -0.75%	[0.5283, 0.6157]	0.32% / 0.26%
$\alpha = 0.4$	[0.5329, 0.6088]	[0.5348, 0.6071]	0.36% / -0.28%	[0.5344, 0.6093]	0.28% / 0.08%
$\alpha = 0.5$	[0.5386, 0.6015]	[0.5413, 0.6001]	0.50% / -0.23%	[0.5405, 0.6030]	0.35% / 0.25%
$\alpha = 0.6$	[0.5440, 0.5955]	[0.5476, 0.5976]	0.66% / 0.35%	[0.5466, 0.5966]	0.48% / 0.18%
$\alpha = 0.7$	[0.5513, 0.5892]	[0.5529, 0.5880]	0.29% / -0.20%	[0.5528, 0.5903]	0.27% / 0.19%
$\alpha = 0.8$	[0.5577, 0.5825]	[0.5559, 0.5808]	-0.32% / -0.29%	[0.5590, 0.5840]	0.23% / 0.26%
$\alpha = 0.9$	[0.5626, 0.5756]	[0.5643, 0.5797]	0.30% / 0.71%	[0.5652, 0.5777]	0.46% / 0.36%

- IEEE Transactions on*, vol. 60, pp. 80-87, 2011.
- [9] M. Giorgio, M. Guida, and G. Pulcini, "An age-and state-dependent Markov model for degradation processes," *IIE Transactions*, vol. 43, pp. 621-632, 2011.
 - [10] W. Li and H. Pham, "Reliability modeling of multi-state degraded systems with multi-competing failures and random shocks," *Reliability, IEEE Transactions on*, vol. 54, pp. 297-303, 2005.
 - [11] A. Lisnianski and G. Levitin, *Multi-state system reliability: assessment, optimization and applications*: World scientific, 2003.
 - [12] Y.-F. Li, E. Zio, and Y.-H. Lin, "A Multistate Physics Model of Component Degradation Based on Stochastic Petri Nets and Simulation," *Reliability, IEEE Transactions on*, vol. 61, pp. 921-931, 2012.
 - [13] Y.-H. Lin, Y.-F. Li, and E. Zio, "Modeling Multiple Dependent Competing Degradation via Piecewise Deterministic Markov Process," *Manuscript submitted for publication*.
 - [14] P.-E. Labeau, "A Monte Carlo estimation of the marginal distributions in a problem of probabilistic dynamics," *Reliability Engineering & System Safety*, vol. 52, pp. 65-75, 1996.
 - [15] M. Marseguerra and E. Zio, "Monte Carlo approach to PSA for dynamic process systems," *Reliability Engineering & System Safety*, vol. 52, pp. 227-241, 1996.
 - [16] R. Eymard and S. Mercier, "Comparison of numerical methods for the assessment of production availability of a hybrid system," *Reliability Engineering & System Safety*, vol. 93, pp. 168-177, 2008.
 - [17] C. Cocozza-Thivent, R. Eymard, and S. Mercier, "A finite-volume scheme for dynamic reliability models," *IMA journal of numerical analysis*, vol. 26, pp. 446-471, 2006.
 - [18] R. Eymard, S. Mercier, and A. Prignet, "An implicit finite volume scheme for a scalar hyperbolic problem with measure data related to piecewise deterministic Markov processes," *Journal of Computational and Applied Mathematics*, vol. 222, pp. 293-323, 2008.
 - [19] M. Laviolette and J. W. Seaman Jr, "The efficacy of fuzzy representations of uncertainty," *Fuzzy Systems, IEEE Transactions on*, vol. 2, pp. 4-15, 1994.
 - [20] Y. Ding, M. J. Zuo, A. Lisnianski, and Z. Tian, "Fuzzy multi-state systems: general definitions, and performance assessment," *Reliability, IEEE Transactions on*, vol. 57, pp. 589-594, 2008.
 - [21] Y. Liu, W. Tang, and R. Zhao, "Reliability and mean time to failure of unrepairable systems with fuzzy random lifetimes," *Fuzzy Systems, IEEE Transactions on*, vol. 15, pp. 1009-1026, 2007.
 - [22] M. Bazu, "A combined fuzzy-logic and physics-of-failure approach to reliability prediction," *Reliability, IEEE Transactions on*, vol. 44, pp. 237-242, 1995.
 - [23] S. A. Sandri, D. Dubois, and H. W. Kalfsbeek, "Elicitation, assessment, and pooling of expert judgments using possibility theory," *Fuzzy Systems, IEEE Transactions on*, vol. 3, pp. 313-335, 1995.
 - [24] Y. Liu, H. Huang, and G. Levitin, "Reliability and performance assessment for fuzzy multi-state elements," *Proceedings of the Institution of Mechanical Engineers, Part O: Journal of Risk and Reliability*, vol. 222, pp. 675-686, 2008.
 - [25] Y. Li, E. Zio, and Y.-H. Lin, "A Multistate Physics Model of Component Degradation Based on Stochastic Petri Nets and Simulation," *Reliability, IEEE Transactions on*, vol. 61, pp. 921-931, 2012.
 - [26] H. Tanaka, L. Fan, F. Lai, and K. Toguchi, "Fault-tree analysis by fuzzy probability," *Reliability, IEEE Transactions on*, vol. 32, pp. 453-457, 1983.
 - [27] D. Singer, "A fuzzy set approach to fault tree and reliability analysis," *Fuzzy Sets and Systems*, vol. 34, pp. 145-155, 1990.
 - [28] J. Dunyak, I. W. Saad, and D. Wunsch, "A theory of independent fuzzy probability for system reliability," *Fuzzy Systems, IEEE Transactions on*, vol. 7, pp. 286-294, 1999.
 - [29] Y. Ding and A. Lisnianski, "Fuzzy universal generating functions for multi-state system reliability assessment," *Fuzzy Sets and Systems*, vol. 159, pp. 307-324, 2008.
 - [30] Y. F. Li, Y. Ding, and E. Zio, "Random Fuzzy Extension of the Universal Generating Function Approach for the Reliability Assessment of Multi-State Systems Under Aleatory and Epistemic Uncertainties," *Reliability, IEEE Transactions on*, vol. PP, pp. 1-1, 2014.
 - [31] M. Sallak, W. Schön, and F. Aguirre, "Reliability assessment for multi-state systems under uncertainties based on the Dempster-Shafer theory," *IIE Transactions*, vol. 45, pp. 995-1007, 2013/09/01 2012.
 - [32] C. Baudrit, D. Dubois, and D. Guyonnet, "Joint propagation and exploitation of probabilistic and possibilistic information in risk assessment," *Fuzzy Systems, IEEE Transactions on*, vol. 14, pp. 593-608, 2006.
 - [33] C. Baudrit, D. Dubois, and N. Perrot, "Representing parametric probabilistic models tainted with imprecision," *Fuzzy sets and systems*, vol. 159, pp. 1913-1928, 2008.
 - [34] R. Coudray and J. Mattei, "System reliability: An example of nuclear reactor system analysis," *Reliability Engineering*, vol. 7, pp. 89-121, 1984.
 - [35] J. Devooght and C. Smidts, "Probabilistic dynamics as a tool for dynamic PSA," *Reliability Engineering & System Safety*, vol. 52, pp. 185-196, 1996.
 - [36] M. H. Davis, *Markov models and optimization* vol. 49: CRC Press, 1993.
 - [37] L. A. Zadeh, "Fuzzy sets," *Information and control*, vol. 8, pp. 338-353, 1965.
 - [38] L. A. Zadeh, "Fuzzy sets as a basis for a theory of possibility," *Fuzzy sets and systems*, vol. 100, pp. 9-34, 1999.
 - [39] S. Zhang, M. Hodkiewicz, L. Ma, and J. Mathew, "Machinery condition prognosis using multivariate analysis," in *Engineering Asset Management*, ed: Springer, 2006, pp. 847-854.
 - [40] P. Moussou, S. Cambier, D. Lachene, S. Longarini, L. Paulhiac, and V. Villouvier, "Vibration investigation of a French PWR power plant piping system caused by cavitating butterfly valves," *ASME-PUBLICATIONS-PVP*, vol. 420, pp. 99-106, 2001.
 - [41] M. Sallak, C. Simon, and J.-F. Aubry, "A fuzzy probabilistic approach for determining safety integrity level," *Fuzzy Systems, IEEE Transactions on*, vol. 16, pp. 239-248, 2008.



Yan-Hui Lin has been a doctoral student at Chair on Systems Science and the Energetic Challenge, European Foundation for New Energy – EDF, CentraleSupélec, France since August 2012. He received the B.Sc. degree in Applied Mathematics from Beihang University, China, the M.Sc. degree in Applied Mathematics from Ecole Centrale Paris, France and the M.Sc. degree in Aircraft Design from Beihang University, China, in 2010, 2012 and 2013, respectively. His research interests are in reliability and degradation modeling, Monte Carlo simulation, and optimization under uncertainty.



Yan-Fu Li is an Assistant Professor at Chair on Systems Science and the Energetic Challenge, European Foundation for New Energy – EDF, CentraleSupélec, France. Dr. Li completed his PhD research in 2009 at National University of Singapore, and went to the University of Tennessee as a research associate. His current research interests include reliability modeling, uncertainty analysis, evolutionary computing, and Monte Carlo simulation. He is the author of more than 30 publications, all in refereed international journals, conferences, and books.



Enrico Zio received the Ph.D. degree in nuclear engineering from Politecnico di Milano and MIT in 1995 and 1998, respectively. He is currently Director of the Chair on Systems Science and the Energetic Challenge, European Foundation for New Energy – EDF, CentraleSupélec, France, and full professor at Politecnico di Milano. His research

focuses on the characterization and modeling of the failure/repair/maintenance behavior of components, complex systems and their reliability, maintainability, prognostics, safety, vulnerability and security, Monte Carlo simulation methods, soft computing techniques, and optimization heuristics.