



HAL
open science

Review of the experience with monitoring uncertainty requirements in the Clean Development Mechanism

Igor Shishlov, Valentin Bellassen

► **To cite this version:**

Igor Shishlov, Valentin Bellassen. Review of the experience with monitoring uncertainty requirements in the Clean Development Mechanism. *Climate Policy*, 2015, 0, pp.29. 10.1080/14693062.2015.1046414 . hal-01196466

HAL Id: hal-01196466

<https://hal.science/hal-01196466>

Submitted on 28 Jun 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Review of monitoring uncertainty requirements in the Clean Development Mechanism

Climate Policy, 16 (6), 703-731.

Corresponding author: Igor Shishlov, Research Fellow at CDC Climat Research, e-mail: igor.shishlov@cdcclimat.com, tel. +33644243682, address: 47 rue de la Victoire, 75009 Paris, France

Co-author: Valentin Bellassen, Research Fellow at French National Institute for Agricultural Research (INRA), e-mail: valentin.bellassen@dijon.inra.fr, tel. +33618598115, address: 26 bd Docteur Petitjean, BP 87999, 21079 Dijon Cedex, France

Abstract:

In order to ensure the environmental integrity of carbon offset projects, emission reductions certified under the Clean Development Mechanism (CDM) have to be ‘real, measurable and additional’, which is ensured *inter alia* through the monitoring, reporting and verification (MRV) process. MRV, however, comes at a cost that ranges from several cents to EUR1.20 and above per ton of CO_{2e} depending on the project type. This article analyzes monitoring uncertainty requirements for carbon offset projects with a particular focus on the trade-off between monitoring stringency and cost. To this end, existing literature is reviewed, overarching monitoring guidelines, as well as the 10 most-used methodologies are scrutinized, and finally three case studies are analysed. It is shown that there is indeed a natural trade-off between the stringency and the cost of monitoring, which if not addressed properly may become a major barrier for the implementation of offset projects in some sectors. It is then demonstrated that this trade-off has not been systematically addressed in the overarching CDM guidelines and that there are only limited incentives to reduce monitoring uncertainty. Some methodologies and calculation tools as well as some other offset standards, however, do incorporate provisions for a trade-off between monitoring costs and stringency. These provisions may take the form of discounting emissions reductions based on the level of monitoring uncertainty – or more implicitly through allowing a project developer to choose between monitoring a given parameter and using a conservative default value.

Policy relevance statement:

The CDM Executive Board acknowledged that the uncertainty of monitoring has not been treated in a consistent manner across methodologies and in the overarching guidelines. The first draft standard on uncertainty of measures was therefore proposed by the Executive Board in May 2013 and included *inter alia* provisions for discounting carbon credits based on monitoring uncertainty. This article support the introduction of such an uncertainty standard, which may help unlock previously untapped or under-represented sectors, while ensuring the environmental integrity through explicit uncertainty discounts.

Keywords: climate policy, carbon offsets, CDM, monitoring, uncertainty.

Acknowledgements: the authors would like to thank Axel Michaelowa (Perspectives), Massamba Thioue (UNFCCC), Benoît Leguet and Ian Cochran (CDC Climat Research) who provided valuable comments on preliminary versions of this paper. The authors are solely responsible for any errors or omissions.

1. Introduction

With over 7,500 registered projects and almost 1.5 billion tCO₂e of GHG emissions reduced in developing countries as of September 2014 (UNEP Risoe 2014), the Clean Development Mechanism (CDM) is the largest carbon offset scheme in the world. The CDM allows developing countries to host emissions reduction projects that generate tradable Certified Emission Reductions (CERs). The mechanism has raised more than US\$360 billion (UNEP Risoe 2014) of mostly private investments in climate change mitigation over 10 years. This figure is 10 to 20 times higher than the value of carbon assets generated. Indeed, the leverage effect of carbon finance enables to raise private investments in climate-friendly projects that may significantly exceed revenues from the sale of carbon credits (Shishlov and Bellassen 2013).

Being an offsetting mechanism, the CDM represents a climate ‘zero-sum’ game, whereby emissions reductions generated in developing countries can be used for compliance by developed countries and private companies (Shishlov and Bellassen 2012). Therefore, in order to ensure that the overall magnitude of GHG abatement does not decrease, emissions reductions under the CDM have to be ‘real, measurable and additional to any that would occur in the absence of the certified project activity’ (UN 1998).

Besides additionality and baselines, the monitoring, reporting and verification (MRV) framework is a crucial element to ensure the integrity of an offset system. MRV, however, comes at a cost and excessively stringent MRV requirements may therefore impede the implementation of projects in certain sectors. For instance, Michaelowa, Hayashi, and Marr (2009) demonstrated that excessively complex monitoring requirements were a major barrier for the implementation of household energy efficiency projects. Foucherot and Bellassen (2011) drew the same conclusion for most agricultural sub-sectors except bioenergy and waste management projects. Rogger, Beaurain, and Schmidt (2011) studied baseline and monitoring methodologies for the waste management sector and found that the methodology for the calculation of emission mitigation was the major barrier for composting projects.

While the past research demonstrated that the MRV rules under the CDM are often more stringent and less flexible than those of the EU ETS (Warnecke 2014), they did not specifically address the issue of monitoring uncertainty in carbon offsetting. Monitoring rules prescribed by the regulator come with an uncertainty range. As a result, the actual amount of emissions may differ from the reported amount even when agents abide by the rules. Different

approaches were suggested to address this uncertainty (see e.g. Monni et al. 2007; Wartmann, Groenenberg, and Brockett 2009), however, to our knowledge there has been no systematic review of the uncertainty treatment in practice under the CDM.

The ongoing discussion about the MRV framework for new market mechanisms as well as the reform of the existing ones calls for a review of the uncertainty requirements under the CDM framework and an analysis their potential influence on the implementation of emissions reduction projects. The main research question of this paper may therefore be formulated as follows: how is the monitoring uncertainty treated under the CDM and what impact does it have on the implementation of offset projects?

The paper proceeds as follows. First, the literature on monitoring uncertainty in climate policy and on monitoring costs is briefly reviewed, particularly focusing on the trade-off between stringency and costs of monitoring. Second, the overarching CDM guidelines and their translation into monitoring methodologies are scrutinized in order to understand whether the stringency-cost trade-off was taken into account in the CDM. Third, the 10 most-used methodologies are reviewed in order to understand whether the monitoring uncertainty is addressed in a systematic manner. Fourth, the impact of historical changes in monitoring requirements on feasibility of certain project types under the CDM is analyzed through three case studies. Finally, the study concludes with a policy recommendation for the CDM and New Market Mechanisms.

2. Monitoring uncertainty and costs in climate policy

This section reviews the existing literature on monitoring uncertainty and costs in climate policy. It is demonstrated that there is a natural trade-off between the uncertainty and the cost of monitoring and that monitoring uncertainty can be addressed by the regulator using ‘hard’ (uncertainty thresholds) or ‘soft’ (discount proportional to uncertainty) approaches.

2.1. Monitoring uncertainty in climate policy

Sectors and sub-sectors vary significantly in terms of monitoring approaches depending on the nature of GHG emissions. This in turn explains the need for multiple methodologies that reflect the peculiarities of different project types and sub-types. In practice not all sectors have precise and affordable monitoring methods, therefore, any climate policy has to find a way to

account for monitoring uncertainty. The OECD (1997) acknowledged that different countries or sectors may have different levels of GHG accounting uncertainty, which may result in inappropriate levels of exchange in emissions rights. For example, if an agent with poor data quality sells carbon credits to an agent with superior data quality, he is also exporting the emissions reduction uncertainty. In case the seller overestimates emissions reductions the overall level of emissions may therefore effectively increase compared to a situation without carbon trading and vice versa.

Monni et al. (2007) suggested three ways to deal with GHG monitoring uncertainty:

- allowing emissions trading only between sectors with comparable uncertainty levels, e.g. credits resulting from increasing carbon stocks in one country can be used to compensate reducing carbon stocks in another country, but not to compensate increased fossil fuel use;
- setting a maximum level of uncertainty allowed for a given sector to be eligible to participate in carbon trading, e.g. using the confidence intervals¹ approach;
- discounting the amount of carbon credits awarded for a given amount of emissions reduction based on the uncertainty of monitoring of these emissions reductions.

The first approach would result in a significant decrease in flexibility and therefore is not applied in the CDM. The second and the third approaches are sometimes used in the CDM, while often the uncertainty is not addressed at all (see Section 3).

Wartmann, Groenenberg, and Brockett (2009) proposed a combination of the two latter approaches to address monitoring uncertainty for Carbon Capture and Storage (CCS) sites under the EU ETS using the “uncertainty supplement”. This supplement – in other words an upward adjustment of a site’s emissions – would equal the difference between the accuracy that a scheme can provide and the maximum uncertainty required by the Monitoring and Reporting Guidelines of the EU ETS. Such an approach would not ban sites with high monitoring uncertainty from participation in the scheme, yet it would encourage development of more accurate monitoring techniques in the long-run.

¹ A statistical measure of the reliability of an estimate, for example, 95/5 confidence/precision interval means that there is a 95% chance that the true value lies within +/-5% of the estimate.

Another way of looking at monitoring uncertainty was suggested by Cantrell et al. (2012), who borrowed the logic of the insurance theory to assign a value to information uncertainty in climate policy. Similar to life insurance that takes into account distribution variance in life expectancy, a risk charge that accounts for uncertainty of GHG emissions is added to their valuation. If an insurance company does not charge a risk premium it will sooner or later go bankrupt due to the random pattern of indemnity payments. Conversely, if an insurer charges too high a risk premium, it will sooner or later be outcompeted by those insurers that can offer a better deal to their customers while keeping afloat themselves. Therefore, the better the company can estimate the uncertainty, the more competitive it becomes. Likewise, a climate regulator would charge a risk premium in order to ensure that emissions remain under a defined cap; otherwise he will 'go bankrupt on climate'. At the same time too large a premium may increase climate change mitigation costs unreasonably, rendering some emissions reductions unprofitable.

2.2. MRV costs in carbon offset projects

The CDM experience shows that MRV costs may vary significantly depending on project type and may be a major barrier for the implementation of projects in certain sectors. Upfront transaction costs borne by CDM project developers include Project Design Document (PDD) elaboration, internal validation costs, Designated Operational Entity (DOE)² fees, UNFCCC registration fees and the cost of installing monitoring equipment.

The CDM Market Support Study (Warnecke et al. 2013) is used here as the most reliable source for three main reasons. First, the data in this study is collected from a sample of DOEs and project developers in sectors, most represented in the CDM. Second, cost estimates of the study are consistent with previous research. Finally, it is the latest study available to our knowledge.

PDD elaboration costs range from EUR6,000-50,000 and depend on the complexity of the project. Internal validation costs range from EUR8,000-60,000, while DOE validation fees fall in the range of EUR20,000-70,000. UNFCCC registration fees depend on the amount of emissions reductions planned in the PDD and may be as low as EUR1,000 for a small-scale

² DOEs are independent auditors accredited by the CDM Executive Board to perform validation of CDM projects and verify their emissions reductions.

wind project to above EUR200,000 for a large-scale adipic acid project. The cost of monitoring equipment may range from zero – in case there is no additional CDM-specific equipment to be installed – to EUR 15,000 (Warnecke et al. 2013). Validation costs may also vary depending on the size and nature of a project. Notably, Programmes of Activities (PoAs) provide a framework for bundling several similar projects, thus reducing costs of registering each project when the critical mass is achieved. For example, a PoA focused on efficient cook stoves becomes less costly than a classic CDM as of the second project, while more complex project types may take 3-5 projects to achieve the economies of scale that justify the use of the PoA framework (Beaurain and Schmidt-Traub 2010).

Periodic transaction costs borne by CDM project developers include the internal costs of monitoring, verification by the DOE and UNFCCC issuance fees. The project developer is responsible for carrying out all monitoring activities, which is usually done either ‘in-house’ using the developer’s own resources or by a hired specialist consultant. This choice may significantly affect the actual monitoring costs: it was reported that the cost of the external consulting firm can exceed 1,000 euros per man-day, while internal costs may be considerably lower (Guigon, Bellassen, and Ambrosi 2009). It may, however, not be economically justifiable for smaller firms or projects to keep full-time employees responsible for monitoring and verification that occurs once a year or even more seldom. The estimates of periodic monitoring costs usually fall in the range of 3,000 to 18,000 euros per monitoring period (Warnecke et al. 2013).


The cost of the periodic verification of monitoring reports under the CDM has been estimated in the range of EUR5,000-30,000 per monitoring period (Warnecke et al. 2013). Project participants may reduce verification costs per ton of CO₂e by increasing the duration of monitoring periods and decreasing the frequency of reporting. Periodic verification costs may also vary depending on the nature of a project. For example it is estimated that verification costs for PoAs can be significantly higher and reach EUR40,000 (IGES 2013a).

Additional periodic costs borne by project proponents are related to the UNFCCC fees and the internal time consumed in dealings with the DOE. UNFCCC fees can amount to EUR0.08-0.15 per CER in addition to the 2% of the issued CERs, which go to the climate change adaptation fund. Projects and PoAs hosted by least-developed countries (LDCs) are exempt from the UNFCCC fees (CDM-EB65-A32-PROC).

Average relative transaction costs (i.e. all costs described above) over a crediting period of a CDM project (7 or 10 years) thus vary from few cents for HFC-23 and N₂O adipic acid projects

to EUR1.20 and above per ton of CO₂e for diffused small-scale projects, often representing a significant share in the cost structure of an offset project (Figure 1).

Figure 1 –Relative MRV costs over a crediting period of a CDM project

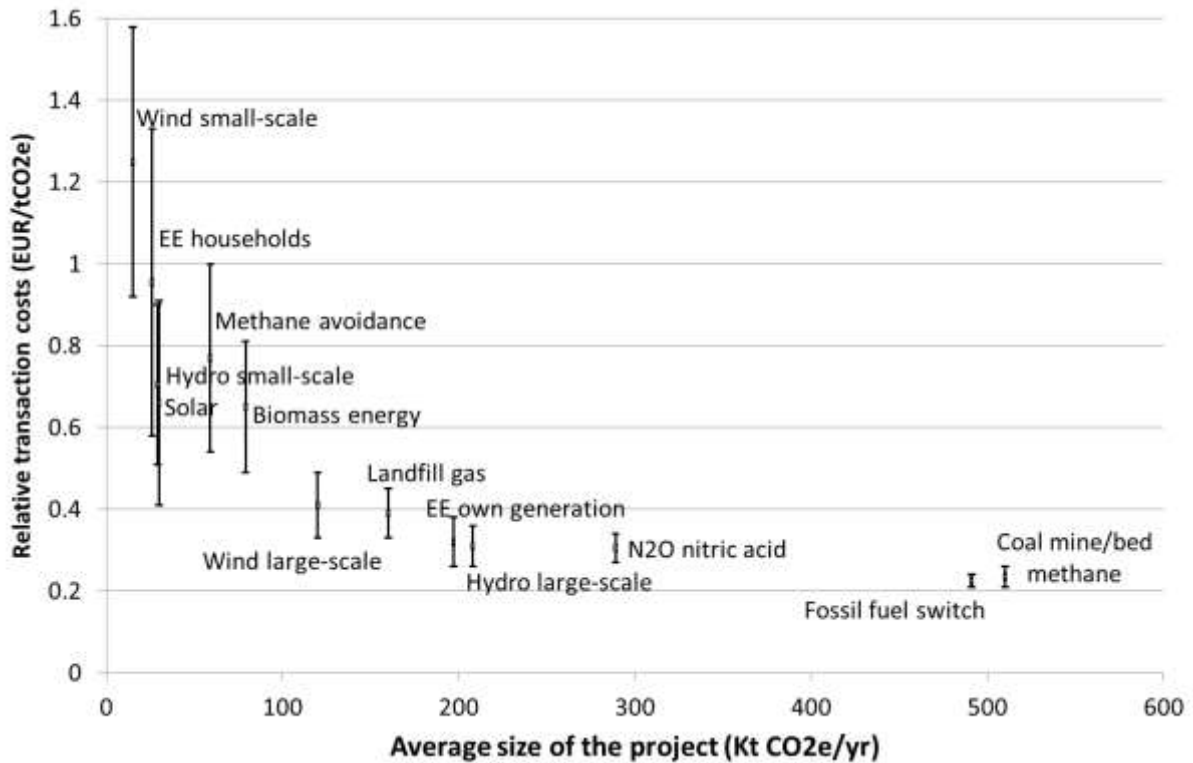

Source: CDC Climat Research based on Warnecke et al. (2013)

The importance of these transaction costs in the cost-structure of a CDM project naturally depends on the carbon price. In the “golden age” of the CDM – before carbon prices collapsed in 2012 – MRV costs could not seriously impact the financial attractiveness of project in most sectors. However, as the cumulative supply of CERs hit the upper limit for their use in the EU ETS – the main source of demand for carbon credits – market prices collapsed (Stephan, Bellassen, and Alberola 2014). Therefore, in the current market circumstances, transaction costs play a significant role for the financial viability of offset projects.

2.3. Cost-stringency trade-off

More accurate monitoring usually comes at an increasing cost, which in some sectors may constitute a major barrier to the implementation of projects. For example, Pearson et al. (2013) quantified monitoring costs in carbon sequestration projects to be in the range of 3% to 42% of total project costs. Indeed, in forestry projects the cost and precision of monitoring carbon

stocks may vary depending on the number of plots sampled – the monitoring error decreases with the increased number of samples, but the marginal benefit of more intense sampling is decreasing (OECD 2002). Although the CDM allows only afforestation and reforestation projects, this is a good example of the correlation between monitoring costs and precision. In this case achieving a high level of certainty may be prohibitively expensive, hence suboptimal.

A similar issue arises when monitoring soil carbon stocks. In their model of contracts for carbon sequestration policies for agriculture Antle et al. (2003) showed that the monitoring costs to achieve a 10% sampling error are in the range of EUR0.01-0.18, to achieve a 5% sampling error – in the range of EUR0.03-0.95, while achieving lower error results in proportionally higher monitoring costs. Similarly, Mäkipää et al. (2008) demonstrated in practice that a relatively high level of precision can be achieved with 10-20 samples per plot, while further increases in the number of samples do not yield any significant monitoring improvements.

These examples demonstrate that there is a trade-off between accuracy and costs of MRV in climate policy. Pearson, Walker, and Brown (2009) suggested the concept of ‘maximizing return on investment in monitoring’, which echoes this trade-off. According to the authors, a rational project developer would weigh the costs of improving monitoring against the potential amount of extra carbon credits generated. The intuitive view that reducing monitoring uncertainty pays off with extra carbon credits is commonly taken for granted by the industry (Cattaneo 2011). However, the reality of CDM rules often contradicts this view as the CDM does not prescribe consistent rules on treatment of uncertainty as explained in Section 3.

The review of the existing literature on monitoring uncertainty and costs yields three key lessons for climate policy in general and carbon offset mechanisms in particular:

- monitoring uncertainty can be addressed through ‘hard’ (minimum thresholds) or ‘flexible’ (discounting) approaches;
- MRV costs in the CDM vary drastically depending on the project type and size and depending on the carbon price may affect the financial attractiveness of a project;
- there is a trade-off between monitoring stringency and cost, which, if not addressed properly, may result in locking some low-cost abatement opportunities.

3. Analysis of monitoring uncertainty rules in carbon offset projects

This section examines whether the trade-off discussed above was incorporated in guidelines and methodologies for carbon offset projects under the CDM through incentives to reduce uncertainty. To this end, the overarching MRV guidelines and their translation into methodologies are reviewed and the treatment of uncertainty in monitoring rules under the CDM and in other carbon offset mechanisms is analyzed. This section thus provides a “snapshot” of the latest rules as of September 2014. It is demonstrated that the CDM provides only limited incentives for project developers to reduce uncertainty through adjustment of certain variables and parameters and that overall the treatment of uncertainty is inconsistent across methodologies.

3.1. Overarching CDM monitoring: no systematic treatment of uncertainty

While the Kyoto Protocol set out general principles of flexibility mechanisms, it did not specifically address the issue of monitoring GHG emissions reductions. Technical details and procedures were elaborated through subsequent negotiations. The most notable package of rules was established at the seventh Conference of the Parties (COP7) to the UNFCCC (UNFCCC 2002) in Marrakech in 2001 (often referred to as the ‘Marrakech Accords’) and confirmed at the first Conference of the Parties serving as the meeting of the Parties (CMP1) to the Kyoto Protocol at Montreal in 2005 (UNFCCC 2006). COP7 established inter alia *Modalities and Procedures for the implementation of the CDM* (17/CP.7), marking the official birth of the mechanism. Overarching monitoring requirements, with which methodologies must comply, are thus defined by the following documents:

- *Modalities and procedures for a clean development mechanism* (Decision 3/CMP.1) for general requirements for baseline and monitoring methodologies;
- *CDM Project Standard* (CDM-EB65-A05-STAN) for project design requirements including principles of monitoring;
- *CDM Project Cycle Procedure* (CDM-EB65-A32-PROC) for procedures for submission and publishing monitoring reports;
- *CDM Validation and Verification Standard* (CDM-EB65-A04-STAN) for procedures of validation and verification;

- Standard for sampling and surveys for the CDM (CDM-EB69-A04);
- Guidelines for completing the proposed new baseline and monitoring methodology form (CDM-EB66-A25-GUID).

According to the *CDM Modalities and Procedures* (Decision 3/CMP.1), Project Design Document (PDD) must include a monitoring plan that provides for “...*the collection and archiving of all relevant data necessary for estimating or measuring anthropogenic emissions by sources of greenhouse gases occurring within the project boundary during the crediting period*”. The *CDM Project Standard* further specifies that variables that continuously affect the amount of GHG emissions (reductions), such as the quantity of fuel input or the amount of gas captured have to be measured constantly, while variables that remain largely unchanged, e.g. emissions factors, have to be measured or calculated once a year (CDM-EB65-A05-STAN). Exceptions may be accepted on case-by-case basis during the review of methodologies.

With regards to data uncertainty, project developers have to ‘reduce bias and uncertainties as far as is practical/cost-effective, or otherwise use conservative assumptions, values and procedures to ensure that GHG emission reductions by sources or GHG removals by sinks are not over-estimated’ (CDM-EB65-A05-STAN). The same principle is applied to baselines: ‘the establishment of a baseline is considered conservative if the resulting projection of the baseline does not lead to an overestimation of emission reductions attributable to the CDM project activity’ (CDM-EB66-A25-GUID).

More specifically, ‘methodologies have to describe the uncertainty of key parameters and, where possible, provide an uncertainty range at 95% confidence level for key parameters for the calculation of emission reductions. Methodology developers are also encouraged to refer to chapter 6 of the *IPCC Good Practice Guidance and Uncertainty Management in National Greenhouse Gas Inventories* for more guidance on analysis of uncertainty’ (CDM-EB66-A25-GUID).

Quantification of monitoring uncertainty can be done in three different ways (CDM-EB68-A10):

- Using default values as provided in the 2006 IPCC guidelines; specifically, methodologies have to ‘describe the uncertainty of key parameters and, where possible, provide an uncertainty range at a 95% confidence level for key parameters for the calculation of emission reductions’ (CDM-EB66-A25-GUID)

- Using the confidence/precision concept for surveys and sampling; specifically, ‘project proponents shall use 90/10 confidence/precision as the criteria for reliability of sampling efforts for small-scale project activities and 95/10 for large-scale project activities’ (CDM-EB69-A4);
- Using manufacturer’s information for obtaining a meter’s uncertainty.

While the uncertainty has to be described and quantified, the CDM guidelines do not specify any accepted levels of uncertainty (Warnecke 2014). The overarching monitoring guidelines, thus, provide no explicit incentives for project developers to reduce uncertainty and do not include explicit provisions regarding the possible trade-off between the stringency of monitoring and the amount of carbon crediting.

The CDM Executive Board nevertheless attempted to adapt the stringency of monitoring to the importance of information at stake via adoption of the *Materiality Standard*. A piece of information is considered material if its omission or misstatement may lead to an overestimation of emissions reductions by more than a defined threshold dependent on the project size: from 0.5% for projects with annual emissions reductions of over 500 Kt CO_{2e} to 5% and 10% for small-scale and micro-scale projects respectively (Decision 9/CMP.7). Small-scale and micro-scale projects comprise 40% of all registered projects, however, they have issued less than 5% of all CERs as of September 2014 (UNEP Risoe 2014).

Overall, provisions of the *Standard for Sampling and Surveys for the CDM* and the *Materiality Standard* demonstrate that the CDM Executive Board followed the concept of materiality, whereby the stringency of monitoring requirements depends on the amount of emissions reductions at stake. Indeed, the CDM rules provide for a differentiation between large-scale and small-scale projects. It is worth noting, however, that the CDM followed a “learning-by-doing” approach, whereby rules, including those regarding materiality and monitoring, have evolved throughout its decade-long history (Shishlov and Bellassen 2012). Notably the CDM Project Standard (CDM-EB65-A05-STAN), the CDM Project Cycle Procedure (CDM-EB65-A32-PROC) and the CDM Validation and Verification Standard were adopted only in late-2011 and are therefore not applied to most existing projects.

3.2. Uncertainty requirements in monitoring methodologies

Methodologies specific to a project type or sub-type must comply with the CDM guidelines. Since CERs are issued against emissions reductions realized by a project, the issue of monitoring is closely linked to the issue of baseline setting. This is the reason why all CDM methodologies include rules for both baselines setting and monitoring. Stringent monitoring requirements together with the need to establish a baseline resulted in complex methodologies that are often costly to implement. Michaelowa, Hayashi, and Marr (2009) noted that the CDM Executive Board was very strict regarding the principles of data quality and conservativeness, which often resulted either in the rejection of newly proposed methodologies or the introduction of requirements to install prohibitively expensive monitoring equipment (such as in the case of the early methodology for landfill gas projects). Moreover, the bottom-up approach to developing methodologies resulted in multiple project-specific methodologies not tailored to be applied across all projects of the same type.

In light of this constraint, the CDM Executive Board attempted to consolidate methodologies to create a concise list of broadly applicable approaches and eliminate inconsistencies among them. As of September 2014 there were 208 active approved methodologies including 89 large-scale methodologies (AM), 23 large-scale consolidated methodologies (ACM), 92 small-scale methodologies (AMS), and 4 afforestation/reforestation (AR) methodologies (UNEP Risoe 2014).

The 10 most commonly used methodologies, representing over 80% of registered projects and over a third of credits issued³ as of September 2014, are analyzed in this paper (Annex 1). Three questions are asked about each methodology:

- what are the key variables or parameters to be monitored?
- what are the requirements regarding the calculation of uncertainty for these key variables or parameters and/or for the resulting estimate of emissions reduction?
- does this calculation impact the amount of credits issued to the project developer, through discounting or otherwise?

³ Top 10 methodologies do not include the methodology for HFC-23 projects, which account for 35% of all issued CERs. This project type has been extensively covered in the literature (e.g. in Schneider 2011) and is therefore not explicitly included in this analysis.

Our review (Annex 1) demonstrates that all top 10 methodologies allow for the use of some IPCC default values – namely through different CDM tools, such as for example the *Tool to calculate the Emission Factor for an electricity system*. These default values are provided by the IPCC with a 95% confidence interval and the choice of the uncertainty bound is in most cases done conservatively. This is an implicit discount for uncertainty. Nevertheless, the IPCC default values usually may only be used when the country- or project-specific data is not available. Moreover, most methodologies do not provide the possibility to reduce the discount with a more precise estimate. In addition, for default values from other sources than IPCC, methodologies do not use this conservativeness principle. As to measured variables, some of them are adjusted for uncertainty though discounts proportional to uncertainty or a default discount (Annex 1).

Most key parameters and variables in the 10 most commonly used methodologies (as of September 2014), however, are not adjusted for uncertainty (Table 1). There are therefore only limited incentives for project developers to reduce uncertainty below the minimum threshold. A detailed review of the 10 most commonly used methodologies is provided in the Annex 1.

Table 1 – Adjustment for uncertainty of key variables/parameters⁴ in the 10 most-used CDM methodologies as of September 2014

Methodology	No. of projects	Number of parameters/variables to which an implicit (conservativeness factor) or explicit discount is applied⁵
ACM0002 (renewable power)	3 210	0.13 out of 3
AMS-I.D. (renewable power)	2 077	0.13 out of 4
AMS-I.C. (thermal energy)	253	0.13 out of 5
AMS-III.H. (wastewater)	225	1.13 out of 5
ACM0001 (landfill gas)	221	1 out of 4
AMS-III.D. (manure management)	179	0.25 out of 4
ACM0006 (biomass)	122	0.18 out of 7
ACM0012 (waste energy)	111	0 out of 2
ACM0008 (coal bed/mine methane)	82	0 out of 3

⁴ “Key variables/parameters” are those identified as such in the CDM Methodology Booklet (UNFCCC 2013a).

⁵ When a “key variable/parameter” is itself composed of several calculation components (e.g. grid emission factor = f(OM vs BM weighting, amount of fuel, net calorific value of fuel, emission factor of fuel)), the number of these components for which a discount is applied is divided by the total number of calculation components. Hence the possibility of a discount being applied to 0.2 out of 4 key variables/parameters. This approach is clearly a coarse approximation of a thorough uncertainty analysis as defined by IPCC (2006) but the latter was beyond the scope of this paper.

Source: authors based on the review of CDM methodologies and calculation tools

Some other methodologies also use adjustment/discount factors to address uncertainty of measurements. For example:

- ACM0016 (mass rapid transport systems) uses the upper value of the 95% confidence interval for fuel consumption;
- ACM0014 (wastewater treatment), AR-ACM0003 and AR-AM0014 (forestry) use discount factors tied to different uncertainty ranges, i.e. an explicit discount for uncertainty;
- AM0018 (steam optimization) uses the standard error to account for uncertainty;
- AM0034 (N₂O nitric acid) explicitly included a provision for discounting carbon credits based on overall monitoring uncertainty. However, in June 2013, it was replaced by AM0019 that addresses monitoring uncertainty through the EN14181 standard.

The analysis above demonstrates that the CDM monitoring requirements have partly followed the conservativeness principle, mainly through the conservative choice of lower/upper uncertainty bounds for some IPCC default values as well as for some monitored variables. Conservativeness however is not applied in a consistent manner within and between methodologies: not all parameters and variable come with an uncertainty estimate and not all those for which a confidence interval is provided use the conservative limit of the interval.⁶

Moreover, existing CDM guidelines and methodologies lack the incentive to reduce uncertainty above the given confidence/precision threshold (e.g. 95/5 or 90/10). The flexibility option to choose the level of uncertainty based on the cost of monitoring has thus been largely omitted in monitoring guidelines and most methodologies.

The CDM Executive Board acknowledged that the rules regarding treatment of uncertainty apply only to selected variables and are not consistent across methodologies. At its 39th meeting in 2008 the Executive Board requested that the Methodology Panel work on the guidelines regarding treatment of uncertainty including the issue ‘flexibility to choose the level

⁶ This is not saying that the conservative limit should always been used: if applied to estimates based on many parameters, the result would certainly be overly conservative. This is why IPCC provides methodologies to assess the overall uncertainty of the estimate.

of uncertainty’ (CDM-EB39). However, the topic was not prioritized and was not further developed until CMP7 that took place in Durban in 2011 re-opened the issue and requested the Executive Board to ‘address the issue of uncertainties of measurements in baseline and monitoring methodologies, so that these types of uncertainties do not need to be considered in addressing materiality’ (9/CMP.7). Since 2012, the Executive Board has been working on developing a new standard (or amending the existing ones) to address the issue of monitoring uncertainty in a systematic way. The new rules ‘should provide flexibility in optimizing measurement instrumentation based on cost-benefit considerations’ (CDM-EB73-AA-A04). As of September 2014, the Standard has not been adopted, therefore its implications could not be evaluated at the time of publication.

3.3. Treatment of uncertainty in other carbon offset standards

Unlike the CDM, several voluntary offset standards provide explicit guidelines regarding the treatment of emissions reduction uncertainty. Notably, the largest voluntary offset standard – the Verified Carbon Standard (VCS) – explicitly incorporates the issue of monitoring uncertainty in its two main documents:

- *The VCS Program Guide* stipulates that ‘all GHG emission reductions and removals must be quantifiable using recognized measurement tools (including adjustments for uncertainty and leakage) against a credible emissions baseline’ (VCS 2012a).
- *The VCS Standard* stipulates that methodologies have to clearly explain uncertainties related to assumptions, parameters and procedures and how they are addressed. 90 or 95 percent confidence interval of parameters has to be estimated: ‘where a methodology applies a 90 percent confidence interval and the width of the confidence interval exceeds 20 percent of the estimated value or where a methodology applies a 95 percent confidence interval and the width of the confidence interval exceeds 30 percent of the estimated value, *an appropriate confidence deduction shall be applied*’ (VCS 2012b).

Uncertainty of carbon stocks is of particular concern in forestry projects. The Chicago Climate Exchange (CCX) Forestry Carbon Sequestration Project Protocol addresses this issue through discounting. Model estimates of net changes in carbon stocks are discounted by twice the reported statistical error at a 90% confidence interval. Moreover, CCX provides project

developers with an explicit incentive to apply more accurate monitoring, as ‘no discount will be applied for instances when in-field inventories are conducted on an annual basis’. It is also stipulated that ‘in order to encourage high-quality inventories, smaller discounts are applied to projects with a higher degree of accuracy for a given level of precision’ (CCX 2009). Another CCX methodology – for Avoided Emissions from Organic Waste Disposal – applies a default discount factor of 0.9 to baseline emissions to account for uncertainties.

The Climate Action Reserve (CAR) Program Manual provides for the principle of conservativeness similar to that of the CDM. At the same time ‘the Reserve retains the right to reject a variance, request further documentation, or *impose additional constraints and/or discount factors* on the proposed monitoring or measuring methods’ (CAR 2011). There is thus a legal window for the regulator to apply discounting for monitoring uncertainty.

The Japan Verified Emission Reduction (J-VER) scheme incorporated more flexible overall MRV requirements compared to the CDM. The monitoring process is significantly simplified with a wide use of conservative default values to calculate emissions reductions (IGES 2013b).

Apart from carbon offsetting, some other policies provide for a trade-off between monitoring costs and accuracy. For example, Vine and Sathaye (2000) noted that the US Environmental Protection Agency’s Conservation Verification Protocols provide an incentive for more rigorous monitoring of energy efficiency improvements, whereby developers adopting more stringent monitoring with inspections are eligible for higher rewards, while those using default values can only claim a part of energy savings.

4. Case studies: monitoring stringency and feasibility of offset projects

This section reviews three case studies illustrating that monitoring requirements may become a major barrier for implementation of projects. It is demonstrated that the Executive Board adopted a ‘case-by-case’ approach to the treatment of uncertainty in some cases attempting to balance the cost and stringency of monitoring requirements. Project types with scattered emissions reduction sources that have not been addressed in section 3.2 were selected for the case studies.

4.1. Compact fluorescent lamps

Despite its emissions reduction potential, demand-side energy efficiency (with a notable exception of waste heat recovery projects) remains largely underrepresented in the CDM. In

general, the main obstacles for energy efficiency projects include high technical and financial risk, imperfect information, hidden costs, access to capital, split incentives and bounded rationality (Sorrell, Mallett, and Nye 2011). Additionally, the diffuse nature of energy efficiency projects may result in prohibitively complex and/or expensive monitoring. Apart from cumbersome monitoring, energy efficiency projects under the CDM suffered from a very high methodology rejection rate due to issues with baseline conservativeness (Müller-Pelzer and Michaelowa 2005).

Michaelowa, Hayashi, and Marr (2009) analyzed two early methodologies (AM0046 and AMS-II.C) for projects focused on distribution of compact fluorescent lamps (CFLs) and concluded that they involved prohibitively complex and expensive monitoring and sampling requirements. Notably, developers were required to sample four groups of at least 100 households each – two participating in the projects and two reference groups. Moreover, the utilization of each lamp had to be directly measured using a meter attached to the lamp cable. Millard-Ball and Ortolano (2010) confirmed this finding, noting that two years after the approval of methodology AM0046 not a single project managed to get registered under the CDM due to excessively rigorous monitoring requirements.

In order to address this challenge, a new methodology (AMS-II.J) was developed and approved in 2008 that substituted certain monitoring requirements with the ex-ante calculation of ‘deemed’ parameters. Interestingly, the ‘deemed savings’ approach was *de facto* previously used in the project 0079: ‘Kuyasa low-cost urban housing energy upgrade project’ registered under the AMS-II.C methodology. Although this methodology required direct monitoring of power consumption and of operating hours, the developer managed to work around these requirements and to estimate these parameters in the PDD using manufacturer’s data and an ex-ante study respectively (Niederberger, Limaye, and Brunner 2007).

The new methodology AMS-II.J offered project developers a choice between direct measurement and applying a ‘default value’ for the following parameters (UNFCCC 2013b):

- Number of daily operating hours of a CFL: measured according to sampling requirements of the methodology or a default value of 3.5 hours;
- Average annual technical grid losses (transmission and distribution): data published either by a national utility or an official governmental body or a default value of 10% if data cannot be regarded as reliable;

- Net-to-gross adjustment factor (share of energy savings that can be attributed to the project): value based on a lighting use survey or a default value of 0.95.

Michaelowa, Hayashi, and Marr (2009) calculated that the reduced monitoring stringency in the AMS-II.J methodology may come at a cost of about 30% less CERs awarded compared to AMS-II.C due to highly conservative assumptions regarding deemed parameters. Nevertheless, this methodology proved to be the most popular among projects focused on efficient lighting: it was used by 36 out of 42 registered CDM projects and 61 out of 71 registered CDM PoAs as of March 2013 (UNEP Risoe 2014).

The example of demand side energy efficiency projects thus shows that despite the absence of an explicit trade-off between monitoring precision and the amount of carbon credits awarded in the overarching CDM guidelines, this trade-off may nevertheless materialize in methodologies applying to the same project type that require different levels of precision balanced by an adjustment of carbon crediting. Moreover, the methodology AMS-II.J provided developers with a possibility to choose the level of monitoring stringency based on their cost considerations. Finally, the availability of different monitoring methodologies for the same sector provides for an implicit monitoring flexibility through the choice of methodology.

4.2. Efficient cook stoves

Another sub-sector where complex monitoring was perceived as a major barrier for implementation of projects is the distribution of efficient cook stoves. Due to the diffused nature of these projects, precise monitoring of emissions reductions is virtually impossible and, therefore, estimations based on samples, surveys and tests are warranted. Emissions reductions from the use of efficient cook stoves are calculated as a product of the amount of woody biomass saved, i.e. fuel consumption, the fraction that is considered non-renewable biomass (fNRB), the emission factor for the fossil fuel and the net calorific value (NCV) of the biomass (Lee et al. 2013). While the NCV is taken from the IPCC Emission Factor Database, the three other parameters must be estimated.

The main methodology used by over 90% of cook stove CDM projects and PoAs (AMS-II.G) allows developers to choose among three methods to measure fuel consumption:

- the Kitchen Performance Test (KPT), conducted in the field and aimed at observing real-life consumption behavior over several days;

- the Controlled Cooking Test (CCT), conducted in a laboratory or in the field and aimed at measuring fuel consumption in a representative cooking task performed by a local cook;
- the Water Boiling Test (WBT), conducted in a laboratory and aimed at measuring fuel consumption in a standardized setting (water-boiling).

These methods provide another example of a trade-off between cost and precision of monitoring. Although laboratory tests enable controlling for errors, which is not possible during field tests, they usually result in lower quality data. For example, Johnson et al. (2007) in their study of a project in Mexico found that using the WBT results in a significant underestimation of emissions reductions. At the same time, despite the fact that field tests may yield better quality data and potentially more carbon credits, most projects resort to simpler WBT in their CDM projects (Lee et al. 2013).

The trade-off between monitoring uncertainty and the amount of carbon credits can also be illustrated through differences in monitoring requirements in the CDM and the Gold Standard. Unlike the CDM methodology, the Gold Standard requires developers to conduct the KPT, while the two other methods are not allowed. In addition to monitoring requirements of the CDM, the Gold Standard methodology obliges developers to biennially check the fraction of non-renewable biomass and to conduct quarterly kitchen surveys, effectively increasing the cost of monitoring. At the same time, the Gold Standard in addition to carbon dioxide (CO₂) takes into account reduction in emissions of methane (CH₄) and nitrous oxide (N₂O), potentially enabling projects to claim more carbon credits (Blunck et al. 2011).

Neither the CDM nor the Gold Standard requires calculating uncertainty for the two other monitored parameters, namely the emission factor and the fraction of non-renewable biomass in fuel (fNRB). Johnson, Edwards, and Masera (2010) suggested that if this uncertainty is taken into account, offset projects would result in zero carbon crediting if the conservative bound of the 95% confidence interval is applied. The authors also proposed their own monitoring approach based on ‘local community sub sampling of emission factors and fuel consumption combined with spatially explicit community-level estimates of non-renewable fuel usage’. Although incurring higher monitoring costs, it may allow project developers to claim larger amounts of carbon credits.

Cook stove methodologies thus provide yet another example of an implicit trade-off between monitoring cost and stringency: a tradeoff between standards – the Gold Standard being more stringent but more lucrative as Gold Standard credits usually sell at a premium compared with CERs – and a trade-off between monitoring options within the CDM as less stringent options use more conservative values, potentially decreasing the amount of credits obtained.

4.3. Transportation

Transportation accounts for 13% of GHG emissions worldwide (IPCC 2007), yet the share of this sector in the CDM is miniscule. One of the commonly reported barriers to implementation of these projects is the complexity of monitoring of diffused emissions reductions. Millard-Ball and Ortolano (2010) conducted 29 interviews with project developers, consultants and members of the CDM Methodology Panel and identified three key groups of barriers that hamper the implementation of CDM projects in the transportation sector:

- inherent challenges of quantification of diffused emissions;
- stringency of the Methodology Panel regarding the approval of methodologies;
- stringent treatment of uncertainty in ‘leakage’ and ‘rebound’ effects for transportation methodologies compared to other sectors.

Romero (2012) noted that methodologies dealing with improved transportation energy efficiency include reasonable monitoring requirements. The methodology AMS-III.AA, for instance, requires monitoring of fuel efficiency in vehicles (baseline and project), annual average distance and the number of operating vehicles. Conversely, methodologies focusing on transportation mode shift – e.g. AM0031 for mass transport system – require monitoring of multiple parameters including transport modes in the absence of the project, fuel consumption of these modes, fuel types used by different modes, distance of travel with different modes, occupancy rate and number of new passengers.

The UNFCCC Practitioner Workshop on the Improvement of CDM Methodologies for Transportation highlighted that monitoring costs in existing transportation methodologies (AM0031 for bus rapid transit and ACM0016 for mass rapid transit) can be prohibitively high – up to EUR144,000 mainly due to multiple surveys required (Replogle and Bakker 2011). The development of a PDD for a typical transportation project was estimated to cost EUR112,000-150,000 (ADB 2013), three times the average for CDM projects. These costs may not be critical for very large transportation projects, however, the median size of 28

registered CDM projects focused on transportation is only 55 Kt CO₂e per year (UNEP Risoe 2014). Similar to Millard-Ball and Ortolano (2010), Replogle and Bakker (2011) emphasized that the requirements to monitor leakage may be excessively stringent in transportation projects. For example, measurement of the occupancy rate may cost a project developer up to EUR18,000 per monitoring period, while according to the reports this parameter does not change significantly over time and hence only marginally improves monitoring precision. One can therefore conclude that the ‘delicate balance between accuracy and practicality is necessary in designing the MRV framework’ called for by IGES (2013) has not yet been reached in transportation methodologies.

Recognizing these challenges, the CDM Executive Board revised the methodology AM0031 to reduce the number of surveys necessary from annual to one every three years. Another proposed solution to the problem of high monitoring costs in transportation was to continue regular monitoring of activity until the observed emissions reductions per citizen stabilize within +/-10% range, after which the monitoring frequency, and hence costs, may be considerably reduced (Zegras, Chen, and Grütter 2009).

4.4. Case-by-case approach to monitoring stringency

These three case studies illustrate the case-by-case approach of the CDM with regards to the trade-off between monitoring stringency and monitoring costs. As the overarching CDM guidelines do not provide clear explicit guidance on this issue, the CDM Executive Board and the Methodology Panel tend to start with strong requirements. Yet, these instances prove flexible when they see, on a case-by-case basis, that the monitoring requirements prevent projects from emerging in a given sub-sector: the monitoring requirements may then be reduced in a new methodology, or a trade-off could be offered between the amount of credits and monitoring stringency to project developers.

The CDM Executive Board acknowledged that the uncertainty of monitoring has not been treated in a consistent manner across methodologies and in the overarching guidelines. The first draft standard on uncertainty of measures was therefore proposed by the Executive Board in May 2013 and included inter alia provisions for discounting carbon credits based on monitoring uncertainty: ‘if the overall measurement uncertainty exceeds five per cent, the aggregated emission reductions shall be adjusted by the calculated overall uncertainty’ (CDM-EB73-AA-A04). The draft also proposed specific formulas for calculating overall monitoring

uncertainty of a project. Introducing such a standard would give project developers more flexibility in choosing their monitoring approach, which may help unlock previously untapped or under-represented sectors, while ensuring the environmental integrity through explicit uncertainty discounts. This ‘learning-by-doing’ approach is quite typical of the CDM, as demonstrated by Shishlov and Bellassen (2012) regarding other issues such as perverse incentives in HFC projects, materiality in verification, standardization of baselines etc.

5. Conclusion

This paper analyzed monitoring uncertainty requirements for carbon offset projects under the CDM scheme with a particular focus on the trade-off between monitoring stringency, particularly treatment of uncertainty, and costs.

The evidence was built, both systematic – through the analysis of overarching CDM guidelines and the 10 most used CDM methodologies – and anecdotal – through three case studies – that the CDM monitoring requirements have partly followed the conservativeness principle, mainly through a conservative choice of lower/upper uncertainty bounds for some IPCC default values as well as for some monitored variables. At the same time, existing CDM guidelines and methodologies do not provide project developers with an incentive to reduce uncertainty below the given confidence/precision threshold (e.g. 95/5 or 90/10). The flexibility option to choose the uncertainty based on the cost of monitoring has thus been so far largely omitted in monitoring guidelines and in most methodologies.

More generally, the issue of monitoring uncertainty has not yet been addressed in a systematic manner in the CDM. Some methodologies and calculation tools as well as some other offset standards, however, do incorporate provisions for a trade-off between the stringency and the costs of monitoring. These provisions may take the form of discounting emissions reductions based on the level of monitoring uncertainty or more implicitly allowing a project developer to choose between monitoring a given parameter and using a conservative default value. The CDM Executive Board acknowledged that monitoring uncertainty has not been treated in a consistent manner and the draft standard on uncertainty was subsequently presented in May 2013. This paper supports the implementation of this standard for more comprehensive, yet cost-efficient, accounting for monitoring uncertainty in carbon offset projects.

Moreover, in the light of the ongoing discussions on the New Market Mechanisms as well as the operationalization of the Green Climate Fund and different national mitigation policies,

three key lessons learnt from the CDM experience with regards to monitoring uncertainty have to be taken into account:

- Monitoring emissions reductions comes at a cost, which is generally inversely proportional to monitoring uncertainty and the size of a project on a *per ton of CO₂e* basis. Too stringent monitoring requirements may therefore impede the implementation of projects, particularly affecting smaller projects.
- The regulator may provide project developers with a certain level of monitoring flexibility either implicitly – through offering a choice between monitoring a parameter and a default value – and explicitly – through imposing a discount proportional uncertainty.
- New mechanisms should nevertheless provide systematic guidance as to how uncertainty should be assessed, limited and/or disincentivized. While we showed that the CDM has so far failed to provide such a systematic treatment of uncertainty, its current attempt to do so and the various treatments of uncertainty existing in as many CDM methodologies constitute a solid basis for designing uncertainty requirements.

6. Bibliography

- ADB. 2013. “The Clean Development Mechanism. A Field Guide for Transport Projects”. Asian Development Bank.
- Antle, J., S. Capalbo, S. Mooney, E. Elliott, and K. Paustian. 2003. “Spatial Heterogeneity, Contract Design, and the Efficiency of Carbon Sequestration Policies for Agriculture.” *Journal of Environmental Economics and Management* 46 (2): 231–250.
- Beaurain, F., and G. Schmidt-Traub. 2010. “Developing CDM Programmes of Activities: a Guidebook”. South Pole.
- Blunck, M., C. Griebenow, M. Rammelt, and C. Zimm. 2011. “Carbon Markets for Improved Cooking Stoves”. A GIZ guide for project operators.
- Cantrell, J., K. Kiser, E. Marland, G. Marland, and K. Shirley. 2012. “The Impact of Uncertainty Methodologies on Dealing with Time Issues in LCA and GHG Accounting”. Working Paper. Appalachian State University. <http://economics.appstate.edu/sites/economics.appstate.edu/files/Marland12.pdf>.
- CAR. 2011. “Program Manual”. Climate Action Reserve.
- Cattaneo, A. 2011. “The Role of Measurement in the Economics of REDD+” presented at the Planet Action REDD+ Workshop, October 26, Paris.
- CCX. 2009. “Forestry Carbon Sequestration Project Protocol”. Chicago Climate Exchange.
- Foucherot, C., and V. Bellassen. 2011. “Carbon Offset Projects in the Agricultural Sector”. Climate Report, CDC Climat Research. http://www.cdclimat.com/IMG/pdf/11-12-15_climate_report_31_-_carbon_offset_projects_in_the_agricultural_sector.pdf.
- Guigon, P., V. Bellassen, and P. Ambrosi. 2009. “Voluntary Carbon Markets: What the Standards Say...” Working Paper, Mission Climat. Caisse des Depots.
- Haya, B. 2009. “Measuring Emissions Against an Alternative Future: Fundamental Flaws in the Structure of the Kyoto Protocol’s Clean Development Mechanism”. Working Paper. University of California, Berkeley.
- Haya, B., and P. Parekh. 2011. “Hydropower in the CDM: Examining Additionality and Criteria for Sustainability”. Working Paper, the Energy and Resources Group. University of California, Berkeley. http://erg.berkeley.edu/working_paper/2011/Haya%20Parekh-2011-Hydropower%20in%20the%20CDM.pdf.
- IGES. 2013a. “One Hundred Questions & Answers About MRV in Developing Countries”. v.1.1.2. Institute for Global Environmental Strategies.
- . 2013b. “Measurement, Reporting, And Verification (MRV) For Low Carbon Development: Learning From Experience In Asia”. Policy Report. Edited by: K. Koakutsu, K. Usui, A. Watarai, Y. Takagi. Institute for Global Environmental Strategies.
- IPCC. 2007. “Climate Change 2007”. 4th Assessment Report.
- Johnson, M., R. Edwards, A. Ghilardi, V. Berrueta, and O. Masera. 2007. “Why Current Assessment Methods May Lead to Significant Underestimation of GHG Reductions of Improved Stoves.” *Boiling Point* 54: 11–14.
- Johnson, M., R. Edwards, and O. Masera. 2010. “Improved Stove Programs Need Robust Methods to Estimate Carbon Offsets.” *Climatic Change* 102 (3-4): 641–649.
- Lee, C., C. Chandler, M. Lazarus, and F. Johnson. 2013. “Assessing the Climate Impacts of Cookstove Projects: Issues in Emissions Accounting”. Working Paper. Stockholm Environment Institute.

- Mäkipää, R., M. Hakkinen, P. Muukkonen, and M. Peltoniemi. 2008. "The Costs of Monitoring Changes in Forest Soil Carbon Stocks." *Boreal Environment Research* 13: 120–130.
- Michaelowa, A., D. Hayashi, and M. Marr. 2009. "Challenges for Energy Efficiency Improvement Under the CDM—the Case of Energy-efficient Lighting." *Energy Efficiency* 2 (4): 353–367.
- Millard-Ball, Adam, and Leonard Ortolano. 2010. "Constructing Carbon Offsets: The Obstacles to Quantifying Emission Reductions." *Energy Policy* 38 (1): 533–546.
- Monni, S., S. Syri, R. Pipatti, and I. Savolainen. 2007. "Extension of EU Emissions Trading Scheme to Other Sectors and Gases: Consequences for Uncertainty of Total Tradable Amount." In *Accounting for Climate Change. Uncertainty in Greenhouse Gas Inventories—Verification, Compliance, and Trading*, 109–118. Springer. http://link.springer.com/chapter/10.1007/978-1-4020-5930-8_9.
- Müller-Pelzer, F., and A. Michaelowa. 2005. "Lessons from the Submission and Approval Process of Energy-efficiency CDM Baseline and Monitoring Methodologies". Research Paper. HWWI. <http://www.econstor.eu/handle/10419/48237>.
- Niederberger, A., D. Limaye, and C. Brunner. 2007. "Demand-side Programs to Promote High-efficiency Electrical End-use Technologies Using Deemed Savings". Justification of Proposed New SSC Methodology. <http://cdm.unfccc.int/filestorage/7/F/3/7F3DLZEKW5SJRTW615VAAF01NUUTGI/Appendix%201%20Justification%20of%20Proposed%20New%20SSC%20Methodology.pdf?t=QmZ8bXAwYXhvfDAzaCJxdXpU0ij4OYgJhNll>.
- OECD. 1997. "Questions and Answers on Emissions Trading Among Annex I Parties". Informaion Paper. Organisation for Economic Co-operation and Development & International Energy Agency.
- . 2002. "Developing Guidance on Monitoring and Project Boundaries". Information Paper COM/ENV/EPOC/IEA/SLT(2002)2.
- Pearson, T., S. Brown, B. Sohngen, J. Henman, and S. Ohrel. 2013. "Transaction Costs for Carbon Sequestration Projects in the Tropical Forest Sector." *Mitigation and Adaptation Strategies for Global Change*: 1–14.
- Pearson, T., S. Walker, and S. Brown. 2009. "Project-based Mechanisms: Methodological Approaches for Measuring and Monitoring Carbon Credits." In *Climate Change and Forests: Emerging Policy and Market Opportunities*, 135–147. Brookings Institution Press.
- Replogle, M., and S. Bakker. 2011. "Can the Clean Development Mechanism Be Made More Effective for the Transportation Sector?" Report to the UNFCCC Practitioner Workshop on the Improvement of CDM Methodologies for Transportation. Bonn, Germany.
- Rogger, Cyrill, Francois Beaurain, and Tobias S. Schmidt. 2011. "Composting Projects Under the Clean Development Mechanism: Sustainable Contribution to Mitigate Climate Change." *Waste Management* 31 (1): 138–146.
- Romero, J. 2012. "NAMAs, CDM and MRV: The Case of Transport Sector". IGES Working Paper. Institute for Global Environmental Strategies. http://enviroscope.iges.or.jp/modules/envirolib/upload/3506/attach/10_namas-cdm-mrv.pdf.
- Schneider, L. 2009. "Assessing the Additionality of CDM Projects: Practical Experiences and Lessons Learned." *Climate Policy* 9 (3) (May 1): 242–254.
- . 2011. "Perverse Incentives Under the CDM: An Evaluation of HFC-23 Destruction Projects." *Climate Policy* 11 (2): 851–864.

- Shishlov, I., and V. Bellassen. 2012. "10 Lessons from 10 Years of the CDM". Climate Report No.37. CDC Climat.
- . 2013. "Unlocking Private Investments in Energy Efficiency through Carbon Finance". Climate Brief No.27. CDC Climat.
- Sorrell, S., A. Mallett, and S. Nye. 2011. "Barriers to Industrial Energy Efficiency: a Literature Review". Working Paper. United Nations Industrial Development Organization. http://www.unido.org/fileadmin/user_media/Services/Research_and_Statistics/WP10_2011_Ebook.pdf.
- Stephan, N., V. Bellassen, and E. Alberola. 2014. "Use of Kyoto Credits by European Industrial Installations: From an Efficient Market to a Burst Bubble". Climate Report No.43. CDC Climat.
- UN. 1998. "Kyoto Protocol to the United Nations Framework Convention on Climate Change."
- UNEP Risoe. 2014. "CDM/JI Pipeline Databases". United Nations Environment Programme. <http://www.cdmpipeline.org/>.
- UNFCCC. 2002. "Report of the Conference of the Parties on Its Seventh Session, Held at Marrakesh from 29 October to 10 November 2001". UNFCCC.
- . 2006. "Report of the Conference of the Parties Serving as the Meeting of the Parties to the Kyoto Protocol on Its First Session, Held at Montreal from 28 November to 10 December 2005". UNFCCC.
- . 2013a. "CDM Methodology Booklet - Fifth Edition."
- . 2013b. "Demand-side Activities for Efficient Lighting Technologies". Small-scale Methodology AMS-II.J. Version 5.0. UNFCCC.
- VCS. 2012a. "VCS Program Guide. Version 3". Verified Carbon Standard.
- . 2012b. "VCS Standard. Version 3". Verified Carbon Standard.
- Vine, E. L., and J. A. Sathaye. 2000. "The Monitoring, Evaluation, Reporting, Verification, and Certification of Energy-efficiency Projects." *Mitigation and Adaptation Strategies for Global Change* 5 (2): 189–216.
- Wara, Michael W. 2008. "Measuring the Clean Development Mechanism's Performance and Potential." *UCLA Law Review* 55 (6): 1759–1803.
- Warnecke, C. 2014. "Can CDM Monitoring Requirements Be Reduced While Maintaining Environmental Integrity?" *Climate Policy*: 1–24. doi:10.1080/14693062.2014.875285.
- Warnecke, C., N. Klein, R. Perroy, and R. Tippmann. 2013. "CDM Market Support Study". KfW. http://www.jiko-bmub.de/files/basisinformationen/application/pdf/kfw_cdm_market_support_study.pdf.
- Wartmann, S., H. Groenenberg, and S. Brockett. 2009. "Monitoring and Reporting of GHG Emissions from CCS Operations Under the EU ETS." *Energy Procedia* 1 (1): 4459–4466.
- Zegras, C., Y. Chen, and J. Grütter. 2009. "Potentials and Challenges for Using the Clean Development Mechanism for Transport-Efficient Development: A Case Study of Nanchang, China Transportation Research Board Annual Meeting." *Washington, DC*: 1–14.

7. Annexes

Annex 1 – Treatment of monitoring uncertainty in the 10 most commonly used CDM methodologies (as of September 2014)

Methodology	Key variables/parameters (as per CDM Methodology Booklet as of November 2013)	Treatment of monitoring uncertainty in the methodology and relevant calculation tools	Explicit discount for uncertainty of key variables/parameters
<p>ACM0002</p> <p>Grid-connected electricity generation from renewable sources (3,210 projects)*</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity supplied to the grid by the project; • If applicable: methane emissions of the project. 	<p>Methodology:</p> <ul style="list-style-type: none"> • baseline uncertainty: the power generation of renewable energy projects can vary significantly from year to year, due to natural variations in the availability of the renewable source (e.g. varying rainfall, wind speed or solar radiation). The use of few historical years to establish the baseline electricity generation can therefore involve a significant uncertainty. The methodology addresses this uncertainty by adjusting the historical electricity generation by its standard deviation. • default emission factor for emissions from reservoirs <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> • IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to calculate the emission factor for an electricity system:</p> <ul style="list-style-type: none"> • IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval 	<p>0.13 of 3 key variables/parameters discounted for uncertainty:</p> <p>Electricity supplied by the project: measured with the electricity meter, no discount (0 of 1)</p> <p>Grid emissions factor consists of 5 key parameters (0.66 of 5 discounted):</p> <ul style="list-style-type: none"> • <i>Amount of fuel consumed:</i> taken from utility records or official publications, no discount (0 of 1) • <i>Net calorific value (energy content) of fuel:</i> calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) • <i>Emission factor of fuel:</i> calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) • <i>Electricity generated:</i> utility or government records or official publications, no discount (0 of 1) • <i>Weighting of the operation margin and build margin emissions factor:</i> default value depending on the type of generation, no discount (0 of 1)

		<ul style="list-style-type: none"> The results of the survey should be used to derive global estimates adjusted for their uncertainty at a 95 per cent confidence level in a conservative manner (using the upper or lower uncertainty bound whatever is conservative) In certain cases (e.g. projects in LDCs) default CO₂ emission factor (0.8 t CO₂/MWh) and the default value of the electricity generated by the off-grid power plants can be applied for the first crediting period 	<p>Emissions from reservoirs of hydro power plants (if applicable): default emission factor for (EB23 decision), no discount (0 of 1)</p>
<p>AMS-I.D.</p> <p>Grid connected renewable electricity generation (2,077 projects)</p>	<p>At validation:</p> <ul style="list-style-type: none"> Grid emission factor (can also be monitored ex post); Moisture content of biomass of homogeneous quality shall be determined ex ante. <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of net electricity supplied to the grid; Quantity of biomass/fossil fuel consumed; Net calorific value of biomass shall be determined once in the first year of the crediting period. 	<p>Methodology:</p> <ul style="list-style-type: none"> baseline uncertainty: in the specific case of retrofit/capacity addition in hydro, solar, wind, geothermal, wave and tidal plants where power generation can vary significantly from year to year, due to natural variations in the availability of the renewable source (e.g. varying rainfall, wind speed or solar radiation), the use of few historical years to establish the baseline electricity generation can therefore involve a significant uncertainty. The methodology addresses this uncertainty by adjusting the historical electricity generation by its standard deviation. This ensures that the baseline electricity generation is established in a conservative manner and that the calculated emission reductions are attributable to the project activity. <p>Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to calculate the emission factor for an electricity system:</p>	<p>0.13 of 4 key variables/parameters discounted for uncertainty:</p> <p>Grid emissions factor consists of 5 key parameters (0.66 of 5 discounted):</p> <ul style="list-style-type: none"> <i>Amount of fuel consumed</i>: taken from utility records or official publications, no discount (0 of 1) <i>Net calorific value (energy content) of fuel</i>: calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) <i>Emission factor of fuel</i>: calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) <i>Electricity generated</i>: utility or government records or official publications, no discount (0 of 1) <i>Weighting of the operation margin and build margin emissions factor</i>: default value depending on the type of generation, no discount (0 of 1) <p>Quantity of biomass/fossil fuel consumed: on-site measurements, no discount (0 of 1)</p> <p>Moisture content of biomass: on-site measurement, no discount (0 of 1)</p>

Monitoring uncertainty in carbon offset projects: a review of the CDM rules

		<ul style="list-style-type: none"> • IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval • The results of the survey should be used to derive global estimates adjusted for their uncertainty at a 95 per cent confidence level in a conservative manner (using the upper or lower uncertainty bound whatever is conservative) • In certain cases (e.g. projects in LDCs) default CO₂ emission factor (0.8 t CO₂/MWh) and the default value of the electricity generated by the off-grid power plants can be applied for the first crediting period 	<p>Net calorific value of biomass: measurement in laboratories according to relevant national/international standards. Measure quarterly, taking at least three samples for each measurement. The average value can be used for the rest of the crediting period, thus no discount (0 of 1)</p>
<p>AMS-I.C.</p> <p>Thermal energy production with or without electricity (253 projects)</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • The moisture content of biomass of homogeneous quality may be fixed ex ante or monitored for each batch of biomass if the emission reductions are calculated based on energy input; • Thermal energy (mass flow, temperature, pressure for heat/cooling) delivered by the project and the amount 	<p>Methodology:</p> <ul style="list-style-type: none"> • for calculating thermal energy production with or without electricity to measure the quantity of hot air where it is not feasible (e.g. because of too high temperature), spot measurements can be used through sampling with a 90% confidence level and a 10% precision <p>Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> • IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> • IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p>	<p>0.13 of 5 key variables/parameters discounted for uncertainty:</p> <p>Grid emissions factor consists of 5 key parameters (0.66 of 5 discounted):</p> <ul style="list-style-type: none"> • <i>Amount of fuel consumed:</i> taken from utility records or official publications, no discount (0 of 1) • <i>Net calorific value (energy content) of fuel:</i> calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) • <i>Emission factor of fuel:</i> calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) • <i>Electricity generated:</i> utility or government records or official publications, no discount (0 of 1) • <i>Weighting of the operation margin and build margin emissions factor:</i> default value depending on the type of generation, no discount (0 of 1)

	<p>of grid and/or captive electricity displaced;</p> <ul style="list-style-type: none"> Quantity of biomass and fossil fuel consumed; Net calorific value of biomass shall be determined once in the first year of the crediting period. 	<ul style="list-style-type: none"> the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived default values can be used for load-efficiency <p>Methodological Tool ‘Emissions from solid waste disposal sites’:</p> <ul style="list-style-type: none"> use of the calculation model correction factor to account for uncertainty of emissions from waste in different conditions (<i>either a default value or calculation</i>) <p>Methodological Tool ‘Project emissions from flaring’:</p> <ul style="list-style-type: none"> the flare efficiency is determined for each minute m of year y based either on monitored data or default values 	<p>Moisture content of biomass: on-site measurement, no discount (0 of 1)</p> <p>Thermal energy supplied: measured continuously, no discount (0 of 1)</p> <p>Quantity of biomass/fossil fuel consumed: on-site measurements, no discount (0 of 1)</p> <p>Net calorific value of biomass: measurement in laboratories according to relevant national/international standards. Measure quarterly, taking at least three samples for each measurement. The average value can be used for the rest of the crediting period, thus no discount (0 of 1)</p> <ul style="list-style-type: none">
<p>AMS-III.H. Wastewater treatment (225 projects)</p>	<p>At validation:</p> <ul style="list-style-type: none"> COD removal efficiency of the baseline system. <p>Monitored:</p> <ul style="list-style-type: none"> Flow of wastewater; Chemical oxygen demand of the wastewater before and after the treatment system; Amount of sludge as dry matter in each sludge treatment system; Amount of biogas recovered, fuelled, flared or utilized (e.g. 	<p>Methodology:</p> <ul style="list-style-type: none"> confidence/precision level of 90/10 for key monitored parameters has to be attained Model correction factor to account for model uncertainties (0.89) Methane Correction Factor depending on the type of wastewater treatment and discharge pathway or system <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval 	<p>1.13 of 5 key variables/parameters discounted for uncertainty:</p> <p>COD removal efficiency: correction factor to account for model uncertainties is applied (1 of 1)</p> <p>Volume of wastewater treated: measured on-site, 90/10 confidence/precision has to be attained, however no discount (0 of 1)</p> <p>Chemical oxygen demand (COD): sampling, 90/10 confidence/precision has to be attained, however no discount (0 of 1)</p> <p>Amount of dry matter in the sludge: <i>measurements</i>, 90/10 confidence/precision has to be attained, however no discount (0 of 1)</p> <p>Methane captured and destroyed/gainfully used by the project activity consists of 4 parameters (0.5 of 4 discounted):</p> <ul style="list-style-type: none"> Amount of biogas flared/combusted: monitored continuously, 90/10 confidence/precision has to be attained, however no discount (0 of 1) Methane content of the biogas: measured with a continuous analyser or, alternatively, with periodical measurements at a

Monitoring uncertainty in carbon offset projects: a review of the CDM rules

	<p>injected into a natural gas distribution grid or distributed via a dedicated piped network).</p>	<p>Methodological Tool ‘Emissions from solid waste disposal sites’:</p> <ul style="list-style-type: none"> • use of the calculation model correction factor to account for uncertainty of emissions from waste in different conditions (<i>either a default value or calculation</i>) <p>Methodological Tool ‘Project emissions from flaring’:</p> <ul style="list-style-type: none"> • the flare efficiency is determined for each minute m of year y based either on monitored data or default values 	<p>90/10 confidence/precision level, however no discount (0 of 1)</p> <ul style="list-style-type: none"> • <i>Density of methane</i>: calculated using temperature and pressure that are measured continuously, no discount (0 of 1) • <i>Flare efficiency</i>: as per ‘Tool to determine project emissions from flaring gases containing Methane’ in case of the open flare default values are applied based on the presence of flare (which is monitored continuously with no discount); in case of an enclosed flare a fixed conservativeness discount is applied, therefore 0.5 out of 1 is discounted
<p>ACM0001</p> <p>Flaring or use of landfill gas (221 projects)</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount of landfill gas captured; • Methane fraction in the landfill gas; • If applicable: electricity generation using landfill gas. 	<p>Methodology:</p> <ul style="list-style-type: none"> • CO2 emission factor of the fossil fuel type used for heat generation in the baseline is taken from 2006 IPCC Guidelines on National GHG Inventories. The lower limit of the 95% confidence interval shall be used <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> • IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Methodological Tool ‘Emissions from solid waste disposal sites’:</p> <ul style="list-style-type: none"> • use of the calculation model correction factor to account for uncertainty of emissions from waste in different conditions (<i>either a default value or calculation</i>) <p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> • IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval <p>Methodological Tool ‘Project emissions from flaring’:</p>	<p>1 of 4 key variables/parameters discounted for uncertainty:</p> <p>Amount of methane in the LFG that is flared/used: measured according to the Tool to determine the mass flow of a greenhouse gas in a gaseous stream, no discount (0 of 1)</p> <p>Fraction of methane in the LFG that would be oxidized: default value as per Methodological Tool ‘Emissions from solid waste disposal sites’, no discount (0 of 1)</p> <p>The model correction factor (ϕ_y) depends on the uncertainty of the parameters used in the FOD model (1 of 1)</p> <p>Electricity produced by the project: measured with the electricity meter, no discount (0 of 1)</p>

		<ul style="list-style-type: none"> the flare efficiency is determined for each minute m of year y based either on monitored data or default values <p>Tool to determine the mass flow of a greenhouse gas in a gaseous stream:</p> <ul style="list-style-type: none"> no reference to uncertainty <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p> <ul style="list-style-type: none"> the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived default values can be used for load-efficiency <p>Tool to determine the remaining lifetime of equipment:</p> <ul style="list-style-type: none"> no reference to uncertainty <p>Methodological tool ‘Project and leakage emissions from transportation of freight’:</p> <ul style="list-style-type: none"> estimate project and/or leakage CO2 emissions from road transportation of freight by vehicles. Two options are provided to determine these emissions: (a) Option A: Monitoring fuel consumption; or (b) Option B: Using conservative default values. 	
<p>AMS-III.D.</p> <p>Methane recovery in animal manure management systems (179 projects)</p>	<p>Monitored:</p> <ul style="list-style-type: none"> Amount of biogas recovered and fuelled, flared or used gainfully; The annual amount of fossil fuel or electricity used to 	<p>Methodology:</p> <ul style="list-style-type: none"> the fraction of methane in the biogas should be measured with a continuous analyser (values are recorded with the same frequency as the flow) or, with periodical measurements at a 90/10 confidence/precision level by following the ‘Standard for sampling and surveys for CDM project activities and Programme of Activities’, or, alternatively a default value of 60% methane content can be 	<p>0.25 of 4 key variables/parameters discounted for uncertainty:</p> <p>Biogas volume: measured using the flow meter, no discount (0 of 1)</p> <p>CO2 emissions from fossil fuel combustion (if applicable) consists of 2 key parameters (0.13 of 2 discounted):</p> <ul style="list-style-type: none"> <i>Quantity of fuels combusted:</i> onsite measurements, no discount (0 of 1) <i>CO2 emission coefficient of the fuel</i> is calculated using two options (0.13 of 1)

Monitoring uncertainty in carbon offset projects: a review of the CDM rules

	<p>operate the facility or auxiliary equipment;</p> <ul style="list-style-type: none"> • Fraction of the manure handled in the manure management system; • Proper soil application (not resulting in methane emissions) of the final sludge must be monitored. 	<p>used. Option chosen should be clearly specified in the PDD</p> <ul style="list-style-type: none"> • Default model correction factor to account for model uncertainties (0.94) <p>Methodological Tool ‘Project emissions from flaring’:</p> <ul style="list-style-type: none"> • the flare efficiency is determined for each minute m of year y based either on monitored data or default values <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> • IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Methodological tool ‘Project and leakage emissions from anaerobic digesters’:</p> <ul style="list-style-type: none"> • Default value for the fraction of methane in the biogas (based on literature) 	<ul style="list-style-type: none"> ▪ Option A (0 of 2): using weighted average mass fraction of carbon in fuel (no discount) and weighted average density of fuel (no discount) ▪ Option B (0.5 of 2): using weighted average net calorific value of the fuel (0.25 of 1 discounted) and weighted average CO2 emission factor of fuel (0.25 of 1 discounted) <p>CO2 emissions from electricity consumption (if applicable) consists of 3 key parameters (0.13 of 3 discounted):</p> <ul style="list-style-type: none"> • <i>Quantity of electricity consumed</i>: measured with the electricity meter, no discount (0 of 1) • <i>Emission factor for electricity generation</i> (as per Tool to calculate the emission factor for an electricity system) consists of 5 key parameters (0.66 of 5 discounted) • <i>Average technical transmission and distribution losses</i>: different default values depending on the scenario, no discount (0 of 1) <p>Quantity of manure treated from livestock: manure weight delivered to each system shall be directly measured or alternatively manure volume can be measured together with the density determined from representative sample (90/10 precision), no discount (0 of 1)</p>
<p>ACM0006</p> <p>Electricity and heat generation from biomass (122 projects)</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and moisture content of the biomass used in the project activity; • Electricity and heat generated in the project activity; 	<p>Methodology:</p> <ul style="list-style-type: none"> • To determine the CH4 emission factor, project participants may undertake measurements or use referenced default values • The uncertainty of the CH4 emission factor is in many cases relatively high. In order to reflect this and for the purpose of providing conservative estimates of emission reductions, a conservativeness factor must be applied to the CH4 emission factor. The level of the conservativeness factor depends on the 	<p>0.18 of 7 key variables/parameters discounted for uncertainty:</p> <p>Grid emissions factor consists of 5 key parameters (0.66 of 5 discounted):</p> <ul style="list-style-type: none"> • <i>Amount of fuel consumed</i>: taken from utility records or official publications, no discount (0 of 1) • <i>Net calorific value (energy content) of fuel</i>: calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount) • <i>Emission factor of fuel</i>: calculated using one of three options (1 of 3 discounted, i.e. 0.33): (i) fuel supplier data, no discount; (ii) regional or national average default values (no

<ul style="list-style-type: none"> Electricity and, if applicable, fossil fuel consumption of the project activity. 	<p>uncertainty range of the estimate for the CH4 emission factor.</p> <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Methodological Tool ‘Emissions from solid waste disposal sites’:</p> <ul style="list-style-type: none"> use of the calculation model correction factor to account for uncertainty of emissions from waste in different conditions (<i>either a default value or calculation</i>) <p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval <p>Tool to calculate the emission factor for an electricity system:</p> <ul style="list-style-type: none"> IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval The results of the survey should be used to derive global estimates adjusted for their uncertainty at a 95 per cent confidence level in a conservative manner (using the upper or lower uncertainty bound whatever is conservative) In certain cases (e.g. projects in LDCs) default CO2 emission factor (0.8 t CO2/MWh) and the default value of the electricity generated by the off-grid power plants can be applied for the first crediting period <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p>	<p>discount); or (iii) IPCC default values at the lower limit of uncertainty at 95% confidence (discount)</p> <ul style="list-style-type: none"> <i>Electricity generated</i>: utility or government records or official publications, no discount (0 of 1) <i>Weighting of the operation margin and build margin emissions factor</i>: default value depending on the type of generation, no discount (0 of 1) <p>Quantity of biomass: on-site measurements, no discount (0 of 1)</p> <p>Moisture content: on-site measurements, no discount (0 of 1)</p> <p>Quantity of electricity generated: on-site measurements with a meter, no discount (0 of 1)</p> <p>Quantity of heat generated: on-site measurements, no discount (0 of 1)</p> <p>CO2 emissions from fossil fuel combustion (if applicable) consists of 2 key parameters (0.13 of 2 discounted):</p> <ul style="list-style-type: none"> <i>Quantity of fuels combusted</i>: on-site measurements, no discount (0 of 1) <i>CO2 emission coefficient of the fuel</i> is calculated using two options (0.13 of 1) <ul style="list-style-type: none"> Option A (0 of 2): using weighted average mass fraction of carbon in fuel (no discount) and weighted average density of fuel (no discount) Option B (0.5 of 2): using weighted average net calorific value of the fuel (0.25 of 1 discounted) and weighted average CO2 emission factor of fuel (0.25 of 1 discounted) <p>CO2 emissions from electricity consumption (if applicable) consists of 3 key parameters (0.13 of 3 discounted):</p> <ul style="list-style-type: none"> <i>Quantity of electricity consumed</i>: measured with the electricity meter, no discount (0 of 1) <i>Emission factor for electricity generation</i> (as per Tool to calculate the emission factor for an electricity system) consists of 5 key parameters (0.66 of 5 discounted)
--	--	--

Monitoring uncertainty in carbon offset projects: a review of the CDM rules

		<ul style="list-style-type: none"> the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived default values can be used for load-efficiency <p>Tool to determine the remaining lifetime of equipment:</p> <ul style="list-style-type: none"> no reference to uncertainty Methodological tool ‘Project and leakage emissions from transportation of freight’: estimate project and/or leakage CO2 emissions from road transportation of freight by vehicles. Two options are provided to determine these emissions: (a) Option A: Monitoring fuel consumption; or (b) Option B: Using conservative default values. 	<ul style="list-style-type: none"> <i>Average technical transmission and distribution losses:</i> different default values depending on the scenario, no discount (0 of 1)
<p>ACM0012</p> <p>Consolidated baseline methodology for GHG emission reductions from waste energy recovery projects (111 projects)</p>	<p>Monitored:</p> <ul style="list-style-type: none"> Quantity of electricity/ heat supplied to the recipient plant(s); Quantity and parameters of waste energy streams during project. 	<p>Methodology:</p> <ul style="list-style-type: none"> IPCC default emission factors can be used for some parameters, no reference to uncertainty however <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p> <ul style="list-style-type: none"> the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived 	<p>0 of 2 key variables/parameters discounted for uncertainty:</p> <p>Electricity produced by the project: measured with the electricity meter, no discount (0 of 1)</p> <p>Net quantity of heat supplied to the recipient facility: consists of two measured parameters with no adjustment for uncertainty (0 of 1)</p>

		<ul style="list-style-type: none"> • default values can be used for load-efficiency <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p> <ul style="list-style-type: none"> • the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived • default values can be used for load-efficiency <p>Tool to determine the remaining lifetime of equipment:</p> <ul style="list-style-type: none"> • no reference to uncertainty 	
<p>ACM0008</p> <p>Consolidated methodology for Abatement of methane from coal mines (82 projects)</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Methane destroyed or used; • Concentration of methane in extracted gas; • If applicable: electricity generated by project. 	<p>Methodology:</p> <ul style="list-style-type: none"> • IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval <p>Tool to calculate project or leakage CO2 emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> • IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> • IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval <p>Methodological Tool ‘Project emissions from flaring’:</p> <ul style="list-style-type: none"> • the flare efficiency is determined for each minute m of year y based either on monitored data or default values <p>Tool to calculate the emission factor for an electricity system:</p> <ul style="list-style-type: none"> • IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval 	<p>0 of 3 key variables/parameters discounted for uncertainty:</p> <p>Methane captured and destroyed: continuous measurement, no discount (0 of 1)</p> <p>Methane concentration: continuous measurement, no discount (0 of 1)</p> <p>Electricity produced by the project: measured with the electricity meter, no discount (0 of 1)</p>

Monitoring uncertainty in carbon offset projects: a review of the CDM rules

		<ul style="list-style-type: none"> The results of the survey should be used to derive global estimates adjusted for their uncertainty at a 95 per cent confidence level in a conservative manner (using the upper or lower uncertainty bound whatever is conservative) In certain cases (e.g. projects in LDCs) default CO₂ emission factor (0.8 t CO₂/MWh) and the default value of the electricity generated by the off-grid power plants can be applied for the first crediting period 	
<p>AM0025 (replaced by ACM0022 in September 2012)</p> <p>Alternative waste treatment processes (62 projects + 6 with ACM0022)</p>	<p>ACM0022:</p> <p>Monitored:</p> <ul style="list-style-type: none"> Weight fraction of the different waste types in a sample and total amount of organic waste prevented from disposal; Electricity and fossil fuel consumption in the project site. 	<p>Methodology:</p> <ul style="list-style-type: none"> IPCC default values at the upper/lower limit of the uncertainty at a 95% confidence interval fixed conservativeness factors for some values Discount factor to account for the uncertainty of the use of historical data to determine the chemical oxygen demand (COD) of the wastewater that would enter the lagoon in the absence of the project activity <p>Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion:</p> <ul style="list-style-type: none"> IPCC default values at the upper limit of the uncertainty at a 95% confidence interval <p>Methodological Tool 'Emissions from solid waste disposal sites':</p> <ul style="list-style-type: none"> use of the calculation model correction factor to account for uncertainty of emissions from waste in different conditions (<i>either a default value or calculation</i>) 	<p>0.25 of 4 key variables/parameters discounted for uncertainty:</p> <p>Weight fraction of the different waste types: sampled, no discount (0 of 1)</p> <p>Amount of waste: measured, no discount (0 of 1)</p> <p>CO₂ emissions from fossil fuel combustion (if applicable) consists of 2 key parameters (0.13 of 2 discounted):</p> <ul style="list-style-type: none"> <i>Quantity of fuels combusted:</i> on-site measurements, no discount (0 of 1) <i>CO₂ emission coefficient of the fuel</i> is calculated using two options (0.13 of 1) <ul style="list-style-type: none"> Option A (0 of 2): using weighted average mass fraction of carbon in fuel (no discount) and weighted average density of fuel (no discount) Option B (0.5 of 2): using weighted average net calorific value of the fuel (0.25 of 1 discounted) and weighted average CO₂ emission factor of fuel (0.25 of 1 discounted) <p>CO₂ emissions from electricity consumption (if applicable) consists of 3 key parameters (0.13 of 3 discounted):</p> <ul style="list-style-type: none"> <i>Quantity of electricity consumed:</i> measured with the electricity meter, no discount (0 of 1)

		<p>Tool to calculate baseline, project and/or leakage emissions from electricity consumption:</p> <ul style="list-style-type: none"> • IPCC default values at the upper or lower limit (whatever is more conservative)–of the uncertainty at a 95% confidence interval <p>Methodological Tool ‘Project emissions from flaring’:</p> <ul style="list-style-type: none"> • the flare efficiency is determined for each minute m of year y based either on monitored data or default values <p>Tool to determine the mass flow of a greenhouse gas in a gaseous stream:</p> <ul style="list-style-type: none"> • no reference to uncertainty <p>Tool to determine the baseline efficiency of thermal or electric energy generation systems:</p> <ul style="list-style-type: none"> • the load-efficiency function derived using regression model shall be adjusted for uncertainty in a conservative manner, by considering the upper bound values of the range at 95% confidence level at the load point where efficiency is to be derived • default values can be used for load-efficiency <p>Methodological tool ‘Project and leakage emissions from composting’:</p> <ul style="list-style-type: none"> • default values with no reference to uncertainty <p>Methodological tool ‘Project and leakage emissions from anaerobic digesters’:</p> <ul style="list-style-type: none"> • default value for the fraction of methane in the biogas (based on literature) 	<ul style="list-style-type: none"> • <i>Emission factor for electricity generation</i> (as per Tool to calculate the emission factor for an electricity system) consists of 5 key parameters (0.66 of 5 discounted) • <i>Average technical transmission and distribution losses</i>: different default values depending on the scenario, no discount (0 of 1)
--	--	--	---

**number of projects using the methodology (including single and combined with others) registered as of September 2014, source: UNEP Risoe*

Source: authors based on the key word search (‘uncertainty’, ‘error’, ‘confidence’, ‘default’, ‘discount’) in CDM methodologies and calculation tools.

