



HAL
open science

Stabilisers for water-in-fluorinated-oil dispersions: Key properties for microfluidic applications

Philipp Gruner, Birte Riechers, Laura Andreina Chacòn Orellana, Quentin Brosseau, Florine Maes, Thomas Beneyton, Deniz Pekin, Jean-Christophe Baret

► **To cite this version:**

Philipp Gruner, Birte Riechers, Laura Andreina Chacòn Orellana, Quentin Brosseau, Florine Maes, et al.. Stabilisers for water-in-fluorinated-oil dispersions: Key properties for microfluidic applications. *Current Opinion in Colloid & Interface Science*, 2015, 20 (3), pp. 183-191. <10.1016/j.cocis.2015.07.005>. <hal-01213318>

HAL Id: hal-01213318

<https://hal.science/hal-01213318v1>

Submitted on 15 May 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization



Stabilisers for water-in-fluorinated-oil dispersions: Key properties for microfluidic applications



Philipp Gruner^a, Birte Riechers^{a,b}, Laura Andreina Chacòn Orellana^b, Quentin Brosseau^a, Florine Maes^{a,b}, Thomas Beneyton^b, Deniz Pekin^{a,b}, Jean-Christophe Baret^{a,b,*}

^a Max Planck Institute for Dynamics and Self-organization, Am Fassberg 17, D-37077 Goettingen, Germany

^b CNRS, Univ. Bordeaux, CRPP, UPR 8641, 33600 Pessac, France

ARTICLE INFO

Article history:

Received 30 May 2015

Received in revised form 15 July 2015

Accepted 24 July 2015

Available online 30 July 2015

ABSTRACT

Droplet-based microfluidics appears as a key emerging technology for the miniaturization and automation of biochemical assays. In terms of technology, it stands on two basic pillars: microfluidic devices on the one hand and emulsions on the other hand. Huge progress has been made on large scale integration of devices and batch production of devices. The limiting factor for a full application of the technology is actually not device development, but rather the robust control of emulsion formulations to be used in these devices. We here review the basic problems related to emulsions relevant for microfluidic applications and open up on new promising applications for these systems.

© 2015 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Simple liquids do not necessarily mix. It reflects the fact that various compounds interact differently at the molecular level. However, immiscible liquids transiently exist in mixtures in the form of dispersions. An emulsion, is a dispersion of small droplets into a continuous phase, stabilised by a third compound, typically surfactant molecules [1]. The properties of the resulting mixture – mechanical, rheological, chemical – are essentially different from those of both individual liquids, creating complex fluids of practical interest for applications. Many products of our daily life are based on these disperse systems, from food colloids to pharmaceutical and cosmetic formulations, drug delivery systems, to just cite a few applications [2]. The kinetic stabilisation of dispersions is essential to maintain the properties of the mixture over time. Recently, the enormous potential of emulsion droplets as miniaturized reaction vessels has been exploited to provide novel assay systems [3,4]. Interestingly, the idea of using droplets as microreactors has already been brought up in the middle of the 20th century [5]. The real breakthrough came with the recent advances in the droplet-based microfluidic technology [6–11]. Droplet-based microfluidics emerged at the very beginning of the 21st century as a subdomain of microfluidics [6]. It employs immiscible phases that are flowed through microchannels such that homogeneous shearing of the liquids results in

the formation of emulsions with discrete monodisperse droplets. The technique allows for the production and precise manipulation of calibrated emulsion droplets at high rates (up to several kHz), unleashing an enormous potential for high-throughput screening applications, single cell analysis, DNA-based diagnostics or drug screening [12–19].

The emulsions produced in microfluidics are unconventional from a material point of view: each droplet has typically an individual composition at every time step, depending on the initial loading of compounds and on the biochemical processes taking place in the droplet (Fig. 1(A)).

As a result, new types of ageing mechanisms are to be expected in these emulsions. First, the flow of droplets in microchannels affects the stability of the droplets (Fig. 1(B)), and induce ageing of the emulsion by manipulation of individual droplets [22,23,21]. Understanding and controlling these ageing processes are a prerequisite for an efficient use of the technology [11]. It is therefore important to understand the dynamics of surfactant-laden interfaces on the flow of droplets in confinement, at the time-scale of droplet manipulation (typically ~1 ms) and at the lengthscale of the microchannels (typically 1–100 μm). As an emulsion, the droplet assembly ages according to the classical ageing processes, such as flocculation, coalescence, gravitational separation, and Ostwald ripening [1]. In addition, molecular transport of solutes between the droplets – driven by differences in chemical potential of encapsulated molecules – is driving the system towards its equilibrium. This process is not really crucial for emulsions used in material science as all droplets are virtually identical in composition. Here such a transport process leads to cross-talk between droplet microreactors [24–27]: the concept of individual, independent microreactor ultimately breaks down at sufficiently large time-scale, compromising the feasibility of assays based on the compartmentalization approach.

* Corresponding author at: Centre de Recherche Paul Pascal Soft Micro Systems 115 Avenue du Dr. Schweitzer F-33600 Pessac (France). Tel.: +33 556 845 634; fax: +33 556 845 600.

E-mail addresses: ppg@novozymes.com (P. Gruner), jean-christophe.baret@u-bordeaux.fr (J.-C. Baret).

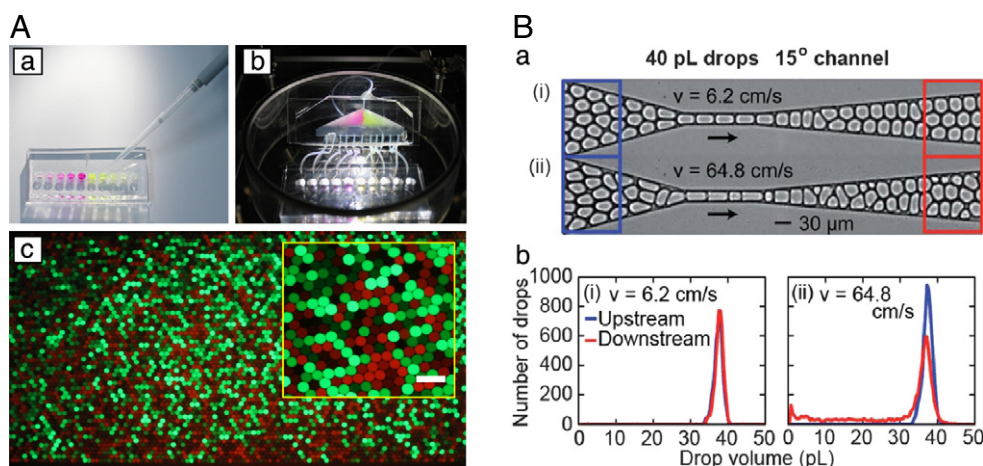


Fig. 1. Microfluidic manipulation of emulsions. (A) Complex emulsions are produced using microfluidics. Each droplet in the emulsion can have its own individual composition as shown here with fluorescent dyes (Reprinted with permission from Lim et al. [20] Copyright 2015, AIP Publishing LLC). (B) The manipulation of emulsions in microchannels leads to new types of ageing processes that need to be understood and controlled (Reproduced in part from Rosenfeld et al. [21] with permission of The Royal Society of Chemistry).

The understanding of mass transfer – and ageing processes in general – in these emulsions is essential for the establishment of platforms usable for biotechnological high-throughput applications. Reversing the viewpoint, the control of these transport processes between droplets can also open new ways to temporally programme the composition of droplet microreactors and design novel materials and microsystems.

2. Manipulation of emulsions in microfluidics

2.1. Droplets in microchannels

The most widely used channel geometries for microfluidic droplet production are the T-junction and the flow-focussing geometries – where the breakup of a stream of a first fluid is induced through shearing by a second fluid [6,28,10] – or step emulsification – where capillary forces at a step change in the height of a microchannel drives droplet formation [29]. In all cases, highly monodisperse droplets are formed due to the homogeneous shearing and the controlled emulsification conditions. Droplet production frequencies are ranging from a few to more than 10 kHz [30,31,20] with volumes down to the femtolitre range [31,32]. Several techniques have been developed to further manipulate, sort, split, trap or fuse droplets in microfluidic devices [10]. Besides their interest for applications [15], the tools for immobilizing, arranging and spacing droplets in a predefined way, allows significantly reducing the degree of freedom of an emulsion system and quantitatively address the dynamics of interfaces at small scales. Such tools appear especially interesting as a means to study physico-chemical processes in emulsions at the length-scale and time-scale of relevance. From a technology view-point, controlling the physico-chemical properties of the formulations used in microfluidics is essential to guarantee that droplet manipulation in channels is effective and reliable.

The manipulation processes in microfluidics are controlled by several dimensionless numbers. The viscosity ratio between both phases, the ratio of the droplet size to the channel dimension, and all the hydrodynamic dimensionless numbers control the droplet behaviour, in addition to all the dimensionless numbers defined to account for channels geometry. Among others, the capillary number $Ca = \eta U/\gamma$, where η is the viscosity (usually taken for the continuous phase), U the droplet velocity and γ the interfacial tension, has a crucial role. As an example, the capillary number controls the splitting of droplets at a constriction during flow (Fig. 1(B)) [21]. For a fixed processing speed (or

throughput), reducing the capillary number is favourable to guarantee that interfacial effects dominate the physics of the system. Therefore η should be ‘small’ and γ ‘large’. This condition determines what an efficient surfactant formulation should be for a reliable manipulation of the droplets: the continuous phase should have a viscosity as low as possible while the interfacial tension should be as high as possible. We will see below how formulations based on fluorinated oils match these requirements.

2.2. Understanding the dynamics of surfactants at interfaces

The surfactant plays a key role in the stabilisation of the interfaces. The dynamics of the droplet deformations will be determined by the properties of the surfactant. Classically, surfactant adsorption is measured using tensiometry on large volumes. It was, however, shown that the dynamics of adsorption of surfactant is essentially different at ‘large’ scales compared to ‘small’ scales [33]. Here, large and small are defined by a discussion on the two limiting cases for adsorption: the adsorption is either limited by the bulk diffusion of the surfactant to the interface (diffusion-limited adsorption) or by the reaction rate of adsorption of molecules to interface (kinetic-limited adsorption). The crossover between both regimes occurs for a droplet size $R^* = D/k_{ads}\Gamma_{\infty}$ where D is the diffusion constant, k_{ads} the forward rate of adsorption and Γ_{∞} the maximum interfacial concentration of the surfactant. Typically, R^* is of order 10–100 μm [33]: At small scales, adsorption/desorption controls the dynamics of surfactant. Tensiometry on large volumes (even using pendant droplets with volumes of $\sim 1 \mu\text{L}$) is diffusion limited and does not provide the relevant information to understand the surfactant dynamics at the scale of emulsion droplets. Over the past years, microfluidic systems have been designed to address the questions dealing with interfacial tensiometry at the relevant scales [34,35] with a recent focus on the dynamics of surfactant-laden interfaces [36–38]. In this context, a full understanding of droplet flow in the presence of surfactant is far from being reached. Open-questions involve the dynamics of interfaces in confinement and the role of Marangoni stresses and interfacial rheology on the behaviour of droplets in confinement.

3. Mass transport in emulsions

The second class of problems related to ageing deals with the transport of compounds between the droplets. Mass transfer between emulsion droplets occurs as a result of phase partitioning due to a finite

solubility of the dispersed phase (or its solutes) in the continuous phase [39,40] or alternatively in the bilayers possibly forming between droplets [41].

3.1. Ostwald ripening

In brief, the chemical potential $\mu(r)$ of molecules of the dispersed phase is a function of the droplets radius r [42]:

$$\mu(r) = \mu_{\infty} + \frac{2\gamma V_m}{r} \quad (1)$$

μ_{∞} being the chemical potential in bulk, V_m as their molar volume and γ as the interfacial tension. The dependence of the solubility S of an emulsion droplet on its size is then described by the Kelvin equation:

$$S(r) = S_{\infty} \exp\left(\frac{2\gamma V_m}{rRT}\right) \quad (2)$$

with S_{∞} as the bulk solubility of the dispersed phase in the continuous phase, R as the ideal gas constant and T as the absolute temperature. In polydisperse emulsions, heterogeneities in chemical potential and solubilities must equilibrate. The diffusion of the solutes of the dispersed phase in the continuous phase results in a net mass transport from smaller to larger droplets. Hence, small droplets shrink on the expense of larger droplets that grow in size, ultimately resulting in a temporal increase of the average droplet size and a reduction of the interfacial area of the emulsion (Ostwald ripening). In the presence of a third species, insoluble in the continuous phase, its osmotic pressure $\Pi \approx RT\Delta c$ will oppose the Laplace pressure. Both contributions should be considered to determine the evolution of droplet sizes and the conditions where monodisperse emulsions can be stabilised [42]. Interestingly, such transport processes are used to measure metabolism of microorganisms in a quantitative manner making use of the variation of composition in individual droplets as a biochemical process is taking place in the droplet (in this case, sugar consumption by yeast) [43].

3.2. Solute transport

According to similar considerations, the net transport of solutes between emulsion droplets is a consequence of heterogeneities in the chemical potential of solutes among the droplets. A finite solubility of solutes in the continuous phase generally results in the leakage of compounds from the emulsion droplets. The release rate was described to be dependent on the partition coefficient of the solutes between the dispersed and the continuous phase [39,40] while interfacial properties were shown to influence the rate of release [44–49]. A decrease in the rate of release was also observed when replacing hydrogenated with fluorinated components as the continuous phase [50,45,48]. This effect was attributed to changes in the interfacial tension, the size of the surfactant molecules and higher cohesive energies between the fluorinated surfactant molecules [47]. However, the partitioning coefficient of most organic molecules in the investigated water-in-oil emulsions is significantly altered when replacing hydrogenated with fluorinated components [51,52]. The hypothesis that interface acts as an effective barrier to the diffusion of molecules was revised by some authors recently [53], suggesting that no significant energy barrier for molecules crossing an interface exists [54]. In this limit, the transport of molecules between emulsion droplets is controlled by the diffusive flux in the continuous phase. The concentration of solutes close to the interface (but in the continuous phase) is then given by the concentration in the dispersed phase and the partition coefficient $K = c_{eq,cont}/c_{eq,disp}$ between both phases. The permeability P of the oil is then defined as:

$$P = \frac{KD}{d} \quad (3)$$

where d is the thickness of the permeable layer. This equation is known as Overton's rule, frequently used to describe the rate of transport through biological membranes [55,56]. In fluorinated oils, the transport of small molecules in emulsions was shown to depend on surfactant concentration [57], an indication that there is no significant energy barrier to partitioning in emulsions – or at least in fluorinated oils. This point is consistent with the scaling observed for the decrease of transport rate upon the addition of Bovine Serum Albumine to the dispersed phase [57].

3.3. Transport through bilayers of surfactant

The transport processes based on phase partitioning, might also arise from transport through bilayers of surfactant possibly forming between emulsion droplets [41]. Such bilayers form upon the interaction of surfactant monolayers adsorbed at the interface of emulsion droplets [58]. After formation of a bilayer, the droplets become strongly adhesive without coalescing, as a result of the molecular interactions between the surfactant molecules [58]. Whether or not bilayers of surfactants form, in a given emulsion system, is dependent on several parameters. For example, the solubility of the surfactant molecules in the continuous phase plays an important role. It was shown that changing the composition of the continuous phase significantly alters the adhesion energy between the droplets. The energy of adhesion is essentially zero in good solvents [58] resulting in the absence of bilayers. Hence, the adhesion energy between monolayers of surfactant molecules is significantly increased by decreasing the solubility of the surfactants in the continuous phase [41]. For mass transport across bilayers, two distinct mechanisms have been suggested. One is based on the partitioning into and diffusion through the bilayer [59], the other one is based on transient pores in the bilayer occurring due to thermal fluctuations [60]. It has been suggested that the transient pore mechanism is dominant for inorganic ions while the partitioning and diffusion mechanism is more relevant for neutral molecules [61]. It was recently shown that an increase in adhesion energy results in a lower membrane fluidity and ultimately in a lower permeability [41].

4. Emulsions with a fluoruous phase

The most promising formulations are based on fluoro-surfactant and fluorinated oils. Controlling these formulations is crucial for applications. We will discuss in more details the specificities and the relevance of fluorinated emulsions for their use in droplet-based microfluidics. We will not focus on the biocompatibility aspects but rather on the physical-chemistry of the system [11].

4.1. Organofluorine chemistry

Starting from terminology, fluorocarbons exclusively contain carbon and fluorine while perfluorinated compounds are characterized by the replacement of all carbon–hydrogen bonds with carbon–fluorine bonds (it should be noted that this terminology is not necessarily strictly followed [62]). We focus here on perfluorocarbon systems as defined above. The C–F-bond is highly polarized due to the high electronegativity of the fluorine. Fluorine is not a very good hydrogen bond donor and does not significantly interact with hydrogen-bonding acceptors [63]. The low polarizability of the C–F-bond, results in relatively weak London dispersion forces between the molecules, which scale with the square of polarizability [62]. Perfluorocarbon compounds were reported as 'extremely nonpolar' [64] and even the least polar existing fluids [65]: teflon, for example, has a relative permittivity of only 2.1 [66].

As a consequence of the generally very weak interactions of fluorinated compounds, they have a low cohesive energy (energy of vaporization). This results in a low value of the solubility parameter in the thermodynamic description of liquid–liquid mixtures [51].

Fluorocarbon are therefore miscible with aliphatic hydrocarbons [51] – at least above a critical temperature as expected for binary mixtures [67,68]. The critical temperature increases with the length of the hydrocarbon chain and the length of the fluorocarbon chain: the solubility of aliphatic hydrocarbons in fluorocarbons therefore decreases for larger molecules [68]. The solubility of small organic molecules is usually considered to be small: as an example naphthalen has a solubility in fluorocarbon derivatives $((C_4F_9)_2O$ and $((C_3F_7)_3N)$ of the order of 0.003 (mole fraction) at 25 °C [52]. The weak intermolecular forces result in a relatively high compressibility of the fluids, which reflects the availability of interstitial space [62]. For that reason, respiratory gases such as oxygen and carbon dioxide are generally highly soluble in fluororous fluids. The solubility of oxygen in fluorocarbons is about three to ten times higher than in the parent hydrocarbons [69]. This characteristic makes them highly valuable for use as blood substitutes or breathing liquids [70–72]. Furthermore, using perfluorinated compounds as a continuous phase, cells can be cultured in aqueous emulsion droplets [73,74]. For droplet-based screening applications, these properties are highly valuable. The low solubility of organic molecules in fluororous fluids results in restricted cross-talk between emulsion droplets [25] by a reduction of the partitioning coefficient while the high solubility of respiratory gases is a key for cell survival in droplets [75–78]. Furthermore, while conventional hydrocarbon compounds may swell the microfluidic core material PDMS (PolyDiMethylSiloxane), leading to device delamination or channel deformation, fluorinated compounds are highly compatible with PDMS [79]. Water-in-fluorinated-oil emulsions are therefore considered to be the most promising systems for the miniaturization of biochemical assays in emulsion droplets [11].

4.2. Phase partitioning into fluororous fluids

Due to the very low polarizability, fluorinated compounds are generally of extremely nonpolar character. Non-fluorous solutes, with the exception of small gases, are in general virtually insoluble in fluororous solvents [80]. These liquids can be valuable for the selective extraction of molecules covalently modified with fluororous tags [81,82].

Specific non-covalent interactions result in an increased solubility of organic molecules in fluororous liquids [65]. The increased solubility is the result of noncovalent associations of perfluorinated molecules and organic molecules based on hydrogen bonding or ion pairing. Attention has for example been drawn to fluororous carboxylic acids. They were shown to act as molecular receptor for organic molecules significantly increasing their solubility in fluororous liquids. One of the first reports came from Palomo et al. [83]. The authors found a dramatic solubility increase in fluororous solvents for fluorinated urea in the presence of fluorinated carboxylic acids. In the absence of any other functional groups, carboxylic acids were shown to exist as hydrogen bonded dimers in fluororous fluids [84]. However, it has been demonstrated that hydrogen bonds with the lone pair of nitrogen are more stable than the hydrogen bonds present in cyclic carboxylic acid dimers [85,86]. As a consequence, most nitrogen H-bond acceptors are more successful at competing for the carboxylic acid H-bonds than the carboxylic acids

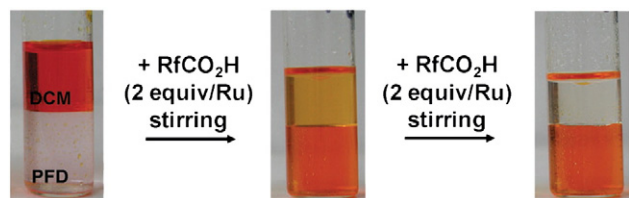


Fig. 2. Switch of partitioning induced by surfactant between a hydrocarbon (DCM = dichloromethane) and a fluororous phase (PFD = perfluorodecalin). A complex is formed between the red dye $[Ru(bipy)_3]^{2+}$ (Ru = ruthenium, $bipy$ = bipyridine) and the perfluoropolyether carboxylic acid $RfCOOH$ leading to the extraction of the ruthenium through complexation in the fluororous phase. Reprinted from Correa et al. [88], with permission of The Royal Society of Chemistry.

Table 1

Stabilisers for water-in-perfluorinated-oils dispersions used in droplet-based microfluidics. (PFPE = perfluoropolyether). Additional information for the case of surfactant is available in Ref. [11].

Stabilisers	Use and typical application	References
PFPE-based surfactant synthesis	Stabilisation of droplets in microfluidics	[97–100]
PFPE-based surfactant	Self-assembly of surfactant at droplet interfaces	[101]
PFPE-based surfactant	Microemulsification of water in supercritical CO_2	[102]
PFPE-based surfactant	Catalysis of chemical reactions	[103,104]
Gold-based nanoparticles	Controlling the mechanics of the interfacial layer	[96]
Silica-based nanoparticles	Pickering emulsions with functionalised silica nanoparticles (fluorosilane coating)	[95]

themselves [87]. This in turn results in the effective extraction of organic molecules comprising Lewis base characteristics as shown for pyridines [87,80]. The presence of equimolar amounts of fluorinated carboxylic acids in the fluororous phase leads to an almost complete extraction (up to 99%) of pyridine derivatives from chloroform into the fluororous phase [87]. Furthermore, it was demonstrated that the extraction of aniline in similar conditions is much less efficient (5%). This was explained by the fact that pyridyl nitrogen acts as a better hydrogen bond donor than primary amines. Moreover, it was argued that the highly selective

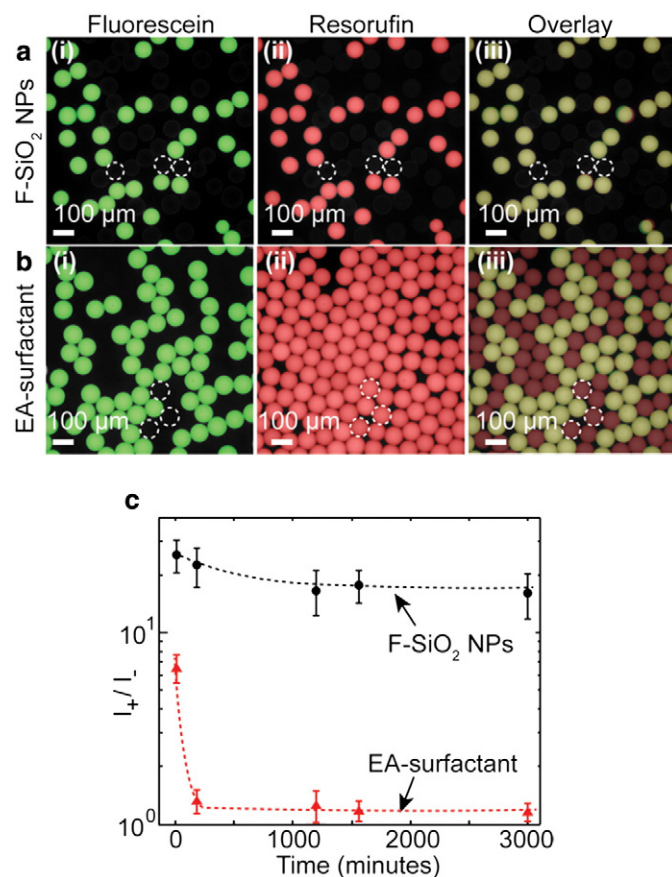


Fig. 3. Retention comparison between surfactant-stabilised emulsions and Pickering emulsions (Reprinted (adapted) with permission from Pan et al. [95] Copyright (2014) American Chemical Society). Two dyes (Fluorescein, green and resorufin, red) are encapsulated in nanoparticles stabilised droplets (top) and surfactant stabilised droplets (bottom). With the surfactant, resorufin is exchanged (yellow droplets) over time while with nanoparticles, the compartmentalization of the dye is more effective. Bottom graph: quantitative measurement of the exchange process showing how retention is improved using nanoparticles at the interface.

and effective extraction is based on the fact that the substrate–receptor interactions are reinforced in fluoruous liquids, as they are considered to be ultimate noncompetitive solvents [80]. Similar effects are observed with dyes (Fig. 2). Surfactant formulations should therefore be optimized to control the emulsion stability while avoiding transport enhancement.

In summary, noncovalent interactions significantly improve the extraction of organic molecules into a fluoruous phase. The efficiency is strongly dependent on the compatibility of substrate and receptor. Particularly fluoruous carboxylic acids have been studied that were shown to form strong hydrogen bonds with nitrogen containing Lewis bases. Understanding these interactions is important for applications and microfluidics provides the tools to address these questions quantitatively.

4.3. Mass transport studied in microfluidics

One of the first microfluidic studies about mass transfer in two-phase systems was presented by Burns et al. [89]. The authors have shown that in droplet-based microfluidic systems the mass transfer rates between the continuous and the dispersed phase can be up to several orders of magnitude faster than in non-miniaturized systems. The enhancement in the interfacial mass transfer was explained by internal convective circulation resulting from shear forces [89–91]. Courtois et al. [24] were among the first to study the retention of organic molecules in emulsion droplets in microfluidic environments, using an on-chip storage system to quantify the exchange rates. Qualitatively it was shown that the mass transfer of fluorophores between aqueous droplets dispersed in mineral oil was dependent on the nature of the compounds, the surfactant concentration and the number and composition of neighbouring droplets. Furthermore, it was stated that the release of fluorophores to the continuous phase “is a consequence of diffusion into the oil phase as well as formation of reverse micelles” but the mechanism of mass transfer remains mostly unclear. Strikingly, a method based on the addition of the protein bovine serum albumin was presented to decrease the leakage of compounds from aqueous

emulsion droplets. The effect was considered to be based on the formation of a protein layer at the droplet interface acting as a kinetic barrier.

Bai et al. [25] have developed a double droplet trap system to study mass transport between emulsion droplets. The authors suggested that the transport of small molecules is occurring “across the resultant surfactant bilayers formed between droplet pairs”. This was justified with the observation that “the droplets were clearly deformed, strongly suggesting the formation of a surfactant bilayer”. However, as their trapping strategy is relying on constant fluid flow through the experimental zone to keep the droplets in contact, such deformations might be the result of the hydrodynamic drag force acting on the droplets. In contrast, it was shown that the transport of the fluorophore fluorescein between neighbouring droplets is significantly faster with a hydrocarbon continuous phase (mineral oil, 1% Span80 (sorbitan monooleate)) compared to a perfluorinated continuous phase (FC-77 (a mixture of perfluoro-octane and perfluorooctane-ether), 1% ‘EA’ surfactant (Polyethylenoxide–perfluoropolyether block-copolymer)). It was reasoned that “the nature of the bilayer determines the transfer rate of molecules”.

However, the solubility of fluorescein in hydrocarbon and fluorocarbon liquids is expected to differ dramatically. Therefore it cannot be excluded that these observations are a result of a transport mechanism based on phase partitioning rather than transport through surfactant bilayers. Woronoff et al. [27] have shown in their experiments that the exchange rate of small molecules between droplets is dependent on their hydrophobicity. Their study was based on the measurement of the retention of several coumarin derivatives in water-in-fluorinated-oil emulsion droplets. A direct link between half-life of retention of the fluorophores in the emulsion droplets and the predicted partition coefficient of the dye was found. Recently the modulation of exchange rates with various buffers and additives was also demonstrated [49,92].

Two limiting situations emerge to explain the exchange kinetics. Either the exchange is limited by the diffusion of the molecules between the droplets (diffusion limited transport) or by the kinetics of partitioning across the interface (the kinetic limited transport, corresponding to an ‘energy barrier’ to partitioning). Chen et al. [93] used

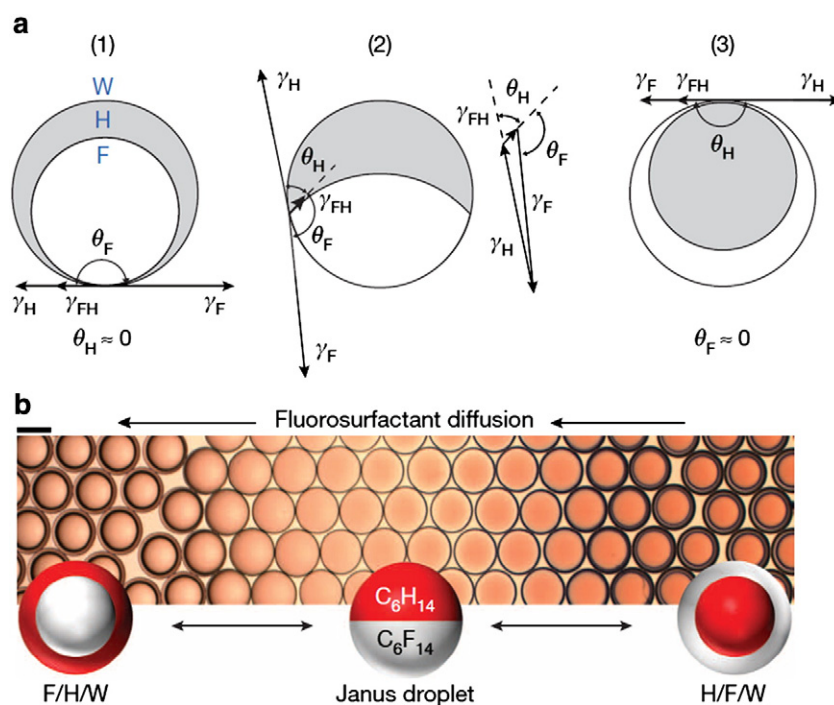


Fig. 4. Switchable emulsions. In a three phase system, surfactants modulate the spreading parameter for the three interfaces and a reversible switching between the configurations is achieved.

Reprinted by permission from Macmillan Publishers Ltd: Nature, Zarzar et al. [105], copyright 2015.

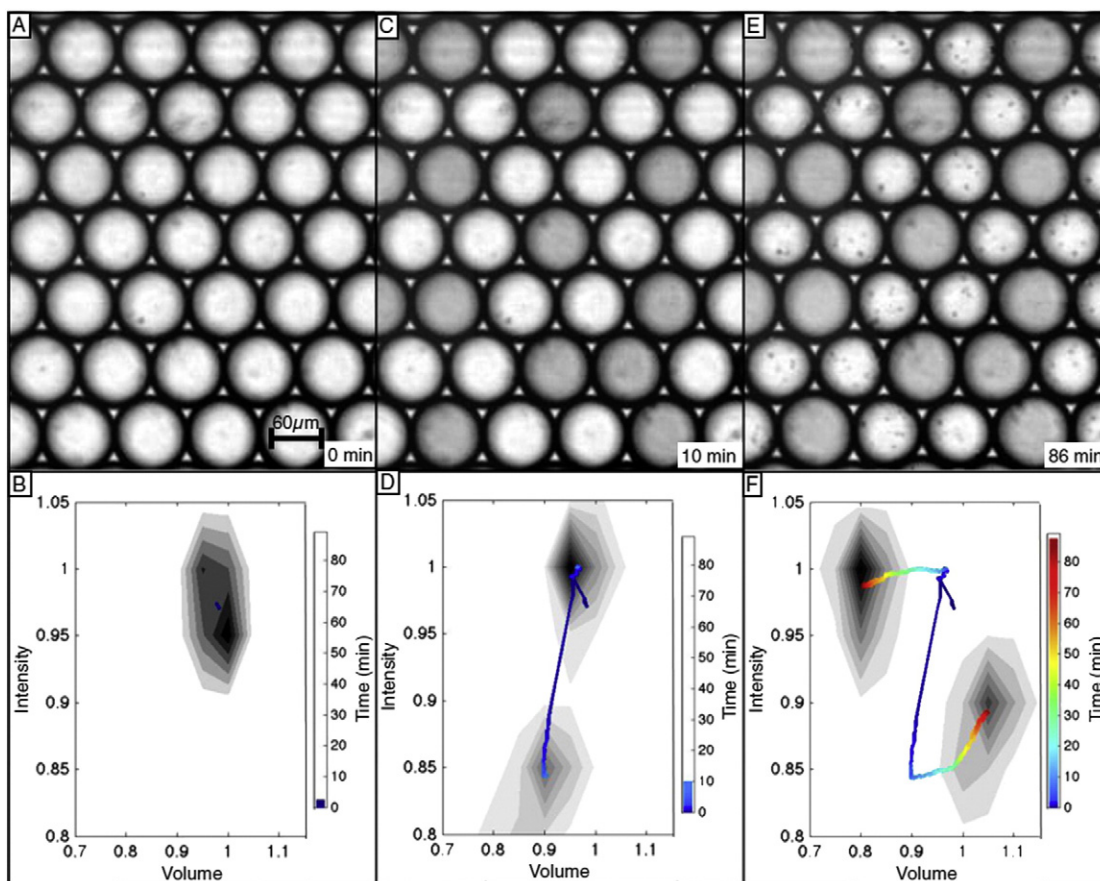


Fig. 5. Coupling of an oscillating chemical reactions to size modulation by transport processes. Starting from individual droplets of water in fluorinated oil (top left), a chemical pattern emerges in the emulsion (revealed by the different grey levels between the droplets in the central top figure). This chemical pattern finally lead to a morphological pattern with droplets of different sizes through coarsening and transport of water between the droplets (top right). The bottom graphs show how the grey level and droplet size evolve in time with first the establishment of the chemical heterogeneity (two populations with the initial droplet volume) and then the coarsening with the growth of the clear droplets and the shrinkage of the dark droplets. The conversion of chemical patterns into mechanical changes is a promising model for morphogenesis studies or mechanical actuations through chemical reactions. Reprinted with permission from Tompkins et al. [107].

numerical methods to model the transport of fluorophores between water-in-hydrocarbon oil or alternatively in water-in-fluorinated oil emulsion droplets arranged in a two-dimensional hexagonal packing. The authors used a model assuming an effective permeability of fluorophores across the droplet interface of 10^{-8} m s^{-1} , which is based on the permeability of rhodamine B across the cornea, measured in another study [94]. The authors found, for the examined case, that “the leakage process was rate-limited by the transport of the probe across the droplet boundary, rather than by diffusion through the

continuous phase [...]”. In contrast, Dunstan et al. investigated the transport of reagents between water-in-hydrocarbon oil emulsion droplets in two-dimensional hexagonal packing and report diffusion through the continuous phase as the limiting process [54] assuming that no significant energy barrier for molecules crossing the droplet interface exists. Accordingly, they find that the rate limiting step of transport is the diffusion across the continuous phase.

It is likely that both limits exist in different systems. However, the quantitative scaling relationship for the exchange rate as a function of

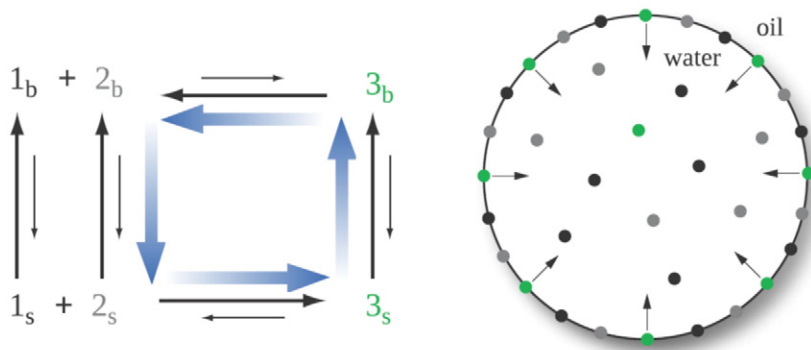


Fig. 6. A simple bimolecular reaction is enhanced when performed in microcompartments. The coupling of adsorption at interfaces, reaction, and diffusion leads to an increase in product formation in microdroplets.

Reprinted with permission from Fallah-Araghi et al. [108], Copyright 2014, American Physical Society.

surfactant concentration strongly suggests that transport in emulsions is diffusion limited [57]. The transport rate decrease observed with BSA is also fully compatible with a modification of the partitioning coefficient and it can therefore be concluded that there are – at the moment – no experimental data showing that kinetic barriers at interfaces are affecting the transport rates in emulsions. Surfactant formulations should therefore be optimized to control the emulsion stability while avoiding transport enhancement. The situation is, however, different for interfaces that are more complex than single molecular layers, as is the case for capsules or particle-laden interfaces.

4.4. Materials beyond surfactants

Surfactants are the basic systems usable to control the stabilisation of interfaces. To date, the family of molecules that are usable for droplet-based microfluidics is still limited (Table 1). Alternative strategies have emerged to stabilise droplets and circumvent the problems related to molecular interactions between the surfactant and the solutes (Fig. 3). Interfaces can be stabilised by particles as in armoured droplets or pickering emulsions.

A series of stabilising agents have been designed to stabilise aqueous dispersions in perfluorinated oils. The successful system involves gold nanoparticles [96] or silica nanoparticles [95]. In the first case, a full control of the mechanical properties was demonstrated with the possibility to attach cells at the droplet interface. In the latter case, the stabilisation of the emulsions is combined to a decrease of the leakage rate of fluorophores. Indeed the absence of surfactant in the oil phase reduces drastically the partitioning [57] making this strategy efficient to reduce the cross-talk. An additional interesting point is that nanoparticles-laden interfaces are expected to have the same interfacial tension as the bare interface. Therefore if we compare these interfaces with surfactant-laden interfaces, at fixed capillary number, the velocity of droplets can be increased and therefore higher throughputs are to be expected for the manipulation of these objects.

5. New doors opening

Transport processes in emulsions are a potential problem for biotechnology applications. In contrast, they can also be seen as an interesting concept for new applications. Three of these applications will be discussed here as promising new avenues for fluorinated emulsions, in combination with microfluidics.

5.1. Switchable systems

The orthogonality in the properties of organic, aqueous and perfluorinated compounds also offers new means to control interfaces. A very striking result was obtained with three-phase systems involving fluorinated compounds (Fig. 4). Switchable systems were designed in which morphological transitions in the emulsion are reliably controlled [105]. The order of the encapsulating phases is reversibly controlled by external parameters (for example temperature or surfactant concentrations) which offers promising switchable systems usable as new types of materials. The crucial role of microfluidics to control this system should be mentioned.

5.2. Relevance as biomimetic models

Compartmentalization is an essential step in the apparition of life and in biological processes [106]. The ability to control compartmentalization will provide platforms usable to experimentally test hypotheses on chemistry in simple minimal systems. Recently the coupling between transport processes in emulsions and oscillating reactions in emulsion droplets led to a conversion of chemical patterns into morphological patterns [107] (Fig. 5). This result is a step towards a better understanding on how transport processes can be coupled to

mechanical systems to explain features related to morphogenesis. The use of this concept can become extremely powerful to design macroscopic active systems and control their behaviour through chemical programming and self-organized processes. Here again the role of microfluidics is to provide the tools to prepare monodisperse emulsions leading to organized patterns.

5.3. Catalysis and enhancement of reactions in compartments

Besides the interest of interfaces as catalyst, especially in fluorinated phases [104], chemical reactions are modulated by the presence of an interface. It was recently demonstrated that an interfacial reaction can contribute to the enhancement of a chemical reactions and significantly improve the efficiency of the given reaction [108]. The basic concept to understand the process is to compare the time it takes for a molecule to diffuse from the interface where it is produced from two reagents to the centre of the droplet with the time scale of the backward reaction in bulk (Fig. 6). From this comparison, a lengthscale emerges below which the bulk concentration is dominated by the interfacial reaction. The coupling between reaction, diffusion and desorption therefore enhances a chemical reaction. This generic result might help to understand the crucial role of compartments in the synthesis of large molecules, a problem of interest for prebiotic chemistry. Here, the role of microfluidics is to provide the tools to prepare calibrated emulsions for a quantitative measurement of the reaction kinetics in monodisperse droplets.

6. Conclusion

In summary, droplet-based microfluidics is the key technology to manipulate emulsions with new applications emerging in biotechnology, material science and chemistry. The success of microfluidics over the past ten years is largely correlated with the development of surfactant formulations in fluorinated oils. Those are especially adapted to microfluidics for the low solubility of organic molecules in fluorocarbon (significantly lower than in organic or mineral oils) which favours compartmentalization of organic molecules. In addition, new experimental strategies provide a whole range of solutions to further improve the systems. A whole new range of experimental systems can now be envisioned for the study of fundamental and applied questions in a wide variety of fields by the coupling of microfluidics and soft-matter systems based on microcompartments.

Acknowledgement

JCB acknowledges the financial support from the European Research Council (ERC) under the European Union's Seventh Framework Program (FP7/2007-2013)/ERC Grant agreement 306385–Sofl, from the SFB-755, from the IdEx Bordeaux and the 'Région Aquitaine'. PG and BR also acknowledge the support of the GGNB doctoral school.

References^{1,2}

- [1] Bibette J, Leal-Calderon F, Poulin P. Emulsions: basic principles. *Rep Prog Phys* 1999;62:696–1033.
- [2] Chappat M. Some applications of emulsions. *Colloids Surf A* 1994;91:57–77.
- [3] Tawfik DS, Griffiths AD. Man-made cell-like compartments for molecular evolution. *Nat Biotechnol* Jul 1998;16(7):652–6.
- [4] Taly Valerie, Kelly Bernard T, Griffiths Andrew D. Droplets as microreactors for high-throughput biology. *ChemBioChem* Jan 2007;8(3):263–72.
- [5] Lederberg J. A simple method for isolating individual microbes. *J Bacteriol* 1954;68:258–9.
- [6] Thorsen T, Roberts RW, Arnold FH, Quake SR. Dynamic pattern formation in a vesicle-generating microfluidic device. *Phys Rev Lett* Apr 2001;86(18):4163–6.
- [7] Baret Jean-Christophe, Miller Oliver J, Taly Valerie, Ryckelynck Michaël, El-Harrak Abdeslam, Frenz Lucas, Rick Christian, Samuels Michael L, Brian Hutchison J,

¹ Of special interest.

² Of outstanding interest.

- Agresti Jeremy J, Link Darren R, Weitz David A, Griffiths Andrew D. Fluorescence-activated droplet sorting (fads): efficient microfluidic cell sorting based on enzymatic activity. *Lab Chip* Jul 2009;9(13):1850–8.
- [8] Abate Adam R, Thiele Julian, Weinhart Marie, Weitz David A. Patterning microfluidic device wettability using flow confinement. *Lab Chip* Jul 2010;10(14):1774–6.
- [9] Priest Craig, Herminghaus Stephan, Seemann Ralf. Controlled electrocoalescence in microfluidics: targeting a single lamella. *Appl Phys Lett* 2006;89(13):134101–3.
- [10] Seemann Ralf, Brinkmann Martin, Pföhl Thomas, Herminghaus Stephan. Droplet-based microfluidics. *Rep Prog Phys* 2012;75:016601.
- [11] Baret Jean-Christophe. Surfactants in droplet-based microfluidics. *Lab Chip* Feb 2012;12(3):422–33.
- [12] Kelly Bernard T, Baret Jean-Christophe, Taly Valerie, Griffiths Andrew D. Miniaturizing chemistry and biology in microdroplets. *Chem Commun* May 2007(18):1773–88.
- [13] Teh Shia-Yen, Lin Robert, Hung Lung-Hsin, Lee Abraham P. Droplet microfluidics. *Lab Chip* Feb 2008;8(2):198–220.
- [14] Theberge Ashleigh B, Courtois Fabienne, Schaerli Yolanda, Fischlechner Martin, Abell Chris, Hoffelder Florian, Huck Wilhelm TS. Microdroplets in microfluidics: an evolving platform for discoveries in chemistry and biology. *Angew Chem Int Ed Jun* 2010;49:5846–68.
- [15] Guo Mira T, Rotem Assaf, Heyman John A, Weitz David A. Droplet microfluidics for high-throughput biological assays. *Lab Chip* 2012;12:2146–55.
- [16] Sjöstrom Staffan L, Bai Yunpeng, Huang Mingtao, Liu Zhi, Nielsen Jens, Joensson Haakan N, Andersson Svahn Helene. High-throughput screening for industrial enzyme production hosts by droplet microfluidics. *Lab Chip* Feb 2014;14(4):806–13.
- [17] Agresti Jeremy J, Antipov Eugene, Abate Adam R, Ahn Keunho, Rowat Amy C, Baret Jean-Christophe, Marquez Manuel, Klibanov Alexander M, Griffiths Andrew D, Weitz David A. Ultrahigh-throughput screening in drop-based microfluidics for directed evolution. *Proc Natl Acad Sci U S A* Mar 2010;107(9):4004–9.
- [18] Pekin Deniz, Skhiri Yousr, Baret Jean-Christophe, Le Corre Delphine, Mazutis Linas, Ben Salem Chaouki, Millot Florian, El Harrak Abdeslam, Brian Hutchison J, Larson Jonathan W, Link Darren R, Laurent-Puig Pierre, Griffiths Andrew D, Taly Valérie. Quantitative and sensitive detection of rare mutations using droplet-based microfluidics. *Lab Chip* May 2011;11:2156–66.
- [19] Miller Oliver J, El Harrak Abdeslam, Mangeat Thomas, Baret Jean-Christophe, Frenz Lucas, El Debs Bachir, Mayot Estelle, Samuels Michael L, Rooney Eamonn K, Dieu Pierre, Galvan Martin, Link Darren R, Griffiths Andrew D. High-resolution dose-response screening using droplet-based microfluidics. *Proc Natl Acad Sci U S A* Jan 2012;109(2):378–83.
- [20] Lim J, Caen O, Vignon J, Konrad M, Taly V, Baret JC. Parallelized ultra-high throughput microfluidic emulsifier for multiplex kinetic assays. *Biomicrofluidics* 2015;9:0341101.
- [21] Rosenfeld Liat, Fan Lin, Chen Yunhan, Swoboda Ryan, Tang Sindy KY. Break-up of droplets in a concentrated emulsion flowing through a narrow constriction. *Soft Matter* Jan 2014;10(3):421–30.
- [22] Bremond N, Thiam AR, Bibette J. Decompressing emulsion droplets favors coalescence. *Phys Rev Lett* January 2008;100(2):024501. In microfluidics, droplet flow is shown to be a source of destabilisation of emulsions: counterintuitively, it is not when droplet approach that they coalesce but rather when they start to separate.
- [23] Bremond N, Domejean H, Bibette J. Propagation of drop coalescence in a two-dimensional emulsion: a route towards phase inversion. *Phys Rev Lett* 2011;214502.
- [24] Courtois Fabienne, Olguin Luis F, Whyte Graeme, Theberge Ashleigh B, Huck Wilhelm TS, Hoffelder Florian, Abell Chris. Controlling the retention of small molecules in emulsion microdroplets for use in cell-based assays. *Anal Chem* Apr 2009;81(8):3008–16.
- [25] Bai Yunpeng, He Ximin, Liu Dingsheng, Patil Santoshkumar N, Bratton Dan, Huebner Ansgar, Hoffelder Florian, Abell Chris, Huck Wilhelm TS. A double droplet trap system for studying mass transport across a droplet–droplet interface. *Lab Chip* May 2010;10(10):1281–5.
- [26] Wu Nan, Courtois Fabienne, Zhu Yonggang, Oakeshott John, Easton Chris, Abell Chris. Management of the diffusion of 4-methylumbelliferone across phases in microdroplet-based systems for in vitro protein evolution. *Electrophoresis* Sep 2010;31(18):3121–8.
- [27] Woronoff Gabrielle, El Harrak Abdeslam, Mayot Estelle, Schicke Olivier, Miller Oliver J, Soumillion Patrice, Griffiths Andrew D, Ryckelynck Michael. New generation of amino coumarin methyl sulfonate-based fluorogenic substrates for amidase assays in droplet-based microfluidic applications. *Anal Chem* Apr 2011;83(8):2852–7.
- [28] Anna Shelley L, Bontoux Nathalie, Stone Howard A. Formation of dispersions using “flow focusing” in microchannels. *Appl Phys Lett* January 2003;82(3):364–6.
- [29] Dangla Rémi, Cagri Kayi S, Baroud Charles N. Droplet microfluidics driven by gradients of confinement. *Proc Natl Acad Sci U S A* Jan 2013;110(3):853–8.
- [30] Nisisako Takasi, Torii T. Microfluidic large-scale integration on a chip for mass production of monodisperse droplets and particles. *Lab Chip* Feb 2008;8(2):287–93.
- [31] Shim J, Ranasinghe RT, Smith CA, Ibrahim SM, Hoffelder F, Huck WTS, Klennerman D, Abell C. Ultrarapid generation of femtoliter microfluidic droplets for single-molecule-counting immunoassays. *ACS Nano* 2013;7:5955–64.
- [32] Leman Marie, Abouakil Faris, Griffiths Andrew D, Tabeling Patrick. Droplet-based microfluidics at the femtolitre scale. *Lab Chip* Feb 2015;15(3):753–65.
- [33] Jin F, Balasubramanian R, Stebe KJ. Surfactant adsorption to spherical particles: the intrinsic length scale governing the shift from diffusion to kinetic-controlled mass transfer. *J Adhes* 2004;80:773–96.
- [34] Hudson Steven D, Cabral Joao T, Goodrum William J, Beers Kathryn L, Amis Eric J. Microfluidic interfacial tensiometry. *Appl Phys Lett* 2005;87:081905.
- [35] Cabral João T, Hudson Steven D. Microfluidic approach for rapid multicomponent interfacial tensiometry. *Lab Chip* Mar 2006;6(3):427–36.
- [36] Martin Jeffrey D, Hudson Steven D. Mass transfer and interfacial properties in two-phase microchannel flows. *New J Phys* 2009;11:115005.
- [37] Martin JD, Marhefka JN, Migler KB, Hudson SD. Interfacial rheology through microfluidics. *Adv Mater* 2011;23:426–32.
- [38] Brosseau Quentin, Vignon Jérémy, Baret Jean-Christophe. Microfluidic dynamic interfacial tensiometry (μ DIT). *Soft Matter* May 2014;10(17):3066–76.
- [39] Trotta M, Gasco MR, Morel S. Release of drugs from oil–water microemulsions. *J Control Release* 1989;10:237–43.
- [40] Koizumi T, Higuchi WI. Analysis of data on drug release from emulsions ii. *J Pharm Sci* 1968;57:87–92.
- [41] Thiam AR, Bremond N, Bibette J. From stability to permeability of adhesive emulsion bilayers. *Langmuir* 2012;28:6291–8.
- [42] Webster AJ, Cates ME. Stabilization of emulsions by trapped species. *Langmuir* 1998;14:2068–79.
- [43] Boitard L, Cottinet D, Kleinschmitt C, Bremond N, Baudry J, Yvert G, Bibette J. Monitoring single-cell bioenergetics via the coarsening of emulsion droplets. *Proc Natl Acad Sci U S A* May 2012;109(19):7181–6.
- [44] Caldero G, Garcia-Celma MJ, Solans C, Plaza M, Pons R. Influence of composition variables on the molecular diffusion from highly concentrated water-in-oil emulsions (gel-emulsions). *Langmuir* 1997;13:385–90.
- [45] Caldero G, Garcia-Celma MJ, Solans C, Stebe MJ, Ravey JC, Rocca S, Pons R. Diffusion from hydrogenated and fluorinated gel-emulsion mixtures. *Langmuir* 1998;14:6840–5.
- [46] Caldero G, Garcia-Celma MJ, Solans C, Pons R. Effect of pH on mandelic acid diffusion in water in oil highly concentrated emulsion. *Langmuir* 2000;16:1668–74.
- [47] Babak V, Stebe MJ, Fa N. Physico-chemical model for molecular diffusion from highly concentrated emulsions. *Mendeleev Commun* 2003;13:254–6.
- [48] Fa N, Babak VG, Stebe MJ. The release of caffeine from hydrogenated and fluorinated gel emulsions and cubic phases. *Colloids Surf A* 2004;243:117–25.
- [49] Sandoz Patrick A, Chung Aram J, Weaver Westbrook M, Di Carlo Dino. Sugar additives improve signal fidelity for implementing two-phase resorufin-based enzyme immunoassays. *Langmuir* Jun 2014;30(23):6637–43.
- [50] Rocca S, Garcia-Celma MJ, Caldero G, Pons R, Solans C, Stebe MJ. Hydrophilic model drug delivery from concentrated reverse emulsions. *Langmuir* 1998;14:6840–5.
- [51] Scott RL. The solubility of fluorocarbons. *J Am Chem Soc* Dec 1948;70(12):4090–3.
- [52] Simons JH, Linevsky MJ. The solubility of organic solids in fluorocarbon derivatives. *J Am Chem Soc* 1952;74:4750–1.
- [53] Llinàs Meritxell, Calderó Gabriela, García-Celma M José, Patti Alessandro, Solans Conxita. New insights on the mechanisms of drug release from highly concentrated emulsions. *J Colloid Interface Sci* Mar 2013;394:337–45.
- [54] Dunstan TS, Fletcher PDI. Compartmentalization and separation of aqueous reagents in the water droplets of water-in-oil high internal phase emulsions. *Langmuir* 2011;27:3409–15.
- [55] Overton E. Über die allgemeinen osmotischen eigenschaften der zelle. *Monatshchr Naturforsch Ges Zürich* 1899;44:88–135.
- [56] Al-Awqati Q. One hundred years of membrane permeability: does Overton still rule? *Nat Cell Biol* 1999;1:E201–2.
- [57] Skhiri Y, Gruner P, Semin S, Brosseau Q, Pekin D, Mazutis L, Goust V, Kleinschmidt F, El Harrak A, Hutchison JB, Mayot E, Bartolo JF, Griffiths AD, Taly V, Baret JC. Dynamics of molecular transport by surfactalization in emulsions. *Soft Matter* 2012;8:10618–27. Surfactant is shown to control the transport of small organic molecules in water in fluorocarbon emulsions. Proteins in the dispersed phase are slowing down the transport because they act on the partitioning coefficient between both phases, not because they form a layer at the droplet interface.
- [58] Poulin P, Bibette J. Adhesion of water droplets in organic solvents. *Langmuir* 1998;14:6341–3.
- [59] Finkelstein A. Water movement through lipid bilayers, pores, and plasma membranes: theory and reality; 1987.
- [60] Nagle JF, Scott HL. Lateral compressibility of lipid mono- and bilayers. Theory of membrane permeability. *Biochim Biophys Acta* 1978;513:236–43.
- [61] Paula S, Volkov AG, Van Hoek AN, Haines TH, Deamer DW. Permeation of protons, potassium ions, and small polar molecules through phospholipid bilayers as a function of membrane thickness. *Biophys J* 1996;70:339–48.
- [62] Lemal David M. Perspective on fluorocarbon chemistry. *J Org Chem* Jan 2004;69(1):1–11.
- [63] O'Hagan. Understanding organofluorine chemistry. An introduction to the C–F bond. *Chem Soc Rev* 2007;37:308–19.
- [64] Brady JE, Carr PW. Perfluorinated solvents as nonpolar test systems for generalized models of solvatochromic measures of solvent strength. *Anal Chem* 1982;54:1751–7.
- [65] Vincent JM. Noncovalent associations in fluoruous fluids. *J Fluor Chem* 2008;129:903–9.
- [66] Gladysz JA, Curran DP. IT Horváth. Handbook of fluoruous chemistry. Wiley & Sons, New York; 2005.
- [67] Munson MSB. Solutions of fluorochemicals and hydrocarbons. *J Phys Chem* 1964;68:796–801.
- [68] Lo Nostro P. Phase separation properties of fluorocarbons, hydrocarbons and their copolymers. *Adv Colloid Interface Sci* 1995;56:245–87.
- [69] Hamza MA, Serratrice G, Stebe MJ, Delpuech JJ. Solute–solvent interactions in perfluorocarbon solutions of oxygen. An NMR study. *J Am Chem Soc* 1981;103:3733–8.
- [70] Gollan F, Clark LC. Organ perfusion with fluorocarbon fluid. *Physiol* 1966;9:191.
- [71] Andjus RK, Suhara K, Sloviter NA. An isolated, perfused rat brain preparation, its spontaneous and stimulated activity. *J Appl Physiol* 1967;22:1033–9.

- [72] Geyer RP. Fluorocarbon-polyol artificial blood substitutes. *N Engl J Med* 1973;289:1077–82.
- [73] Clausell-Tormos Jenifer, Lieber Diana, Baret Jean-Christophe, El-Harrak Abdeslam, Miller Oliver J, Frenz Lucas, Blouwolf Joshua, Humphry Katherine J, Koester Sarah, Duan Honey, Holtze Christian, Weitz David A, Griffiths Andrew D, Merten Christoph A. Droplet-based microfluidic platforms for the encapsulation and screening of mammalian cells and multicellular organisms. *Chem Biol May* 2008;15(5):427–37.
- [74] Abbyad Paul, Tharaux Pierre-Louis, Martin Jean-Louis, Charles N Baroud, and Antigoni Alexandrou. Sickling of red blood cells through rapid oxygen exchange in microfluidic drops. *Lab Chip Jul* 2010;19:2505–12.
- [75] Riess JG, Dalfors JL, Hanna GK, Klein DH, Krafft MP, Pelura TJ, Schutt EG. Development of highly fluid, concentrated and stable fluorocarbon emulsions for diagnosis and therapy. *Biomater Artif Cell Immobil Biotechnol* 1992;20(2-4):839–42.
- [76] Krafft MP, Postel M, Riess JG, Ni Y, Pelura TJ, Hanna GK, Song D. Drop size stability assessment of fluorocarbon emulsions. *Biomater Artif Cell Immobil Biotechnol* 1992;20(2-4):865–8.
- [77] Riess JG, Krafft MP. Advanced fluorocarbon-based systems for oxygen and drug delivery, and diagnosis. *Artif Cells Blood Substit Immobil Biotechnol* 1997;25(1-2):43–52.
- [78] Riess JG, Krafft MP. Fluorinated materials for in vivo oxygen transport (blood substitutes), diagnosis and drug delivery. *Biomaterials Aug* 1998;19(16):1529–39.
- [79] Lee JN, Park C, Whitesides GM. Solvent compatibility of poly(dimethylsiloxane)-based microfluidic devices. *Anal Chem* 2003;75:6544–54.
- [80] O'Neal KL, Weber SG. Molecular and ionic hydrogen bond formation in fluorosolvents. *J Phys Chem B* 2009;113:149–58.
- [81] Vincent JM, Rabion A, Yachandra VK, Fish RH. Fluorous biphasic catalysis: complexation of 1, 4, 7-trisubstituted-1,4,7-triazacyclononane with $[m(C_8F_{17}(CH_2)_3)_3-1,4,7\text{-triazacyclononane}]$ ($m = mn, co$) to provide perfluoroheptane-soluble catalysts for alkane and alkene functionalization in the presence of $t\text{-BuOOH}$ and O_2 . *Angew Chem* 1997;36:2346–9.
- [82] Pozzi G, Cavazzini M, Quincy S, Fontana S. Metal complexes of a tetraazacyclotetradecane bearing highly fluorinated tails: new catalysts for the oxidation of hydrocarbons under fluorosoluble conditions. *Tetrahedron Lett* 1997;38:7605–8.
- [83] Palomo C, Aizpurua JM, Loinaz I, Fernandez-Berridi MJ, Irusta L. Scavenging of fluorinated N,N' -dialkylureas by hydrogen binding: a novel separation method for fluorosynthesis. *Org Lett Jul* 2001;3(15):2361–4.
- [84] Doan V, Köppe R, Kasai PH. Dimerization of carboxylic acids and salts: an IR study in perfluoropolyether media. *J Am Chem Soc* 1997;119:9810–5.
- [85] Remko M. A theoretical (PCLO) study of hydrogen bonding in carboxylic acids and their adducts with pyridine. *Adv Mol Relax Interact Process* 1979;15:193–206.
- [86] Vishweshwar Peddy, Nangia Ashwini, Lynch Vincent M. Recurrence of carboxylic acid-pyridine supramolecular synthon in the crystal structures of some pyrazinecarboxylic acids. *J Org Chem Jan* 2002;67(2):556–65.
- [87] O'Neal KL, Geib S, Weber SG. Extraction of pyridines into fluorosolvents based on hydrogen bond complex formation with carboxylic acid receptors. *Anal Chem* 2007;79:3117–25.
- [88] Correa da Costa R, Buffeteau T, Del Guerzo A, McClenaghan ND, Vincent JM. Reversible hydrocarbon/perfluorocarbon phase-switching of rubipy32+ driven by supramolecular heteromeric fluorosoluble carboxylate-carboxylic acid h-bond interactions. *Chem Commun* 2011;47:8250–2. Inter molecular association between solutes in one phase and surfactant in the other phase is a mechanism strongly affecting the partitioning between phases.
- [89] Burns JR, Ramshaw C. The intensification of rapid reactions in multiphase systems using slug flow in capillaries. *Lab Chip Sep* 2001;1(1):10–5.
- [90] Kralj Jason G, Schmidt Martin A, Jensen Klavs F. Surfactant-enhanced liquid-liquid extraction in microfluidic channels with inline electric-field enhanced coalescence. *Lab Chip May* 2005;5(5):531–5.
- [91] Kumemura M, Korenaga T. Quantitative extraction using flowing nano-liter droplet in microfluidic system. *Anal Chim Acta* 2006;558:75–9.
- [92] Janiesch Jan-Willi, Weiss Marian, Kannenberg Gerri, Hannabuss Jonathon, Surrey Thomas, Platzman Ilia, Spatz Joachim P. Key factors for stable retention of fluorophores and labeled biomolecules in droplet-based microfluidics. *Anal Chem Feb* 2015;87(4):2063–7.
- [93] Chen Y, Gani AW, Tang SKY. Characterization of sensitivity and specificity in leaky droplet-based assays. *Soft Matter* 2012;12:5093–103.
- [94] Gupta Chhavi, Chauhan Anuj, Mutharasan Raj, Srinivas Sangly P. Measurement and modeling of diffusion kinetics of a lipophilic molecule across rabbit cornea. *Pharm Res Apr* 2010;27(4):699–711.
- [95] Pan Ming, Rosenfeld Liat, Kim Minkyu, Xu Manqi, Lin Edith, Derda Ratmir, Tang Sindy KY. Fluorinated pickering emulsions impede interfacial transport and form rigid interface for the growth of anchorage-dependent cells. *ACS Appl Mater Interfaces Dec* 2014;6(23):21446–53. The stabilisation of interfaces by nanoparticles solves two problems at once: transport in the continuous phase is significantly reduced and cells have a solid substrate where they can anchor.
- [96] Platzman Ilia, Janiesch Jan-Willi, Pius Spatz Joachim. Synthesis of nanostructured and biofunctionalized water-in-oil droplets as tools for homing t cells. *J Am Chem Soc Mar* 2013;135(9):3339–42.
- [97] Holtze C, Rowat AC, Agresti JJ, Hutchison JB, Angile FE, Schmitz CHJ, Koester S, Duan H, Humphry KJ, Scanga RA, Johnson JS, Pisinano D, Weitz DA. Biocompatible surfactants for water-in-fluorocarbon emulsions. *Lab Chip Oct* 2008;8(10):1632–9.
- [98] Scanga R, Nassar R, Miller B, Gang H, Li X, Hutchison JB. Fluorinated amphiphilic block copolymers to stabilize water-in-fluorocarbon emulsions. *Polym Prepr* 2009;50:148.
- [99] Holt Daniel J, Payne Richard J, Chow Wing Ying, Abell Chris. Fluorosurfactants for microdroplets: interfacial tension analysis. *J Colloid Interface Sci Oct* 2010;350(1):205–11.
- [100] Matochko Wadim L, Ng Simon, Jafari Mohammad R, Romaniuk Joseph, Tang Sindy KY, Derda Ratmir. Uniform amplification of phage display libraries in monodisperse emulsions. *Methods Sep* 2012;58(1):18–27.
- [101] DeJournette Cheryl J, Kim Joonyul, Medlen Haley, Li Xiangpeng, Vincent Luke J, Easley Christopher J. Creating biocompatible oil-water interfaces without synthesis: direct interactions between primary amines and carboxylated perfluorocarbon surfactants. *Anal Chem Nov* 2013;85(21):10556–64.
- [102] Loeker F, Marr PC, Howdle SM. FTIR analysis of water in supercritical carbon dioxide microemulsions using monofunctional perfluoropolyether surfactants. *Colloids Surf A March* 2003;214(1-3):143–50.
- [103] Theberge Ashleigh B, Whyte Graeme, Frenzel Max, Fidalgo Luis M, Wootton Robert CR, Huck Wilhelm TS. Suzuki-Miyaura coupling reactions in aqueous microdroplets with catalytically active fluorosoluble interfaces. *Chem Commun Nov* 2009(41):6225–7.
- [104] Jochym Q, Mignard E, Vincent JM. Fluorosurfactants for applications in catalysis. *J Fluor Chem* 2015. <http://dx.doi.org/10.1016/j.jfluchem.2015.01.011>.
- [105] Zarzar Lauren D, Sresht Vishnu, Sletten Ellen M, Kalow Julia A, Blankschtein Daniel, Swager Timothy M. Dynamically reconfigurable complex emulsions via tunable interfacial tensions. *Nature* 2015;518:520. This paper shows how the control of a three phase system leads to switchable systems in a soft matter system, while maintaining the overall structure of the system.
- [106] Mann Stephen. The origins of life: old problems, new chemistries. *Angew Chem Int Ed Engl Jan* 2013;52(1):155–62.
- [107] Tompkins Nathan, Li Ning, Girabawe Camille, Heymann Michael, Bard Ermentrout G, Epstein Irving R, Fraden Seth. Testing Turing's theory of morphogenesis in chemical cells. *Proc Natl Acad Sci U S A Mar* 2014;111(12):4397–402. This paper shows how chemical patterns can lead to morphological patterns in emulsions through transport and ageing processes.
- [108] Fallah-Araghi Ali, Meguellati Kamel, Baret Jean-Christophe, El Harrak Abdeslam, Mangeat Thomas, Karplus Martin, Ladame Sylvain, Marques Carlos M, Griffiths Andrew D. Enhanced chemical synthesis at soft interfaces: a universal reaction-adsorption mechanism in microcompartments. *Phys Rev Lett Jan* 13 2014;112(2):028301.