



**HAL**  
open science

# Fourth-order energy-preserving locally implicit time discretization for linear wave equations

Juliette Chabassier, Sebastien Imperiale

► **To cite this version:**

Juliette Chabassier, Sebastien Imperiale. Fourth-order energy-preserving locally implicit time discretization for linear wave equations. WAVES 2015 - The 12th international conference on mathematical and numerical aspects of wave propagation, Jul 2015, Karlsruhe, Germany. 10.1002/nme.5130 . hal-01264044

**HAL Id: hal-01264044**

**<https://hal.science/hal-01264044v1>**

Submitted on 28 Jan 2016

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Fourth order energy-preserving locally implicit discretization for linear wave equations

**Juliette Chabassier**<sup>1,\*</sup>, **Sébastien Imperiale**<sup>2</sup>

<sup>1</sup>Magique3D Team, Inria Bordeaux Sud Ouest, University of Pau and Pays de l'Adour, Pau, France.

<sup>2</sup>M3DISIM Team, Inria Saclay, Palaiseau, France

\*Email: juliette.chabassier@inria.fr

**Suggested Scientific Committee Members:**

Eliane Bécache, Julien Diaz, Jerónimo Rodríguez García

## Abstract

A family of fourth order locally implicit schemes is presented as a special case of fourth order coupled implicit schemes for linear wave equations. The domain of interest is decomposed into several regions where different (explicit or implicit) fourth order time discretization are used. The coupling is based on a Lagrangian formulation on the boundaries between the several non conforming meshes of the regions. Fourth order accuracy follows from global energy identities. Numerical results in 1d and 2d illustrate the good behavior of the schemes and their potential for the simulation of realistic highly heterogeneous media or strongly refined geometries, for which using everywhere an explicit scheme can be extremely penalizing. Fourth order accuracy reduces the numerical dispersion inherent to implicit methods used with a large time step, and makes this family of schemes attractive compared to classical approaches.

**Keywords:** High-order numerical methods, Time discretization, Locally implicit schemes.

## 1 Continuous system

We want to solve for time  $t > 0$ , the system (closed with Neumann homogeneous boundary conditions):

$$\begin{cases} \partial_t^2 u_0 - \nabla \cdot c^2(\mathbf{x}) \nabla u_0 = s_0 & \text{in } \Omega_0, & (1a) \\ c^2(\mathbf{x}) \nabla u_0 \cdot \mathbf{n}_0 = \lambda & \text{on } \Gamma, & (1b) \\ \partial_t^2 u_1 - \nabla \cdot c^2(\mathbf{x}) \nabla u_1 = s_1 & \text{in } \Omega_1, & (1c) \\ c^2(\mathbf{x}) \nabla u_1 \cdot \mathbf{n}_1 = -\lambda & \text{on } \Gamma, & (1d) \\ u_0 = u_1 & \text{on } \Gamma & (1e) \end{cases}$$

in a domain  $\Omega$  composed by disjoint sets  $\Omega = \Omega_0 \cup \Omega_1$  separated by  $\Gamma = \overline{\Omega_0} \cap \overline{\Omega_1}$ .  $s_0$  and  $s_1$

are given source terms, and  $c(\mathbf{x}) > c_0 > 0$  is the inhomogeneous velocity of the waves. Any solution to (1) satisfies the energy identity:

$$\begin{aligned} \frac{d\mathcal{E}_{01}}{dt} &= \int_{\Omega_0} s_0 \partial_t u_0 + \int_{\Omega_1} s_1 \partial_t u_1, \text{ where} \\ \mathcal{E}_{01} &= \frac{1}{2} \|\partial_t u_0\|_{L^2(\Omega_0)}^2 + \frac{1}{2} \|\partial_t u_1\|_{L^2(\Omega_1)}^2 \\ &\quad + \frac{1}{2} \|c \nabla u_0\|_{L^2(\Omega_0)}^2 + \frac{1}{2} \|c \nabla u_1\|_{L^2(\Omega_1)}^2 \end{aligned} \quad (2)$$

## 2 Semi discrete system

We consider spatial meshes of  $\Omega_0$  and  $\Omega_1$  upon which are based finite dimensional finite element spaces:  $\mathcal{V}_{h,0} \subset H^1(\Omega_0)$ ,  $\mathcal{V}_{h,1} \subset H^1(\Omega_1)$  and  $\Gamma_h \subset H^{-1/2}(\Gamma)$ . One have leeway in the choice of  $(\mathcal{V}_{h,0}, \mathcal{V}_{h,1})$  after which  $\Gamma_h$  must be chosen so that an inf-sup type condition is satisfied, see [1, 3, 4].  $(\tilde{U}_{h,0}, \tilde{U}_{h,1}, \tilde{\Lambda}_h)$  is the solution of:

$$\begin{cases} d_t^2 M_{h,0} \tilde{U}_{h,0} + K_{h,0} \tilde{U}_{h,0} - {}^t C_{h,0} \tilde{\Lambda}_h = M_{h,0} \tilde{S}_{h,0} & (3a) \\ d_t^2 M_{h,1} \tilde{U}_{h,1} + K_{h,1} \tilde{U}_{h,1} + {}^t C_{h,1} \tilde{\Lambda}_h = M_{h,1} \tilde{S}_{h,1} & (3b) \\ C_{h,0} \tilde{U}_{h,0} = C_{h,1} \tilde{U}_{h,1} & (3c) \end{cases}$$

A semi discrete energy identity can be obtained.

$$\begin{aligned} \frac{d\mathcal{E}_{01,h}}{dt} &= M_{h,0} \tilde{S}_{h,0} \cdot d_t \tilde{U}_{h,0} + M_{h,1} \tilde{S}_{h,1} \cdot d_t \tilde{U}_{h,1}, \text{ where} \\ \mathcal{E}_{01,h} &= \frac{1}{2} \|d_t \tilde{U}_{h,0}\|_{M_{h,0}}^2 + \frac{1}{2} \|d_t \tilde{U}_{h,1}\|_{M_{h,1}}^2 \\ &\quad + \frac{1}{2} \|\tilde{U}_{h,0}\|_{K_{h,0}}^2 + \frac{1}{2} \|\tilde{U}_{h,1}\|_{K_{h,1}}^2 \end{aligned} \quad (4)$$

where  $\|X\|_M^2 = MX \cdot X$  for any nonnegative matrix  $M$ .

## 3 Discrete system

The proposed numerical discretization is based on the following definitions:

$$\begin{aligned} D_{\Delta t}^2 U_h^n &:= (U_h^{n+1} - 2U_h^n + U_h^{n-1}) / \Delta t^2 \\ \{U_h\}_\theta^n &:= \theta U_h^{n+1} + (1 - 2\theta)U_h^n + \theta U_h^{n-1} \end{aligned}$$

The consistency analysis of the fourth order family of schemes [2] applied to each equation of system (3) instigates the following scheme:

$$\left\{ \begin{array}{l} M_{h,0} D_{\Delta t}^2 U_{h,0}^n + K_{h,0} \{U_{h,0}\}_{\theta_0}^n - {}^t C_{h,0} \Pi_h^n = M_{h,0} S_{h,0}^n \\ + \Delta t^2 \alpha_0 K_{h,0} M_{h,0}^{-1} [-K_{h,0} \{U_{h,0}\}_{\varphi_0}^n + {}^t C_{h,0} \Pi_h^n] \quad (5a) \\ \\ M_{h,1} D_{\Delta t}^2 U_{h,1}^n + K_{h,1} \{U_{h,1}\}_{\theta_1}^n + {}^t C_{h,1} \Pi_h^n = M_{h,1} S_{h,1}^n \\ + \Delta t^2 \alpha_1 K_{h,1} M_{h,1}^{-1} [-K_{h,1} \{U_{h,1}\}_{\varphi_1}^n - {}^t C_{h,1} \Pi_h^n] \quad (5b) \\ \\ C_{h,0} \frac{U_{h,0}^{n+1} - U_{h,0}^{n-1}}{2\Delta t} - C_{h,1} \frac{U_{h,1}^{n+1} - U_{h,1}^{n-1}}{2\Delta t} = 0 \quad (5c) \end{array} \right.$$

where  $\alpha_i = \theta_i - 1/12$ . Any solution to (5) satisfies the energy identity:

$$\frac{\mathcal{E}_{01,4,h}^{n+1/2} - \mathcal{E}_{01,4,h}^{n+1/2}}{\Delta t} = \tilde{I}_{h,0}^{-1} M_{h,0} S_{h,0}^n \cdot \frac{U_{h,0}^{n+1} - U_{h,0}^{n-1}}{2\Delta t} \\ + \tilde{I}_{h,1}^{-1} M_{h,1} S_{h,1}^n \cdot \frac{U_{h,1}^{n+1} - U_{h,1}^{n-1}}{2\Delta t},$$

where the discrete energy reads

$$\mathcal{E}_{01,4,h}^{n+1/2} = \frac{1}{2} \left\| \frac{U_{h,0}^{n+1} - U_{h,0}^n}{\Delta t} \right\|_{\widehat{M}_{h,0}}^2 + \frac{1}{2} \left\| \frac{U_{h,1}^{n+1} - U_{h,1}^n}{\Delta t} \right\|_{\widehat{M}_{h,1}}^2 \\ + \frac{1}{2} \left\| \frac{U_{h,0}^{n+1} + U_{h,0}^n}{2} \right\|_{K_{h,0}}^2 + \frac{1}{2} \left\| \frac{U_{h,1}^{n+1} + U_{h,1}^n}{2} \right\|_{K_{h,1}}^2$$

where the modified mass matrices  $\widehat{M}_{h,i}$  are defined by  $\widehat{M}_{h,i} = \tilde{I}_{h,i}^{-1} \widetilde{M}_{h,i}$  where

$$\left\{ \begin{array}{l} \tilde{I}_{h,i} = I_{h,i} + \Delta t^2 \left( \theta_i - \frac{1}{12} \right) K_{h,i} M_{h,i}^{-1} \\ \widetilde{M}_{h,i} = M_{h,i} + \Delta t^2 \left( \theta_i - \frac{1}{4} \right) K_{h,i} \\ \quad + \Delta t^4 \left( \theta_i - \frac{1}{12} \right) \left( \varphi_i - \frac{1}{4} \right) K_{h,i} M_{h,i}^{-1} K_{h,i} \end{array} \right.$$

The positivity of the energy can be proven under standard CFL condition that depend on the parameters  $(\theta_i, \varphi_i)$ . Despite the non standard form of this energy, stability in  $L_2$ -norm can be proved in the case  $\theta_i \geq 1/4$  and  $\varphi_i \geq 1/4$ .  $L_2$ -Stability in the other cases is not proven yet but show good numerical behavior.

A 1d numerical experiment is performed where the segment  $[0, 1]$  is cut in two intervals  $\Omega_0 = [0, 0.5]$  and  $\Omega_1 = [0.5, 1]$ .  $\Omega_0$  and  $\Omega_1$  are respectively divided into 7 and 13 elements. Sixth order spectral elements are implemented. A fourth

order explicit scheme is used on  $\Omega_0$  ( $\theta_0 = \varphi_0 = 0$ ) while an unconditionally stable implicit scheme is used on  $\Omega_1$  ( $\theta_1 = \varphi_1 = 1/4$ ). A gaussian initial condition is set on the left interval and crosses the middle point around time 0.3. Fig. 1 shows that the energy is preserved up to machine precision. Fig. 2 shows that the coupling of second order implicit and explicit schemes only provides second order accuracy (as expected), while our scheme provides fourth order accuracy.

Figure 1: Relative energy deviation


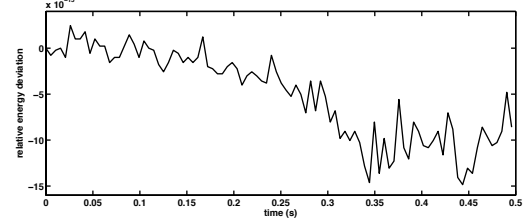


Figure 2: Convergence curve

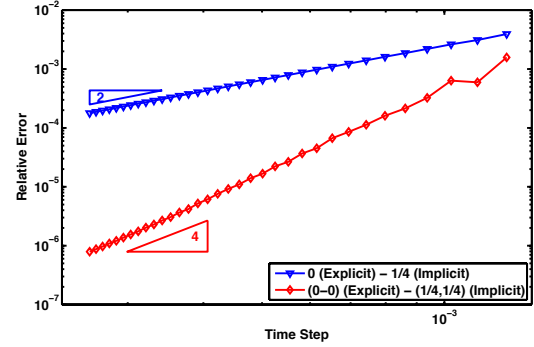

Numerical illustrations in 2D as well as details about stability and consistency of scheme (5) will be presented at the oral session.

## References

- [1] E. Becache, P. Joly, J. Rodríguez, *CMAME*, vol. 194 (2-5), pp 355–366, 2005.
- [2] J. Chabassier, S. Imperiale. *JCAM*, vol. 245, pp 194–212, 2012.
- [3] P. Joly, J. Rodríguez Effective computational methods for wave propagation. Chap 13 : Space time mesh refinement methods, *Chapman and Hall/CRC*, 2008.
- [4] Y. Maday, C. Mavriplis, A. T. Patera, Nonconforming mortar element methods - Application to spectral discretizations in Domain decomposition methods, *SIAM Philadelphia*, pp 392–418, 1989.