



HAL
open science

LMI-based design of a structured direct adaptive satellite attitude control with actuator rate feedback

Harmonie Leduc, Dimitri Peaucelle, Christelle Pittet-Mechin

► To cite this version:

Harmonie Leduc, Dimitri Peaucelle, Christelle Pittet-Mechin. LMI-based design of a structured direct adaptive satellite attitude control with actuator rate feedback. 2015 IEEE 54th Annual Conference on Decision and Control (CDC 2015), Dec 2015, Osaka, Japan. 10.1109/CDC.2015.7402732 . hal-01388191

HAL Id: hal-01388191

<https://hal.science/hal-01388191>

Submitted on 28 Oct 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

LMI-based design of a structured direct adaptive satellite attitude control with actuator rate feedback

Harmonie Leduc
hleduc@laas.fr

Dimitri Peaucelle
peaucell@laas.fr

Christelle Pittet
christelle.pittet@cnes.fr

Abstract

Satellite attitude control of a microsatellite of the CNES Myriade series is considered. Reduction of saturations on the angular rate of reaction wheel actuators is addressed by means of control gain adaptation. The proposed adaptive control design has the following features: performances of the adaptive law are the same as those of a predefined linear time-invariant control when the state is close to the equilibrium; adaptation is structured allowing to include engineering considerations in the design; asymptotic stability is guaranteed based on Lyapunov arguments; fine tuning of adaptive gains is made by linear matrix inequality based convex optimization. The novelties compared to previous results are: to include magnetorquer information in the adaptive scheme; to provide a simplified design procedure.

1 Introduction

The attitude control of satellites is a challenging issue that has attracted much attention of the scientific community (see for example [23, 3]). Many of these contributions consider an idealized rigid body model with ideal actuators which allows to provide powerful global hybrid stabilization solutions such as in [13, 21]. One can also cite sliding mode control solutions as for example [8] where additional flexible structure characteristics are included to the basic rigid body model, or [25] where actuator saturation is considered. Such non-linear approaches have the advantage of providing global stability characteristics essential when the satellite performs large atti-

tude changes, but they can scarcely characterize the attitude control at fine pointing mode in which the satellite is most of the time.

A complementary approach is the design of a local linear control, for example using linear matrix inequality (LMI) based results as in [19, 2, 24]. Such approaches have the advantage to provide robust controllers with optimized performances that can be designed for precise models including flexible modes and actuator dynamics. The main disadvantage of the obtained controllers is that they have high gain characteristics (for improved performance) that inevitably saturate the actuators as soon as the pointing errors are greater than a few degrees. To expand the neighborhood of the equilibrium point where the local linear control remains valid without saturating actuators, a solution adopted by CNES [16] is to switch to a less aggressive control when depointing exceeds some fixed threshold. In [1] a linear parameter-varying alternative is proposed that avoids the discontinuities due to switching. An other solution based on adaptive control is proposed in [12, 11] and was satisfactorily tested onboard the PICARD satellite [17]. The goal of the paper is to improve these last results and to justify theoretically some heuristic tunings done in [17].

At the difference of [5, 4, 25], we adopt a direct adaptive control strategy that does not rely on on-line parameter estimation, but tunes directly the control gains based on the measurements. Such direct adaptive strategy follows the passivity-based results of [6, 9, 7, 14]. Here we apply some of the most recent developments from [12] that have the following important features: the adaptive control design

only requires feedback stabilizability of the plant (no closed-loop passivity assumption); the adaptive law can be structured which allows engineering considerations; the design of the adaptive law parameters is via linear matrix inequality (LMI) constrained optimization (that is convex and solvable efficiently in polynomial time).

The contributions of the paper are both in terms of improved attitude control strategy by adapting the magnetotorquer proportional gain, and in terms of reduction of the numerical burden of the LMI-based design.

Following the specifications [15] given by CNES (the french space agency that develops the Myriade series of micro satellites), and at the difference of many papers such as [25], the critical saturation issue that we consider is not in terms of saturation of the control torques, but the saturation of the reaction wheels angular rate. The actual control torque is related to the derivative of this angular rate and hence the satellite is uncontrollable by reaction wheels when saturation occurs. Our contribution is to include in the adaptive control strategy the information about the reaction wheels angular rate with the objective to avoid as much as possible the saturations.

The second contribution is to revisit the LMI-based design strategy. The new conditions we provide not only allow the design of the adaptive law parameters in one unique LMI step (two steps in [12]) but the adaptive control has proved asymptotic convergence to equilibrium points even in the presence of forgetting factor terms.

The paper is organized as follows. First we expose the satellite attitude control problem for the latest Myriade series satellite. Section III then provides the theoretical contributions, namely the LMI-based design methodology and the proofs of asymptotic stability of the direct adaptive control law. The fourth section demonstrates how the proposed methodology applies to the satellite example and illustrates the improvements made possible when adapting the magnetotorquer gain. Finally we draw some conclusions and perspectives for future work.

Notation. I stands for the identity matrix. A^T is the transpose of the matrix A . $\{A\}^S$ stands for the symmetric matrix $\{A\}^S = A + A^T$. $A(\preceq) \prec B$ is the

matrix inequality stating that $A - B$ is negative (semi-)definite. $\text{diag}(F_1, \dots, F_k)$ stands for a bloc-diagonal matrix whose diagonal blocs are the $F_1, \dots, F_k, \dots, F_k$ matrices.

2 Taranis microsatellite attitude control

In 2016-2017, CNES schedules to send to orbit an other microsatellite from the Myriade series, Taranis, dedicated to the study of thunderstorms. The satellite will weight from 150 to 200kg and its architecture is very close to that of Demeter [15] satellites launched in 2004. It is more complex to control than the Picard satellite launched in 2010 since it has four appendices (as for Demeter) that bring low frequency flexible modes to the dynamics. The current study is assuming the dynamics of the three axes are decoupled and we consider the linearized x-axis model with flexible modes:

$$\theta = G_{Tar}(s)T = \frac{0.449s^2 + 0.0038s + 1}{2.3169s^4 + 0.1425s^3 + 37.49s^2}T. \quad (1)$$

The actuation torque T is realized by reaction wheels modeled as

$$T = G_r(s)\omega_{rs} = \frac{(1.214s + 0.7625)J_r s}{s^2 + 2.4s + 0.7625}\omega_{rs},$$

$$\omega_r = \frac{1}{J_r s}u_f \quad (2)$$

where ω_r is the reaction wheel angular rate and J_r is the inertia of the reaction wheel. In practice the reaction wheel is saturated in terms of angular rate: $\omega_{rs} = \text{sat}_{\bar{\omega}_r}(\omega_r)$ where $\pm\bar{\omega}_r = \pm 293 \text{rad/s}$ are the limits on the angular rate. Due to the derivative type term in $G_r(s)$, as soon as the reaction wheel rate saturates, the actuation torque T is zero: the satellite is non actuated. It is a situation to be avoided.

The classical control law structure for the Myriade series is composed of an estimator of the satellite angular rate $\omega_e = G_e(s)\theta$, a proportional/derivative baseline control $u_c = F_\theta\theta + F_\omega\omega_e$ and some stabilizing fourth order filter $u_f = G_f(s)u$. The same filter is considered as in [16]. This classical structure suffers

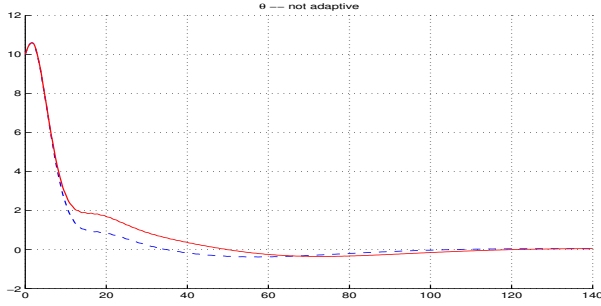


Figure 1: Attitude angle. Dashed: classical control architecture; Solid: with the magnetotorquer.

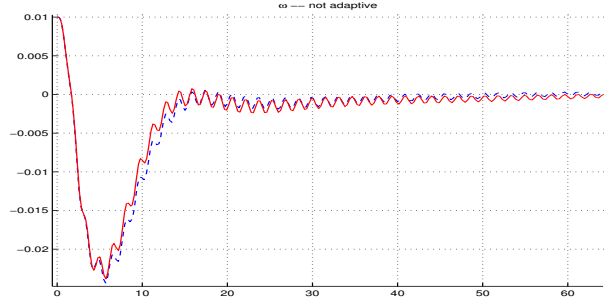


Figure 2: Attitude angular rate. Dashed: classical control architecture; Solid: with the magnetotorquer.

from the fact that the reaction wheel rate is a non asymptotically stable state. To stabilize it without introducing much difference with the existing control architecture, we also consider in this paper case the action of a magnetotorquer, whose transfer function is a proportional-integral controller:

$$T = (G_r(s) + J_r G_{mgt}(s)) \omega_{rs}, \quad G_{mgt}(s) = 0.01 + \frac{6e^{-5}}{s}. \quad (3)$$

To illustrate the modification brought by the magnetotorquer the time histories of the satellite angle, angular rate and the reaction wheel angular rate are plotted respectively in Figures 1, 2 and 3. The initial conditions $\theta(0) = 10deg$, $\omega(0) = 0.01rad/s$ and $\omega_r(0) = 0rad/s$ are such that the reaction wheel saturates. The angular rate shows some rapid oscillations due to the flexible mode. The proportional-integral controller improves the dynamics of the response and reduces slightly the time of saturation, at the expense of a slower stabilization of the reaction wheel speed (the magnetotorquer uses magnetic field data). Our goal is to reduce it further, without modifying the characteristics of the closed-loop at fine foisting. For that purpose we propose in the following a rigorous LMI-based methodology to design an adaptive version of this controller.

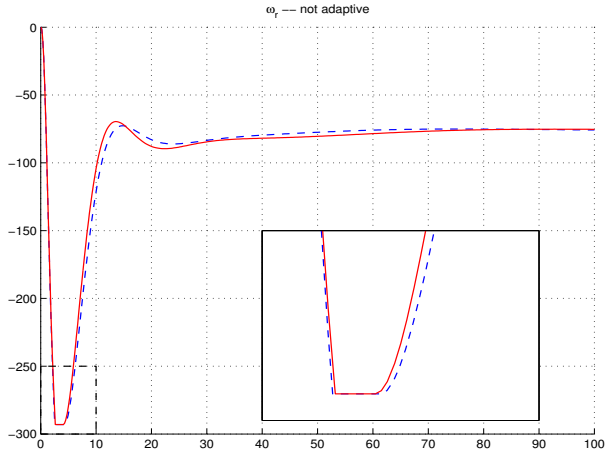


Figure 3: Actuator angular rate. Dashed: classical control architecture; Solid: with the magnetotorquer.

3 New LMI-based adaptive control design

Let the following linear state-space model for the plant

$$\dot{x} = Ax + Bu, \quad y = Cx \quad (4)$$

and assume some existing structured stabilizing static output feedback control written in the following format

$$u = \sum_{k=1}^{\bar{k}} L_k F_k R_k y \quad (5)$$

where L_k and R_k are full rank matrices composed of zero or unity elements, defining the structure of the controller, and where F_k are full-block independent gains. For building compact formulas we denote $L = [L_1 \ \dots \ L_{\bar{k}}]$, $R^T = [R_1^T \ \dots \ R_{\bar{k}}^T]$ and $F = \text{diag}(F_1, \dots, F_{\bar{k}})$ the block-diagonal matrix composed of all the gains. With these notations one has $u = LFRy$

For the attitude control example, the output vector is $y^T = (\omega_r \ \theta \ \omega_e)$ and the control input is $u^T = (u_r \ u_c)$. The considered controller structure is such that

$$LFR = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \end{bmatrix} \begin{bmatrix} F_r & 0 & 0 \\ 0 & F_\theta & 0 \\ 0 & 0 & F_\omega \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

The proposed structured adaptive control amounts to replacing the static gains F_k by dynamically adapted ones such that $u(t) = LK(t)Ry(t)$ with $K(t) = \text{diag}(K_1(t), \dots, K_{\bar{k}}(t))$ and each individual gain $K_k(t)$ is solution to non-linear differential equations

$$\begin{aligned} \dot{K}_k(t) &= \text{Proj}_{D_k}(K_k(t) - F_k, W_k(t)) \\ W_k(t) &= \gamma_k(-G_k y(t)(R_k y(t))^T - \sigma_k(K_k(t) - F_k)). \end{aligned} \quad (6)$$

In these equations the Proj_{D_k} operator is parameterized by a matrix D_k that defines an ellipsoidal-like set defined by the following inequality:

$$(K_k - F_k) \in \mathcal{E}_k \Leftrightarrow \text{Tr}((K_k - F_k)^T D_k (K_k - F_k)) \leq 1 \quad (7)$$

The operator Proj_{D_k} has a similar definition as in [20]. It outputs the value W_k when the gain $K_k - F_k$

is in the interior of the set and enforces the derivative of K_k to be such that the gain is pushed to the interior of the set when it is at the border:

$$\text{Proj}_{D_k}(K_k - F_k, W_k) = W_k - H_k$$

where H_k is such that

$$H_k = 0 \text{ if } (K_k - F_k) \in \mathcal{E}_k \\ \text{else s.t. } \begin{cases} \text{Tr}((W_k - H_k)^T D_k (K_k - F_k)) \leq 0 \\ \text{Tr}((K_k - F_k)^T H_k) \geq 0 \end{cases} \quad (8)$$

The first of the two inequalities in (8) ensures that the derivative of $\text{Tr}((K_k - F_k)^T D_k (K_k - F_k))$ is negative when $\text{Tr}((K_k - F_k)^T D_k (K_k - F_k)) = 1$. Hence the gains cannot exit the set \mathcal{E}_k . The second imposes H_k to be oriented towards the exterior of the set (no need so subtract any component if W_k already pushes the gain to the interior of the set).

The operator guarantees that whatever values of W_k , the gains K_k remain in a bounded neighborhood of F_k parameterized by D_k . In the case of scalar gains K_k the set \mathcal{E}_k is an interval and the Proj_{D_k} operator can be implemented as a saturated integrator.

The adaptation in (6) is driven by two terms. The first term $G_k y(t)(R_k y(t))^T$ drives the adaptation while the second term $-\sigma_k(K_k(t) - F_k)$ is a forgetting factor that brings the gain back to the value F_k as soon as the system is at the zero equilibrium. The adaptation law hence has the property that the control is exactly the same as the baseline control F when the errors are small (at least very close to it). Any property of the control F computed on the linear model remains valid for the adaptive control, at least for small deviations from the equilibrium point where the linear model is valid.

The design problem for the adaptive law (6) is to choose appropriately the matrices D_k, G_k and the scalars σ_k, γ_k . The following theorem answers this question.

Theorem 3.1 *If LFR is an asymptotically stabilizing gain for the plant (4), then there exist $P \succ 0$, $\epsilon > 0$, $G = [G_1^T \ \dots \ G_{\bar{k}}^T]^T$ and $D =$*

$\text{diag}(D_1, \dots, D_{\bar{k}})$ solution to

$$\begin{bmatrix} \{P(A + BLFRC)\}^S + \epsilon I + 2C^T R^T RC & PBL - C^T G^T \\ L^T B^T P - GC & -2D \end{bmatrix} \begin{matrix} 2x^T P\dot{x} - 2y^T G^T (K - F)Ry \\ 2y^T R^T (I - (K - F)^T D (K - F))Ry \end{matrix} \leq -\epsilon x^T x. \quad (9)$$

Moreover, the solution is such that the adaptive control (6) stabilizes the plant whatever positive values of σ_k, γ_k .

Proof: The first part of the proof is to assess that if the stability property holds for the static gain F , then there indeed exist ϵ, D_k and G_k parameters solution to the LMI.

Let $\hat{V}(x) = x^T \hat{P}x$, $\hat{P} \succ 0$ be a quadratic Lyapunov function which proves the asymptotic stability of $\dot{x} = (A + BLFRC)x$, i.e. $\{\hat{P}(A + BLFRC)\}^S \prec 0$. By a small perturbation argument, and whatever a priori choice of \hat{G} , there exist small positive $\check{\epsilon} > 0$, $\hat{\epsilon} > 0$ and $\tilde{\epsilon} > 0$ such that

$$\{\hat{P}(A + BLFRC)\}^S \preceq -\check{\epsilon}I - \hat{\epsilon}C^T R^T RC - \tilde{\epsilon}(\hat{P}BL - C^T \hat{G}^T)(L^T B^T \hat{P} - \hat{G}C).$$

Multiply this inequality by $\kappa = 2/\hat{\epsilon}$ and take $\epsilon = \kappa\check{\epsilon}$, $P = \kappa\hat{P}$, $G = \kappa\hat{G}$, $D = (\hat{\epsilon}/\tilde{\epsilon})I$, the inequality also reads as

$$\begin{bmatrix} \{P(A + BLFRC)\}^S \preceq -\epsilon I - 2C^T R^T RC \\ -(PBL - C^T G^T)(2D)^{-1}(L^T B^T P - GC) \end{bmatrix}$$

By a Schur complement argument, this inequality is equivalent to the LMI (9).

Now let us prove the stability of the closed-loop with adaptive control. Pre an post-multiply (9) by $\begin{pmatrix} x^T & x^T C^T R^T (K - F)^T \end{pmatrix}$ and its transpose respectively, to get for $y = Cx$:

$$\begin{aligned} 2x^T PAx + 2x^T PBLFRy + \epsilon x^T x + 2y^T R^T Ry \\ + 2x^T (PBL - C^T G^T)(K - F)Ry \leq 0. \\ -2y^T R^T (K - F)^T D (K - F)Ry \end{aligned}$$

Along the adaptive control closed-loop system trajectories $\dot{x} = (A + BLKRC)x$, this inequality also reads as

$$\begin{aligned} 2x^T P\dot{x} - x^T PBL(K - F)Ry + 2y^T R^T Ry \\ + 2x^T (PBL - C^T G^T)(K - F)Ry \leq -\epsilon x^T x \\ -2y^T R^T (K - F)^T D (K - F)Ry \end{aligned}$$

or after rearranging terms

$$2x^T P\dot{x} - 2y^T G^T (K - F)Ry \leq -\epsilon x^T x.$$

Due to the block-diagonal nature of the matrices K, F and D , the matrix $I - (K - F)^T D (K - F)$ is block diagonal with $I - (K_k - F_k)^T D_k (K_k - F_k)$ elements on its diagonal. Moreover recall that for a positive definite matrix M , $\text{Tr}(M) \leq 1$ implies $I - M \succeq 0$. Because of this one has:

$$2x^T P\dot{x} - 2y^T G^T (K - F)Ry \leq -\epsilon x^T x. \quad (10)$$

We shall now exploit (10) to prove stability of the adaptive control closed-loop. For that purpose consider the following Lyapunov function:

$$V(x, K) = x^T Px + \text{Tr}((K - F)^T \Gamma^{-1} (K - F))$$

where $\Gamma = \text{diag}(\gamma_1 I_{m_1}, \dots, \gamma_{\bar{k}} I_{m_{\bar{k}}})$ and m_k is the number of columns of L_k . The derivative of this Lyapunov function along the trajectories of the adaptive closed-loop system reads as

$$\begin{aligned} \dot{V}(x, K) &= 2x^T P\dot{x} + 2\text{Tr}((K - F)^T \Gamma^{-1} \dot{K}) \\ &= 2x^T P\dot{x} - 2\text{Tr}((K - F)^T (Gy)(Ry)^T) \\ &\quad - 2\text{Tr}((K - F)^T \sigma(K - F)) - 2\text{Tr}((K - F)^T \Gamma^{-1} H) \end{aligned}$$

The second row of this formula is obtained by replacing the derivative of the adaptive add-on by its formula, while taking $\sigma = \text{diag}(\sigma_1 I_{m_1}, \dots, \sigma_{\bar{k}} I_{m_{\bar{k}}})$ and $H = \text{diag}(H_1, \dots, H_{\bar{k}})$. Using the properties of the trace operator, the fact that matrices are block diagonal and the definition of the H_k matrices one gets:

$$\text{Tr}((K - F)^T \Gamma^{-1} H) = \sum_{k=1}^{\bar{k}} \gamma_k^{-1} \text{Tr}((K_k - F_k)^T H_k) \geq 0.$$

Moreover, thanks to the trace operator properties on has

$$\begin{aligned} \text{Tr}((K - F)^T (Gy)(Ry)^T) &= \text{Tr}((Ry)(Gy)^T (K - F)) \\ &= \text{Tr}((Gy)^T (K - F)(Ry)) \\ &= y^T G^T (K - F)Ry. \end{aligned}$$

Hence using (10), the derivative of the Lyapunov function is negative:

$$\dot{V}(x, K) \leq -\epsilon x^T x - \sum_{k=1}^{\bar{k}} \sigma_k \text{Tr}((K_k - F_k)^T (K_k - F_k)).$$

According to the Lyapunov theory the non-linear adaptive closed-loop system is asymptotically stable and the states x and K_k converge respectively to zero and F_k .

Remark 1: The D_k matrices parametrize the sets in which the adaptive gains lie. The “larger” D_k is, then the smaller is the set \mathcal{E}_k . This means that if we aim at having large sets in which the adaption performs, one has to look for the “smallest” possible D_k . In practice we suggest to minimize

$$f_w(D) = \sum_{k=1}^{\bar{k}} w_k \text{Tr}(D_k)$$

where the weights w_k are chosen as a tradeoff between the different gains and the trace operator is chosen such that the “size” is defined by a linear function. Minimizing $f_w(D)$ under the LMI constraints (10) is a convex optimization problem that can be easily coded in Matlab using the YALMIP parser [10] and solved efficiently using semi-definite programming tools such as [22].

Remark 2: The condition (10) being linear in G , it is possible to perform the convex LMI optimization with any additional linear constraints on the coefficients of G . This is used in the following for the satellite example in order to force the directions in which adaptation is done, based on engineering considerations.

Remark 3: Theorem 3.1 is an improved version of results given in [12]. The improvements have the following characteristics

- The LMI-based design is done in one step (two steps in [12]) thus reducing the computation burden by a factor two.
- The adaptive gains are guaranteed to converge asymptotically to the nominal values F_k , while in [12] only convergence to a neighborhood of these is guaranteed. The drawback is that the sets in which the gains evolve may be smaller.
- In [12] boundedness of the adaptive gains is guaranteed by a penalty barrier function in the

adaptation equation. Such barrier function has proved complex to implement, even in the case of scalar gains (see [11]). The projection operator appears to be more appropriate for implementation.

4 Design of the Taranis adaptive attitude control

By default the adaptive law for the satellite control with three scalar gains is driven by the following equations

$$\begin{aligned} W_\theta(t) &= \gamma_\theta(-G_\theta y(t)\theta(t) - \sigma_\theta(K_\theta(t) - F_\theta)), \\ W_\omega(t) &= \gamma_\omega(-G_\omega y(t)\omega_e(t) - \sigma_\omega(K_\omega(t) - F_\omega)), \\ W_{mgt}(t) &= \gamma_{mgt}(-G_{mgt}y(t)h_r(t) - \sigma_{mgt}(K_{mgt}(t) - F_{mgt})), \\ h_r(t) &= J_r \omega_r(t). \end{aligned}$$

and the projection operator guarantees the gains to be in intervals centered at the nominal values and of length proportional to the inverse of the square root of the D matrices:

$$\begin{aligned} K_\theta &\in [F_\theta - D_\theta^{-1/2}, F_\theta + D_\theta^{-1/2}], \\ K_\omega &\in [F_\omega - D_\omega^{-1/2}, F_\omega + D_\omega^{-1/2}], \\ K_{mgt} &\in [F_{mgt} - D_{mgt}^{-1/2}, F_{mgt} + D_{mgt}^{-1/2}]. \end{aligned}$$

4.1 Design without actuator rate feedback

To analyse the usefulness of the magnetotorquer introduced in section 2 for the adaptive control problem, we first consider the case when only position and rate are adapted. $F_{mgt} = -0.01$ is constant and $G_{mgt} = 0$. The LMI problem is then solved with the following constraints on the other matrices:

$$\begin{aligned} G_\theta &= \begin{bmatrix} g_\theta & 0 & 0 \end{bmatrix}, \quad g_\theta \geq 1, \\ G_\omega &= \begin{bmatrix} 0 & g_\omega & 0 \end{bmatrix}, \quad g_\omega \leq -10g_\theta. \end{aligned}$$

This choice is done such that: when the depointing is large (θ^2 is large), the adaptation will push K_θ to smaller values, thus reducing the actuation effort; when the satellite rotation rate is large (ω_e^2 is large), the adaptation will push K_ω to larger values, thus regulating strongly the angular rate to zero. Both

these effects tend to slow down the convergence of the attitude with the expected benefit of avoiding actuator rate saturation. The factor 10 between the two gains is chosen heuristically to avoid numerical issues. It has no influence on the adaptive control itself since the adaptation equations (6) are finally multiplied by a positive scalar γ_k that drives the adaptation speed of each gain independently.

Weights chosen as $w_\theta = 10$, $w_\omega = 1$ in order to push for larger variations of K_θ compared to those on K_ω . The LMI optimization problem is solved with a computation time of about 1 second and gives:

$$\begin{aligned} g_\theta &= 2.52, & D_\theta^{-1/2} &= 0.0986, \\ g_\omega &= -25.19, & D_\omega^{-1/2} &= 0.0517. \end{aligned}$$

The other parameters are chosen accordingly to the methodology exposed in [12]. Their values are

$$\gamma_\theta = 0.569, \quad \sigma_\theta = 0.049, \quad \gamma_\omega = 0.569, \quad \sigma_\omega = 0.037.$$

Simulation results with this adaptive control are plotted with dash lines in Figures 4, 5, 6, 7 and 8.

4.2 Design with actuator rate feedback

In [17] a modification of the adaptive law is proposed (and successfully tested onboard the PICARD satellite). This modification is heuristic and comes from the intuition that there is no reason for slowing down the dynamics when the reactions wheel angular rate is far from saturation. The proposed modification is on the adaptive rule for K_θ and reads as

$$W_\theta(t) = \gamma_\theta(-g_\theta\theta^2(t) + g_r\omega_r^2 - \sigma_\theta(K_\theta(t) - F_\theta)),$$

Rather than testing this heuristic solution, we suggest a new one that can be validated with the LMI design and that assumes that the proportional gain K_p of the proportional-integral controller of the magnetorquer can be adapted as the gains K_θ and K_ω are.

The design is lead with the following constraints

$$\begin{aligned} G_\theta &= \begin{bmatrix} g_\theta & 0 & 0 \end{bmatrix}, & g_\theta &\geq 0, \\ G_\omega &= \begin{bmatrix} 0 & g_\omega & 0 \end{bmatrix}, & g_\omega &\leq 0, \\ G_{mgt} &= \begin{bmatrix} 0 & 0 & g_{mgt} \end{bmatrix}, & g_{mgt} &\leq 0 \end{aligned}$$

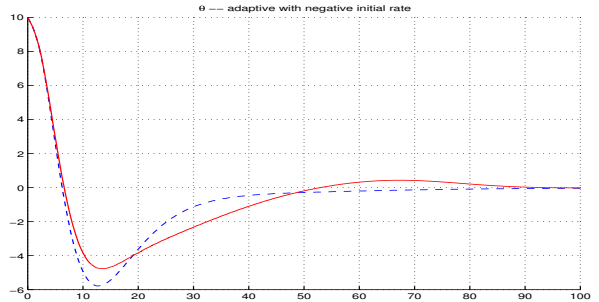


Figure 4: Attitude angle. Dashed: without mgt proportional gain adaptation; Solid: with mgt proportional gain adaptation.

Weights are chosen to fit the previous ones $w_\theta = 10$, $w_\omega = 1$ and with $w_{mgt} = 10^{-4}$ that need not to be large since K_{mgt} will vary around small values ($F_{mgt} = -10^{-2}$). The LMI optimization problem is solved with a computation time of about 1 second and gives:

$$\begin{aligned} g_\theta &= 103.64, & D_\theta^{-1/2} &= 0.0411, \\ g_\omega &= -1039.39, & D_\omega^{-1/2} &= 0.0179, \\ g_{mgt} &= -163.85, & D_{mgt}^{-1/2} &= 0.0020. \end{aligned}$$

The other parameters are chosen accordingly to the methodology exposed in [12]. Their values are

$$\begin{aligned} \gamma_\theta &= 0.014, & \sigma_\theta &= 4.801, & \gamma_\omega &= 0.014, & \sigma_\omega &= 4.424, \\ \gamma_{mgt} &= 0.007, & \sigma_{mgt} &= 613.137. \end{aligned}$$

Simulation results with this adaptive control are plotted with solid lines in Figures 4, 5, 6, 7 and 8.

4.3 Simulation results

Time responses of the attitude angle with the same initial conditions as those used in Section II are plotted in Figure 4. The comparison with Figure 1 shows that the adaptive controllers allow a faster convergence.

Time responses of the actuator angular rate are plotted in Figure 5. The comparison with Figure 3 shows that the adaptive controllers allow a reduced

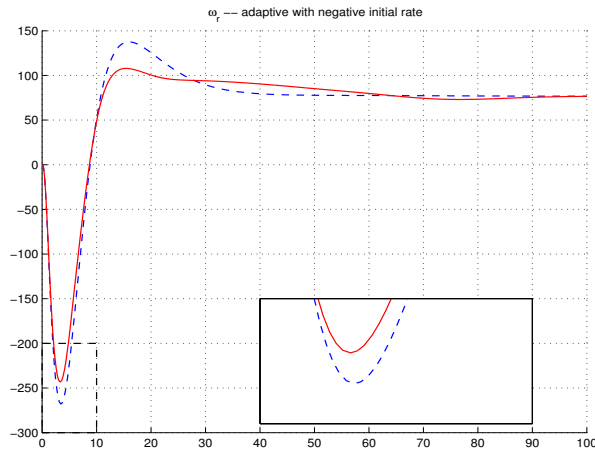


Figure 5: Actuator angular rate. Dashed: without mgt proportional gain adaptation; Solid: with mgt proportional gain adaptation.

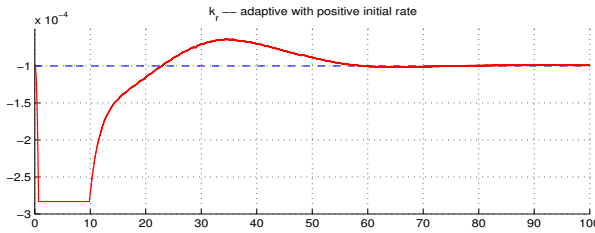


Figure 6: Adaptive gain K_{mgt} . Dashed: without mgt proportional gain adaptation; Solid: with mgt proportional gain adaptation.

saturation time. The adaptation based on the reaction wheel momentum further reduces the saturation time.

Time histories of the adaptive gain K_{mgt} are plotted in Figure 6. The dotted curve is constant since it corresponds to the case when no adaptation is done for this gain. In the adapted case the variations are non negligible compared to the nominal value.

Time histories of the gains K_θ and K_ω are plotted in Figures 7 and 8 respectively. In the case of adaptation involving the actuator rate the bounds in which the gains evolve are tighter. This is coherent with the smaller values of $D_\theta^{-1/2}$ and $D_\omega^{-1/2}$. The new

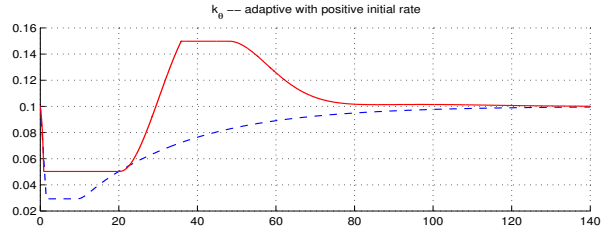


Figure 7: Adaptive gain K_θ . Dashed: without mgt proportional gain adaptation; Solid: with mgt proportional gain adaptation.

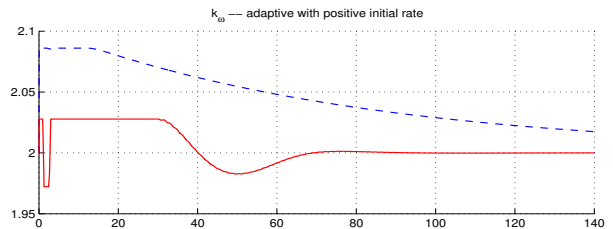


Figure 8: Adaptive gain K_ω . Dashed: without mgt proportional gain adaptation; Solid: with mgt proportional gain adaptation.

adaptive strategy achieves better performances without having too large valuations of the gains around their nominal values.

An important feature is that the gains do converge back to their nominal values as soon as the satellite is close to the equilibrium. The convergence rate is driven by the σ_\bullet values (see [12] for the explanation on how these should be chosen based on thresholds between large and small distances to equilibrium). An other feature is that the gains evolve rather smoothly. This is achieved by tuning the γ_\bullet values knowing the range of evolution of the different signals, in order to have reasonable, implementable, values for the derivatives \dot{K}_k .

5 CONCLUSIONS AND FUTURE WORKS

We have explored in this paper the opportunity to adapt control gains based on all available information

from the plant: attitude angle and rate, plus actuator rate. Results show that such adaptive control can be designed based on any existing linear-time invariant control, that performances of this baseline control are recovered when the state is close to equilibrium, and that the design can be lead using up-to-date convex optimization techniques. In terms of the application, the adaptive control improves slightly the criterion that we have considered (faster time response and reduction of the actuator rate saturation). This feature needs to be validated on a 3 axis non-linear model of the satellite which is left for future work. The advantage of the linear-matrix inequality based design is that, except for possible numerical issues, it should be applicable to full 3 axis models.

References

- [1] J.-M. Biannic, C. Roos, and C. Pittet. LPV analysis of switched controllers for attitude control systems. *Journal of Guidance, Control and Dynamics*, 34(5):1561–1566, 2011.
- [2] C. Charbonnel. H_∞ and LMI attitude control design: towards performances and robustness enhancement. *Acta Astronautica*, 54:307–314, 2004.
- [3] N.A. Chaturvedi, A.K. Sanyal, and N.H. McClamroch. Rigid-body attitude control. *IEEE Control Systems Magazine*, 31(3):30–51, 2011.
- [4] B.T. Costic, D.M. Dawson, M.S. de Queiroz, and V. Kapila. A quaternion-based adaptive attitude tracking controller without velocity measurements. *Journal of Guidance, Control and Dynamics*, 24(6):1214–1222, 2001.
- [5] O. Egeland and J.-M. Godhavn. Passivity based adaptive attitude control of a rigid spacecraft. *IEEE Transactions on Automatic Control*, 39(4):842–846, 1994.
- [6] A.L. Fradkov. Adaptive stabilization of a linear dynamic plant. *Autom. Remote Contr.*, 35(12):1960–1966, 1974.
- [7] A.L. Fradkov, I.V. Miroshnik, and V.O. Niki-forov. *Nonlinear and Adaptive Control of Complex Systems*. Kluwer Academic Publishers, Dordrecht, 1999.
- [8] Qinglei Hu. Sliding mode attitude control with L_2 -gain performance and vibration reduction of flexible spacecraft with actuator dynamics. *Acta Astronautica*, 67:572–583, 2010.
- [9] H. Kaufman, I. Barkana, and K. Sobel. *Direct adaptive control algorithms*. Springer, New York, 1998. Second Edition.
- [10] J. Löfberg. YALMIP : A toolbox for modeling and optimization in MATLAB, 2001.
- [11] A.R. Luzi. *Commande variante dans le temps pour le contrôle d’attitude de satellites*. PhD thesis, Université de Toulouse, February 2014.
- [12] A.R. Luzi, D. Peaucelle, J.-M. Biannic, C. Pittet, and J. Mignot. Structured adaptive attitude control of a satellite. *Int. J. of Adaptive Control and Signal Processing*, 28(7-8):664–685, 2014.
- [13] C.G. Mayhew, R.G. Sanfelice, and A.R. Teel. Quaternion-based hybrid control for robust global attitude tracking. *IEEE Transactions on Automatic Control*, pages 2555 – 2566, 2011.
- [14] D. Peaucelle and A.L. Fradkov. Robust adaptive L_2 -gain control of polytopic MIMO LTI systems - LMI results. *Systems & Control Letters*, 57(11):881–887, 2008.
- [15] C. Pittet and D. Arzelier. DEMETER: a benchmark for robust analysis and control of the attitude of flexible microsatellites. In *IFAC Symposium on Robust Control Design*, Toulouse, France, 2006.
- [16] C. Pittet and C. Fallet. Gyroless attitude control of a flexible microsatellite. In *Dynamics and control of systems and structures in space*, pages 65–71, Cambridge, UK, 2002.
- [17] C. Pittet, A.R. Luzi, D. Peaucelle, J.-M. Biannic, and J. Mignot. In flight results of adaptive

attitude control law for a microsatellite. *CEAS Space Journal*, December 2014. Journal version of [18].

- [18] C. Pittet, A.R. Luzi, D. Peaucelle, J.-M. Bianic, and J. Mignot. In flight results of adaptive attitude control law for a microsatellite. In *ESA Conference on Guidance, Navigation and Control Systems*, Porto, June 2014.
- [19] C. Pittet, J. Mignot, and C. Fallet. LMI based multi-objective H_∞ control of flexible microsatellites. In *IEEE Conference on Decision and Control*, Sydney, Australia, 1999.
- [20] J.B. Pomet and L. Praly. Adaptive nonlinear regulation: Equation error from the lyapunov function. In *IEEE Conf. Decision and Control*, 1989.
- [21] R. Schlanbusch, A. Loria, and P.J. Nicklasson. On the stability and stabilization of quaternion equilibria of rigid bodies. *Automatica*, 48(12):3135–3141, 2012.
- [22] T.C. Toh, M.J. Todd, and R.H. Tutuncu. SDPT3 - a MATLAB software package for semidefinite programming. *Optimization Methods and Software*, 11:545–581, 1999.
- [23] J.T.Y Wen and K. Kreutz-Delgado. The attitude control problem. *IEEE Transactions on Automatic Control*, 36(10):1148–1162, 1991.
- [24] B. Wu, X. Cao, and Z. Li. Multi-objective output-feedback control for microsatellite attitude control: an LMI approach. *Acta Astronautica*, 64:1021–1031, 2009.
- [25] Z. Zhu, Y. Xia, and M. Fu. Adaptive sliding mode control for attitude stabilization with actuator saturation. *IEEE Transactions on Industrial Electronics*, 58:4898–4907, 2011.