



**HAL**  
open science

# The influence of the level of definition of functional specifications on the environmental performances of a complex system. EcoCSP approach

Nicolas Tchertchian, Dominique Millet, Pierre-Alain Yvars

## ► To cite this version:

Nicolas Tchertchian, Dominique Millet, Pierre-Alain Yvars. The influence of the level of definition of functional specifications on the environmental performances of a complex system. EcoCSP approach. *International Journal of Sustainable Engineering*, 2016, 9 (4), pp.277 - 290. 10.1080/19397038.2015.1085110 . hal-01401947

**HAL Id: hal-01401947**

**<https://hal.science/hal-01401947>**

Submitted on 24 Nov 2016

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1       **The influence of the level of definition of functional specifications on the**  
2       **environmental performances of a complex system.**  
3                               **EcoCSP approach**

4  
5       **Nicolas Tchertchian<sup>1</sup>, Dominique Millet<sup>1</sup>, Pierre Alain Yvars<sup>2</sup>**

6  
7       'Design & Ecodesign Methodology' Lab

8       <sup>1</sup> S U P M E C A - Toulon, Avenue de l'Université - BP 20132 - 83957 La Garde Cedex, France

9       <sup>2</sup> S U P M E C A – 3, rue Fernand Hainaut, 93407 Saint-Ouen Cedex, France

10  
11       Abstract:

12       The tendency towards a homogenous mode of development modeled on that of Western countries means that  
13       sustainable development has become increasingly urgent. It is necessary to thoroughly redefine products and  
14       their expected performances in such a way that the consequences are compatible with sustainable development.  
15       In the domain of product design, this means that it is no longer sufficient to use assessment tools « after the  
16       fact » to check the impact of products whose functional unit was defined prior to production; it is now necessary  
17       to rethink the definition of the functional unit itself.

18       This article aims to present an approach based on a combination of life cycle analysis methods (LCA) and  
19       problem solving by constraint satisfaction (CSP). This original approach makes it possible to vary the design of  
20       the different dimensions of the functional units of a complex system and thus to make it easier to identify the  
21       best architecture along with the best functional definition of the system.

22       In this study, the EcoCSP approach is applied to define the functional performances of an ecological passenger  
23       ferry.

24       The complexity of couplings between sub-systems and the sheer number of those sub-systems mean that the  
25       designer has to use « intelligent » tools. These simulate a great number of scenarios and help him/her to fine-tune  
26       the system and make the right technological choices with regard to the right functional specifications.

27  
28       **Keywords:** Life cycle assessment; Constraint satisfaction problem; Ecodesign; Complex system; ship  
29       design; sustainable development

30       1. Introduction

31       Industrial growth has affected the conditions of life on earth as witnessed by the increase in ecological problems  
32       that threaten future generations. In response to this situation, the concept of sustainable development that began  
33       in the 80's, has gradually become mainstream. Sustainable development calls on all actors involved in the  
34       evolution of developed societies to balance the economic social and environmental dimensions of their  
35       activity. This means setting a new paradigm where reasonable consumption/production has become essential. In  
36       order to reach this objective, products and systems must be designed to be sustainable. Sustainable design is  
37       different from Eco design and Design for Environment because it goes beyond the environmental optimization of  
38       goods and services (Van Weenen 1995): it attempts to incorporate the considerations demanded by the three  
39       pillars of sustainable development, namely social, economic and environmental factors.

40       Various authors (Daly 1973; Simonis 1985; Williams et al. 1987; Herman et al. 1989; Ayres and Kneese 1990;  
41       Freeman 1992) have mentioned the radical nature of the technological transformation that needs to be effected in  
42       order to improve the environmental performance of a product or system: they have recommended reducing the  
43       proportion of material in the economy using expressions such as X Factor, eco-efficiency, industrial ecology,  
44       functional economy, dematerialization, product service-system etc.

45       Today, traditional Eco design approaches either carry out curative environmental assessments (LCA)  
46       (Hauschild 2005), or lead designers towards improved solutions by providing guidelines (Wimmer 2001). Both  
47       of these approaches, used in the design of complex systems, most often result in global under-optimizations that  
48       are unsuited to the design of complex systems. It thus appears necessary to implement new Eco design practices  
49       that are better suited to designing such systems.

50       A complex system can be defined (Krob 2009), (Cilliers 1998) as a system comprising numerous sub-sets that  
51       are interdependent; each of these sub-sets has several possible alternative solutions. In general, complex systems  
52       have different ways of functioning with performances that change according to conditions of use. Finally, the

1 long-term life cycle of a complex system is not easy to predict during the design phase; this is particularly true  
2 for life duration, maintenance, component upgrading and end of life.

3 Any increase in complexity results in the multiplication of technical solutions and thus of possible alternatives. In  
4 such cases, design becomes a long process of negotiation within the design team. This negotiation is generally  
5 based on an initial definition of the system's specifications – specifications that are rarely questioned during the  
6 design process. In this article, we focus on the necessity for the actors concerned to generate a functional  
7 negotiation, that is to say, to select the « right » functions, then the characteristics of the system in order to  
8 optimize its environmental performance.

9 In the following section of this article we deal with the problem of defining functional units in assessing the life  
10 cycle of complex systems. In the third part of the article we give a theoretical introduction to the EcoCSP  
11 method; this method combines CSP and LCA in order to identify the optimal architecture of a system by  
12 negotiating the functional unit so that an environmental optimum may emerge. In section 4, the EcoCSP  
13 approach is applied in the context of designing a new passenger ferry with hybrid technology. Finally in section  
14 5 we discuss the results and estimate the environmental improvement compared to a system with fixed  
15 functionalities. Our conclusion in section 6 summarizes the contributions of this article to a global approach, part  
16 of which includes EcoCSP.

## 17 18 2. The innovative Eco design approach: reassessing functionalities

### 19 2.1. Improving environmental performances by reassessing product functions

20  
21 As underlined by Lagerstedt (2003), environmental performance generally depends on product functionalities.  
22 However, from another point of view, the commercial success of a product depends on the functions it offers to  
23 users. Lagerstedt (2003) mentions the balance that must be found between the « environmental cost » and the  
24 « functional gain ». Few methodological supports exist in the domain of tools/methods for environmental  
25 improvement or hierarchization, and amongst those that do exist, even fewer enable early intervention in the  
26 design process. Current methods of Eco design such as life cycle analysis and other assessment methods derived  
27 from this, such as environmental guidelines and checklists, merely identify the causes of environmental  
28 problems in order to redesign the product while keeping its functionalities unchanged; this is in contradiction to  
29 strategies of radical environmental improvement (X Factor) that necessitate a complete reassessment of product  
30 functionalities. Achieving a higher degree of sustainable development requires finding a balance between  
31 acceptable impacts and necessary functions. Luttrupp (2005) presents different ways of reaching this balance: he  
32 favors reducing environmental impacts while increasing the level of the product's functional performance - a  
33 win-win situation that eliminates all unnecessary functions. On the other hand, he is critical of the « green fix »  
34 strategy (using new materials while keeping all the functions) that result in short term, temporary optimizations;  
35 he also judges inefficient the « linear down » strategy (improving environmental impact by downgrading or  
36 eliminating functions).

### 37 2.2. The problem of defining the functional unit in the LCA method.

38  
39 Life cycle analysis (LCA) is a method of environmental assessment of a product or service over the whole of its  
40 life cycle, that is, from the phase of extracting the raw materials and manufacturing the product until the end of  
41 life (discharge, recycling, reuse etc.), including distribution, use and maintenance. The methodological  
42 framework of LCA is governed by ISO 14040; this distinguishes 4 phases – defining the objectives and the  
43 perimeter of the study, taking the inventory of the life cycle, assessing the impacts of the life cycle and  
44 interpreting the results). The phase of defining the objectives and perimeter of the study requires the definition of  
45 a functional unit. The functional unit is the « quantified performance of a system of products to be used as the  
46 unit of reference in a life cycle analysis » (ISO 14044, 2006). The definition of this functional unit is crucial.  
47 Indeed, in cases where the LCA study aims to analyze the potential impacts of different options, it is imperative  
48 that all the options assessed fulfill the same function in order to be comparable (Jolliet et al. 2005). Now, by  
49 constraining the designer to reason by iso-functionality, the LCA methods and its derivations naturally hinder  
50 thinking about products that might have a better balance between environmental cost and functional gain  
51 (Luttrupp and Lagerstedt 2006). In general, the available tools, amongst them LCA, are based on a single  
52 criterion: the main function expressed in the form of a functional unit (Lagerstedt 2003). This means that very  
53 different products or concepts can be compared.

54 Consequently, when comparative LCA's are undertaken for these types of products (i.e. that have several  
55 functions), it is important to consider the other sub-functions. If these functions are not identified, broken down,  
56 specified and/or prioritized in the right way with regard to the objectives and perimeter of the study, it could  
57 result in a functional unit that does not reflect reality. As underlined by Reap et al. (2008), these are important  
58 questions, for they can downgrade the precision of the reference flows associated with the chosen functional unit  
59 and thus decrease confidence in LCA results.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15

2.3. State of the art review of environmental assessments (LCA) on systems of transport and vehicles.

In the literature, numerous products and systems have been environmentally assessed using LCA. In order to highlight the problems related to the definition of a functional unit, about thirty LCA studies published by 3 scientific publishers (Springer, Taylor & Francis, Elsevier) between 2003-2013 as well as a few LCA studies presented in the context of doctoral theses were evaluated in the domain of transport systems. Each of these LCA studies is characterized by the system (mainly vehicles), the functional unit attributed by the author and the parameters that were modified during the sensitivity test. The results are given in Table 1. This non-exhaustive state of the art on new technologies in the transport sector (especially cars) shows that the functional unit is very often assimilated to a principle function: that of transporting a person or an object from A to B over a distance of x thousand kilometers. As stressed in the previous paragraph, and highlighted by Reap et al. (2008), vehicles are complex systems with sub-functions that must be taken into account when two systems are being compared.

1 *Table1: State of the art review of LCA studies in the domain of transport.*

Paper	System	Functional Unit	Variability/ Sensitivity
Spielmann, De Haan and Scholz 2008	High-speed underground maglev train	Average daily mobility of an average Swiss traveler	Not include
MacLean and Lave 2003	A Car: A-Class Mercedes Benz	1000 km traveled by the vehicle	Not include
Strazza et al. 2010	Auxiliary power systems for commercial vessels	1 kWh of electricity generated	Variations in efficiency
Hussain, Dincer and Li 2007	Polymer electrolyte membrane (PEM) fuel cell automobile	lifetime is assumed to be 300,000 km	Not include
Ally and Pryor 2007	Fuel cell bus	55,000km annually, with a lifetime of 16 years	Fuel cell durability
Gao and Winfield 2012	6 Cars (Corolla, Prius, Prius Plug-in, Volt, Leaf, Clarity)	Lifetime of 160,000 miles,	Distance between charge
Finkbeiner et al. 2006	Mercedes Benz S-Class Car (S 350)	Driving distance 300 000km	Sensitivity analyses of car module structure
Schweimer and Levin 2000	Golf A4, 1999 model, 4-door: 1.4 litre 55 kW Petrol and 1.9 litre 66 kW TDI diesel	The functional unit is a 150,000 km of driving distance over 10 years	Not include
Schmidt et al. 2004	European, compact-sized, 5-door gasoline vehicle	Reference scenario with a mileage of 150,000 km over 12 years	Variation of Weight Reference 1000kg, 900 and alternatives
Lee et al. 2000	A typical tractor (model: LT360D) produced in LG Machinery	The functional unit is one set of a typical tractor which cultivates about 92 ha of land for its entire life span (8 years)	Not include
Castro, Remmerxwaal and Reuter 2003	Generic Compact Class Passenger Vehicles, the weight is considered to be around 900 kg and its fuel consumption to be 11.5km/l	The functional unit is a 200 000km of driving with lifetime of approximately 14 years	Not include
Tharumarajah and Koltun 2007	A medium size car with a mass MV = 1300 kg and fuel consumption of K = 8.5 l per 100 km of driving	The car reaches the end of its life after a driving distance of 200,000 km	Variation of Engine Block materials
Takeda, Sugioka and Shimada 2008	4 different car technologies, Gasoline Vehicle, Hybrid Electric Vehicle, Electric Vehicle, Fuel Cell Vehicle	A mileage of 100,000 km over 10 years.	Different production process of hydrogen in the process
Spielmann et al. 2005	Supply of regional transport: rail, bus and private car	A seat kilometer	Different level of comfort in train
Boureima et al. 2008	Conventional and alternative passenger car	The life time driven distance of the vehicles will range from approximately 50000 km to 400000 km	A range of life time driven distance is defined
Sweeting and Winfield 2012	Light duty vehicles (Battery electric vehicles, fuel cell vehicles, Spark ignition engine vehicles, Compression ignition engine vehicles)	150,000 km for the lifetime distance travelled with lifetime of 13 years	Different fuel alternatives for each powertrain te
Baptista et al. 2011	A fuel cell hybrid taxi	Around 350,000 miles was assumed for the Taxi lifetime corresponding to an average of around 56,000 miles per year	Range of the number of components and consum replacements, 3 electric battery discharging strat hydrogen powered vehicles
Mayyas et al. 2012	Vehicular body-in-white	200,000 miles	Changed independently (no interaction between parameters): energy embodied, manufacturing er distance travelled, fuel economy, recycle fractio
Zamel and Li 2006	Fuel cell vehicles and internal combustion engine vehicles	300,000 km	Not include
Bartolozzi, Rizzi and Frey 2010	hydrogen and electric vehicles	Deliver goods within an urban area with an average estimated daily route of 200 km	Different hydrogen production scenario; Differ electricity production scenario
Wagner, Eckel and Tzscheutschler 2006	Fuel cell powertrain systems (medium size passenger car)	A physical lifetime of 10 years and a total mileage of 150,000 km in the NEDC	Not include
Nagatomo et al., 1997	Shinkansen vehicle	The electric consumption per 1km running (lifetime 8 Million km)	Not include
Schwab Castella et al. 2009	Rail car-bodies for a Korean train	The functional unit is <b>one car-body</b> for the TTX train, with a lifetime of 25 years and used over 7,500,000 km	Different material scenario: Steel, full composite composit, Aluminium 10% recycled and aluminu recycled. Different electricity production scenari
Horvath 2006	Freight Transportation	Ton-mile (ton-km)	% Empty miles; Vehicle lifetime; vehicle utilizat Average distance per shipment; etc.
Nanaki and Koroneos 2012	Middle size and recent car	100km	Not include
Zackrisson, Avellán and Orlenius 2010	Battery for plugin hybrid	10kWh sustaining 3000 charge cycles at 80% max discharge	Battery efficiency; electricity production scenari energy of batteries relationship
Pehnt 2002	Fuel Cell system	1kWh electric	Not include
Mousazadeh et al. 2011	Solar assist plugin hybrid Tracor	12 000 hours 2.9h/day	Not include
Ma et al. 2012	battery electric vehicles and internal combustion vehicles	Per vehicle km travelled lifetime 15 years	Vehicle life; Vehicle annual mileage; driving coi drive cycle and auxiliary loadings
Querini et al. 2012	Electric vehicles	Lifetime 10 years 150 000km (15 000km/y)	Not include
Laudon and Soriano 2012	Electric heavy Vehicles (hybrid and plugin hybrid) waste collection vehicle and distribution truck	Waste collection 300 000km (21 000km/y) and distribution truck 1 000 000km (66 000km/y)	Variation of amount of charge by day; type of el grid loss
Van Mierlo, Maggetto and Lataire 2006	Battery, hybrid, and fuel cell vehicles	Passenger kilometers (p.km) and ton kilometers (ton.km)	Not include
Koffler and Rohde-Brandenburger 2010	Internal combustion engine vehicle	Fuel consumption 100kg x 100km (NEDC)	Weight variation of vehicle body structure
Subic and Schiavone 2010	Internal combustion engine vehicle 1500kg	A total mileage of 200,000 km	Driving conditions : drive cycle

2  
3 In thirteen studies the variability of functional unit is not taken account. Among the functional modifications  
4 suggested, the modification of the driving cycle (annual mileage, vehicle lifetime, use), reduction of the vehicle's  
5 mass, the number of battery charges, etc. All these functional modifications are integrated into the process of  
6 sensitivity analysis required by the ISO norm. Now, in actual fact, the designer only looks at the extra gains or  
7 impacts generated by the modification of one or several parameters ; he/she takes no account of the  
8 consequences on the whole of the system. These modifications are not completed by a redefinition of the design  
9 parameters. Indeed, if we take the example of the reduction of a vehicle's mass, this could potentially call for a  
10 different distribution of the masses of the vehicle, and thus a modification of the system's aerodynamic  
11 performances that might generate a resizing of the propulsion.

### 3. Presentation of the EcoCSP approach

The EcoCSP approach is a further development of the CSP/ LCA approach proposed by (Tchertchian et al. 2013). This approach is based on a combination of 2 methods « Constraint Satisfaction Problem»/Life Cycle Assessment.

#### 3.1. Definition of a CSP

A CSP (Constraint Satisfaction Problem) is defined by (Montanary, 1974):

$X = \{x_1, x_2, x_3, \dots, x_n\}$ , a set of variables,  $n$  being the number of variables of the problem. To keep the generic element, we say that these variables may relate to design, performance or state. Design parameters structure the design and their values distinguish between two design configurations. The instantiation of all the design parameters defines the complete potential design solution. Performance parameters translate the state or the quality of a design alternative and compare it to a reference from the specifications or one related to the state of the art of the company or sector concerned. These characteristics are linked to the translation of a given configuration in physical terms and are generally directly linked to the design parameters.

$D = \{d_1, d_2, d_3, \dots, d_n\}$ , a set of domains. Each domain, associated to a variable, can be discrete or continuous.

$C = \{c_1, c_2, c_3, \dots, c_p\}$ , a set of constraints,  $p$  being the number of constraints of the problem. The constraints translate how the structuring functions are carried out by the system during the life situation in question. The constraints take the form of explicit relationships between several variables. These relationships impose restrictions on the domains of possible values for the variables of the problem. More precisely, it can be a logical combination of several elementary constraints, among the following:

- Extensive constraints: a constraint in extension describes an explicit and exhaustive list of possible, or on the contrary, impossible combinations — of values ( $m$ -tuples) between the  $m$  variables at play within the constraint.
- Intensive constraints: a constraint in intension is an explicit equivalence (or non equivalence) linking two variables to each other (equality or inequality). It brings linear and/or non-linear operators into play.
- Logical constraints: conditional constraints (IF...THEN), conjunction of constraints (AND), disjunction of constraints (OR), obtain logical combinations of constraints. In the case of designing a complex system, logical constraints establish composition relationships among the system's components and define « components » whose state of functioning varies over the life cycle.

Environmental criteria come into the CSP approach as constraints to be satisfied in order to respond to an objective of environmental optimization. Depending on the objectives required by the designer, the algorithm of resolution indicates system architectures and operation modes (if these exist) that respect these constraints. Figure 1 shows the resolution of CSP.

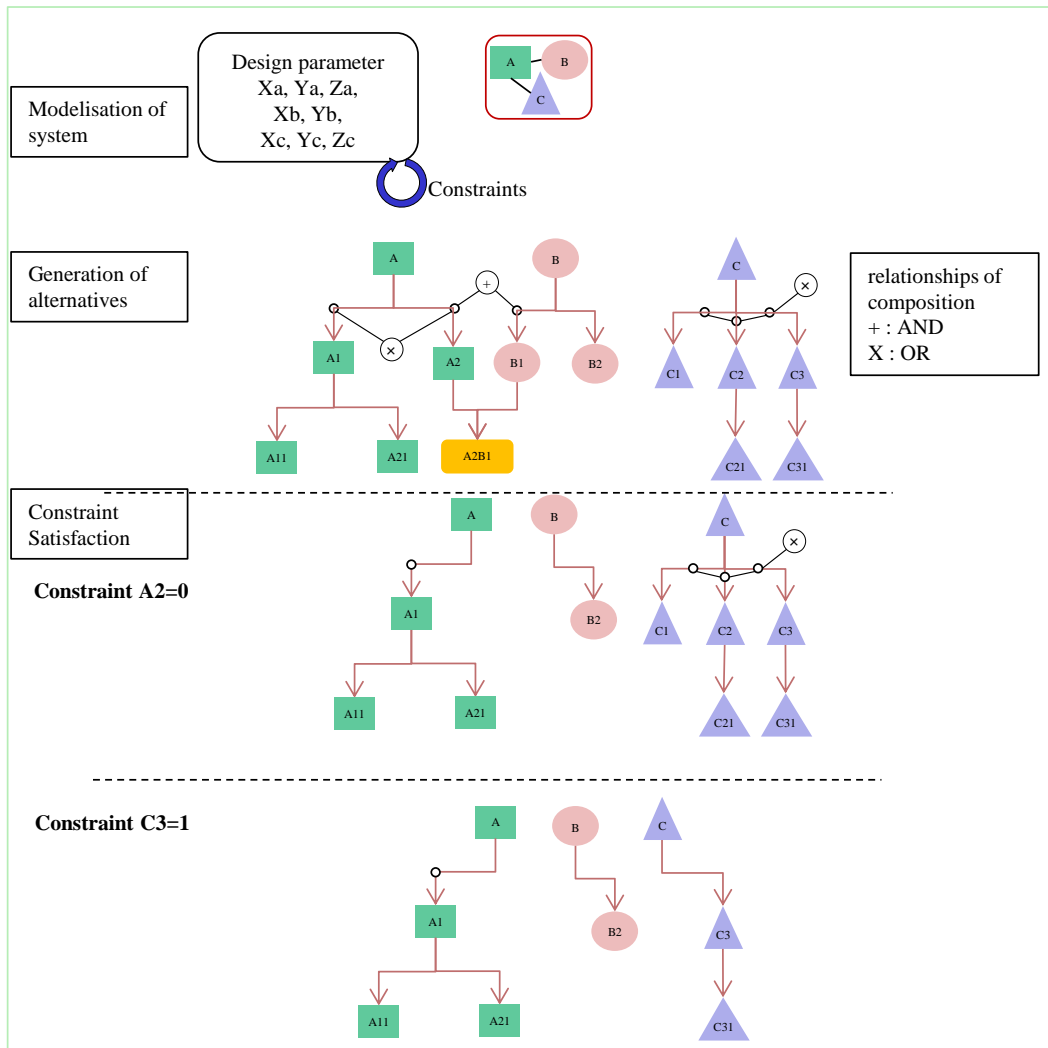


Figure 1: Process of CSP solution.

### 3.2. CSP resolution

Resolution by constraint satisfaction results in a complete set of solutions that enable the design team to choose one suited to a design problem according to specific performance variables and constraints. A CSP is typically solved by reducing the domains. The objective of propagating constraints is to replace an initial CSP by an equivalent one which has a more restricted research space. The most basic way of reducing the area for solution is to proceed by trial and error or by dichotomy. A more systematic method is to use filtering techniques which rely on arithmetic of intervals (Moore, 1966) and propagation of constraints (Mackworth, 1977). The most commonly used domain filtering techniques are Arc-Consistency (Mackworth, 1977, Debruyne and Bessiere, 2001) for discrete CSP's, Hull-Consistency (Lhomme, 1993, Benhamou, 1995, Benhamou and Older, 1997) and Box-Consistency (Chiriaev and Walster, 1997, Benhamou et al., 1999) for discrete and continuous CSP's. As Chenouard (2007) points out, using CSP in preliminary design has the advantage of great flexibility for expressing knowledge and modifying models; it resolves generic problems. This is a sought after characteristic in design, for it expresses knowledge without defining how it should be dealt with. CSP makes it easier to manipulate and reuse such knowledge.

### 3.3. The EcoCSP approach : a development of the CSP/ LCA approach

The methodology of life cycle analysis uses a normalized functional unit ( $UF_n$ ), to facilitate comparisons among systems that show unequal performances.

Our state of the art review and the compilation of Reap et al. (2008) of the main problems posed by LCA, show that defining a functional unit is not sufficient for the radical improvement of the environmental performances of a complex system.

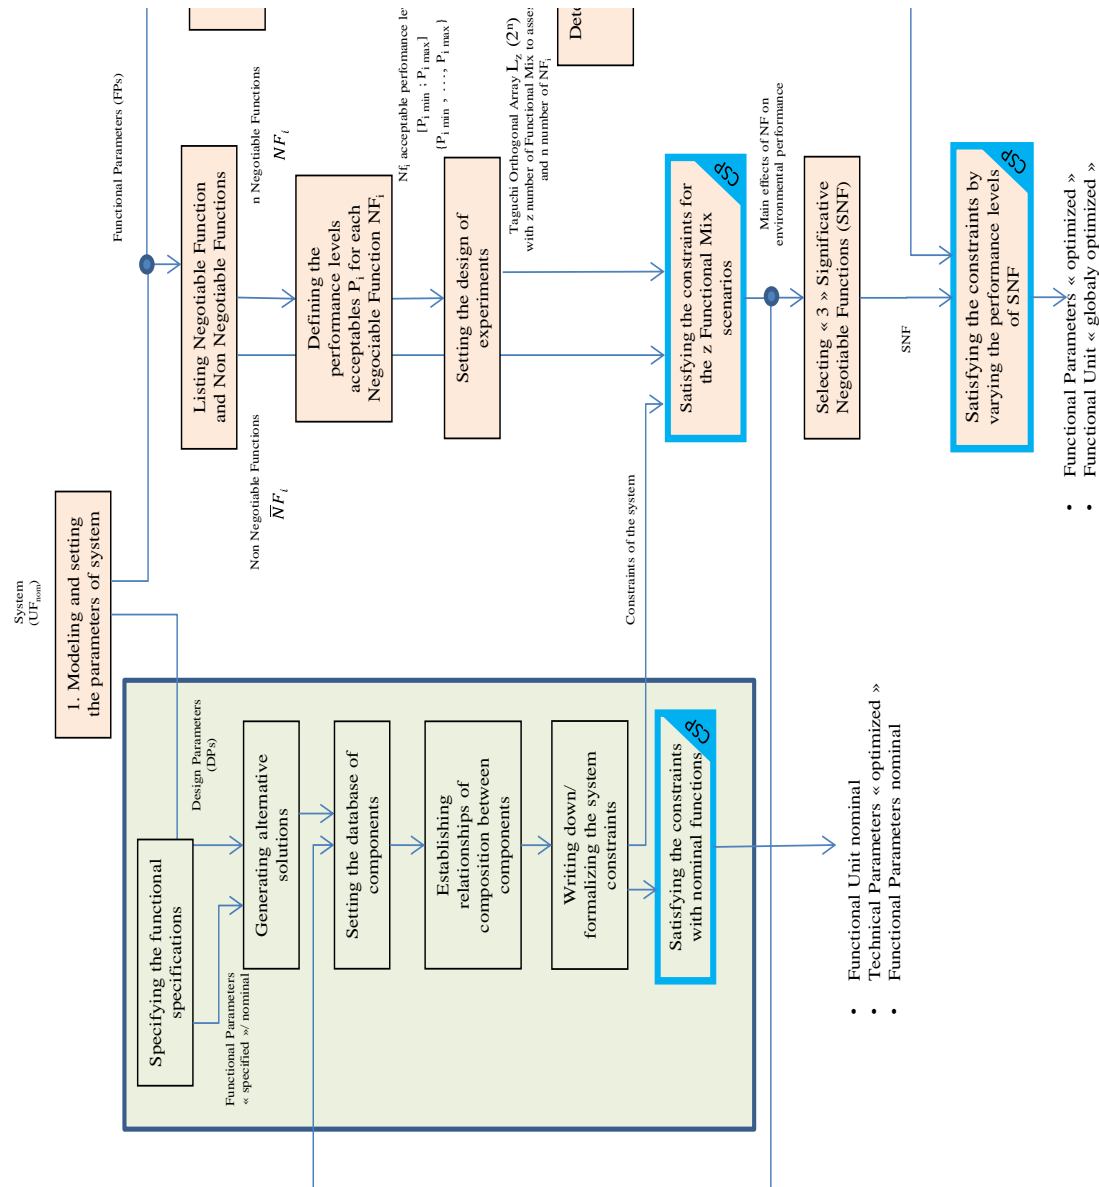


Figure 2: Flowchart of the EcoCSP approach.

1  
2

3 The works of Tchertchian, Yvars and Millet (2013) demonstrated the relevance of an approach combining  
 4 Constraint Satisfaction Problem solving approach (CSP) and Life Cycle Analysis method to define the best  
 5 architecture and operation modes of a complex system with respect of environmental constraints. This fruitful  
 6 research pointed to a way forward. Indeed, the CSP approach allows us to modelise functional requirements as  
 7 constraints; by exploring these as such, it is then possible to simulate the various architectural alternatives of a  
 8 complex system while at the same time varying the specifications of that system. We have called this approach  
 9 EcoCSP.

10 The general framework of the EcoCSP approach, represented by a flowchart Figure 2, contains a phase of  
 11 predefinition of the functional specifications of the system, in which are listed the Negotiable Functions (NF),  
 12 these are flexible functions in the specification of the " Performance level " expected by the system, and the Non  
 13 Negotiable Functions (NNF), these are functions whose performances are specified from the beginning (ex:  
 14 functions related with security).

15  $NF_i \in [P_{i\min}, P_{i\max}]$ , where  $P_{i\min}$  is the minimum level of performance of the function  $i$  and  $P_{i\max}$  the maximum  
 16 level of performance.

17 In parallel with the definition of overall performance of the system, the design team defines the range of  
 18 variation of the Functional Unit (FU). The functional unit defines the quantification of performance  
 19 characteristics of the product intended to be used as reference. In EcoCSP approach the FU is sought to minimize



1 the environmental burden of the system architecture. The globally optimized performance of the system ( $FU_{GO}$ )  
 2 may vary in the domain  $[P_{s \min}, P_{s \max}]$ .

3 Significant Negotiable Function (SNF) which variation of the performance level led to a significant fluctuation  
 4 of the environmental impact of the system is identified through design of experiments via Taguchi orthogonal  
 5 array  $L_z$  (Taguchi, Elsayed and Hsiang, 1989).  $L_z$  is an array where  $z$  is the number of simulations required to  
 6 represent all the effect of NF on environmental criteria.

7 A design of experiments (DoE) is an efficient way to identify the contribution of each function to the  
 8 environmental impact. It reduces the number of trials (CSP simulations). Without DoE the number of  
 9 simulations required to test all functional mixes is  $m^n$  with  $n$  the number of functions and  $m$  the number of  
 10 performance level for each function.

11 In this first methodological proposal, the functions are not supposed to interact among themselves and each of  
 12 them have  $m = 2$  levels. Each function  $NF_i$  whose performance  $P_i$  is in the domain  $[P_{i \min}, P_{i \max}]$  the two levels  
 13 are the upper  $P_{i \max}$  and lower  $P_{i \min}$  bounds; for functions  $NF_i$  whose performance is in discrete domain  $\{P_{i1}, \dots,$   
 14  $P_{ik}\}$  the two levels are the minimum and maximum values.

15 For example, a functional mix composed of  $n = 7$  NF and with  $m = 2$  performance levels would require  $2^7$  trials  
 16 to test all variants of functional mix. The appropriate Taguchi orthogonal array is  $L_8 (2^7)$ , reducing the number of  
 17 CSP simulations to  $z = 8$  instead of 128.


18 Each variant of the functional mix is characterized by a line in DoE (cf. Table 2). The results are used to draw the  
 19 graph of main effect on the average of Environmental Impact (see Figure 3), i.e. the effect of each  $NF_i$  on  
 20 environmental performance.

21 In Figure 3, for example, the transition from performance level  $P_{1 \min}$  to  $P_{1 \max}$  of function  $F_1$  causes a significant  
 22 change in the average environmental impact  $EI_{Avg}$ , the function  $NF_1$  is a significant negotiable function. The  
 23 three most "significant" NF are retained in the next step to specify their optimal performance level.

24 Table 2 : Taguchi Orthogonal Array  $L_z (2^n)$ .

Functional Mix	$F_1$	$F_2$	$F_3$	...	$F_n$
1	$P_{1 \max}$	$P_{2 \max}$	$P_{3 \min}$		$P_{n \min}$
2	$P_{1 \max}$	$P_{2 \min}$	$P_{3 \max}$		$P_{n \min}$
$z$	$P_{1 \min}$	$P_{2 \min}$	$P_{3 \max}$		$P_{n \max}$

25

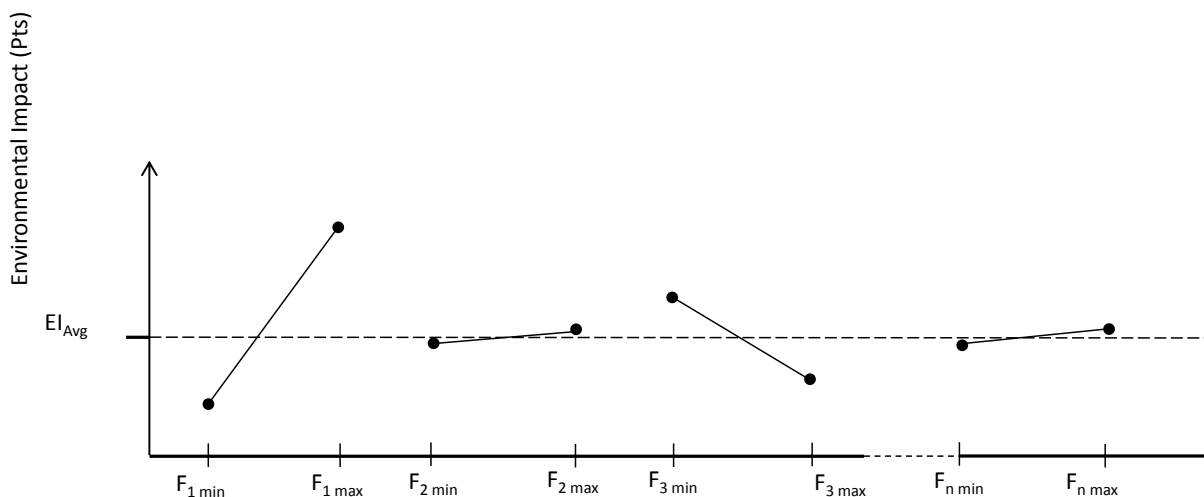

26

27

Figure 3 : Graph of Main effect on Environmental Impact of  $NF_i$ .

28 While the previous approach deals with a functional unit normalised ( $FU_n$ ) and functional performance defined  
 29 ( $P_{i n}$ ) according to system specifications defined at the beginning of design process ; the EcoCSP approach  
 30 allows to model the three significant Negotiable Functions as constraints that operate on domains of

1 performance:  $[P_{i \min}, P_{i \max}]$ . Similarly, the functional unit  $FU_{GO}$  is defined as a constraint in domain  $[P_{s \min}, P_{s \max}]$ .  
 2 A limited variation in the level of performance of  $FU_{GO}$  compared to the baseline performance of the  $FU_n$  allows  
 3 a radical improvement in environmental performance system.

4 The optimal solution is generated by constraint satisfaction (CSP). Design parameters defining technological  
 5 choices for each subsystem (eg motor sizing), the way of components operate according to the use phase  
 6 sequences (eg component activate or not) and the performance level of 3 Functions Negotiable are specified by  
 7 propagating the constraints.

8 A CSP solver is used to instantiate the design variables and the performance  $P_i$  of Negotiable Functions that  
 9 minimize the performance variables based on environmental criteria. The constraint solver used is ILOG Solver,  
 10 developed by IBM. ILOG Solver is a C++ library. In the flowchart, the solver is involved in 3 activity boxes  
 11 labelled CSP to satisfy the constraints; generating technological choices, operation modes of components and the  
 12 performance level of 3 Negotiable Functions.

13 Finally, we propose an area of improvement to reduce the impact caused by overproduction of a non-suitable  
 14 components (oversizing, non-mature technology, etc.) towards the Negotiable Functions performed. Reducing  
 15 the performance level of the functions of the system creates a need for appropriately sized components to meet  
 16 performance adapted downwards or upwards. The number of components constituting such databases are not  
 17 exhaustive, they depend on their availability on the market. Extending the database of components to meet the  
 18 appropriate performance level should achieve additional environmental benefits. This observation leads to  
 19 imagine (re) design specific component to achieve the optimal performance level.


20 EcoCSP allows judgments and choices to be made about functions on the basis of those functions that are  
 21 deemed negotiable; the approach makes it possible to vary the system's performance in order to reduce  
 22 environmental impacts.

23  
 24 4. Case Study : designing an eco compatible hybrid passenger ferry

25  
 26 4.1. Simplified modelisation for a complex system - a maritime ferry

27  
 28 The system under study is a maritime passenger ferry that crosses the bay of Toulon. The ferry to be redesigned  
 29 is equipped with an aluminum hull, two diesel motors and an electric generator to power the auxiliaries. The ferry  
 30 can transport 100 passengers. The Toulon ferry runs three lines 7 days a week over 300 days per year. Each ferry  
 31 makes 24 bay crossings daily. The ferry has a lifetime of 20 years. The diesel motors are replaced approximately  
 32 every 12500 hours (or about 500 000 km).

33

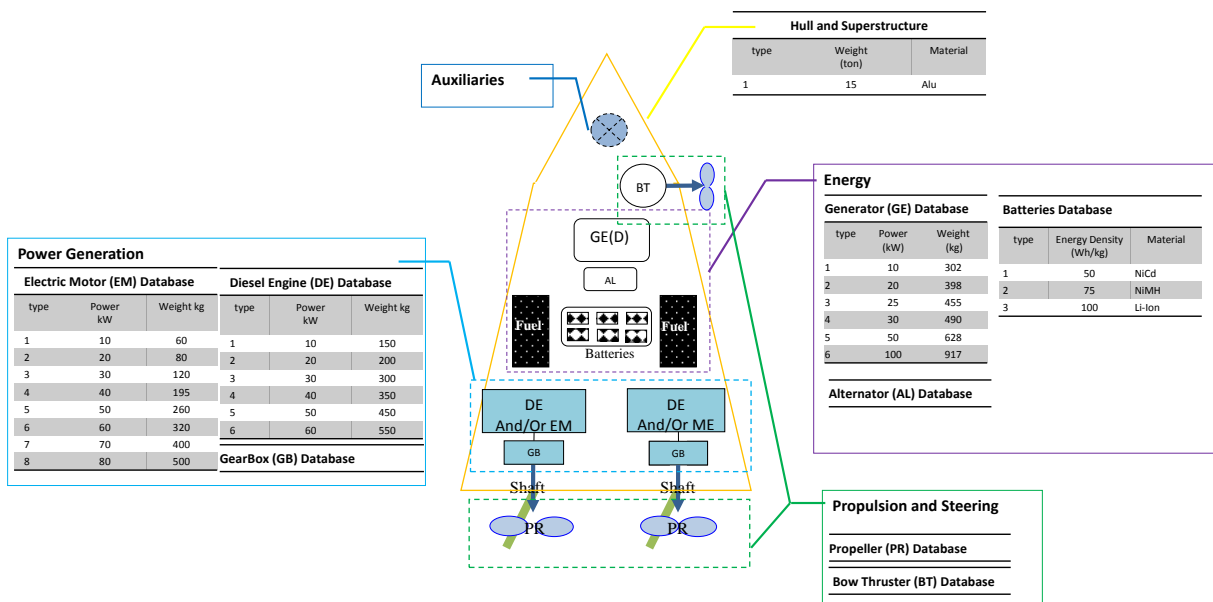

34  
 35 Figure 4: Model of hybrid passenger ferry.

1 The design project aims to define the architecture and the state of the systems for each sequence of the use cycle  
 2 according to pre-established conditions of use and assessment criteria (performance variables, environmental,  
 3 technical and economic criteria respectively). In the case of intercity passenger transport, ship performances are  
 4 strongly related to conditions of use.  
 5 For practical reasons, in this article we have deliberately simplified the system. The passenger ferry is thus  
 6 broken down into 5 main sub-sets (shown in Figure 4): Hull & Superstructure, Power Generation, Propulsion  
 7 andSteering, Energy and Auxiliaries.The main relationships governing the system are shown in the appendices.

#### 4.2. Defining negotiable functional parameters

To simplify the problem, we identified 6 Negotiable Functions: maximum cruise speed, maximum passenger capacity, number of daily trips, thermal insulation, air conditioning system and the number of charging / day. In the classical approach the performance of Negotiable Functions are defined in the specifications, each function is characterised by a nominal performance level  $P_{i \text{ nom}}$  (Table3). The functional unit chosen to compare the various systems and functional scenarios is the number of passengers transported per day. The performance corresponding to the nominal Functional Unit ( $FU_n$ ) is 2400 passengers transported a day.

Table3 shows for each Negotiable Functions the acceptable performance level ; eg the performance for NF1 "maximum speed" is :

$$P_1 \in [P_{1 \text{ min}}, P_{1 \text{ max}}] = [11.5, 12].$$

Table3 : Definition of nominal performance  $P_{i \text{ nom}}$  and performance level  $[P_{i \text{ min}}, P_{i \text{ max}}]$  of  $NF_i$ .

Level	Parameters						
	P1: Maximal Speed	P2: Number of passengers	P3: Number of missions	P4: isolation	P5: Climatisation	P6 : Nombre de charges	Ps : Unité fonctionnelle
$P_{i \text{ nom}}$	12	100	24	1 (insulation)	1 (AC)	1	2400
$P_{i \text{ min}}$	11.5	97	23	0 (no insulation)	0 (No AC)	1	2231
$P_{i \text{ max}}$	12	100	24	1	1	12	2400

#### 4.3. Defining significant negotiable functional parameters

They are  $2^6$  possible functional mix for 6 Negotiable Functions with two performance levels. In order to reduce the number of CSP simulation, the appropriate Taguchi orthogonal array is  $L_8 (2^6)$  is implemented Table4, representing the main effects of each NF on the environmental impact.

Table4 : Design of Experiment - Taguchi orthogonal array  $L_8 (2^6)$ .

Functional Mix (FM)	Performance level forNF1	Performance level for NF2	Performance level for NF3	Performance level for NF4	Performance level for NF5	Performance level for NF6
FM0	12	100	24	0	0	1
FM1	12	100	24	1	1	12
FM2	12	97	23	0	0	12
FM3	12	97	23	1	1	1
FM4	11.5	100	23	0	1	1
FM5	11.5	100	23	1	0	12
FM6	11.5	97	24	0	1	12
FM7	11.5	97	24	1	0	1

The Functional Mix 0 (FM0) is the nominal functional mix (maximum speed 12 knots, 100 passengers per day, 24 missions daily, no insulation and air conditioning system, 1 charge per day).

For each mix, the CSP model is solved using ILOG solver generating architectures and operation modes minimizing environmental impact with Eco Indicator 99 (EI 99) scores.

For each Functional mix  $FM_j$ , Table5shows the main elements of Architectures  $A_j$ (of the simplified model) selected from the component libraries.

The function « objective » is to minimize the environmental impact over the life cycle (Raw Materials + Manufacturing phase, Use phase and Maintenance phase, the End of Life phase is not included).

The diagram (Figure 5) shows the distribution of impacts over the three life cycle phases that are assessed. The predominant phase is the Use phase with 87% of impacts, then the Maintenance phase with 8% and the Raw Materials +Manufacturing phase with 5%.

The eight Functional Mix scenarios described above are assessed environmentally using the indicator of a single EI99 score in order to make the results clearer. It is understood that a multicriteria assessment is recommended in order that the study be robust. We therefore provide a summary with the results of the multicriteria assessment below in annex.

Table5 : Specifications of main elements of the system.

		Architectures							
		Functional Mix 0	Functional Mix 1	Functional Mix 2	Functional Mix 3	Functional Mix 4	Functional Mix 5	Functional Mix 6	Functional Mix 7
Engine	Power	80 000 W	80 000 W	70 000 W	80 000 W	70 000 W	70 000 W	70 000 W	70 000 W
	Weight	800 Kg	800 Kg	750 Kg	800 Kg	750 Kg	750 Kg	750 Kg	750 Kg
Motor	Power	24 000 W	24 000 W	22 000 W	24 000 W	24 000 W	24 000 W	22 000 W	24 000 W
	Weight	94 Kg	94 Kg	85 Kg	82 Kg	94 Kg	94 Kg	70 Kg	94 Kg
Generator	Power	10000	10000	10000	10000	10000	10000	10000	10000
	Weight	200	200	200	200	250	250	250	250
Batteries	Energy mission (Winter/Summer)	15 kWh/ 12,4	13,7 kWh/ 17,7	14,6 kWh/ 11,9	13,7 kWh/ 17,7	15,3 Wh/18,0	14,0 Wh/12,6	14,8 Wh/17,5	14,0 Wh/12,6
	Weight	501 Kg	53 Kg	42 Kg	565 Kg	577 Kg	40 Kg	53 Kg	464 Kg
	Energy Density	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg
Hull	Weight	15 000 Kg	15 000 Kg	15 000 Kg	15 000 Kg	15 000 Kg	15 000 Kg	15 000 Kg	15 000 Kg
Ship	Weight	27 539 kg	27 648 Kg	25 504 Kg	27 769 Kg	27 587 Pts	27 520 Kg	25 526 Kg	27 462 Kg
	Impact of Use phase / Mission	2,03 Pts	1,82 Pts	1,79 Pts	2,04 Pts	1,82 Pts	1,87 Pts	1,67 Pts	1,81 Pts
	Impact of Manufacturing Phase	16 325 Pts	13 901 Pts	13 562 Pts	16 670 Pts	16 690 Pts	13 789 Pts	13 848 Pts	16 079 Pts
	Impact of Maintenance	27134 Pts	31250 Pts	24403 Pts	30244 Pts	30804 Pts	32177 Pts	30839 Pts	25134 Pts

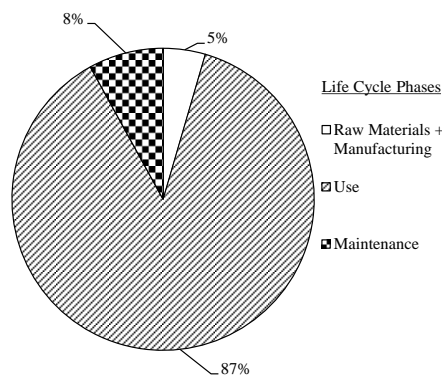


Figure 5 : Average distribution of impacts on life cycle phases.

Table6 : Life Cycle Assessment of Architecture A<sub>j</sub>.

Functional Mix (FM)	Raw Material + Manufacturing	Use	Maintenance	Life Cycle	Performance level P <sub>3</sub> forFU
FM 0	16325	318077	27134	361536	2400
FM 1	13901	331917	31250	377068	2231
FM 2	13562	259115	24403	297080	2231
FM 3	16670	296337	30244	343251	2400
FM 4	16690	268935	30804	316428	2400
FM 5	13789	269761	32177	315727	2231
FM 6	13848	270843	30839	315530	2231
FM 7	16079	285645	25134	326858	2400
Average Impact	15108	287579	27936	330623	

Table7 : Impact of architectures for functional mix with Design of Experiment L<sub>8</sub> (2<sup>6</sup>).

Functional Mix	Raw Materials/ Manufacture EI 99 (Pt)	Gains (-) or losses (+)/ FMO (%)	Use EI 99 (Pt)	Gains (-) or losses (+)/FMO (%)	Maintenance EI 99 (Pt)	Gains (-) or losses (+)/ FMO (%)	Total EI 99 (Pt)	Gains (-) or losses (+)/ FMO (%)
FM0	16325		318077		27134		361536	
FM1	13901	-14,9	331917	4,4	31250	15,2	377067	4,3
FM2	13562	-16,9	259115	-18,5	24403	-10,1	297080	-17,8
FM3	16670	2,1	296337	-6,8	30244	11,5	343251	-5,1
FM4	16690	2,2	268935	-15,4	30804	13,5	316428	-12,5
FM5	13789	-15,5	269761	-15,2	23685	-12,7	307235	-15,0
FM6	13848	-15,2	270843	-14,8	30839	13,7	315529	-12,7
FM7	16079	-1,5	285645	-10,2	25134	-7,4	326857	-9,6

- Assessment of the Raw Materials + Manufacturing phase

Each architecture generated by functional mix described by design of experiment (Table4) is environmentally assessed (Table7). The graph of main effects (Figure 6) illustrates the influence of Negotiable Functions on the Raw materials and Manufacturing impact. Functions from 1 to 5 have little impact on Raw materials and Manufacturing phase. The number of battery charge (NF6), explains largely environmental gains measured for Functional Mix scenarios 1, 2, 5 and 6. In fact, recharging batteries more often, the amount of energy to be stored becomes less important and the need for batteries is less. Batteries, with the superstructure of the ship, are the main contributors to the impacts in Raw materials and Manufacturing phase.

- Assessment of the Use phase

The use phase represents over 85% of the impacts generated by the passenger ferry. Moreover, as shown by the various assessments of scenarios 1 to 7 (Table7), the environmental impact of use is sensitive to the variation of negotiable functionalities.

The best functional mixes allow more than 10% gains.

The performance level of NFs leads to a variation of the average environmental impact generated by the eight functional mix scenarios of the DoE of :

- 4.5% for NF<sub>3</sub>,
- 3.3% for NF<sub>1</sub>,
- 2.7% forNF<sub>2</sub>,
- 2.5% for NF<sub>4</sub>,
- 1.3% for NF<sub>6</sub>,
- and 0.9% for NF<sub>5</sub>.

The analysis of different scenarios associated with a functional mix explains in part the impacts resulting of the use phase. Reducing the maximum speed or the number of missions per day, reduces the fuel consumption.

The increase of the number of batteries chargeleads to reducethe mass of batteries and thus reducing the need of propelling poweras system presents less drag. In the same way reducing passenger capacity per mission also reduces the propulsive power. The combination of air conditioning and insulation of system is more difficult to predict, better insulation improves thermal efficiency but weighed down the system increasing fuel consumption while air conditioning increases the energy demand of the system.

- Assessment of the maintenance phase

The ferry undergoes maintenance throughout its entire life cycle: motors are changed (lifetime of 12 500 running hours) and batteries are charged and uncharged (600 cycles for this study). Initially, 5 motors are used over the ship's life time involving 4 changes of motor. For a single charge/uncharge cycle per day, batteries must be replaced 9 times. The batteries are the components generating the highest impact. The number of missions per day leads to a variation of 5% of the average environmental impact of maintenance phase. The use of the system is due to the number of mission it performs by day, which generates wear of these main components.

- Global assessment of scenarios

The overall impact (Raw materials, Use and maintenance) of the various scenarios associated with a Functional Mix of DoE follows the trend drawn by the use phase, in fact 87% of the environmental impacts caused by the

use phase. The three significant functions are determined by the functions generating the greatest variation on the overall impact, they are characterized by observation on the graph of main effects (Figure 6). The performance level of NF1, NF2 and NF3 leads, respectively, to a variation of 3.3%, 2.7% and 4.7% of the average environmental impact generated by the eight functional mix scenarios of the DoE.

In the following, the three Significant Negotiable Functions are modeled as constraints and the three non significant are set at their nominal values.

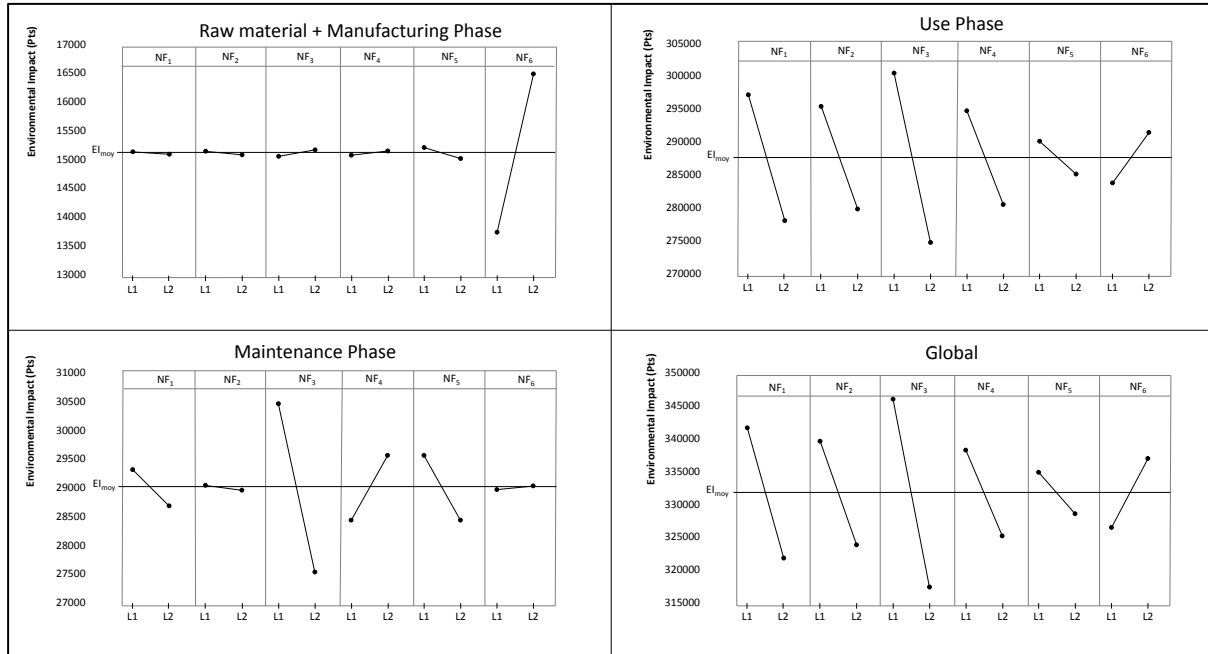


Figure 6 : Main effect of Negotiable Function on Environmental Impact.

#### 4.4. Optimisation of the system from Significant Negotiable Functions (SNF)

After an identification of the Significant Negotiable Functions, these functions are modeled as constraints:

- Maximum speed (kts) :  $P_1 = [11.5, 12]$ .
- Passenger capacity per mission :  $P_2 = \{97 ; 98 ; 99 ; 100\}$ .
- Number of mission per day :  $P_3 = \{23, 24\}$ .

The Functional Unit « Number of passengers transported per day » is also modeled as a constraint to satisfy  $P_s = [2280, 2400]$ .

Other "less significant" functions are set at their nominal values:

- No thermal insulation isolation thermique  $P4_{nom} = \{0\}$ .
- No Air Conditioning system  $P5_{nom} = \{0\}$ .
- Number of batteries charges per day  $P6_{nom} = \{1\}$ .

The performance level of NF is identified by CSP.

The performance of three SNF to optimize the environmental performance of the system is characterized by a 11.5 knots as maximum speed, 98 passengers as a maximum capacity and 23 crossings per day (Table8). The main components of the system satisfying the requirements of functional mix globally optimized ( $FM_{GO}$ ) are defined Table9. The Functional Unit Globally Optimized ( $FU_{GO}$ ) is 2300 passengers per day. This corresponds to a reduction of about 5% of the nominal performance. However, in line with the trend observed on the effects of SNF (Figure 6), environmental impacts compared to the reference system are reduced by approximately 13%.

Table8 : Functional mix globally optimized ( $FM_{GO}$ ).

Functional Mix	Parameters						
	P1: Maximal Speed	P2: Number of passengers	P3: Number of missions	P4: isolation	P5: Climatisation	P6 : Nombre de charges	Ps : Unité fonctionnelle
FM <sub>n</sub>	12	100	24	0 (No insulation)	0 (No AC)	1	2400
FM <sub>go</sub>	11.5	100	23	0 (No insulation)	0 (No AC)	1	2300

Table9 : Specifications of main elements for system with FM<sub>GO</sub>.

		Functional Mix normalized	Functional Mix globally optimized	
Engine	Power	80 000 W	70 000 W	
	Weight	800 Kg	750 Kg	
Motor	Power	24 000 W	22 000 W	
	Weight	94 Kg	85 Kg	
Generator	Power	10000	10000	
	Weight	200	200	
Batteries	Energy mission	15 kWh/ 12,4	15,2 Wh/12,6	
	Weight	501 Kg	460 Kg	
	Energy Density	50 Wh/Kg	50 Wh/Kg	
Hull	Weight	15 000 Kg	15 000 Kg	
				gain
Ship	Impact of Use phase (Pts)	292320	251160	-14,1
	Impact of Manufacturing Phase (Pts)	16 325	16 125	-1,2
	Impact of Maintenance (Pts)	27134,05	25250,78	-6,9
	Global	335 779	292 536	-12,9
	Functional Unit	2400	2300	-4,2

Reducing the system's performances or eliminating certain functions raises the question of outcomes for the passenger. For example, in this type of intercity transport, the number of passengers is not constant throughout the day. It fluctuates, and there are more people during rush hours. In the above simulations, the environmental gain is achieved to the detriment of « social » considerations; this is in contradiction to the concept of sustainable development. Reducing the amount of space on the ship results in constraints for the user. In parallel with initiatives to define a coherent functional mix (that we suggest with the EcoCSP tool), it is therefore necessary to set up measures to make sure that the system's ecological performances are not achieved at the expense of the users experience. This means, for example, setting up incentives to obtain a more regular flow of passengers throughout the day, such as preferential tariffs for certain time bands etc.

#### 4.5. Influence of the exhaustiveness of technological solutions on environmental performance.

In this section, we propose to modify the component database "Engine". The database used to model the system comes from the manufacturers catalogs. In Figure 7 the speed of the nominal functional mix is reduced by 0.5 kts. In the first case the database "Engine" (DB<sub>0</sub>) is not modified. In the second case, a new engine of 70kW is added to the database (DB<sub>1</sub>) (Figure 7). The integration of a 70kW diesel engine in the component database of CSP model has allowed an environmental gain of 8% compared to the use of the initial database (DB<sub>0</sub>) using diesel engines from manufacturers catalogs. More the alternatives are important more opportunities to generate better solutions for environment are high.

Functional negotiations must lead a questioning about the components to use in the system, which could otherwise limit the benefits of environmental performance.

		<b>Diesel Engine DB<sub>0</sub></b>			<b>Diesel Engine DB<sub>1</sub></b>		
		Type	Power (kW)	Weight (kg)	Type	Power (kW)	Weight (kg)
		1	60	550	1	60	550
		2	80	800	2	70	750
		3	100	900	2	80	800
					4	90	850
					3	100	900

		Functional Mix normalized	Functional Mix globally optimized/ DB <sub>0</sub>	Functional Mix globally optimized/ DB <sub>1</sub>
Engine	Power	80 000 W	80 000 W	70 000 W
	Weight	800 Kg	800 Kg	750 Kg
Motor	Power	24 000 W	22 000 W	22 000 W
	Weight	94 Kg	85 Kg	85 Kg
Generator	Power	10000	10000	10000
	Weight	200	200	200
Batteries	Energy mission	15 kWh/ 12,4	15,2 Wh/12,4	15,2 Wh/12,6
	Weight	501 Kg	488 Kg	460 Kg
	Energy Density	50 Wh/Kg	50 Wh/Kg	50 Wh/Kg
Hull	Weight	15 000 Kg	15 000 Kg	15 000 Kg

Ship	Impact of Use phase (Pts)	292320	279460	251160
	Impact of Manufacturing Phase (Pts)	16 325	16 079	16 125
	Impact of Maintenance (Pts)	27134,0	25103,9	25250,8
	Global	335 779	320 643 (-4,7%)	292 536 (-12,9%)
	Functional Unit	2400	2300	2300

Figure 7 : Influence of Diesel Engine database on environmental performance

## 5. Discussions and Conclusions

The CSP / LCA approach relies on the CSP solver makes it possible to instantiate the design variables of the system that optimize the performance variables, in our case it is environmental criteria (but it could be also economic criteria). It allows to identify early in design process what are the best combinations of technologies, among many alternatives, for each subsystem whose functions are already specified in the specifications.

The Philosophy behind the use of CSP is to allow the designer to model and identify viable concepts reconciling environmental and economic aspects (CSP / LCA), but also the social aspects by acting on the definition of functional performance to get closer to a model of sustainable development.

In this article we have therefore enriched the CSP/LCA approach by constructing the EcoCSP approach. This enables us to anticipate the configuration of a system's architecture by adapting the performances of negotiable functions. A complex system such as a passenger ferry has numerous sub-functions. A slight downgrading of the performances related to these functions can generate substantial environmental gains. The complexity of couplings among sub-systems and their sheer number obliges the user to make use of « intelligent » tools, that by simulating many different scenarios, help the designer to fine-tune and choose the right technologies for sustainable systems.

This EcoCSP approach breaks with traditional design conventions, and allows us to define firstly combinations of technologies and secondly the functional mix that will significantly reduce environmental impacts. Life Cycle Analysis (LCA) is thus no longer used as a tool for system assessment and comparison, but as a tool for eco-design.

In the experimentation phase we showed the significance of the number of alternatives suggested by the CSP model for reducing environmental impacts. The greater the number of alternative techniques, the higher the number of possibilities for generating better environmental solutions.

Finally, modifying the functional performances of a system results in new social, economic and environmental constraints. In parallel therefore, it is necessary to reflect on all the consequences of such modifications in order to avoid destabilizing the three mainstays of sustainable development.



The EcoCSP tool allows us to make functional judgments and choices to optimize negotiable functional performances and thereby reduce environmental impacts. Nevertheless, this does not mean we should neglect consideration of the social consequences that these choices have on the system's use.

## References

- Abassard, C., and Agerri, F. 2002."La naissance de l'éco-conception : du cycle de vie du produit au management environnemental produit. Responsabilité et Environnement."
- Ally, J., and Pryor, T. 2007."Life-cycle assessment of diesel, natural gas and hydrogen fuel cell bus transportation systems." *J Power Sources* 170(2):401–411.
- Ayres, R. U., and Kneese, A.V. 1990."Externalities: Economy and Ecology: Towards sustainable development." In: Archibugi, F., Nijkamp, P. (eds) Dordrecht: Kluwer.
- Baptista, P., Ribau, J., Bravo, J., Silva, C., Adcock, P., and Kells, A. 2011."Fuel cell hybrid taxi life cycle analysis." *Energ Policy* 39 (9): 4683-4691
- Bartolozzi, I., Rizzi, F., and Frey, M. 2013."Comparison between hydrogen and electric vehicles by life cycle assessment: A case study in Tuscany, Italy." *Appl Energ* 101: 103-111.
- Benhamou, F. 1995."Interval constraint logic programming. In: Podelski A (eds) *Constraint Programming: Basics and Trends.*" Volume 910 of *Lecture Notes in Computer Science*, Springer-Verlag.
- Benhamou, F., Goualard, F., Granvilliers, L., and Puget, J. F. 1999."Revising Hull and Box Consistency. In: De Schreye D (Eds.) *Proceedings of International Conference on Logic Programming*, Las Cruces, USA, The MIT Press.
- Benhamou, F., and Older, W. J. 1997."Applying Interval Arithmetic to Real, Integer and Boolean Constraints." *J Logic Program* 32(1):1-24.
- Boureima, F., Sergeant, N., Wynen, V., Rombaut, H., Matheys, J., Van Mierlo, J., De Vos, M., et al. 2008."LCA of conventional and alternative vehicles using a "data range-based modeling system". *Proceedings of Urban Transport XIV : Urban Transport and the Environment in the 21st Century:301–309.*
- Brezet, H., and van Hemel, C. 1997."EcoDesign: A promising approach to sustainable production and consumption, UNEP, France.
- Castro, M. B. G., Remmerswaal, J. A. M., Reuter, M. A. 2003."Life cycle impact assessment of the average passenger vehicle in the Netherlands." *Int J Life Cycle Assess* 8(5):297-304.
- Chenouard, R. 2007."Résolution par satisfaction de contraintes appliquée à l'aide à la décision en conception architecturale." *Dissertation, ENSAM, Paris.*
- Chiriaev, D., and Walster, G. W. 1997."Interval arithmetic specification." *Manuscript J3/97-199 for ANSI X3J3.*
- Cilliers, P. 1998. "Complexity and postmodernism: Understanding complex systems", London.
- Daly, H. E. 1973."Towards a steady-state economy." San Francisco.
- Debruyne, R., and Bessiere, C. 2001."Domain Filtering Consistencies." *J Artif Intell Res* 14:205-230.
- Dewulf, W., Willems, B., and Duflou, J. R. 2005."Estimating the environmental profile of early design concepts for an electric fruit juicer using the Eco-Pas methodology." *Life Cycle Engineering International Conference*, Grenoble, France.
- Ekvall, T., and Weidema, B. P. 2004."System boundaries and input data in consequential life cycle inventory analysis." *Int J Life Cycle Assess* 9(3):161-171
- Finkbeiner, M., Hoffmann, R., Ruhland, K, Liebhart, D, and Stark, B. 2006."Application of Life Cycle Assessment for the Environmental Certificate of Mercedes-Benz S-Class." *Int J Life Cycle Assess* 11(4):240-246.
- Freeman, C. 1992."The economics of hope: Essays on technical change, economic growth, and the environment." London.
- Gao, L., and Winfield, Z. C. 2012."Life Cycle Assessment of Environmental and Economic Impacts of Advanced Vehicles." *Energies* 5(12):605-620.
- Goedkoop, M., and Spreinsma, R. 2001."The Eco-indicator 99 – A damage oriented method for Life Cycle Impact Assessment – Methodology annex." *Pré consultants.*
- Guinée, J. B., Gorrée, M., Heijungs, R., Huppes, G., et al. 2001. *CML-Guide to Life Cycle Assessment.* Institute of Environmental Sciences (CML), Leiden University, NL.
- Hauschild, M., Jeswiet J., Alting, L. 2005."From Life Cycle Assessment to Sustainable Production: Status and Perspectives." *Manuf Eng* 3:1-21.
- Herman, R., Ardekani, S., and Ausubel, J. 1989. *In technology and environment.* In: Ausubel J, Sladovich H (eds) Washington, DC, National Academy Press.
- Hischier, R., and Reichart, I. 2003."Multifunctional Electronic Media - Traditional Media." *Int J Life Cycle Assess* 8(4):201-208.

- Horvath, A. 2006."Environmental Assessment of Freight Transportation in the US." *Int J Life Cycle Assess* 11(4):229-239.
- Hussain, M. M., Dincer, I., and Li, X. 2007."A preliminary life cycle assessment of PEM fuel cell powered automobiles." *Appl Therm Eng* 27(13): 2294-2299.
- Ilog, IlogCP. 2006. Reference Manual, Ilog, Gentilly, France.
- ISO 14040 (International Standard Organization. 2000."14040 series: environmental management – life cycle assessment – principles and framework."ISO 14040 series.
- Jolliet, O., Saadé, M., Grettaz, P., and Shaked, S. 2005."Analyse du cycle de vie (ACV), Comprendre et réaliser un écobilan."Presses polytechniques et universitaires romandes.
- Koffler, C., and Rohde-Brandenburger, K. 2009."On the calculation of fuel savings through lightweight design in automotive life cycle assessments." *Int J Life Cycle Assess* 15(1):128-135.
- Krob, D. 2009."Eléments d'architecture des systèmes complexes, Gestion de la complexité et de l'information dans les grands systèmes critiques."CNRS Editions.
- Lagerstedt, J. 2003."Functional And Environmental Factors In Early Phases Of Product Development-Eco Functional Matrix." Dissertation, KTH, Stockholm.
- Laudon, N., and Soriano, M. I. 2012."Comparative LCA of Electrified Heavy Vehicles in Urban Use." Master of Science Thesis in the Master's Degree Programme Technology, Society and the Environment.
- Lee, J, Cho, H, Choi, B, Sung, J, Lee, S, and Shin, M. 2000."Life cycle assessment of tractors." *Int J Life Cycle Assess* 5(4): 205-208.
- Levasseur, A. 2011."Développement d'une méthode d'analyse du cycle de vie dynamique pour l'évaluation des impacts sur le réchauffement climatique."Dissertation, Ecole polytechnique de Montréal.
- Lhomme, O. 1993."Consistency Techniques for Numeric CSPs." Proceedings of IJCAI 93, Morgan Kaufmann, San Mateo, CA, USA.
- Luttrupp, C. 2005."Strategy and material flow in ecodesign." 12th CIRP international conference on Life Cycle Engineering, Grenoble, France.
- Luttrupp, C., and Lagerstedt, J. 2006."EcoDesign and The Ten Golden Rules: generic advice for merging environmental aspects into product development." *J Clean Prod* 14(15-16):1396-1408.
- Ma, H., Balthasar, F., Tait, N., Riera-Palou, X., and Harrison, A. 2012."A new comparison between the life cycle greenhouse gas emissions of battery electric vehicles and internal combustion vehicles." *Energy Policy* 44:160–173.
- Mackworth, A. K. 1977."Consistency in Networks of Relations." *Artif Intell* 8(1):99-118.
- MacLean, H. L., and Lave, L. B. 2003. "Evaluating automobile fuel/propulsion system technologies." *Prog Energy Combust*29(1):1-69.
- Mayyas, A. T., Qattawi, A., Mayyas, A. R., and Omar, M.A. 2012."Life cycle assessment-based selection for a sustainable lightweight body-in-white design." *Energy* 39(1):412-425.
- Millet, D., Tchertchian, N., and Brissaud, D. 2009."How to identify the most promising areas of environmental improvement at the early stage of the design process." *Int J Design Engineering* 2(3):299-319.
- Montanari, U. 1974."Networks of Constraints: Fundamental Properties and Applications to Picture Processing." *Inform Science* 7(2):95-132.
- Moore, R. E. 1966."Interval Analysis." Prentice-Hall, Englewood Cliffs N.J.
- Mousazadeh, H., Keyhani, A., Javadi, A., Mobli, H., Abrinia, K., and Sharifi, A. 2011."Life-cycle assessment of a Solar Assist Plug-in Hybrid electric Tractor (SAPHT) in comparison with a conventional tractor." *Energy Convers Manage* 52(3): 1700-1710.
- Nagatomo, T., Miyauchi, T., and Tsuchiya, H. 1997. "Preliminary Investigation for Life Cycle Assessment (LCA) of Shinkansen Vehicles", <http://www.rtri.or.jp/infoce/wcrr97/E142/E142.html> accessed on 10 June 2003.
- Nanaki, E. A., and Koroneos, C. J. 2012."Comparative LCA of the use of biodiesel, diesel and gasoline for transportation." *J Clean Prod* 20(1):14-19.
- Owens, J. W. 1997."Life-cycle assessment in relation to risk assessment: an evolving perspective." *Risk Anal* 17(3):359-365.
- Pehnt, M. 2002."Life Cycle Assessment of Fuel Cell Systems." *Erscheint in Fuel Cell Handbook*, 3.
- Potting, J., and Hauschild, M.Z. 2006."Spatial differentiation in life cycle impact assessment: a decade of method development to increase the environmental realism of LCIA." *Int J Life Cycle Assess* 11:11-13.
- Querini, F., Dagostino, S., Morel, S., and Rousseaux, P. 2012."Greenhouse Gas Emissions of Electric Vehicles Associated with Wind and Photovoltaic Electricity." *Energy Procedia* 20: 391-401.
- Reap, J., Roman, F., Duncan, S., and Bras, B. 2008."A survey of unresolved problems in life cycle assessment." *Int J Life Cycle Assess* 13(5): 374-388

- Schmidt, W. P., Dahlqvist, E., Finkbeiner, M., Krinke, S., Lazzari, S., Oschmann, D., Pichon, S., et al. 2004 "Life Cycle Assessment of Lightweight and End-of-Life Scenarios for Generic Compact Class." *Int J Life Cycle Assess* 9(6): 405-416.
- Schwab Castella, P., Blanc I., Gomez Ferrer, M., Ecabert, B., Wakeman, M., Manson, J. A., Emery, D., et al. 2009."Integrating life cycle costs and environmental impacts of composite rail car-bodies for a Korean train." *Int J Life Cycle Assess* 14(5):429-442.
- Schweimer, G. W., and Levin, M. 2000."Life Cycle Inventory for the Golf A4." Research, Environment and Transport, Volkswagen AG, Wolfsburg, Germany.
- Simonis, U.E., 1985. Preventative environmental policy: Prerequisites, trends and prospects. *Ekistic* 313:369–372.
- Spielmann, M., Scholz, R., Tietje, O., and Haan, P. 2005."Scenario Modelling in Prospective LCA of Transport Systems. Application of Formative Scenario Analysis." *Int J Life Cycle Assess* 10(5):325-335.
- Spielmann, M., De Haan, P., and Scholz, R.W. 2008."Environmental rebound effects of high-speed transport technologies: a case study of climate change rebound effects of a future underground maglev train system." *J Clean Prod* 16(13):1388-1398.
- Strazza, C., Del Borghi, A., Costamagna, P., Traverso, A., and Santin, M. 2010."Comparative LCA of methanol-fuelled SOFCs as auxiliary power systems on-board ships." *Appl Energ* 87(5):1670-1678.
- Subic, A., and Schiavone, F. 2010."Comparative Life Cycle Assessment (LCA) of passenger seats and their impact on different vehicle models." *Int J Vehicle Des* 53(1-2):89-109.
- Sweeting, W.J., and Winfield, P.H. 2012."Future transportation: Lifetime considerations and framework for sustainability assessment." *Energ Policy* 51:927-938.
- Taguchi, G., Elsayed, E. and Hsiang, T. 1989."Quality Engineering In Production System", New York McGraw Hill.
- Takeda, K., Sugioka, S., and Shimada, Y. (2008) LCA of the Various Vehicles in Environment and Safety Aspect. ; Proceedings of the 12th international conference on Knowledge-Based Intelligent Information and Engineering Systems, Pt 3, 9–16.
- Tchertchian, N., Yvars, P. A., and Millet, D. 2013."Benefits and limits of a Constraint Satisfaction Problem/Life Cycle Assessment approach for the ecodesign of complex systems: a case applied to a hybrid passenger ferry." *J Clean Prod* 42:1-18.
- Tharumarajah, A., and Koltun, P. 2007."Is there an environmental advantage of using magnesium components for light-weighting cars?" *J Clean Prod* 15(11-12):1007-1013.
- Tillman, A. M. 2000."Significance of decision-making for LCA methodology." *Environ Impact Asses* 20:113–123.
- Van den Hoed, R.1997."An exploration of approaches towards Sustainable Innovation and their implications on the product development process", Proceedings of The Greening of Industry Conference Developing Sustainability: New Dialogue, New Approaches.
- Van Mierlo, J., Maggetto, G., and Lataire, P.2006."Which energy source for road transport in the future? A comparison of battery, hybrid and fuel cell vehicles." *Energ Convers Manage* 47(17):2748-2760.
- Van Weenen, J. C.1995."Towards sustainable product development." *J Clean Prod* 3(1–2):95-100.
- Von Weizsäcker, E., Hargroves, K., Smith, M. H., Desha, C., and Stasinopoulos, P. 2009."Factor Five. Transforming the Global Economy through 80% Improvements in Resource Productivity." Earthscan, London.
- Wagner, U., Eckl, R., and Tzscheuschler, P. 2006."Energetic life cycle assessment of fuel cell powertrain systems and alternative fuels in Germany." *Energy* 31(14):3062-3075.
- Weidema, B. P. 2003."Market Information in Life Cycle Assessment." In: Environmental Project No. 863. Danish Environmental Protection Agency, Copenhagen.
- William, R. E., Larson, E.D., and Ross, M. H. 1987."Materials, Affluence, and Industrial Energy Use." *Annu Rev Energy* 12:99-144.
- Wimmer, W., and Züst, R.2003."ECODESIGN Pilot, Product-Investigation-, Learning- and Optimization-Tool for Sustainable Product Development." Alliance for Global Sustainability Bookseries.
- Zackrisson, M., Avellán L., and Orlenius, J. 2010."Life cycle assessment of lithium-ion batteries for plug-in hybrid electric vehicles – Critical issues." *J Clean Prod* 18(15):1519-1529.
- Zamel, N., and Li, X. 2006."Life cycle comparison of fuel cell vehicles and internal combustion engine vehicles for Canada and the United States." *J Power Sources* 162(2):1241-1253.

Table: Multicriteria assessment according CML Method<sup>1</sup>.

eq	Eutrophication	
	Gains (-) or losses (+) FMO (%)	kg CO <sub>2</sub> eq
1393		1324
1345	-3,6	1264
1320	-5,6	1243
1481	5,9	1394
1410	1,1	1340
1569	11,2	1462
1551	10,2	1462
1368	-1,9	1283

<sup>1</sup>Guinée, J.B., Gorée, M., Heijungs, R., Huppes, G., et al. 2001. "CML-Guide to Life Cycle Assessment." Institute of Environmental Sciences (CML), Leiden University, NL