



**HAL**  
open science

## When Does Output Feedback Enlarge the Capacity of the Interference Channel?

Victor Quintero, Samir Perlaza, Iñaki Iñaki Esnaola, Jean-Marie M Gorce

► **To cite this version:**

Victor Quintero, Samir Perlaza, Iñaki Iñaki Esnaola, Jean-Marie M Gorce. When Does Output Feedback Enlarge the Capacity of the Interference Channel?. 2016. hal-01432525v2

**HAL Id: hal-01432525**

**<https://hal.science/hal-01432525v2>**

Preprint submitted on 23 Jun 2017 (v2), last revised 14 Sep 2017 (v3)

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# When Does Output Feedback Enlarge the Capacity of the Interference Channel?

Victor Quintero, Samir M. Perlaza, Iñaki Esnaola, Jean-Marie Gorce

## Abstract

In this paper, the benefits of channel-output feedback in the Gaussian interference channel (G-IC) are studied under the effect of additive Gaussian noise. Using a linear deterministic (LD) model, the signal to noise ratios (SNRs) in the feedback links beyond which feedback plays a significant role in terms of increasing the individual rates or the sum-rate are approximated. The relevance of this work lies on the fact that it identifies the feedback SNRs for which in any G-IC one of the following statements is true: (a) Feedback does not enlarge the capacity region; (b) Feedback enlarges the capacity region and the sum-rate is higher than the largest sum-rate without feedback; and (c) Feedback enlarges the capacity region but no significant improvement is observed in the sum-rate.

## Index Terms

Interference Channel, Noisy Channel-Output Feedback, Capacity Region.

## I. INTRODUCTION

The two-user Gaussian interference channel (G-IC) is the simplest channel model that captures the impairments brought by mutual interference into point-to-point communications subject to

Victor Quintero, Samir M. Perlaza and Jean-Marie Gorce are with the Laboratoire CITI (a joint laboratory between the Université de Lyon, INSA de Lyon, and INRIA). 6 Avenue des Arts, F-69621, Villeurbanne, France. ({victor.quintero-florez, samir.perlaza, jean-marie.gorce}@inria.fr).

Iñaki Esnaola is with the Department of Automatic Control and Systems Engineering, University of Sheffield, Mappin Street, Sheffield, S1 3JD, United Kingdom. (esnaola@sheffield.ac.uk).

This research was supported in part by the European Commission under Marie Skłodowska-Curie Individual Fellowship No. 659316 (CYBERNETS); and the Administrative Department of Science, Technology, and Innovation of Colombia (Colciencias), fellowship No. 617-2013. Part of this work was presented at the 11th EAI International Conference on Cognitive Radio Oriented Wireless Networks (CROWNCOM), Grenoble, France, May 30-Jun 1 2016 [1].

additive Gaussian noise. The interference channel (IC), in its most general form, was first proposed by Claude E. Shannon in [2]. The G-IC is a particular case that has been studied by several authors, see for instance [3]–[13] and references therein. However, despite this active research, the capacity region of the G-IC is characterized only in some special cases [4]. In general, the capacity region is not known exactly and only approximations to within a constant number of bits per channel-use per user are known [9].

On the other hand, channel-output feedback, which consists in letting a transmitter observe the channel-output at its intended receiver, was one of the first models for studying two-way point-to-point communications [14]. A G-IC with channel-output feedback is a model in which the backward direction (from receivers to transmitters) is exclusively used to let the transmitters observe the channel-output at the receivers with the goal of increasing the information rate or the reliability in the forward direction (from transmitters to receivers). Note that the backward direction may also be an IC since the point-to-point feedback links might be subject to mutual interference. There are several special cases of channel-output feedback in the G-IC. First, the case in which the observation of the channel-output from the intended receiver is noiseless corresponds to *perfect channel-output feedback* (POF) [15]. Second, the case in which such observation is noisy corresponds to *noisy channel-output feedback* (NOF) [16], [17]. Third, the case in which such observation is a linear combination of the channel-outputs from both receivers subject to additive noise corresponds to *wireless channel-output feedback* (WOF) [18]. The most general formulation is referred to as *general channel-output feedback* (GOF) [19]–[22]. Other types of feedback, including a channel-output processing, e.g., signal decoding, are known as *rate-limited feedback* (RLF) [23].

This work focuses in the case of G-IC with NOF (G-IC-NOF). One of the main motivations to focus on the G-IC-NOF stems from the recent findings regarding the impact of additive noise in the feedback links. In particular, in [16] and [17], it is shown that additive noise in the feedback links can dramatically change the number of generalized degrees of freedom (G-DoF) of the G-IC. In particular, one of the main benefits of feedback is that the number of G-DoF with perfect feedback increases monotonically with the interference to noise ratio (INR) in the very strong interference regime. However, in the presence of additive Gaussian noise in the feedback links, the number of G-DoF is bounded [16], [17].

### A. Contributions

From the discussion above a relevant question arises: “*When does channel-output feedback enlarge the capacity region of the G-IC?*” This paper provides the answer when feedback links are impaired by noise and free of mutual interference, i.e., G-IC-NOF. The desired answer is of the form: “*Implementing channel-output feedback in transmitter-receiver  $i$  enlarges the capacity region if the feedback SNR is bigger than  $\text{SNR}_i^*$* ”, with  $i \in \{1, 2\}$  and fixed SNRs and INRs in the forward G-IC. Note that the description of the capacity region of the G-IC-NOF in [17] does not provide an answer of the form mentioned above. An answer in the desired form requires some calculations that, despite the conceptual simplicity of this analysis, are long and tedious. More specifically, the value  $\text{SNR}_i^*$  is obtained by comparing the capacity region of the linear deterministic IC (LD-IC) in [9] and the capacity region of the LD-IC with noisy channel-output feedback (LD-IC-NOF) in [17] to identify the feedback parameters that ensure strict inclusion of the former into the latter. After, using the fact that the capacity region of the LD-IC-NOF approximates the capacity region of the G-IC-NOF, an approximation of  $\text{SNR}_i^*$  is obtained. Solving this problem leads to a handful of equally relevant byproducts to determine whether or not implementing feedback in one of the transmitter-receiver pairs increases any of the individual rates or the sum-rate. That is, answers to the following questions: *When does feedback in transmitter-receiver  $i$  allow achieving a rate  $R_1$ , such that for at least one  $R_2$ , all rate pairs  $(R'_1, R_2)$  achievable without feedback satisfy  $R_1 > R'_1$ ?*; *When does feedback in transmitter-receiver  $i$  allow achieving a rate  $R_2$ , such that for at least one  $R_1$ , all rate pairs  $(R_1, R'_2)$  achievable without feedback satisfies  $R_2 > R'_2$ ?*; or *When does feedback in transmitter-receiver  $i$  allow achieving a higher sum-rate than the maximum sum-rate achievable without feedback?*, with  $i \in \{1, 2\}$  and fixed SNRs and INRs in the forward G-IC.

The answers to the questions above provide a lot of engineering insights about the benefits of feedback in the G-IC. For instance, all the cases in which feedback, even perfect channel-output feedback, is useless for increasing an individual rate or the sum-rate are identified. Similarly, this work provides guidelines for choosing in which of the point-to-point links feedback should be implemented for increasing either an individual rate or the sum-rate. Interestingly, in some cases, implementing feedback in only one of the transmitter-receiver pairs, despite the additive noise, turns out to be as beneficial as perfect channel-output feedback in both links.

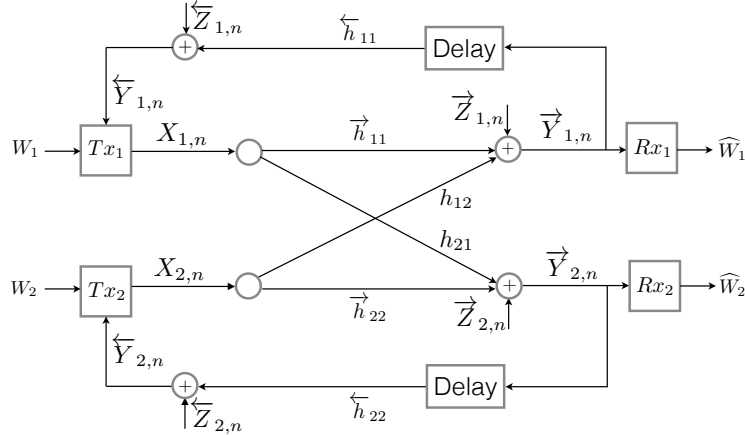


Fig. 1. Gaussian interference channel with noisy channel-output feedback at channel use  $n$ .

## B. Organization of the Paper

Section II introduces the G-IC and the linear deterministic IC (LD-IC). The capacity region of the G-IC is shown to be approximated by the capacity region of an LD-IC, with a particular choice of parameters. Section III presents the answers to the questions described above for the LD-IC. Section IV presents some LD-IC examples. Section V presents the implications of the conclusions obtained from the LD-IC (Section III) on the G-IC. The examples in Section IV are revisited in the context of the G-IC. The paper closes with the conclusions in Section VII.

## II. CHANNEL MODELS

### A. Gaussian Interference Channels

Consider the two-user G-IC-NOF depicted in Figure 1. Transmitter  $i$ , with  $i \in \{1, 2\}$ , communicates with receiver  $i$  subject to the interference produced by transmitter  $j$ , with  $j \in \{1, 2\} \setminus \{i\}$ . There are two independent and uniformly distributed messages,  $W_i \in \mathcal{W}_i$ , with  $\mathcal{W}_i = \{1, 2, \dots, 2^{NR_i}\}$ , where  $N$  denotes the fixed block-length in channel uses and  $R_i$  is the transmission rate in bits per channel use. At each block, transmitter  $i$  sends the codeword  $\mathbf{X}_i = (X_{i,1}, X_{i,2}, \dots, X_{i,N})^\top \in \mathcal{C}_i \subseteq \mathcal{X}_i^N$ , where  $\mathcal{X}_i$  and  $\mathcal{C}_i$  are respectively the channel-input alphabet and the codebook of transmitter  $i$ .

The channel coefficient from transmitter  $i$  to receiver  $i$  is denoted by  $\vec{h}_{ii}$ , the channel coefficient from transmitter  $j$  to receiver  $i$  is denoted by  $h_{ij}$ ; and the channel coefficient from

channel-output  $i$  to transmitter  $i$  is denoted by  $\overleftarrow{h}_{ii}$ . All channel coefficients are assumed to be non-negative real numbers. At a given channel use  $n \in \{1, 2, \dots, N\}$ , the channel output at receiver  $i$  is denoted by  $\overrightarrow{Y}_{i,n}$ . During channel use  $n$ , the input-output relation of the channel model is given by

$$\overrightarrow{Y}_{i,n} = \overrightarrow{h}_{ii} X_{i,n} + h_{ij} X_{j,n} + \overrightarrow{Z}_{i,n}, \quad (1)$$

where  $\overrightarrow{Z}_{i,n}$  is a real Gaussian random variable with zero mean and unit variance that represents the noise at the input of receiver  $i$ . Let  $d > 0$  be the finite feedback delay measured in channel uses. At the end of channel use  $n$ , transmitter  $i$  observes  $\overleftarrow{Y}_{i,n}$ , which consists of a scaled and noisy version of  $\overrightarrow{Y}_{i,n-d}$ . More specifically,

$$\overleftarrow{Y}_{i,n} = \begin{cases} \overleftarrow{Z}_{i,n} & \text{for } n \in \{1, 2, \dots, d\} \\ \overleftarrow{h}_{ii} \overrightarrow{Y}_{i,n-d} + \overleftarrow{Z}_{i,n}, & \text{for } n \in \{d+1, d+2, \dots, N\}, \end{cases} \quad (2)$$

where  $\overleftarrow{Z}_{i,n}$  is a real Gaussian random variable with zero mean and unit variance that represents the noise in the feedback link of transmitter-receiver pair  $i$ . The random variables  $\overrightarrow{Z}_{i,n}$  and  $\overleftarrow{Z}_{i,n}$  are independent and identically distributed. In the following, without loss of generality, the feedback delay is assumed to be one channel use, i.e.,  $d = 1$ . The encoder of transmitter  $i$  is defined by a set of deterministic functions  $f_i^{(1)}, f_i^{(2)}, \dots, f_i^{(N)}$ , with  $f_i^{(1)} : \mathcal{W}_i \rightarrow \mathcal{X}_i$  and for all  $n \in \{2, 3, \dots, N\}$ ,  $f_i^{(n)} : \mathcal{W}_i \times \mathbb{R}^{n-1} \rightarrow \mathcal{X}_i$ , such that

$$X_{i,1} = f_i^{(1)}(W_i), \quad (3a)$$

and for all  $n \in \{2, 3, \dots, N\}$ ,

$$X_{i,n} = f_i^{(n)}(W_i, \overleftarrow{Y}_{i,1}, \overleftarrow{Y}_{i,2}, \dots, \overleftarrow{Y}_{i,n-1}). \quad (3b)$$

The components of the input vector  $\mathbf{X}_i$  are real numbers subject to an average power constraint:

$$\frac{1}{N} \sum_{n=1}^N \mathbb{E}(X_{i,n}^2) \leq 1, \quad (4)$$

where the expectation is taken over the joint distribution of the message indices  $W_1, W_2$ , and the noise terms, i.e.,  $\overrightarrow{Z}_1, \overrightarrow{Z}_2, \overleftarrow{Z}_1$ , and  $\overleftarrow{Z}_2$ . The dependence of  $X_{i,n}$  on  $W_1, W_2$ , and the previously observed noise realizations is due to the effect of feedback as shown in (2) and (3).

Hence, the decoder of receiver  $i$  is defined by a deterministic function  $\psi_i : \mathbb{R}_i^N \rightarrow \mathcal{W}_i$ . At the end of the communication, receiver  $i$  uses the vector  $(\vec{Y}_{i,1}, \vec{Y}_{i,2}, \dots, \vec{Y}_{i,N})^\top$  to obtain an estimate of the message index:

$$\widehat{W}_i = \psi_i(\vec{Y}_{i,1}, \vec{Y}_{i,2}, \dots, \vec{Y}_{i,N}), \quad (5)$$

where  $\widehat{W}_i$  is an estimate of the message index. The decoding error probability in the two-user G-IC-NOF, denoted by  $P_e(N)$ , is given by

$$P_e(N) = \max \left( \Pr(\widehat{W}_1 \neq W_1), \Pr(\widehat{W}_2 \neq W_2) \right). \quad (6)$$

The definition of an achievable rate pair  $(R_1, R_2) \in \mathbb{R}_+^2$  follows:

*Definition 1 (Achievable Rate Pairs):* A rate pair  $(R_1, R_2) \in \mathbb{R}_+^2$  is achievable if there exists at least one pair of codebooks in  $\mathcal{X}_1^N$  and in  $\mathcal{X}_2^N$  with codewords of length  $N$ , the corresponding encoding functions  $f_1^{(1)}, f_1^{(2)}, \dots, f_1^{(N)}$  and  $f_2^{(1)}, f_2^{(2)}, \dots, f_2^{(N)}$ , and the decoding functions  $\psi_1$  and  $\psi_2$ , such that the decoding error probability can be made arbitrarily small by letting the block-length  $N$  grow to infinity.

The set of all achievable information rate pairs  $(R_1, R_2)$  is known as the information capacity region. The capacity region of a G-IC-NOF is described by six parameters:  $\overrightarrow{\text{SNR}}_i$ ,  $\text{INR}_{ij}$  and  $\overleftarrow{\text{SNR}}_i$ , with  $i \in \{1, 2\}$  and  $j \in \{1, 2\} \setminus \{i\}$ , which are defined as follows:

$$\overrightarrow{\text{SNR}}_i = \vec{h}_{ii}^2, \quad (7)$$

$$\text{INR}_{ij} = h_{ij}^2, \quad \text{and} \quad (8)$$

$$\overleftarrow{\text{SNR}}_i = \overleftarrow{h}_{ii}^2 \left( \vec{h}_{ii}^2 + 2 \vec{h}_{ii} h_{ij} + h_{ij}^2 + 1 \right). \quad (9)$$

Given fixed parameters  $\overrightarrow{\text{SNR}}_1, \overrightarrow{\text{SNR}}_2, \text{INR}_{12}, \text{INR}_{21}, \overleftarrow{\text{SNR}}_1$ , and  $\overleftarrow{\text{SNR}}_2$ , the capacity region of the G-IC-NOF is approximated to within a constant number of bits by Theorem 4 in [17].

## B. Linear Deterministic Interference Channels

Consider the two-user LD-IC-NOF with parameters  $\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}, \overleftarrow{n}_{11}$  and  $\overleftarrow{n}_{22}$  depicted in Fig. 2. Parameter  $\vec{n}_{ii}$  represents the number of bit-pipes between transmitter  $i$  and receiver  $i$ ; parameter  $n_{ij}$  represents the number of bit-pipes between transmitter  $j$  and receiver  $i$ ; and parameter  $\overleftarrow{n}_{ii}$  represents the number of bit-pipes between receiver  $i$  and transmitter  $i$  (feedback).

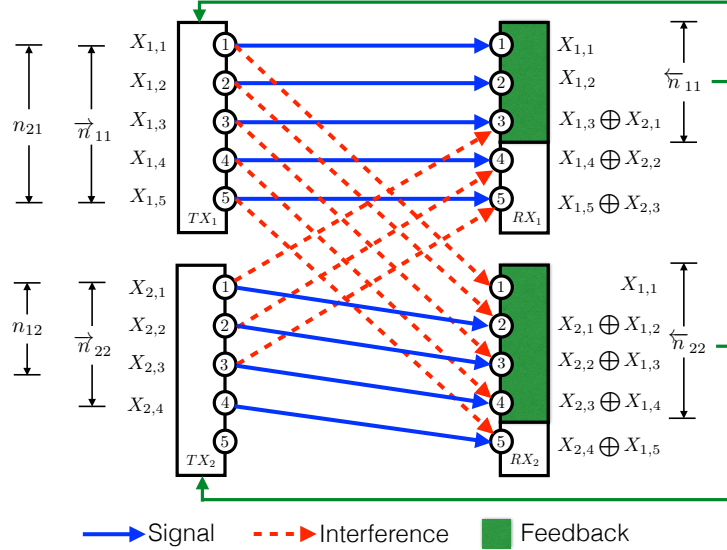


Fig. 2. Two-user linear deterministic interference channel with noisy channel-output feedback. The bit-pipe line number 1 represents the most significant bit.

At transmitter  $i$ , the channel-input  $\mathbf{X}_{i,n}$  during channel use  $n$ , with  $n \in \{1, 2, \dots, N\}$ , is a  $q$ -dimensional binary vector  $\mathbf{X}_{i,n} = (X_{i,n}^{(1)}, X_{i,n}^{(2)}, \dots, X_{i,n}^{(q)})^\top$ , where

$$q = \max(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}), \quad (10)$$

and  $N$  is the block-length. At receiver  $i$ , the channel-output  $\vec{\mathbf{Y}}_{i,n}$  during channel use  $n$  is also a  $q$ -dimensional binary vector  $\vec{\mathbf{Y}}_{i,n} = (\vec{Y}_{i,n}^{(1)}, \vec{Y}_{i,n}^{(2)}, \dots, \vec{Y}_{i,n}^{(q)})^\top$ . Let  $\mathbf{S}$  be a  $q \times q$  lower shift matrix of the form:

$$\mathbf{S} = \begin{bmatrix} 0 & 0 & 0 & \cdots & 0 \\ 1 & 0 & 0 & \cdots & 0 \\ 0 & 1 & 0 & \cdots & \vdots \\ \vdots & \ddots & \ddots & \ddots & 0 \\ 0 & \cdots & 0 & 1 & 0 \end{bmatrix}. \quad (11)$$

The input-output relation during channel use  $n$  is given by

$$\vec{\mathbf{Y}}_{i,n} = \mathbf{S}^{q-\vec{n}_{ii}} \mathbf{X}_{i,n} + \mathbf{S}^{q-n_{ij}} \mathbf{X}_{j,n}, \quad (12)$$

and the feedback signal  $\overleftarrow{\mathbf{Y}}_{i,n}$  available at transmitter  $i$  at the end of channel use  $n$  satisfies

$$\overleftarrow{\mathbf{Y}}_{i,n} = \mathbf{S}^{(\max(\vec{n}_{ii}, n_{ij}) - \overleftarrow{n}_{ii})^+} \vec{\mathbf{Y}}_{i,n-d}, \quad (13)$$



where  $d$  is a finite delay, additions and multiplications are defined over the Galois Field of two elements  $\text{GF}(2)$ , and  $(\cdot)^+$  is the positive part operator.

Without any loss of generality, the feedback delay is assumed to be equal to one channel use. Let  $\mathcal{W}_i$  be the set of message indices of transmitter  $i$ . Transmitter  $i$  sends the message index  $W_i \in \mathcal{W}_i$  by sending the codeword  $\mathbf{X}_i = (\mathbf{X}_{i,1}, \mathbf{X}_{i,2}, \dots, \mathbf{X}_{i,N})$ , which is a binary  $q \times N$  matrix. The encoder of transmitter  $i$  can be modeled as a set of deterministic mappings  $f_i^{(1)}, f_i^{(2)}, \dots, f_i^{(N)}$ , with  $f_i^{(1)} : \mathcal{W}_i \rightarrow \{0, 1\}^q$  and for all  $n \in \{2, 3, \dots, N\}$ ,  $f_i^{(n)} : \mathcal{W}_i \times \{0, 1\}^{q \times (n-1)} \rightarrow \{0, 1\}^q$ , such that

$$\mathbf{X}_{i,1} = f_i^{(1)}(W_i) \quad (14a)$$

and for all  $n \in \{2, 3, \dots, N\}$ ,

$$\mathbf{X}_{i,n} = f_i^{(n)}(W_i, \overleftarrow{\mathbf{Y}}_{i,1}, \overleftarrow{\mathbf{Y}}_{i,2}, \dots, \overleftarrow{\mathbf{Y}}_{i,n-1}). \quad (14b)$$

The decoder of receiver  $i$  is defined by a deterministic function  $\psi_i : \{0, 1\}^{q \times N} \rightarrow \mathcal{W}_i$ . At the end of the communication, receiver  $i$  uses the sequence  $(\overrightarrow{\mathbf{Y}}_{i,1}, \overrightarrow{\mathbf{Y}}_{i,2}, \dots, \overrightarrow{\mathbf{Y}}_{i,N})$  to obtain an estimate  $\widehat{W}_i$  of the message index  $W_i$ . The decoding error probability in the two-user LD-IC-NOF, denoted by  $P_e(N)$ , is given by (6).

A rate pair  $(R_1, R_2) \in \mathbb{R}_+^2$  is said to be achievable if it satisfies Definition 1. The set of all achievable information rate pairs  $(R_1, R_2)$  is known as the information capacity region and it is characterized by Theorem 1 in [17].

### C. Connections between Linear Deterministic and Gaussian Interference Channels

The capacity region of the G-IC-NOF with parameters  $\overrightarrow{\text{SNR}}_1, \overrightarrow{\text{SNR}}_2, \text{INR}_{12}, \text{INR}_{21}, \overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$  can be approximated by the capacity region of an LD-IC-NOF with parameters  $\overrightarrow{n}_{ii} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{SNR}}_i) \rfloor$ ;  $n_{ij} = \lfloor \frac{1}{2} \log_2(\text{INR}_{ij}) \rfloor$ ;  $\overleftarrow{n}_{ii} = \lfloor \frac{1}{2} \log_2(\overleftarrow{\text{SNR}}_i) \rfloor$ , with  $i \in \{1, 2\}$  and  $j \in \{1, 2\} \setminus \{i\}$ . For instance, in the case without feedback, the capacity region of any G-IC with parameters  $\overrightarrow{\text{SNR}}_1 > 1, \overrightarrow{\text{SNR}}_2 > 1, \text{INR}_{12} > 1$  and  $\text{INR}_{21} > 1$  is within 18.6 bits per channel use per user of the capacity of an LD-IC with parameters  $\overrightarrow{n}_{11} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{SNR}}_1) \rfloor$ ,  $\overrightarrow{n}_{22} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{SNR}}_2) \rfloor$ ,  $\overrightarrow{n}_{12} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{INR}}_{21}) \rfloor$ , and  $\overrightarrow{n}_{21} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{INR}}_{12}) \rfloor$  (Theorem 2 in [24]). More specifically, if the capacity region of the G-IC and LD-IC without feedback are

denoted by  $\mathcal{C}_G$  and  $\mathcal{C}_{LD}$ , respectively, the following holds:

$$\mathcal{C}_{LD} \subseteq \mathcal{C}_G + (5, 5), \text{ and} \quad (15a)$$

$$\mathcal{C}_G \subseteq \mathcal{C}_{LD} + (13.6, 13.6). \quad (15b)$$

In a more general setting, for instance in the case with noisy channel-output feedback, the LD-IC is known to be a close approximation of the G-IC [17]. In Section V, this approximation is used to simplify the identification of the cases in which channel-output feedback, even subject to additive noise, enlarges the capacity region of the G-IC.

### III. MAIN RESULTS

#### A. Preliminaries

Let  $\alpha_i \in \mathbb{Q}$ , with  $i \in \{1, 2\}$  and  $j \in \{1, 2\} \setminus \{i\}$  be defined as

$$\alpha_i = \frac{n_{ij}}{\bar{n}_{ii}}. \quad (16)$$

For each transmitter-receiver pair  $i$ , there exist five possible interference regimes (IRs), as suggested in [9]: the very weak IR (VWIR), i.e.,  $\alpha_i \leq \frac{1}{2}$ , the weak IR (WIR), i.e.,  $\frac{1}{2} < \alpha_i \leq \frac{2}{3}$ , the moderate IR (MIR), i.e.,  $\frac{2}{3} < \alpha_i < 1$ , the strong IR (SIR), i.e.,  $1 \leq \alpha_i \leq 2$  and the very strong IR (VSIR), i.e.,  $\alpha_i > 2$ . The scenarios in which the desired signal is stronger than the interference ( $\alpha_i < 1$ ), namely the VWIR, the WIR, and the MIR, are referred to as the low-interference regimes (LIRs). Conversely, the scenarios in which the desired signal is weaker than or equal to the interference ( $\alpha_i \geq 1$ ), namely the SIR and the VSIR, are referred to as the high-interference regimes (HIRs).

The main results of this paper are presented using a set of events (Boolean variables) that are determined by the parameters  $\vec{n}_{11}$ ,  $\vec{n}_{22}$ ,  $n_{12}$ , and  $n_{21}$ . Given a fixed tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , the events are defined below:

$$E_1 : \quad \alpha_1 < 1 \wedge \alpha_2 < 1, \quad (17)$$

$$E_{2,i} : \quad \alpha_i \leq \frac{1}{2} \wedge 1 \leq \alpha_j \leq 2, \quad (18)$$

$$E_{3,i} : \quad \alpha_i \leq \frac{1}{2} \wedge \alpha_j > 2, \quad (19)$$

$$E_{4,i} : \quad \frac{1}{2} < \alpha_i \leq \frac{2}{3} \wedge \alpha_j \geq 1, \quad (20)$$

$$E_{5,i} : \quad \frac{2}{3} < \alpha_i < 1 \wedge \alpha_j \geq 1, \quad (21)$$

$$E_{6,i} : \quad \frac{1}{2} < \alpha_i \leq 1 \wedge \alpha_j > 1, \quad (22)$$

$$E_{7,i} : \quad \alpha_i \geq 1 \wedge \alpha_j \leq 1, \quad (23)$$

$$E_{8,i} : \quad \vec{n}_{ii} > n_{ji}, \quad (24)$$

$$E_9 : \quad \vec{n}_{11} + \vec{n}_{22} > n_{12} + n_{21}, \quad (25)$$

$$E_{10,i} : \quad \vec{n}_{ii} + \vec{n}_{jj} > n_{ij} + 2n_{ji}, \quad (26)$$

$$E_{11,i} : \quad \vec{n}_{ii} + \vec{n}_{jj} < n_{ij}. \quad (27)$$

In the following, given an event, e.g.  $E_{8,i} : \vec{n}_{ii} > n_{ji}$ , the notation  $\widetilde{E}_{8,i}$  indicates  $\vec{n}_{ii} < n_{ji}$ ; the notation  $\overline{E}_{8,i}$  indicates  $\vec{n}_{ii} \leq n_{ji}$  (logical complement); and the notation  $\check{E}_{8,i}$  indicates  $\vec{n}_{ii} \geq n_{ji}$ .

Combining the events (17)-(27), five main scenarios are identified:

$$S_{1,i} : (E_1 \wedge E_{8,i}) \vee (E_{2,i} \wedge E_{8,i}) \vee (E_{3,i} \wedge E_{8,i} \wedge E_9) \vee (E_{4,i} \wedge E_{8,i} \wedge E_9) \vee (E_{5,i} \wedge E_{8,i} \wedge E_9), \quad (28)$$

$$S_{2,i} : (E_{3,i} \wedge \widetilde{E}_{8,j} \wedge \overline{E}_9) \vee (E_{6,i} \wedge \widetilde{E}_{8,j} \wedge \overline{E}_9) \vee (\widetilde{E}_1 \wedge \widetilde{E}_{8,j}), \quad (29)$$

$$S_{3,i} : (E_1 \wedge \overline{E}_{8,i}) \vee (E_{2,i} \wedge \overline{E}_{8,i}) \vee (E_{3,i} \wedge \check{E}_{8,j} \wedge \overline{E}_{8,i}) \vee (E_{4,i} \wedge \check{E}_{8,j} \wedge \overline{E}_{8,i}) \\ \vee (E_{5,i} \wedge \check{E}_{8,j} \wedge \overline{E}_{8,i}) \vee (\overline{E}_1 \wedge \check{E}_{8,j}) \vee (E_{7,i}), \quad (30)$$

$$S_4 : E_1 \wedge E_{8,1} \wedge E_{8,2} \wedge E_{10,1} \wedge E_{10,2}, \quad (31)$$

$$S_5 : \overline{E}_1 \wedge E_{11,1} \wedge E_{11,2}. \quad (32)$$

For all  $i \in \{1, 2\}$ , the events  $S_{1,i}$ ,  $S_{2,i}$ ,  $S_{3,i}$ ,  $S_4$  and  $S_5$  exhibit the properties stated by the following corollaries.

*Corollary 1:* For all  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$ , given a fixed  $i \in \{1, 2\}$ , only one of the events  $S_{1,i}$ ,  $S_{2,i}$  and  $S_{3,i}$  is true.

*Corollary 2:* For all  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$ , when one of the events  $S_4$  or  $S_5$  holds true, then the other necessarily holds false.

Note that Corollary 2 does not exclude the case in which both  $S_4$  and  $S_5$  are simultaneously false.

*Corollary 3:* For all  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$ , when  $S_4$  holds true, then both  $S_{1,1}$  and  $S_{1,2}$  hold true; and when  $S_5$  holds true, then both  $S_{2,1}$  and  $S_{2,2}$  hold true.

## B. Rate Improvement Metrics

Given a fixed tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , let  $\mathcal{C}(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})$  be the capacity region of an LD-IC with noisy channel-output feedback with parameters  $\overleftarrow{n}_{11}$  and  $\overleftarrow{n}_{22}$ . The maximum improvement of the individual rates  $R_1$  and  $R_2$ , denoted by  $\Delta_1(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})$  and  $\Delta_2(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})$ , due to the effect of channel-output feedback with respect to the case without feedback is

$$\Delta_1(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) = \max_{0 < R_2 < R_2^*} \left\{ \sup_{(R_1, R_2) \in \mathcal{C}(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})} R_1 - \sup_{(R_1^\dagger, R_2) \in \mathcal{C}(0, 0)} R_1^\dagger \right\} \text{ and} \quad (33)$$

$$\Delta_2(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) = \max_{0 < R_1 < R_1^*} \left\{ \sup_{(R_1, R_2) \in \mathcal{C}(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})} R_2 - \sup_{(R_1, R_2^\dagger) \in \mathcal{C}(0, 0)} R_2^\dagger \right\}, \quad (34)$$

with

$$R_1^* = \sup_{(r_1, r_2) \in \mathcal{C}(0, 0)} r_1 \text{ and} \quad (35)$$

$$R_2^* = \sup_{(r_1, r_2) \in \mathcal{C}(0, 0)} r_2. \quad (36)$$

Note that for a fixed  $i \in \{1, 2\}$ ,  $\Delta_i(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) > 0$  if and only if it is possible to achieve a rate pair  $(R_1, R_2)$  with channel-output feedback such that  $R_i$  is higher than the maximum rate achievable by transmitter-receiver  $i$  without feedback when the rate of transmitter-receiver pair  $j$  is fixed at  $R_j$ . In the following, given fixed parameters  $\overleftarrow{n}_{11}$  and  $\overleftarrow{n}_{22}$ , the statement “*the rate  $R_i$  is improved by using feedback*” is used to indicate that  $\Delta_i(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) > 0$ .

Alternatively, the maximum improvement of the sum-rate  $\Sigma(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})$  with respect to the case without feedback is

$$\Sigma(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) = \sup_{(R_1, R_2) \in \mathcal{C}(\overleftarrow{n}_{11}, \overleftarrow{n}_{22})} \left\{ R_1 + R_2 \right\} - \sup_{(R_1^\dagger, R_2^\dagger) \in \mathcal{C}(0, 0)} \left\{ R_1^\dagger + R_2^\dagger \right\}. \quad (37)$$

Note that  $\Sigma(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) > 0$  if and only if there exists a rate pair with feedback whose sum is higher than the maximum sum-rate achievable without feedback. In the following, given fixed parameters  $\overleftarrow{n}_{11}$  and  $\overleftarrow{n}_{22}$ , the statement “*the sum-rate is improved by using feedback*” is used to imply that  $\Sigma(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) > 0$ .

In the following, when feedback is exclusively used by transmitter-receiver pair  $i$ , i.e.,  $\overleftarrow{n}_{ii} > 0$  and  $\overleftarrow{n}_{jj} = 0$ , then the maximum improvement of the individual rate of transmitter-receiver  $k$ , with  $k \in \{1, 2\}$ , and the maximum improvement of the sum-rate are denoted by  $\Delta_k(\overleftarrow{n}_{ii})$  and  $\Sigma(\overleftarrow{n}_{ii})$ , respectively. Hence, this notation  $\Delta_k(\overleftarrow{n}_{ii})$  replaces either  $\Delta_k(\overleftarrow{n}_{11}, 0)$  or  $\Delta_k(0, \overleftarrow{n}_{22})$ ,

when  $i = 1$  or  $i = 2$ , respectively. The same holds for the notation  $\Sigma(\overleftarrow{n}_{ii})$  that replaces  $\Sigma(\overleftarrow{n}_{11}, 0)$  or  $\Sigma(0, \overleftarrow{n}_{22})$ , when  $i = 1$  or  $i = 2$ , respectively.

### C. Enlargement of the Capacity Region

Given fixed parameters  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21})$ ,  $i \in \{1, 2\}$ , and  $j \in \{1, 2\} \setminus \{i\}$ , the capacity region of a two-user LD-IC, when feedback is available only at transmitter-receiver pair  $i$ , i.e.,  $\overleftarrow{n}_{ii} > 0$  and  $\overleftarrow{n}_{jj} = 0$ , is denoted by  $\mathcal{C}(\overleftarrow{n}_{ii})$  instead of  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  or  $\mathcal{C}(0, \overleftarrow{n}_{22})$ , when  $i = 1$  or  $i = 2$ , respectively. Following this notation, Theorem 1 identifies the exact values of  $\overleftarrow{n}_{ii}$  for which the strict inclusion  $\mathcal{C}(0, 0) \subset \mathcal{C}(\overleftarrow{n}_{ii})$  holds for  $i \in \{1, 2\}$ .

*Theorem 1:* Let  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$  be a fixed tuple. Let also  $i \in \{1, 2\}$ ,  $j \in \{1, 2\} \setminus \{i\}$  and  $\overleftarrow{n}_{ii}^* \in \mathbb{N}$  be fixed integers, with

$$\overleftarrow{n}_{ii}^* = \begin{cases} \max(n_{ji}, (\overrightarrow{n}_{ii} - n_{ij})^+) & \text{if } S_{1,i} = \text{True} \\ \overrightarrow{n}_{jj} + (\overrightarrow{n}_{ii} - n_{ij})^+ & \text{if } S_{2,i} = \text{True}. \end{cases} \quad (38)$$

Assume that  $S_{3,i} = \text{True}$ . Then, for all  $\overleftarrow{n}_{ii} \in \mathbb{N}$ ,  $\mathcal{C}(0, 0) = \mathcal{C}(\overleftarrow{n}_{ii})$ . Assume that either  $S_{1,i} = \text{True}$  or  $S_{2,i} = \text{True}$ . Then, for all  $\overleftarrow{n}_{ii} \leq \overleftarrow{n}_{ii}^*$ ,  $\mathcal{C}(0, 0) = \mathcal{C}(\overleftarrow{n}_{ii})$  and for all  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$ ,  $\mathcal{C}(0, 0) \subset \mathcal{C}(\overleftarrow{n}_{ii})$ .

*Proof:* The proof of Theorem 1 is presented in Appendix A. ■

Theorem 1 shows that under event  $S_{3,i}$  in (30), implementing feedback in transmitter-receiver pair  $i$ , with any  $\overleftarrow{n}_{ii} > 0$  and  $\overleftarrow{n}_{jj} = 0$ , does not enlarge the capacity region. Note that when both  $E_{8,i}$  and  $\widetilde{E}_{8,j}$  hold false, then both  $S_{1,i}$  and  $S_{2,i}$  hold false, which implies that  $S_{3,i}$  holds true (Corollary 1). The following remark is a consequence of this observation.

**Remark 1:** A necessary but not sufficient condition for enlarging the capacity region by using feedback in transmitter-receiver pair  $i$  is: there exists at least one transmitter able to send more information bits to receiver  $i$  than to receiver  $j$ , i.e.,  $\overrightarrow{n}_{ii} > n_{ji}$  (Event  $E_{8,i}$ ) or  $n_{ij} > \overrightarrow{n}_{jj}$  (Event  $\widetilde{E}_{8,j}$ ).

Alternatively, under events  $S_{1,i}$  in (28) and  $S_{2,i}$  in (29), the capacity region can be enlarged when  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$ . It is important to highlight that in the cases in which feedback enlarges the capacity region of the two-user LD-IC-NOF, that is, in events  $S_{1,1}$ ,  $S_{2,1}$ ,  $S_{1,2}$  or  $S_{2,2}$ , for all  $i \in \{1, 2\}$  and  $j \in \{1, 2\} \setminus \{i\}$ , the following is always true :

$$\overleftarrow{n}_{ii}^* > (\overrightarrow{n}_{ii} - n_{ij})^+. \quad (39)$$

Essentially, the inequality in (39) unveils a necessary but not sufficient condition to enlarge the capacity region using channel-output feedback. This condition is that for at least one  $i \in \{1, 2\}$ , with  $j \in \{1, 2\} \setminus \{i\}$ , transmitter  $i$  decodes a subset of the information bits sent by transmitter  $j$  at each channel use.

Another interesting observation is that the threshold  $\overleftarrow{n}_{ii}^*$  beyond which feedback is useful is different under event  $S_{1,i}$  in (28) and event  $S_{2,i}$  in (29). In general when  $S_{1,i}$  holds true, the enlargement of the capacity region is due to the fact that feedback allows using *interference as side information* [25]. Alternatively, when  $S_{2,i}$  in (29) holds true, the enlargement of the capacity region occurs as a consequence of the fact that some of the bits that cannot be transmitted directly from transmitter  $j$  to receiver  $j$ , can arrive to receiver  $j$  via an alternative path: transmitter  $j$  - receiver  $i$  - transmitter  $i$  - receiver  $j$ . Both scenarios, interference as side information and alternative path, are extensively discussed in [15], [16], and [17].

#### D. Improvement of the Individual Rate $R_i$ by Using Feedback in Link $i$

Given fixed parameters  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21})$ , and  $i \in \{1, 2\}$ , implementing channel-output feedback in transmitter-receiver pair  $i$  increases the individual rate  $R_i$ , i.e.,  $\Delta_i(\overleftarrow{n}_{ii}) > 0$  for some values of  $\overleftarrow{n}_{ii}$ . Theorem 2 identifies the exact values of  $\overleftarrow{n}_{ii}$  for which  $\Delta_i(\overleftarrow{n}_{ii}) > 0$ .

*Theorem 2:* Let  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$  be a fixed tuple. Let also  $i \in \{1, 2\}$ ,  $j \in \{1, 2\} \setminus \{i\}$  and  $\overleftarrow{n}_{ii}^\dagger \in \mathbb{N}$  be fixed integers, with

$$\overleftarrow{n}_{ii}^\dagger = \max(n_{ji}, (\overrightarrow{n}_{ii} - n_{ij})^+). \quad (40)$$

Assume that either  $S_{2,i} = \text{True}$  or  $S_{3,i} = \text{True}$ . Then, for all  $\overleftarrow{n}_{ii} \in \mathbb{N}$ ,  $\Delta_i(\overleftarrow{n}_{ii}) = 0$ . Assume that  $S_{1,i} = \text{True}$ . Then, when  $\overleftarrow{n}_{ii} \leq \overleftarrow{n}_{ii}^\dagger$ , it holds that  $\Delta_i(\overleftarrow{n}_{ii}) = 0$ ; and when  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^\dagger$ , it holds that  $\Delta_i(\overleftarrow{n}_{ii}) > 0$ .

*Proof:* The proof of Theorem 2 is presented in Appendix B. ■

Theorem 2 highlights that under events  $S_{2,i}$  in (29) and  $S_{3,i}$  in (30), the individual rate  $R_i$  cannot be improved by using feedback in transmitter-receiver pair  $i$ , i.e.,  $\Delta_i(\overleftarrow{n}_{ii}) = 0$ . Alternatively, under event  $S_{1,i}$  in (28), the individual rate  $R_i$  can be improved, i.e.,  $\Delta_i(\overleftarrow{n}_{ii}) > 0$ , whenever  $\overleftarrow{n}_{ii} > \max(n_{ji}, (\overrightarrow{n}_{ii} - n_{ij})^+)$ . Hence, given the definition of  $S_{1,i}$ , the following remark is relevant.

**Remark 2:** A necessary but not sufficient condition for  $\Delta_i(\overleftarrow{n}_{ii}) > 0$  is: the number of bit-pipes from transmitter  $i$  to receiver  $i$  is higher than the number of bit-pipes from transmitter  $i$  to receiver  $j$ , i.e.,  $\overrightarrow{n}_{ii} > n_{ji}$  (Event  $E_{8,i}$ )

### E. Improvement of the Individual Rate $R_j$ by Using Feedback in Link $i$

Given fixed parameters  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21})$ ,  $i \in \{1, 2\}$ , and  $j \in \{1, 2\} \setminus \{i\}$ , implementing channel-output feedback in transmitter-receiver pair  $i$  increases the individual rate  $R_j$ , i.e.,  $\Delta_j(\overleftarrow{n}_{ii}) > 0$  for some values of  $\overleftarrow{n}_{ii}$ . Theorem 3 identifies the exact values of  $\overleftarrow{n}_{ii}$  for which  $\Delta_j(\overleftarrow{n}_{ii}) > 0$ .

**Theorem 3:** Let  $(\overrightarrow{n}_{11}, \overrightarrow{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$  be a fixed tuple. Let also  $i \in \{1, 2\}$ ,  $j \in \{1, 2\} \setminus \{i\}$  and  $\overleftarrow{n}_{ii}^* \in \mathbb{N}$  given in (38), be fixed integers. Assume that  $S_{3,i} = \text{True}$ . Then, for all  $\overleftarrow{n}_{ii} \in \mathbb{N}$ ,  $\Delta_j(\overleftarrow{n}_{ii}) = 0$ . Assume that either  $S_{1,i} = \text{True}$  or  $S_{2,i} = \text{True}$ . Then, when  $\overleftarrow{n}_{ii} \leq \overleftarrow{n}_{ii}^*$ , it holds that  $\Delta_j(\overleftarrow{n}_{ii}) = 0$ ; and when  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$ , it holds that  $\Delta_j(\overleftarrow{n}_{ii}) > 0$ .

*Proof:* The proof of Theorem 3 follows along the same lines of the proof of Theorem 2 in Appendix B. ■

Theorem 3 shows that under event  $S_{3,i}$  in (30), implementing feedback in transmitter-receiver pair  $i$  does not bring any improvement on the rate  $R_j$ . This is in line with the results of Theorem 1. In contrast, under events  $S_{1,i}$  in (28) and  $S_{2,i}$  in (29), the individual rate  $R_j$  can be improved, i.e.,  $\Delta_j(\overleftarrow{n}_{ii}) > 0$  for all  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$ . From the definition of events  $S_{1,i}$  and  $S_{2,i}$ , the following remark holds:

**Remark 3:** A necessary but not sufficient condition for  $\Delta_j(\overleftarrow{n}_{ii}) > 0$  is: there exists at least one transmitter able to send more information bits to receiver  $i$  than to receiver  $j$ , i.e.,  $\overrightarrow{n}_{ii} > n_{ji}$  (Event  $E_{8,i}$ ) or  $n_{ij} > \overrightarrow{n}_{jj}$  (Event  $\widetilde{E}_{8,j}$ ).

It is important to highlight that under event  $S_{1,i}$ , the threshold on  $\overleftarrow{n}_{ii}$  for increasing the individual rate  $R_i$  i.e.,  $\overleftarrow{n}_{ii}^\dagger$ , and  $R_j$  i.e.,  $\overleftarrow{n}_{ii}^*$ , are identical, see Theorem 2 and Theorem 3. This implies that in this case, the use of feedback in transmitter-receiver pair  $i$ , with  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^\dagger = \overleftarrow{n}_{ii}^*$ , benefits both transmitter-receiver pairs, i.e.,  $\Delta_i(\overleftarrow{n}_{ii}) > 0$  and  $\Delta_j(\overleftarrow{n}_{ii}) > 0$ . Under event  $S_{2,i}$ , using feedback in transmitter-receiver pair  $i$ , with  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$ , exclusively benefits transmitter-receiver pair  $j$ , i.e.,  $\Delta_i(\overleftarrow{n}_{ii}) = 0$  and  $\Delta_j(\overleftarrow{n}_{ii}) > 0$ .

### F. Improvement of the Sum-Rate

Given fixed parameters  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , and  $i \in \{1, 2\}$ , implementing channel-output feedback in transmitter-receiver pair  $i$  increases the sum-rate, i.e.,  $\Sigma(\overleftarrow{n}_{ii}) > 0$  for some values of  $\overleftarrow{n}_{ii}$ . Theorem 4 identifies the exact values of  $\overleftarrow{n}_{ii}$  for which  $\Sigma(\overleftarrow{n}_{ii}) > 0$ .

*Theorem 4:* Let  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$  be a fixed tuple. Let also  $i \in \{1, 2\}$ ,  $j \in \{1, 2\} \setminus \{i\}$  and  $\overleftarrow{n}_{ii}^+ \in \mathbb{N}$  be fixed integers, with

$$\overleftarrow{n}_{ii}^+ = \begin{cases} \max(n_{ji}, (\vec{n}_{ii} - n_{ij})^+) & \text{if } S_4 = \text{True} \\ \vec{n}_{jj} + (\vec{n}_{ii} - n_{ij})^+ & \text{if } S_5 = \text{True}. \end{cases} \quad (41)$$

Assume that  $S_4 = \text{False}$  and  $S_5 = \text{False}$ . Then,  $\Sigma(\overleftarrow{n}_{ii}) = 0$  for all  $\overleftarrow{n}_{ii} \in \mathbb{N}$ . Assume that  $S_4 = \text{True}$  or  $S_5 = \text{True}$ . Then, when  $\overleftarrow{n}_{ii} \leq \overleftarrow{n}_{ii}^+$ , it holds that  $\Sigma(\overleftarrow{n}_{ii}) = 0$ ; and when  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^+$ , it holds that  $\Sigma(\overleftarrow{n}_{ii}) > 0$ .

*Proof:* The proof of Theorem 4 is presented in Appendix C. ■

Theorem 4 highlights a necessary but not sufficient condition for improving the sum-rate by implementing feedback in transmitter-receiver pair  $i$ .

**Remark 4:** A necessary but not sufficient condition for observing  $\Sigma(\overleftarrow{n}_{ii}) > 0$  is to satisfy one of the following conditions: (a) both transmitter-receiver pairs are in LIR (Event  $E_1$ ); or (b) both transmitter-receiver pairs are in HIR (Event  $\bar{E}_1$ ).

Finally, it follows from Corollary 3 that when  $S_4$  or  $S_5$  holds true, with  $i \in \{1, 2\}$  and  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^+$ , aside from the fact that  $\Sigma(\overleftarrow{n}_{ii}) > 0$ , it also holds that  $\Delta_1(\overleftarrow{n}_{ii}) > 0$  and  $\Delta_2(\overleftarrow{n}_{ii}) > 0$ .

## IV. EXAMPLES

*Example 1:* Consider an LD-IC-NOF with parameters  $\vec{n}_{11} = 7$ ,  $\vec{n}_{22} = 7$ ,  $n_{12} = 3$ , and  $n_{21} = 5$ .

In Example 1, both  $S_{1,1}$  and  $S_{1,2}$  hold true. Hence, from Theorem 1, when  $\overleftarrow{n}_{11} > 5$  or  $\overleftarrow{n}_{22} > 3$ , there always exists an enlargement of the capacity region. More specifically, it follows from Theorem 2 and Theorem 3 that using feedback in transmitter-receiver pair 1, with  $\overleftarrow{n}_{11} > 5$  or using feedback in transmitter-receiver pair 2, with  $\overleftarrow{n}_{22} > 3$ , both individual rates can be simultaneously improved, i.e.,  $\Delta_1(\overleftarrow{n}_{ii}) > 0$  and  $\Delta_2(\overleftarrow{n}_{ii}) > 0$  with  $i = 1$  or  $i = 2$  respectively. Alternatively, note that  $S_4$  holds true. Hence, it follows from Theorem 4 that using feedback in transmitter-receiver pair 1, with  $\overleftarrow{n}_{11} > 5$  or using feedback in transmitter-receiver pair 2,



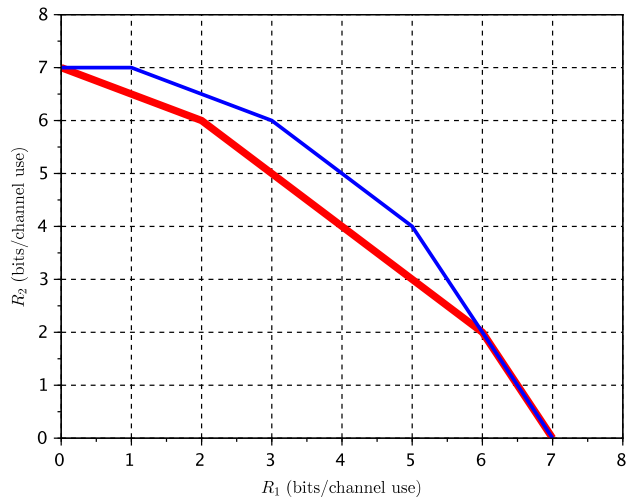


Fig. 3. Capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(6,0)$  (thin blue line), with  $\vec{n}_{11} = 7$ ,  $\vec{n}_{22} = 7$ ,  $n_{12} = 3$ ,  $n_{21} = 5$ .

with  $\overleftarrow{n}_{22} > 3$ , improves the sum-rate, i.e.,  $\Sigma(\overleftarrow{n}_{ii}) > 0$  with  $i = 1$  or  $i = 2$  respectively. These conclusions are observed in Figure 3, for the case  $\overleftarrow{n}_{11} = 6$  and  $\overleftarrow{n}_{22} = 0$ , where the capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(6,0)$  (thin blue line) are plotted. Note that, when  $\overleftarrow{n}_{11} = 6$ , there always exist a rate pair  $(R'_1, R'_2) \in \mathcal{C}(0,0)$  and a rate pair  $(R_1, R_2) \in \mathcal{C}(6,0) \setminus \mathcal{C}(0,0)$  such that  $R'_1 < R_1$  and  $R'_2 = R_2$  (Theorem 2). Simultaneously, there always exist a rate pair  $(R'_1, R'_2) \in \mathcal{C}(0,0)$  and a rate pair  $(R_1, R_2) \in \mathcal{C}(6,0) \setminus \mathcal{C}(0,0)$  such that  $R'_2 < R_2$  and  $R'_1 = R_1$  (Theorem 3). Finally, note that for all rate pairs  $(R'_1, R'_2) \in \mathcal{C}(0,0)$  there always exists a rate pair  $(R_1, R_2) \in \mathcal{C}(6,0)$ , for which  $R_1 + R_2 > R'_1 + R'_2$  (Theorem 4).

*Example 2:* Consider an LD-IC-NOF with parameters  $\vec{n}_{11} = 7$ ,  $\vec{n}_{22} = 8$ ,  $n_{12} = 6$ , and  $n_{21} = 5$ .

In Example 2, the events  $S_{1,1}$  and  $S_{1,2}$  hold true; and the events  $S_4$  and  $S_5$  hold false. Hence, it follows from Theorem 4 that using feedback in either transmitter-receiver pair does not improve the sum-rate, i.e., for all  $i \in \{1,2\}$  and for all  $\overleftarrow{n}_{ii} > 0$ ,  $\Sigma(\overleftarrow{n}_{ii}) = 0$ . These conclusions are observed in Figure 4, for the case  $\overleftarrow{n}_{11} = 0$  and  $\overleftarrow{n}_{22} = 7$ , where the capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(0,7)$  (thin blue line) are plotted. From Example 2, it becomes evident that when  $S_{1,1}$  and  $S_{1,2}$  hold true,  $S_4$  and  $S_5$  do not necessarily hold true. That is, the improvements on the individual rates, despite that they can be observed simultaneously, are not enough to

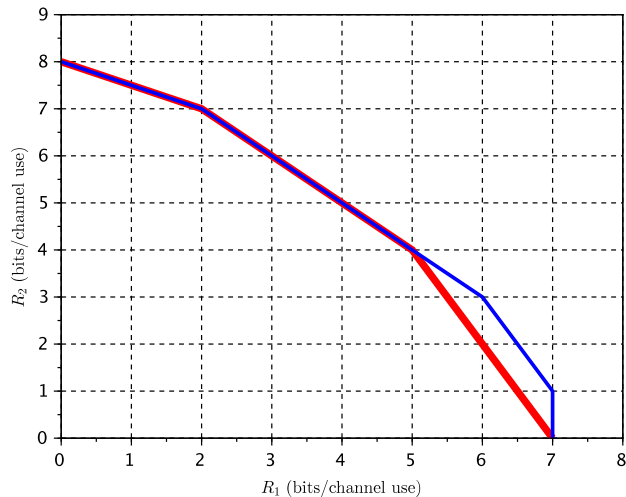


Fig. 4. Capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(0,7)$  (thin blue line), with  $\vec{n}_{11} = 7$ ,  $\vec{n}_{22} = 8$ ,  $n_{12} = 6$ ,  $n_{21} = 5$ .

improve the sum-rate beyond what is already achievable without feedback.

*Example 3: Consider an LD-IC-NOF with parameters  $\vec{n}_{11} = 5$ ,  $\vec{n}_{22} = 1$ ,  $n_{12} = 3$ , and  $n_{21} = 4$ .*

In Example 3, both  $S_{2,1}$  in (29) and  $S_{3,2}$  in (30) hold true. Hence, it follows from Theorem 1 that the capacity region can be enlarged by using feedback in transmitter-receiver pair 1 when  $\overleftarrow{n}_{11} > 3$ , whereas using feedback in transmitter-receiver pair 2 is useless. More specifically, it follows from Theorem 2 and Theorem 3 that using feedback in transmitter-receiver pair 1 does not improve the individual rate  $R_1$  but  $R_2$ , i.e.,  $\Delta_1(\overleftarrow{n}_{11}) = 0$  and  $\Delta_2(\overleftarrow{n}_{11}) > 0$ . Note also that  $S_4$  and  $S_5$  hold false. Hence, it follows from Theorem 4 that using feedback in either transmitter-receiver pair does not improve the sum-rate, i.e.,  $\Sigma(\overleftarrow{n}_{11}) = 0$  and  $\Sigma(\overleftarrow{n}_{22}) = 0$ . These conclusions are observed in Figure 5, for the case  $\overleftarrow{n}_{11} = 4$  and  $\overleftarrow{n}_{22} = 0$ , where the capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(4,0)$  (thin blue line) are plotted.

## V. IMPLICATIONS ON THE GAUSSIAN INTERFERENCE CHANNEL

Given a fixed tuple  $(\overrightarrow{\text{SNR}}_1, \overrightarrow{\text{SNR}}_2, \text{INR}_{12}, \text{INR}_{21})$ , let  $\underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  be the achievable region of the G-IC-NOF described by Theorem 2 in [17] with parameters  $\overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$ ; let  $\overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  be the converse region of the G-IC-NOF described by Theorem 3 in [17]

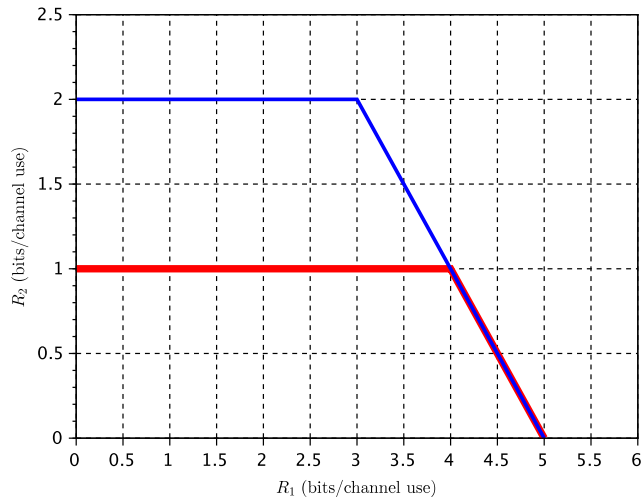


Fig. 5. Capacity regions  $\mathcal{C}(0,0)$  (thick red line) and  $\mathcal{C}(4,0)$  (thin blue line), with  $\vec{n}_{11} = 5$ ,  $\vec{n}_{22} = 1$ ,  $n_{12} = 3$ ,  $n_{21} = 4$ .

with parameters  $\overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$ ; and let also  $\mathcal{C}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  be the capacity region of the G-IC-NOF with parameters  $\overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$ .

These regions satisfy the following inclusions:

$$\underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) \subseteq \mathcal{C}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) \subseteq \overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2). \quad (42)$$

#### A. Improvement Metrics

In order to quantify the benefits of channel-output feedback in enlarging the achievable region  $\underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  or the converse region  $\overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$ , consider the following improvement metrics, which are similar to those defined in Sec. III-B for the LD-IC-NOF. The improvement metrics on the individual rates are defined as

$$\Delta_1^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \max_{0 < R_2 < R_2^*} \left\{ \sup_{(R_1, R_2) \in \underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \{R_1\} - \sup_{(R_1^\dagger, R_2) \in \underline{\mathcal{R}}(0,0)} \{R_1^\dagger\} \right\}, \quad (43)$$

$$\Delta_2^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \max_{0 < R_1 < R_1^*} \left\{ \sup_{(R_1, R_2) \in \underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \{R_2\} - \sup_{(R_1, R_2^\dagger) \in \underline{\mathcal{R}}(0,0)} \{R_2^\dagger\} \right\}, \quad (44)$$

$$\Delta_1^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \max_{0 < R_2 < R_2^\dagger} \left\{ \sup_{(R_1, R_2) \in \overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \{R_1\} - \sup_{(R_1^\dagger, R_2) \in \overline{\mathcal{R}}(0,0)} \{R_1^\dagger\} \right\}, \text{ and} \quad (45)$$

$$\Delta_2^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \max_{0 < R_1 < R_1^\dagger} \left\{ \sup_{(R_1, R_2) \in \overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \{R_2\} - \sup_{(R_1, R_2^\dagger) \in \overline{\mathcal{R}}(0,0)} \{R_2^\dagger\} \right\}, \quad (46)$$

with

$$R_1^* = \sup_{(r_1, r_2) \in \underline{\mathcal{R}}(0,0)} r_1, \quad (47)$$

$$R_2^* = \sup_{(r_1, r_2) \in \underline{\mathcal{R}}(0,0)} r_2, \quad (48)$$

$$R_1^\dagger = \sup_{(r_1, r_2) \in \overline{\mathcal{R}}(0,0)} r_1, \text{ and} \quad (49)$$

$$R_2^\dagger = \sup_{(r_1, r_2) \in \overline{\mathcal{R}}(0,0)} r_2. \quad (50)$$

Alternatively, the maximum improvements of the sum-rate  $\Sigma^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  and  $\Sigma^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  with respect to the case without feedback are

$$\Sigma^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \sup_{(R_1, R_2) \in \underline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \left\{ R_1 + R_2 \right\} - \sup_{(R_1^\dagger, R_2^\dagger) \in \underline{\mathcal{R}}(0,0)} \left\{ R_1^\dagger + R_2^\dagger \right\}, \text{ and} \quad (51)$$

$$\Sigma^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2) = \sup_{(R_1, R_2) \in \overline{\mathcal{R}}(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)} \left\{ R_1 + R_2 \right\} - \sup_{(R_1^\dagger, R_2^\dagger) \in \overline{\mathcal{R}}(0,0)} \left\{ R_1^\dagger + R_2^\dagger \right\}. \quad (52)$$

### B. Approximate Thresholds on the Feedback SNRs

In Sec. II-C, the connections between the LD-IC-NOF and the G-IC-NOF were discussed. Using these connections, a G-IC with fixed parameters  $(\overrightarrow{\text{SNR}}_1, \overrightarrow{\text{SNR}}_2, \text{INR}_{12}, \text{INR}_{21})$  is approximated by an LD-IC with parameters  $\overrightarrow{n}_{11} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{SNR}}_1) \rfloor$ ,  $\overrightarrow{n}_{22} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{SNR}}_2) \rfloor$ ,  $\overrightarrow{n}_{12} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{INR}}_{21}) \rfloor$  and  $\overrightarrow{n}_{21} = \lfloor \frac{1}{2} \log_2(\overrightarrow{\text{INR}}_{12}) \rfloor$ . From this observation, the results from Theorem 1 - Theorem 4 can be used to determine the feedback SNR thresholds beyond which either an individual rate or the sum-rate is improved in the original G-IC-NOF. The procedure consists on using the equalities  $\overleftarrow{n}_{ii} = \lfloor \frac{1}{2} \log_2(\overleftarrow{\text{SNR}}_i) \rfloor$ , with  $i \in \{1, 2\}$ . Hence, the corresponding thresholds in the G-IC can be approximated by:

$$\overleftarrow{\text{SNR}}_i^* = 2^{2\overleftarrow{n}_{ii}} \quad (53a)$$

$$\overleftarrow{\text{SNR}}_i^\dagger = 2^{2\overleftarrow{n}_{ii}^\dagger} \text{ and} \quad (53b)$$

$$\overleftarrow{\text{SNR}}_i^\dagger = 2^{2\overleftarrow{n}_{ii}^\dagger}. \quad (53c)$$

When the corresponding LD-IC-NOF is such that its capacity region can be improved when  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^*$  (Theorem 1), for a given  $i \in \{1, 2\}$ , it is expected that either the achievability

or converse regions of the original G-IC-NOF become larger when  $\overleftarrow{\text{SNR}}_i > \overleftarrow{\text{SNR}}_i^*$ . Similarly, when the corresponding LD-IC-NOF is such that  $\Delta_i(\overleftarrow{n}_{ii}) > 0$  or  $\Delta_i(\overleftarrow{n}_{jj}) > 0$ , it is expected to observe an improvement on the individual rate  $R_i$  by either using feedback in transmitter-receiver pair  $i$ , with  $\overleftarrow{\text{SNR}}_i > \overleftarrow{\text{SNR}}_i^\dagger$  or by using feedback in transmitter-receiver pair  $j$ , with  $\overleftarrow{\text{SNR}}_j > \overleftarrow{\text{SNR}}_j^*$ . In the case of the sum-rate, when the corresponding LD-IC-NOF is such that  $\Sigma(\overleftarrow{n}_{ii}) > 0$  using feedback in transmitter-receiver pair  $i$ , with  $\overleftarrow{n}_{ii} > \overleftarrow{n}_{ii}^+$ , (Theorem 4), it is expected to observe an improvement on the sum-rate by using feedback in transmitter-receiver pair  $i$ , with  $\overleftarrow{\text{SNR}}_i > \overleftarrow{\text{SNR}}_i^+$ . Finally, when no improvement in a given metric is observed in the LD-IC-NOF, i.e.,  $\Delta_1(\overleftarrow{n}_{11}) = 0$ ,  $\Delta_1(\overleftarrow{n}_{22}) = 0$ ,  $\Delta_2(\overleftarrow{n}_{11}) = 0$ ,  $\Delta_2(\overleftarrow{n}_{22}) = 0$ ,  $\Sigma(\overleftarrow{n}_{11}) = 0$ , or  $\Sigma(\overleftarrow{n}_{22}) = 0$ , only a negligible improvement (if any) is observed in the corresponding metric of the G-IC-NOF. For instance, when  $\Delta_1(\overleftarrow{n}_{11}) = 0$ , it is expected that  $\Delta_1^C(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$  and  $\Delta_1^A(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$ , with  $\epsilon > 0$  small. Similarly, when  $\Delta_2(\overleftarrow{n}_{11}) = 0$ , it is expected that  $\Delta_2^C(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$  and  $\Delta_2^A(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$ . Finally, when  $\Sigma(\overleftarrow{n}_{11}) = 0$ , it is expected that  $\Sigma^C(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$  and  $\Sigma^A(\overleftarrow{\text{SNR}}_1, 0) < \epsilon$ .

### C. Examples

The following examples highlight the relevance of the approximations in (53).

*Example 4: Consider a G-IC with parameters  $\overrightarrow{\text{SNR}}_1 = 44\text{dB}$ ,  $\overrightarrow{\text{SNR}}_2 = 44\text{dB}$ ,  $\text{INR}_{12} = 20\text{dB}$ , and  $\text{INR}_{21} = 33\text{dB}$ .*

The linear deterministic approximation to the G-IC in Example 4 is the one presented in Example 1. Hence,  $\overleftarrow{n}_{11}^* = \overleftarrow{n}_{11}^\dagger = \overleftarrow{n}_{11}^+ = 5$  and  $\overleftarrow{n}_{22}^* = \overleftarrow{n}_{22}^\dagger = \overleftarrow{n}_{22}^+ = 3$ . This implies that  $\overleftarrow{\text{SNR}}_1^* = \overleftarrow{\text{SNR}}_1^\dagger = \overleftarrow{\text{SNR}}_1^+ = 30\text{dB}$  and  $\overleftarrow{\text{SNR}}_2^* = \overleftarrow{\text{SNR}}_2^\dagger = \overleftarrow{\text{SNR}}_2^+ = 18\text{dB}$ .

Figure 6 shows that significant improvements on the metrics  $\Delta_i^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$ ,  $\Delta_i^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$ ,  $\Sigma^A(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  and  $\Sigma^C(\overleftarrow{\text{SNR}}_1, \overleftarrow{\text{SNR}}_2)$  are obtained when the feedback SNRs are beyond the corresponding thresholds. More importantly, negligible effects are observed when  $\overleftarrow{\text{SNR}}_1 < \overleftarrow{\text{SNR}}_1^\dagger$  and  $\overleftarrow{\text{SNR}}_2 < \overleftarrow{\text{SNR}}_2^*$ .

*Example 5: Consider a G-IC with parameters  $\overrightarrow{\text{SNR}}_1 = 33\text{dB}$ ,  $\overrightarrow{\text{SNR}}_2 = 9\text{dB}$ ,  $\text{INR}_{12} = 20\text{dB}$ , and  $\text{INR}_{21} = 27\text{dB}$ .*

The linear deterministic approximation to the G-IC in Example 5 is the one presented in Example 3. Hence,  $\overleftarrow{n}_{11}^* = 3$ , which implies that  $\overleftarrow{\text{SNR}}_1^* = 18\text{dB}$ . It follows from the LD-IC that using feedback in transmitter-receiver pair 1 exclusively increases the individual rate  $R_2$ . This is

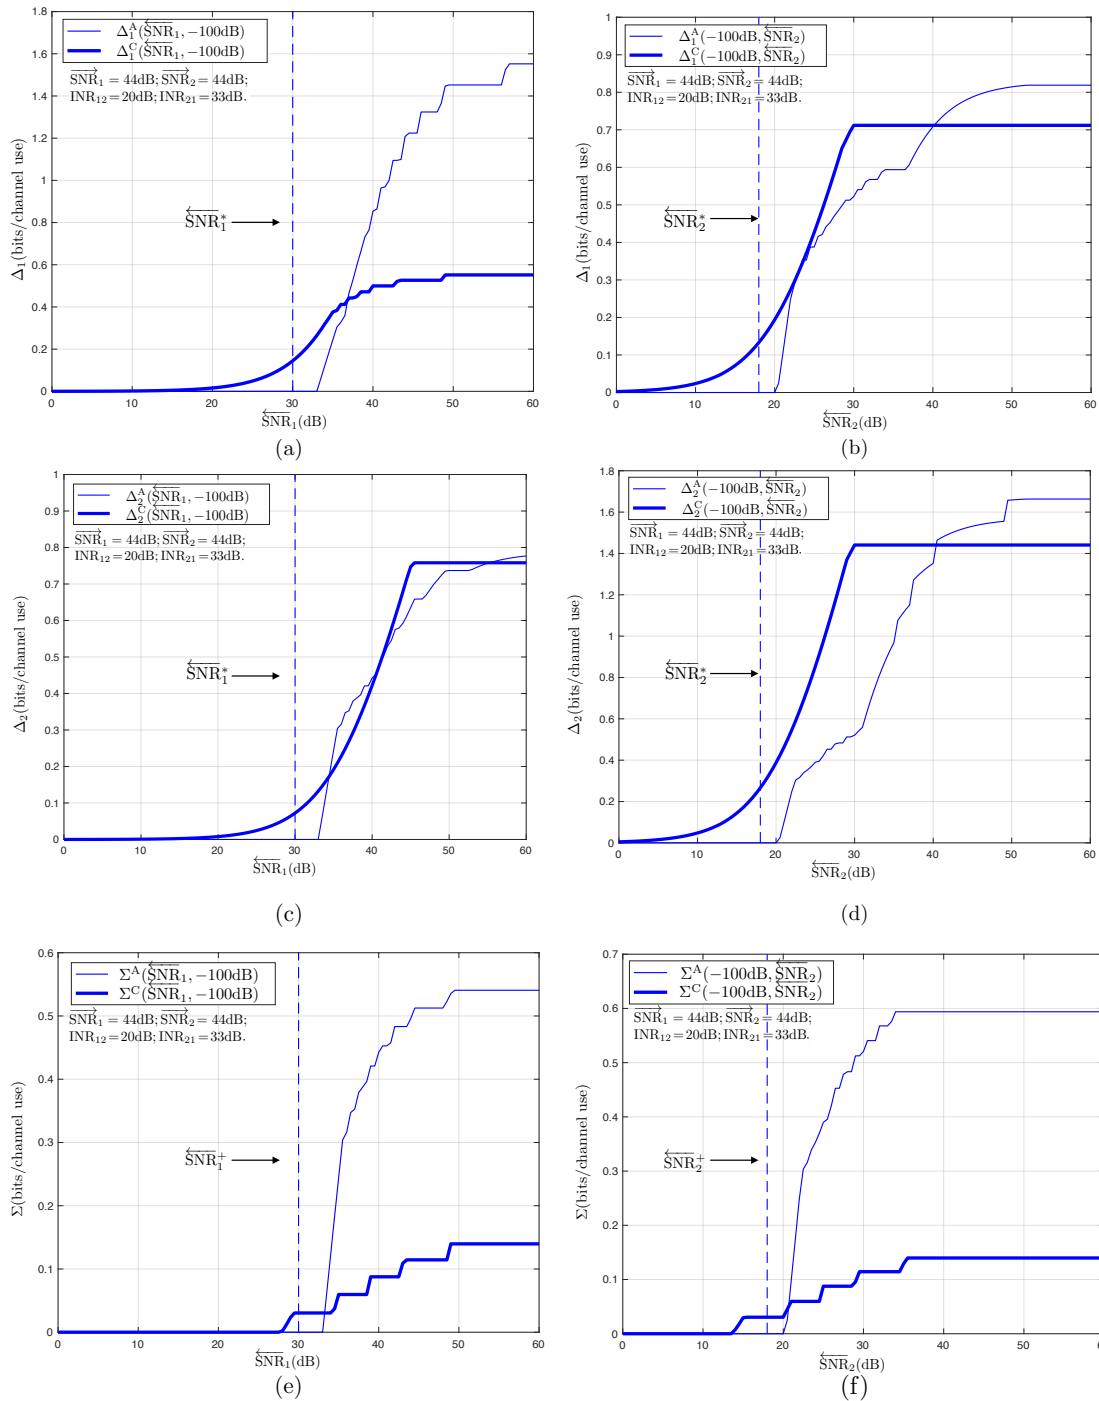


Fig. 6. Improvement metrics  $\Delta_i^A$ ,  $\Delta_i^C$ ,  $\Sigma^A$ , and  $\Sigma^C$  as functions of  $\overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$ , with  $i \in \{1, 2\}$ , for Example 4.

observed in Figure 7c. Note that the improvement in the individual rate  $R_2$  for all  $\overleftarrow{\text{SNR}}_1 < \overleftarrow{\text{SNR}}_1^*$  is negligible. Significant improvement is observed only beyond the threshold  $\overleftarrow{\text{SNR}}_1^*$ .

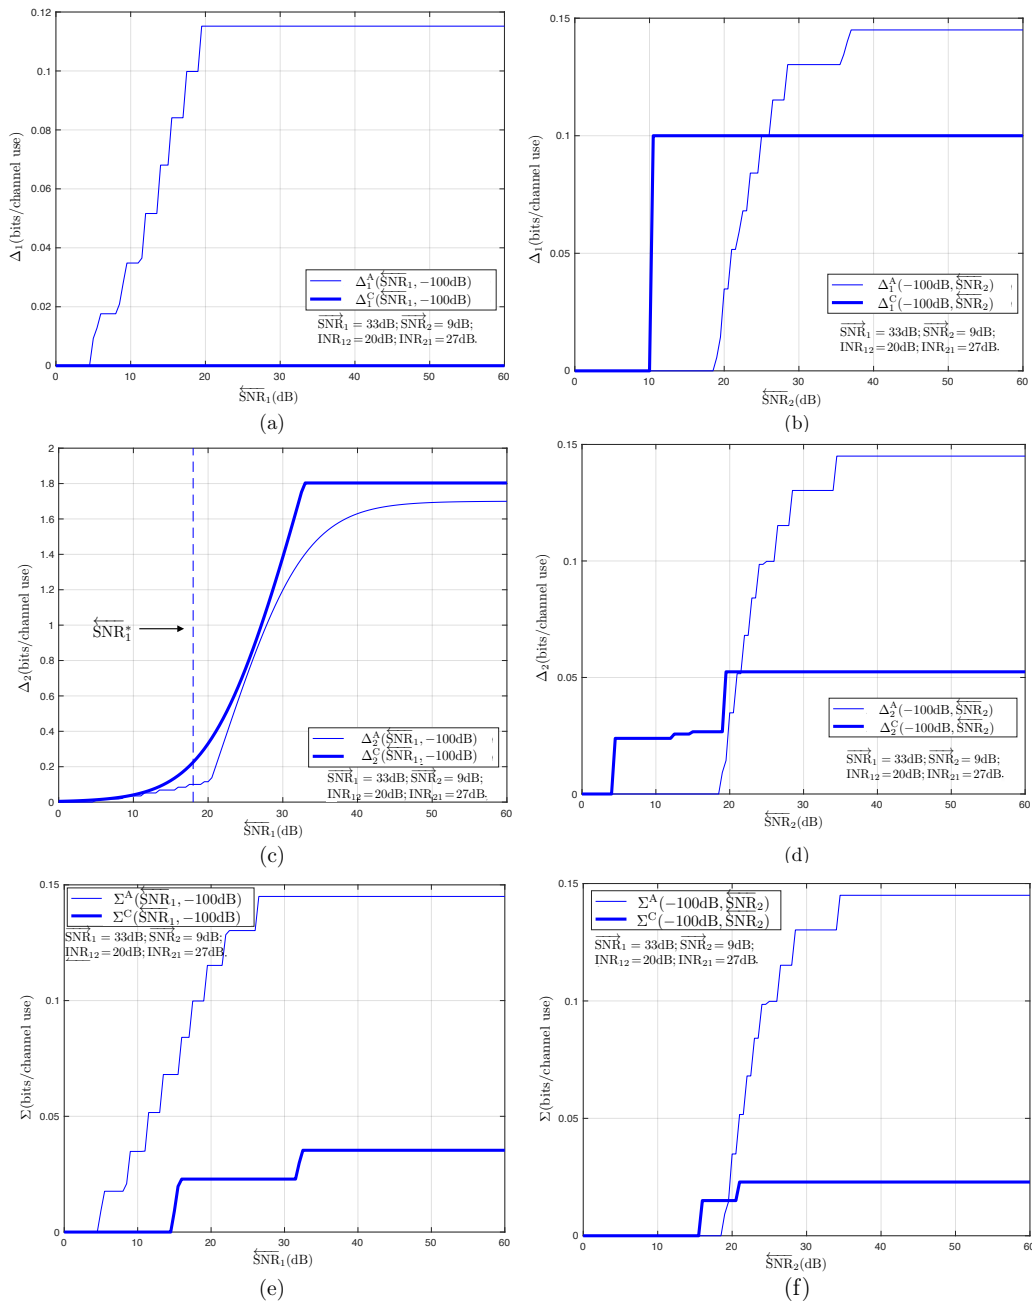


Fig. 7. Improvement metrics  $\Delta_i^A$ ,  $\Delta_i^C$ ,  $\Sigma^A$ , and  $\Sigma^C$  as functions of  $\overleftarrow{\text{SNR}}_1$  and  $\overleftarrow{\text{SNR}}_2$ , with  $i \in \{1, 2\}$ , for Example 5.

Note also that using feedback in either transmitter-receiver pair does not improve the rate  $R_1$  in the LD-IC-NOF, i.e.,  $\Delta_1(\overleftarrow{\eta}_{11}) = \Delta_1(\overleftarrow{\eta}_{22}) = 0$ . This is also verified in the G-IC-NOF by Figure 7a, Figure 7b, and Figure 7d, where  $\Delta_1^A(-100\text{dB}, \overleftarrow{\text{SNR}}_2) < 0.15$  and  $\Delta_1^C(-100\text{dB}, \overleftarrow{\text{SNR}}_2) < 0.1$ .

Finally, note that using feedback in either transmitter-receiver pair does not increase the sum-rate in the LD-IC-NOF, i.e.,  $\Sigma(\overleftarrow{n}_{11}) = \Sigma(\overleftarrow{n}_{22}) = 0$ . This is also verified in the G-IC-NOF by Figure 7e and Figure 7f, where  $\Sigma^A(\overleftarrow{\text{SNR}}_1, -100\text{dB}) < 0.15$ ,  $\Sigma^C(\overleftarrow{\text{SNR}}_1, -100\text{dB}) < 0.05$ ,  $\Sigma^A(-100\text{dB}, \overleftarrow{\text{SNR}}_2) < 0.15$ , and  $\Sigma^C(-100\text{dB}, \overleftarrow{\text{SNR}}_2) < 0.05$ .

## VI. ACKNOWLEDGMENTS

The authors gratefully acknowledge the constructive comments and suggestions made by the editor and the reviewers aiming to improve the clarity of this paper.

## VII. CONCLUSIONS

In this paper, for any 4-tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}) \in \mathbb{N}^4$ , the exact values on the feedback parameters  $\overleftarrow{n}_{11}$  and  $\overleftarrow{n}_{22}$  of the two-user LD-IC-NOF beyond which the capacity region can be enlarged are characterized. That is, the exact values of  $\overleftarrow{n}_{11}$  (resp.  $\overleftarrow{n}_{22}$ ) for which  $\mathcal{C}(0, 0) \subset \mathcal{C}(\overleftarrow{n}_{11}, 0)$  (resp.  $\mathcal{C}(0, 0) \subset \mathcal{C}(0, \overleftarrow{n}_{22})$ ) holds with strict inclusion. Using these results from the LD approximation, the SNRs in the feedback links beyond which feedback plays a significant role in terms of increasing the individual rates or the sum-rate in the G-IC are identified. The relevance of this work lies on the fact that it allows identifying a number of scenarios in any G-IC for which one of the following statements is true: (a) Feedback does not enlarge the capacity region; (b) Feedback enlarges the capacity region and the sum-rate is higher than the largest sum-rate without feedback; and (c) Feedback enlarges the capacity region but no significant improvement is observed in the sum-rate.

## APPENDIX A

### PROOF OF THEOREM 1: ENLARGEMENT OF THE CAPACITY REGION BY USING FEEDBACK IN ONE TRANSMITTER-RECEIVER PAIR

The proof of Theorem 1 is obtained by comparing  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  (resp.  $\mathcal{C}(0, \overleftarrow{n}_{22})$ ) and  $\mathcal{C}(0, 0)$ , with fixed parameters  $\vec{n}_{11}$ ,  $\vec{n}_{22}$ ,  $n_{12}$ , and  $n_{21}$ . More specifically, for each tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , the exact value  $\overleftarrow{n}_{11}^*$  (resp.  $\overleftarrow{n}_{22}^*$ ) for which any  $\overleftarrow{n}_{11} > \overleftarrow{n}_{11}^*$  (resp.  $\overleftarrow{n}_{22} > \overleftarrow{n}_{22}^*$ ) ensures  $\mathcal{C}(0, 0) \subset \mathcal{C}(\overleftarrow{n}_{11}, 0)$  (resp.  $\mathcal{C}(0, 0) \subset \mathcal{C}(0, \overleftarrow{n}_{22})$ ) is calculated. This procedure is tedious and repetitive, and thus, in this appendix only one combination of interference regimes is studied, e.g., VWIR - VWIR.



*Proof:*

Consider that both transmitter-receiver pairs are in VWIR, that is,

$$\alpha_1 = \frac{n_{12}}{\vec{n}_{11}} \leq \frac{1}{2} \text{ and } \alpha_2 = \frac{n_{21}}{\vec{n}_{22}} \leq \frac{1}{2}. \quad (54)$$

Under conditions (54), it follows from Theorem 1 in [17] that  $\mathcal{C}(0, 0)$  is the set of non-negative rate pairs  $(R_1, R_2)$  that satisfy

$$R_1 \leq \vec{n}_{11} \triangleq \theta_1, \quad (55a)$$

$$R_2 \leq \vec{n}_{22} \triangleq \theta_2, \quad (55b)$$

$$R_1 + R_2 \leq \min(\max(\vec{n}_{22}, n_{12}) + \vec{n}_{11} - n_{12}, \max(\vec{n}_{11}, n_{21}) + \vec{n}_{22} - n_{21}) \triangleq \theta_3, \quad (55c)$$

$$R_1 + R_2 \leq \max(\vec{n}_{11} - n_{12}, n_{21}) + \max(\vec{n}_{22} - n_{21}, n_{12}) \triangleq \theta_4, \quad (55d)$$

$$2R_1 + R_2 \leq \max(\vec{n}_{11}, n_{21}) + \vec{n}_{11} - n_{12} + \max(\vec{n}_{22} - n_{21}, n_{12}) \triangleq \theta_5, \quad (55e)$$

$$R_1 + 2R_2 \leq \max(\vec{n}_{22}, n_{12}) + \vec{n}_{22} - n_{21} + \max(n_{21}, \vec{n}_{11} - n_{12}) \triangleq \theta_6. \quad (55f)$$

Note that for all  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}, \overleftarrow{n}_{22}) \in \mathbb{N}^5$  and  $\overleftarrow{n}_{11} > \max(\vec{n}_{11}, n_{12})$ , it follows that  $\mathcal{C}(\overleftarrow{n}_{11}, \overleftarrow{n}_{22}) = \mathcal{C}(\max(\vec{n}_{11}, n_{12}), \overleftarrow{n}_{22})$ . Hence, in the following, the analysis is restricted to the following condition:

$$\overleftarrow{n}_{11} \leq \max(\vec{n}_{11}, n_{12}). \quad (56)$$

Under conditions (54) and (56), it follows from Theorem 1 in [17] that  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  is the set of non-negative rate pairs  $(R_1, R_2)$  that satisfy

$$R_1 \leq \overleftarrow{n}_{11}, \quad (57a)$$

$$R_2 \leq \vec{n}_{22}, \quad (57b)$$

$$R_1 + R_2 \leq \min(\max(\vec{n}_{22}, n_{12}) + \vec{n}_{11} - n_{12}, \max(\vec{n}_{11}, n_{21}) + \vec{n}_{22} - n_{21}), \quad (57c)$$

$$R_1 + R_2 \leq \max(\vec{n}_{11} - n_{12}, n_{21}, \overleftarrow{n}_{11}) + \max(\vec{n}_{22} - n_{21}, n_{12}) \triangleq \theta_7, \quad (57d)$$

$$2R_1 + R_2 \leq \max(\vec{n}_{11}, n_{21}) + \vec{n}_{11} - n_{12} + \max(\vec{n}_{22} - n_{21}, n_{12}), \quad (57e)$$

$$R_1 + 2R_2 \leq \max(\vec{n}_{22}, n_{12}) + \vec{n}_{22} - n_{21} + \max(\vec{n}_{11} - n_{12}, n_{21}, \overleftarrow{n}_{11}) \triangleq \theta_8. \quad (57f)$$

When comparing  $\mathcal{C}(0, 0)$  and  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$ , note that (55a), (55b), (55c), and (55e) are equivalent to (57a), (57b), (57c), and (57e), respectively. Under these observations, the region  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  is

greater than the region  $\mathcal{C}(0, 0)$  if at least one of the following conditions is true:

$$\min(\theta_3, \theta_4, \theta_1 + \theta_2, \theta_5, \theta_6) < \theta_7 < \min(\theta_3, \theta_1 + \theta_2, \theta_5, \theta_8), \quad (58a)$$

$$\min(\theta_6, \theta_1 + 2\theta_2, \theta_2 + \theta_3, \theta_4 + \theta_2) < \theta_8 < \min(\theta_1 + 2\theta_2, \theta_2 + \theta_3, \theta_2 + \theta_7). \quad (58b)$$

Condition (58a) implies that the active sum-rate bound in  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  is greater than the active sum-rate bound in  $\mathcal{C}(0, 0)$ . Condition (58b) implies that the active weighted sum-rate bound on  $R_1 + 2R_2$  in  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  is greater than the active weighted sum-rate bound on  $R_1 + 2R_2$  in  $\mathcal{C}(0, 0)$ .

To simplify the inequalities containing the operator  $\max(\cdot, \cdot)$  in (57) and (55), the following 4 cases are identified:

$$\text{Case 1 : } \overrightarrow{n}_{11} - n_{12} < n_{21} \text{ and } \overrightarrow{n}_{22} - n_{21} < n_{12}; \quad (59)$$

$$\text{Case 2 : } \overrightarrow{n}_{11} - n_{12} < n_{21} \text{ and } \overrightarrow{n}_{22} - n_{21} \geq n_{12}; \quad (60)$$

$$\text{Case 3: } \overrightarrow{n}_{11} - n_{12} \geq n_{21} \text{ and } \overrightarrow{n}_{22} - n_{21} < n_{12}; \text{ and} \quad (61)$$

$$\text{Case 4: } \overrightarrow{n}_{11} - n_{12} \geq n_{21} \text{ and } \overrightarrow{n}_{22} - n_{21} \geq n_{12}. \quad (62)$$

Case 1: Under assumptions (54) and (59), this case is not possible.

Case 2: Under assumptions (54) and (60), this case is possible.

Plugging (60) into (57) yields:

$$R_1 + R_2 \leq \min(\overrightarrow{n}_{22} + \overrightarrow{n}_{11} - n_{12}, \max(\overrightarrow{n}_{11}, n_{21}) + \overrightarrow{n}_{22} - n_{21}), \quad (63a)$$

$$R_1 + R_2 \leq \max(n_{21}, \overleftarrow{n}_{11}) + \overrightarrow{n}_{22} - n_{21}, \quad (63b)$$

$$R_1 + 2R_2 \leq 2\overrightarrow{n}_{22} - n_{21} + \max(n_{21}, \overleftarrow{n}_{11}). \quad (63c)$$

Plugging (60) into (55) yields:

$$R_1 + R_2 \leq \overrightarrow{n}_{22}, \quad (64a)$$

$$R_1 + 2R_2 \leq 2\overrightarrow{n}_{22}. \quad (64b)$$

To simplify the inequalities containing the operator  $\max(\cdot, \cdot)$  in (63), the following 2 cases are identified:

$$\text{Case 2a : } \overrightarrow{n}_{11} > n_{21}; \text{ and} \quad (65)$$

$$\text{Case 2b : } \overrightarrow{n}_{11} \leq n_{21}. \quad (66)$$

Case 2a: Plugging (65) into (63) yields:

$$R_1 + R_2 \leq \vec{n}_{11} + \vec{n}_{22} - n_{21}, \quad (67a)$$

$$R_1 + R_2 \leq \max(n_{21}, \overleftarrow{n}_{11}) + \vec{n}_{22} - n_{21}, \quad (67b)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \max(n_{21}, \overleftarrow{n}_{11}). \quad (67c)$$

Comparing inequalities (67a) and (67b) with inequality (64a), it can be verified that  $\min(\vec{n}_{11} + \vec{n}_{22} - n_{21}, \max(n_{21}, \overleftarrow{n}_{11}) + \vec{n}_{22} - n_{21}) > \vec{n}_{22}$ , i.e., condition (58a) holds, when  $\overleftarrow{n}_{11} > n_{21}$ . Comparing inequalities (67c) and (64b), it can be verified that  $2\vec{n}_{22} - n_{21} + \max(n_{21}, \overleftarrow{n}_{11}) > 2\vec{n}_{22}$ , i.e., condition (58b) holds, when  $\overleftarrow{n}_{11} > n_{21}$ . Therefore,  $\overleftarrow{n}_{11}^* = n_{21}$  under assumptions (54), (56), (60), and (65).

Case 2b: Plugging (66) into (63) yields:

$$R_1 + R_2 \leq \vec{n}_{22}, \quad (68a)$$

$$R_1 + R_2 \leq \max(n_{21}, \overleftarrow{n}_{11}) + \vec{n}_{22} - n_{21}, \quad (68b)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \max(n_{21}, \overleftarrow{n}_{11}). \quad (68c)$$

Comparing inequalities (68a) and (68b) with inequality (64a), it can be verified that  $\min(\vec{n}_{22}, \max(n_{21}, \overleftarrow{n}_{11}) + \vec{n}_{22} - n_{21}) = \vec{n}_{22}$ , i.e., condition (58a) does not hold, for all  $\overleftarrow{n}_{11} \in \mathbb{N}$ . Comparing inequalities (68c) and (64b) it can be verified that  $2\vec{n}_{22} - n_{21} + \max(n_{21}, \overleftarrow{n}_{11}) > 2\vec{n}_{22}$ , when  $\overleftarrow{n}_{11} > n_{21}$ , which implies that  $\overleftarrow{n}_{11} > \max(\vec{n}_{11}, n_{12})$ . However, under the assumptions (54), (56), (60), and (66), the bounds (64b) and (68c) are not active. Hence, condition (58b) does not hold. Therefore, for all  $\overleftarrow{n}_{11} \in \mathbb{N}$ , the capacity region cannot be enlarged under assumptions (54), (56), (60), and (66).

Case 3: Under assumptions (54) and (61), this case is possible.

Plugging (61) into (57) yields:

$$R_1 + R_2 \leq \min(\max(\vec{n}_{22}, n_{12}) + \vec{n}_{11} - n_{12}, \vec{n}_{11} + \vec{n}_{22} - n_{21}), \quad (69a)$$

$$R_1 + R_2 \leq \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}) + n_{12}, \quad (69b)$$

$$R_1 + 2R_2 \leq \max(\vec{n}_{22}, n_{12}) + \vec{n}_{22} - n_{21} + \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}). \quad (69c)$$

Plugging (61) into (55) yields:

$$R_1 + R_2 \leq \vec{n}_{11}, \quad (70a)$$

$$R_1 + 2R_2 \leq \max(\vec{n}_{22}, n_{12}) + \vec{n}_{22} - n_{21} + \vec{n}_{11} - n_{12}. \quad (70b)$$

To simplify the inequalities containing the operator  $\max(\cdot, \cdot)$  in (69) and (70), the following 2 cases are identified:

$$\text{Case 3a : } \vec{n}_{22} > n_{12}; \text{ and} \quad (71)$$

$$\text{Case 3b : } \vec{n}_{22} \leq n_{12}. \quad (72)$$

Case 3a: Plugging (71) into (69) yields:

$$R_1 + R_2 \leq \vec{n}_{22} + \vec{n}_{11} - n_{12}, \quad (73a)$$

$$R_1 + R_2 \leq \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}) + n_{12}, \quad (73b)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}). \quad (73c)$$

Plugging (71) into (70) yields:

$$R_1 + R_2 \leq \vec{n}_{11}, \quad (74a)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \vec{n}_{11} - n_{12}. \quad (74b)$$

Comparing inequalities (73a) and (73b) with inequality (74a), it can be verified that  $\min(\vec{n}_{22} + \vec{n}_{11} - n_{12}, \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}) + n_{12}) > \vec{n}_{11}$ , i.e., condition (58a) holds, when  $\overleftarrow{n}_{11} > \vec{n}_{11} - n_{12}$ . Comparing inequalities (73c) and (74b), it can be verified that  $2\vec{n}_{22} - n_{21} + \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}) > 2\vec{n}_{22} - n_{21} + \vec{n}_{11} - n_{12}$ , i.e., condition (58b) holds, when  $\overleftarrow{n}_{11} > \vec{n}_{11} - n_{12}$ . Therefore,  $\overleftarrow{n}_{11}^* = \vec{n}_{11} - n_{12}$  under assumptions (54), (56), (61), and (71).

Case 3b: Plugging (72) into (69) yields:

$$R_1 + R_2 \leq \vec{n}_{11}, \quad (75a)$$

$$R_1 + R_2 \leq \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}) + n_{12}, \quad (75b)$$

$$R_1 + 2R_2 \leq n_{12} + \vec{n}_{22} - n_{21} + \max(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}). \quad (75c)$$

Plugging (71) into (70) yields:

$$R_1 + R_2 \leq \vec{n}_{11}, \quad (76a)$$

$$R_1 + 2R_2 \leq \vec{n}_{22} - n_{21} + \vec{n}_{11}. \quad (76b)$$

Comparing inequalities (75a) and (75b) with inequality (76a), it can be verified that  $\min\left(\vec{n}_{11}, \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right) + n_{12}\right) = \vec{n}_{11}$ , i.e., condition (58a) does not hold, for all  $\overleftarrow{n}_{11} \in \mathbb{N}$ . Comparing inequalities (75c) and (76b), it can be verified that  $n_{12} + \vec{n}_{22} - n_{21} + \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right) > \vec{n}_{22} - n_{21} + \vec{n}_{11}$ , i.e., condition (58b) holds, when  $\overleftarrow{n}_{11} > \vec{n}_{11} - n_{12}$ . Therefore,  $\overleftarrow{n}_{11}^* = \vec{n}_{11} - n_{12}$  under conditions (54), (56), (61), and (72).

Case 4: Under conditions (54) and (62), this case is possible.

Plugging (62) into (57) yields:

$$R_1 + R_2 \leq \min\left(\vec{n}_{22} + \vec{n}_{11} - n_{12}, \vec{n}_{11} + \vec{n}_{22} - n_{21}\right), \quad (77a)$$

$$R_1 + R_2 \leq \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right) + \vec{n}_{22} - n_{21}, \quad (77b)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right). \quad (77c)$$

Plugging (62) into (55) yields:

$$R_1 + R_2 \leq \vec{n}_{11} - n_{12} + \vec{n}_{22} - n_{21}, \quad (78a)$$

$$R_1 + 2R_2 \leq 2\vec{n}_{22} - n_{21} + \vec{n}_{11} - n_{12}. \quad (78b)$$

Comparing inequalities (77a) and (77b) with inequality (78a), it can be verified that  $\min\left(\min\left(\vec{n}_{22} + \vec{n}_{11} - n_{12}, \vec{n}_{11} + \vec{n}_{22} - n_{21}\right), \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right) + \vec{n}_{22} - n_{21}\right) > \vec{n}_{11} - n_{12} + \vec{n}_{22} - n_{21}$ , i.e., condition (58a) holds, when  $\overleftarrow{n}_{11} > \vec{n}_{11} - n_{12}$ . Comparing inequalities (77c) and (78b), it can be verified that:  $2\vec{n}_{22} - n_{21} + \max\left(\vec{n}_{11} - n_{12}, \overleftarrow{n}_{11}\right) > 2\vec{n}_{22} - n_{21} + \vec{n}_{11} - n_{12}$ , i.e., condition (58b) holds, when  $\overleftarrow{n}_{11} > \vec{n}_{11} - n_{12}$ .

Therefore,  $\overleftarrow{n}_{11}^* = \vec{n}_{11} - n_{12}$  under conditions (54), (56), and (62).

From all the observations above, when both transmitter-receiver pairs are in VWIR (event  $E_1$  is True), it follows that when  $\overleftarrow{n}_{11} > \overleftarrow{n}_{11}^*$  and  $\vec{n}_{11} > n_{21}$  (event  $E_{8,1}$  is True) with  $\overleftarrow{n}_{11}^* = \max\left(\vec{n}_{11} - n_{12}, n_{21}\right)$ , then  $\mathcal{C}(0, 0) \subset \mathcal{C}(\overleftarrow{n}_{11}, 0)$ . Otherwise  $\mathcal{C}(0, 0) = \mathcal{C}(\overleftarrow{n}_{11}, 0)$ . Note that when events  $E_1$  and  $E_{8,1}$  hold simultaneously true, then the event  $S_{1,1}$  is true, which verifies the statement of Theorem 1. The same procedure can be applied for all the other combinations of interference regimes. This completes the proof.  $\blacksquare$

## APPENDIX B

PROOF OF THEOREM 2: IMPROVEMENT OF THE INDIVIDUAL RATE  $R_i$  BY USING FEEDBACK  
IN LINK  $i$ 

The proof of Theorem 2 is obtained by comparing  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  (resp.  $\mathcal{C}(0, \overleftarrow{n}_{22})$ ) and  $\mathcal{C}(0, 0)$ , for all possible parameters  $\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}$ , and  $\overleftarrow{n}_{11}$  (resp.  $\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}$ , and  $\overleftarrow{n}_{22}$ ). More specifically, for each tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , the exact value  $\overleftarrow{n}_{11}^\dagger$  (resp.  $\overleftarrow{n}_{22}^\dagger$ ) for which any  $\overleftarrow{n}_{11} > \overleftarrow{n}_{11}^\dagger$  (resp.  $\overleftarrow{n}_{22} > \overleftarrow{n}_{22}^\dagger$ ) ensures an improvement on  $R_1$  (resp.  $R_2$ ), i.e.,  $\Delta_1(\overleftarrow{n}_{11}, 0) > 0$  (resp.  $\Delta_2(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}, 0, \overleftarrow{n}_{22}) > 0$ ), is calculated. This procedure is tedious and repetitive, and thus, in this appendix only one combination of interference regimes is studied, e.g., VWIR - VWIR.

*Proof:*

Consider that both transmitter-receiver pairs are in VWIR, i.e., conditions (54) hold. Under these conditions, the capacity regions  $\mathcal{C}(0, 0)$  and  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  are given by (55) and (57), respectively. When comparing  $\mathcal{C}(0, 0)$  and  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$ , note that (55a), (55b), (55c), and (55e) are equivalent to (57a), (57b), (57c), and (57e), respectively. In this case any improvement on  $R_1$  is produced by an improvement on  $R_1 + R_2$  (condition (58a)) or  $2R_1 + R_2$  (condition (58a)), and thus, the proof of Theorem 2 in these particular interference regimes follows exactly the same steps in Theorem 1. This completes the proof. ■

## APPENDIX C

PROOF OF THEOREM 4: IMPROVEMENT OF THE SUM-RATE CAPACITY BY USING FEEDBACK  
IN ONE TRANSMITTER-RECEIVER PAIR

The proof of Theorem 4 is obtained by comparing  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  (resp.  $\mathcal{C}(0, \overleftarrow{n}_{22})$ ) and  $\mathcal{C}(0, 0)$ , for all possible parameters  $\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}$ , and  $\overleftarrow{n}_{11}$  (resp.  $\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21}$ , and  $\overleftarrow{n}_{22}$ ). More specifically, for each tuple  $(\vec{n}_{11}, \vec{n}_{22}, n_{12}, n_{21})$ , the exact value  $\overleftarrow{n}_{11}^+$  (resp.  $\overleftarrow{n}_{22}^+$ ) for which any  $\overleftarrow{n}_{11} > \overleftarrow{n}_{11}^+$  (resp.  $\overleftarrow{n}_{22} > \overleftarrow{n}_{22}^+$ ) ensures an improvement on  $R_1 + R_2$ , i.e.,  $\Sigma(\overleftarrow{n}_{11}, 0) > 0$  (resp.  $\Sigma(0, \overleftarrow{n}_{22}) > 0$ ), is calculated. This procedure is tedious and repetitive, and thus, in this appendix only one combination of interference regimes is studied, e.g., VWIR - VWIR.

*Proof:*

Consider that both transmitter-receiver pairs are in VWIR, i.e., conditions (54) hold. Under these conditions, the capacity regions  $\mathcal{C}(0, 0)$  and  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$  are given by (55) and (57), res-

pectively. When comparing  $\mathcal{C}(0, 0)$  and  $\mathcal{C}(\overleftarrow{n}_{11}, 0)$ , note that (55a), (55b), (55c), and (55e) are equivalent to (57a), (57b), (57c), and (57e), respectively.

In this case, the proof is focused on any improvement on  $R_1 + R_2$  (condition (58a)), and thus, the proof of Theorem 4 in these particular interference regimes follows exactly the same steps in Theorem 1.

From the analysis presented in Appendix A, it follows that:

Case 2a: condition (58a) holds true, when  $\overleftarrow{n}_{11} > n_{21}$  under assumptions (54), (56), (60), and (65).

Case 2b: condition (58a) does not hold true, under assumptions (54), (60), and (66).

Case 3a: condition (58a) holds true, when  $\overleftarrow{n}_{11} > \overrightarrow{n}_{11} - n_{12}$  under assumptions (54), (56), (61), and (71).

Case 3b: condition (58a) does not hold true, when  $\overleftarrow{n}_{11} > \overrightarrow{n}_{11} - n_{12}$  under assumptions (54), (56), (61), and (72).

Case 4: condition (58a) holds true, when  $\overleftarrow{n}_{11} > \overrightarrow{n}_{11} - n_{12}$  under assumptions (54), (56), and (62).

From all the observations above, when both transmitter-receiver pairs are in VWIR (event  $E_1$  is True), it follows that when  $\overleftarrow{n}_{11} > \overleftarrow{n}_{11}^+$ ,  $\overrightarrow{n}_{11} > n_{21}$  (event  $E_{8,1}$  is True),  $\overrightarrow{n}_{22} > n_{12}$  (event  $E_{8,2}$  is True),  $\overrightarrow{n}_{11} + \overrightarrow{n}_{22} > n_{12} + 2n_{21}$  (event  $E_{10,1}$  is True), and  $\overrightarrow{n}_{11} + \overrightarrow{n}_{22} > n_{21} + 2n_{12}$  (event  $E_{10,2}$  is True) with  $\overleftarrow{n}_{11}^+ = \max(\overrightarrow{n}_{11} - n_{12}, n_{21})$ , then  $\Sigma(\overleftarrow{n}_{11}, 0) > 0$ . Otherwise  $\Sigma(\overleftarrow{n}_{11}, 0) = 0$ . Note that when events  $E_1$ ,  $E_{8,1}$ ,  $E_{8,2}$ ,  $E_{10,1}$ , and  $E_{10,2}$  hold simultaneously true, then the event  $S_4$  is true, which verifies the statement of Theorem 4. The same procedure can be applied for all the other combinations of interference regimes. This completes the proof. ■

## REFERENCES

- [1] V. Quintero, S. M. Perlaza, I. Esnaola, and J.-M. Gorce, "When does channel-output feedback enlarge the capacity region of the two-user linear deterministic interference channel?" in *Proc. 11th EAI International Conference on Cognitive Radio Oriented Wireless Networks*, Grenoble, France, May. 2016.
- [2] C. E. Shannon, "Two-way communication channels," in *Proc. 4th Berkeley Symposium on Mathematical Statistics and Probability*, Berkeley, CA, USA, 1961, pp. 611–644.
- [3] R. Ahlswede, "The capacity region of a channel with two senders and two receivers," *The Annals of Probability*, vol. 2, no. 5, pp. 805–814, Oct. 1974.
- [4] A. Carleial, "A case where interference does not reduce capacity," *IEEE Trans. Inf. Theory*, vol. 21, no. 5, pp. 569–570, Sep. 1975.

- [5] H. Sato, "Two-user communication channels," *IEEE Trans. Inf. Theory*, vol. 23, no. 3, pp. 295–304, 1977.
- [6] A. Carleial, "Interference channels," *IEEE Trans. Inf. Theory*, vol. 24, no. 1, pp. 60–70, Sep. 1978.
- [7] H. Sato, "The capacity of the Gaussian interference channel under strong interference," *IEEE Trans. Inf. Theory*, vol. 27, no. 6, pp. 786–788, Nov. 1981.
- [8] T. S. Han and K. Kobayashi, "A new achievable rate region for the interference channel," *IEEE Trans. Inf. Theory*, vol. 27, no. 1, pp. 49–60, 1981.
- [9] R. H. Etkin, D. N. C. Tse, and W. Hua, "Gaussian interference channel capacity to within one bit," *IEEE Trans. Inf. Theory*, vol. 54, no. 12, pp. 5534–5562, Dec. 2008.
- [10] I. Sason, "On achievable rate regions for the Gaussian interference channel," *IEEE Trans. Inf. Theory*, vol. 50, no. 6, pp. 1345–1356, Jun. 2004.
- [11] G. Kramer, "Outer bounds on the capacity of Gaussian interference channels," *IEEE Trans. Inf. Theory*, vol. 50, no. 3, pp. 581–586, Mar. 2004.
- [12] H.-F. Chong, M. Motani, and H. K. Garg, "A comparison of two achievable rate regions for the interference channel," in *ITA Workshop*, Feb. 2006.
- [13] H.-F. Chong, M. Motani, H. K. Garg, and H. El Gamal, "On the Han-Kobayashi region for the interference channel," *IEEE Trans. Inf. Theory*, vol. 54, no. 7, pp. 3188–3195, Jul 2008.
- [14] C. E. Shannon, "The zero-error capacity of a noisy channel," *IRE Transactions on Information Theory*, vol. 2, no. 3, pp. 8–19, Sep. 1956.
- [15] C. Suh and D. N. C. Tse, "Feedback capacity of the Gaussian interference channel to within 2 bits," *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 2667–2685, May. 2011.
- [16] S.-Q. Le, R. Tandon, M. Motani, and H. V. Poor, "Approximate capacity region for the symmetric Gaussian interference channel with noisy feedback," *IEEE Trans. Inf. Theory*, vol. 61, no. 7, pp. 3737–3762, Jul. 2015.
- [17] V. Quintero, S. M. Perlaza, I. Esnaola, and J.-M. Gorce, "Approximate capacity region of the two-user Gaussian interference channel with noisy channel-output feedback," (Submitted to) *IEEE Trans. Inf. Theory*, Nov 2016. [Online]. Available: <https://arxiv.org/pdf/1611.05322.pdf>
- [18] A. Sahai, V. Aggarwal, M. Yuksel, and A. Sabharwal, "Capacity of all nine models of channel output feedback for the two-user interference channel," *IEEE Trans. Inf. Theory*, vol. 59, no. 11, pp. 6957–6979, 2013.
- [19] D. Tuninetti, "On interference channel with generalized feedback (IFC-GF)," in *Proc. of International Symposium on Information Theory (ISIT)*, Nice, France, Jun. 2007, pp. 2661–2665.
- [20] S. Yang and D. Tuninetti, "Interference channel with generalized feedback (a.k.a. with source cooperation): Part I: Achievable region," *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 2686–2710, May. 2011.
- [21] D. Tuninetti, "An outer bound region for interference channels with generalized feedback," in *IEEE Information Theory and Applications Workshop (ITA)*, Feb. 2010, pp. 1–5.
- [22] —, "An outer bound for the memoryless two-user interference channel with general cooperation," in *IEEE Information Theory Workshop (ITW)*, Sep. 2012, pp. 217–221.
- [23] A. Vahid, C. Suh, and A. S. Avestimehr, "Interference channels with rate-limited feedback," *IEEE Trans. Inf. Theory*, vol. 58, no. 5, pp. 2788–2812, May. 2012.
- [24] G. Bresler and D. N. C. Tse, "The two user Gaussian interference channel: A deterministic view," *European Transactions on Telecommunications*, vol. 19, no. 4, pp. 333–354, Apr. 2008.



- [25] C. E. Shannon, "Channels with side information at the transmitter," *IBM Journal of Research and Development*, vol. 2, no. 4, pp. 289–293, Oct. 1958.