



HAL
open science

Prediction of the vibroacoustic behavior of a submerged shell with non-axisymmetric internal substructures by a condensed transfer function method

Valentin Meyer, Laurent Maxit, J.-L. Guyader, T. Leissing

► To cite this version:

Valentin Meyer, Laurent Maxit, J.-L. Guyader, T. Leissing. Prediction of the vibroacoustic behavior of a submerged shell with non-axisymmetric internal substructures by a condensed transfer function method. *Journal of Sound and Vibration*, 2016, 360, pp.260-276. <10.1016/j.jsv.2015.09.030>. <hal-01508112>

HAL Id: hal-01508112

<https://hal.science/hal-01508112v1>

Submitted on 13 Apr 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



HAL Authorization

Prediction of the vibroacoustic behavior of a submerged shell with non-axisymmetric internal substructures by a Condensed Transfer Function method

V. Meyer^{a,b,*}, L. Maxit^a, J.-L. Guyader^a, T. Leissing^b

^a*INSA Lyon, Laboratoire Vibrations Acoustique (LVA), 25 bis av. Jean Capelle, 69210 Villeurbanne, France*

^b*DCNS Research, Rond Point de l'Artillerie de Marine, 83000 Toulon, France*

Abstract

The vibroacoustic behavior of axisymmetric stiffened shells immersed in water has been intensively studied in the past. On the contrary, little attention has been paid to the modeling of these shells coupled to non-axisymmetric internal frames. Indeed, breaking the axisymmetry couples the circumferential orders of the Fourier series and considerably increases the computational costs. In order to tackle this issue, we propose a sub-structuring approach called the Condensed Transfer Function (CTF) method that will allow assembling a model of axisymmetric stiffened shell with models of non-axisymmetric internal frames. The CTF method is developed in the general case of mechanical subsystems coupled along curves. A set of orthonormal functions called condensation functions, which depend on the curvilinear abscissa along the coupling line, is considered. This set is then used as a basis for approximating and decomposing the displacements and the applied forces at the line junctions. Thanks to the definition and

*Corresponding author

Email address: valentin.meyer@insa-lyon.fr (V. Meyer)

calculation of condensed transfer functions for each uncoupled subsystem and by using the superposition principle for passive linear systems, the behavior of the coupled subsystems can be deduced. A plane plate is considered as a test case to study the convergence of the method with respect to the type and the number of condensation functions taken into account. The CTF method is then applied to couple a submerged non-periodically stiffened shell described using the Circumferential Admittance Approach (CAA) with internal substructures described by Finite Element Method (FEM). The influence of non-axisymmetric internal substructures can finally be studied and it is shown that it tends to increase the radiation efficiency of the shell and can modify the vibrational and acoustic energy distribution.

Keywords: Admittance, Sub-structuring, Stiffened shell, Vibroacoustics, Non-axisymmetric, Numerical modeling.

1. Introduction

Modeling the vibroacoustic behavior of submerged stiffened hulls is of primary importance for several industrial applications. The Circumferential Admittance Approach (CAA) [1] is well adapted to describe the vibroacoustic behavior of a submerged shell non periodically stiffened by axisymmetric internal frames. The CAA is a substructuring approach based on the admittance principle for linear systems [2, 3], for which the admittances are defined for each subsystem and for each circumferential order. A dedicated model of the fluid loaded cylindrical shell can then be coupled with axisymmetric Finite Element models of internal frames. It allows modeling the vibroacoustic behavior of the

shell with various internal frames (ring stiffeners, axisymmetric bulkheads, end caps) on a wide frequency range, typically from 100 Hz to 1 kHz. However, this method is based on the assumption of an axisymmetric system, so that the circumferential orders can be studied individually. The vibroacoustic behavior of shells with non-axisymmetric internal structures is nevertheless of great interest for naval or aerospace applications. In the present paper, we propose therefore a method called the condensed transfer function (CTF) method to couple an axisymmetric submerged stiffened shell with non-axisymmetric internal frames. This method is based on an extension of the admittance method, allowing to assemble mechanical structures coupled along lines. As the admittances are calculated separately for each subsystem, the CAA model can be used to calculate the admittances of the submerged stiffened shell on one hand. On the other hand, the Finite Element Method (FEM) can be used to calculate the admittances of the non-axisymmetric internal frames.

In the past, different models of shell with non-axisymmetric internal structures have been proposed. Some of these studies have focused on the vibroacoustic behavior of non-axisymmetric cylindrical shells *in vacuo* [4, 5, 6, 7, 8]. Besides, other studies taking into account heavy fluid loading in the shell model can be found. Rebillard *et al.* [9] add a mass-spring system in an immersed cylinder. They solve analytically the problem from the eigenmodes of the axisymmetric cylinder *in vacuo*, include a radiation-impedance term to account for the fluid, and validate the results experimentally. Achenbach, Bjarnason and Igusa [10] study the influence of a non-axisymmetric substructure on a

similar configuration and show that the mass-spring system can heftily modify
35 the vibroacoustic behavior of the shell. Their method is based on a variational
formulation and the introduction of Lagrange coefficients to account for the
coupling forces. Depending on the frequency considered, adding such a subsystem
can either increase or decrease the amplitude of the radiated sound field
around the cylindrical shell. The same method is used to take into account floors
40 and stiffeners in a 2-D problem on an infinitely long cylindrical shell [11, 12],
to highlight the influence of non-axisymmetric excitations [13] and to consider
the example of two longitudinal beams lying on stiffeners [14]. In the general
formulation, the circumferential orders are coupled and it results from the previous
studies show that the coupling cannot be neglected in non-axisymmetric
45 problems. This idea reinforces the results given by Laulagnet and Guyader [15],
who break the axisymmetry of an immersed cylinder through partial masking,
namely by overlaying the external surface of the cylinder by an acoustic coating.
Similarly, Cuschieri and Feit [16] study the influence of the masking and notice
that the coupling of the circumferential modes depends on its regularity.

50 The increasing complexity of the internal structures, including irregular spacing
of stiffeners, non-axisymmetry and the addition of internal degrees of freedom
changes some resonances, modifies the acoustic field and couples different
modes [17]. To tackle these problems, for which geometry is more complex than
the academic studies cited above, experimental and numerical methods have
55 been used. Photiadis *et al.* [18] create an experimental model of an immersed
stiffened cylinder with numerous mass-spring systems attached on the stiffen-

ers, and compare the measurements to a model without the resonators. They deduce that the internal structures induce several effects on the mono-static scattering and in particular the attenuation of Bloch-Floquet waves. Bucaro *et al.* [19] clarify these results by modifying locally the structure admittance to account for the resonators. Because each complexity level tends to increase the level of the radiated and scattered field, it is advisable for industrial applications to keep as simple systems as possible and not to break the axisymmetry. This conclusion is equivalent to say that discontinuities tend to enhance the radiation efficiency of the structures [20]. The pressure radiated by an immersed shell with and without point masses is calculated by the Finite Element Method by Marcus and Houston [21]. For their example, they show that the coupling of the circumferential modes induces a rise in the radiation level of about 10 dB over a broad frequency range. Studies by coupled FEM-BEM (Finite Element Method - Boundary Element Method) give results at low frequency that highlight the crucial importance of isolating internal structures through flexible mounts [22, 23]. Ettouney *et al.* [24] solve the problem of a submerged axisymmetric shell by using the uncoupled circumferential harmonics. They use a sub-structuring approach based on the admittances to include three-dimensional systems in the axisymmetric shell while keeping the circumferential orders uncoupled. The system is thus equivalent to an axisymmetric submerged shell with internal point forces that account for the presence of the internal systems, but the method is however limited to point coupling.

In general, the element based methods are well suited for modeling systems

80 with high geometry and property complexity. Due to the current computational limits, they are however limited to low frequencies when the system to be described is a submerged shell. On the contrary, semi-analytical models as described previously are available to analyze the behavior of shells coupled with particular internal non-axisymmetric structures such as oscillators, beams, 85 simply supported plates, etc., over a wide frequency range. The limitations of these methods lie in general on their low versatility, meaning that a dedicated model should be developed for each type of internal structure. The method proposed in this paper consists in benefiting from these different methods, so that the submerged stiffened shell is modeled by the CAA method whereas the 90 non-axisymmetric internal structures are modeled by FEM, allowing for flexibility with their geometry. The junctions between the stiffened shell and the non-axisymmetric internal frames are supposed to be lines. A set of orthonormal functions called condensation functions are used as a basis for approximating the displacements and the forces at the junctions. Condensed transfer functions 95 are then defined and calculated for each uncoupled subsystem, and the superposition principle for passive linear systems leads to the vibroacoustic behavior of the coupled system. The paper is organized as follow:

- In section 2, the principle of the CTF method is described for the general case of subsystems coupled along a line. A set of orthonormal functions 100 called condensation functions is considered to approximate the forces and displacements at the line junctions.
- Three different examples of condensation functions are considered to val-

idate the CTF method on a plane plate case and convergence criteria are studied in section 3.

- 105 • In section 4, the CTF method is applied to add non-axisymmetric internal frames to a stiffened shell. An *in vacuo* case is first defined and the results are compared with FE calculation to validate the numerical process. Finally, the radial displacements and the pressure radiated by a non-axisymmetric stiffened submerged shell are presented and physical
110 phenomena are discussed.

2. Principle of the Condensed Transfer Function (CTF) method

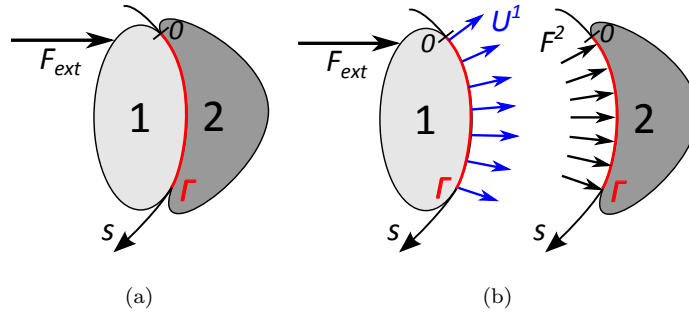


Figure 1: Admittance method extended to line coupling. (a) Subsystems coupled along a line. (b) Subsystems uncoupled.

Let us consider two mechanical thin structures coupled along a line, as shown in Fig. 1. Γ represents the coupling line and the curvilinear abscissa s is used to locate a point on Γ . A set of N orthonormal functions is considered and
115 are called the *condensation functions*: $\{\varphi_i\}_{1 \leq i \leq N}$. The type and the number of condensation functions N may play a key role in the convergence of the method

and will be discussed later in this paper. One assumes that the displacements $U^\alpha(s)$ and the line coupling forces $F^\alpha(s)$ at the junction can be approximated for each subsystem α as a linear combination of these condensation functions. For each uncoupled subsystem $\alpha \in \{1, 2\}$, the condensed transfer function between φ_i and φ_j is defined by applying a force $F^\alpha = \varphi_j$ on Γ :

$$Y_{ij}^\alpha = \frac{\langle \bar{U}_j^\alpha, \varphi_i \rangle}{\langle F^\alpha, \varphi_j \rangle} = \langle \bar{U}_j^\alpha, \varphi_i \rangle \quad (1)$$

where $\langle \bullet, \bullet \rangle$ is a scalar product and \bar{U}_j^α the displacement of the junction Γ when the subsystem is excited by $F^\alpha = \varphi_j$.

Moreover, the free condensed displacement of each uncoupled subsystem α is defined by:

$$\tilde{u}_i^\alpha = \langle \tilde{U}^\alpha, \varphi_i \rangle \quad (2)$$

where \tilde{U}^α is the displacement at the junction of the uncoupled subsystem α when only external loading is applied. As in the example of Fig. 1, the subsystem 2 has no external load: $\tilde{u}_i^2 = 0, \forall i \in \llbracket 1, N \rrbracket$. As proposed above, the displacement and the line force applied on subsystem α can be decomposed using the condensation functions:

$$\left\{ \begin{array}{l} U^1(s) \simeq \sum_{i=1}^N u_i^1 \varphi_i(s) \\ U^2(s) \simeq \sum_{i=1}^N u_i^2 \varphi_i(s) \end{array} \right. \quad \text{and} \quad \left\{ \begin{array}{l} F^1(s) \simeq \sum_{i=1}^N f_i^1 \varphi_i(s) \\ F^2(s) \simeq \sum_{i=1}^N f_i^2 \varphi_i(s) \end{array} \right. \quad (3)$$

where u_i^α (resp. f_i^α) is the displacement amplitude (resp. the force amplitude) of subsystem α associated to the condensation function φ_i . In response to these

line coupling forces and the external load, the superposition principle for passive linear systems enables to write the displacements coefficients u_i^α as follow:

$$\begin{cases} u_i^1 = \tilde{u}_i^1 + \sum_{j=1}^N Y_{ij}^1 f_j^1 \\ u_i^2 = \sum_{j=1}^N Y_{ij}^2 f_j^2 \end{cases}, \forall s \in \Gamma, \forall i \in \llbracket 1; N \rrbracket \quad (4)$$

135 Besides, the displacement continuity and force equilibrium at the junction lead to:

$$\begin{cases} U^1(s) = U^2(s) \\ F^1(s) + F^2(s) = 0 \end{cases}, \forall s \in \Gamma \quad (5)$$

The set of condensation functions being orthonormal, the projection of Eq. (5) on a function φ_i yields:

$$\begin{cases} u_i^1 = u_i^2 \\ f_i^1 = -f_i^2 \end{cases}, \forall i \in \llbracket 1; N \rrbracket \quad (6)$$

Injecting Eq. (4) in Eq. (6) results in a similar formula compared to the 140 classical admittance method to deduce the coupling forces $\mathbf{F}^c = \mathbf{F}^1 = -\mathbf{F}^2$ between the subsystems:

$$(\mathbf{Y}^1 + \mathbf{Y}^2) \mathbf{F}^c = -\tilde{\mathbf{U}}^1 \quad (7)$$

In the general case, for a given subsystem α and a couple of condensation functions (φ_i, φ_j) , the matrix \mathbf{Y}^α is a square matrix which size depends on the number of degrees of freedom (generally 6 in 3-D problems), to take into 145 account all the possible directions of excitations and displacements. Thus, the

matrix \mathbf{Y}^α has $6N \times 6N$ elements. Similarly, $\tilde{\mathbf{U}}^\alpha$ is a $6N$ elements vector (still considering having a general 3-D problem) to calculate the response of the edge in all directions of space to the external load. The size of this system is therefore equal to the number of transfer functions multiplied by the number of degrees
150 of freedom.

To calculate the terms of the admittance matrices in practice, each uncoupled subsystem is excited by the condensation functions. As the set of condensation functions is orthonormal, the denominator of the admittance term is in this case equal to 1, and the admittance is deduced by projecting the displacements on
155 the condensation functions (compare Eq. (1)).

Once the coupling forces have been calculated by inverting Eq. (7), one can deduce the response at given points M_1 and M_2 , respectively on subsystems 1 and 2:

$$\begin{cases} U(M_1) = \tilde{U}^1(M_1) + \sum_{i=1}^N Y_{M_1 i}^1 F_i^c \\ U(M_2) = - \sum_{i=1}^N Y_{M_2 i}^2 F_i^c \end{cases} \quad (8)$$

where $Y_{M_\alpha i}^\alpha$ is the admittance at the point M_α of the uncoupled subsystem α
160 and is defined as the response at the point M_α when the subsystem is excited by φ_i on Γ .

The method has been presented in the case of the coupling between only two subsystems but can easily be extended to more complex systems, with more than one junction. It is important to note that unlike classical reduction
165 methods, such as Component Mode Synthesis [25] or branch mode analysis [26], the subsystems in the CTF method do not necessarily need to be described by

Finite Element Method (FEM) or by projections on a modal basis. Indeed, it is sufficient to be able to evaluate the admittance at the interfaces by any mean to apply the method. Examples of condensation functions with their associated scalar product are given in the next section, before being applied to a thin plate test case.

3. Numerical study on a basic test case

3.1. Test case parameters

To validate and study the numerical convergence of the CTF approach, let us consider in this section two rectangular plates made of the same material and having the same thickness. The aim is to couple the two plates together along their longest edge, as shown in Fig. 2. The characteristics and dimensions are given in Table 1. The plates lie in the $z = 0$ plane and the boundary conditions are free on all the edges. Considering the coordinates origin at the bottom left of plate 1, the system is excited by a transverse harmonic excitation on plate 1 at the point with the coordinates $(0.9, 0.5)$.

For comparison purposes, a reference calculation is made using the FEM to model a $1.5 \times 2.5 \text{ m}^2$ plate. Harmonic responses are calculated for frequencies between 10Hz and 1500Hz, with approximately 400 values logarithmically spread over the domain. This frequency resolution ensures to properly describe the resonance peaks of the system regarding the value of the structural damping coefficient [27], which is accounted for as a complex factor in the stiffness matrix. One layer of quadrilateral isotropic shell elements of thickness h is chosen

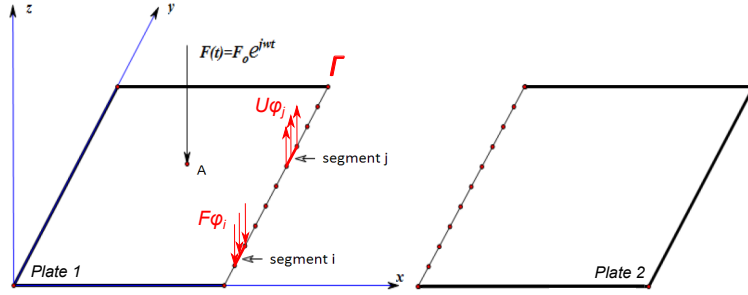


Figure 2: Two rectangular plates coupled along a line. Partition of the coupling line into 10 segments.

Parameter	Notation	Value	Unit
Young modulus	E	210	GPa
Poisson coefficient	ν	0.3	-
Density	ρ_p	7800	kg.m^{-3}
Structural damping coefficient	η	0.02	-
Length of plate 1 & 2	L	1.5	m
Width of plate 1	l_1	1.2	m
Width of plate 2	l_2	1.3	m
Thickness	h	0.017	m

Table 1: Material characteristics and plates dimensions.

with a linear interpolation function. The Finite Element mesh is fine enough
 190 in order to respect the criterion of 6 elements per bending wavelength which is
 commonly used for such problems.

To apply the CTF approach, the condensed admittances should be calcu-
 lated for the two subsystems. As discussed previously, the estimation of the
 response of each uncoupled subsystem excited on the junction line by forces
 195 corresponding to condensation functions are needed. FEM calculations and the
 modal superposition including quasi-static residual modes [28] can be used for
 this purpose thanks to its good convergence. The principle of this technique is
 presented in Appendix A. The modal basis is truncated such that the frequency
 of the highest mode is 1.9 times higher than the highest frequency. In the case
 200 of the two plates described previously, the basis for plate 1 counts 116 modes
 (highest eigenfrequency at $f = 2848.6$ Hz) and 125 modes for plate 2 (highest
 eigenfrequency at $f = 2839.3$ Hz). Three examples of condensation functions
 are given in the next subsection before discussing the results for the present test
 case.

205 3.2. Three examples of condensation functions

3.2.1. Gate functions

The gate functions φ_i , $i \in \llbracket 1, N \rrbracket$, are defined depending on their length L_s
 as follows:

$$\varphi_i(s) = \begin{cases} \frac{1}{\sqrt{L_s}} & \text{if } (i-1)L_s \leq s < iL_s \\ 0 & \text{elsewhere} \end{cases} \quad (9)$$

As the junction Γ has a finite length, giving a gate length L_s leads to a

210 number N of condensation functions taken into account. The scalar product associated with the gate function is defined by:

$$\begin{aligned} \mathcal{C}_I^0 \times \mathcal{C}_I^0 &\rightarrow \mathbb{C} \\ \langle f, g \rangle &\mapsto \int_{\Gamma} f(s)g^*(s) ds \end{aligned} \quad (10)$$

where \mathcal{C}_I^0 is the set of piecewise continuous functions on intervals $[a, b[\subset \Gamma$, and $*$ means the complex conjugate. It can be easily verified that the gate functions form an orthonormal set for this scalar product.

215 In this case, applying the CTF approach can be seen as dividing the coupling line into N segments and calculating the admittances between the segments, as shown in Fig. 2. The segments are excited one after the other, and the displacement on each segment allows to obtain the admittance matrix of each uncoupled subsystem. Each term of the free displacement vector is the result of
220 the integral of the displacement on one segment due to the external load (only for plate 1 in this example).

3.2.2. Exponential functions

Complex exponential functions can be well adapted to describe the flexural waves at the junction. These exponential functions are defined by:

$$\varphi_i(s) = \frac{1}{\sqrt{L}} \exp\left(j \frac{i\pi s}{L}\right) \quad (11)$$

225 where L is the length of the junction Γ and j the complex number $j^2 = -1$. The associated scalar product is defined as follow, ensuring the set to be orthonormal:

$$\mathcal{C}^0 \times \mathcal{C}^0 \rightarrow \mathbb{C}$$

$$\langle f, g \rangle \mapsto \int_{\Gamma} f(s)g^*(s) ds \quad (12)$$

where \mathcal{C}^0 is the set of continuous function on Γ . The set of condensation functions is characterized by the maximal index i_{\max} and all the functions such that $i \in \llbracket -i_{\max}, i_{\max} \rrbracket$ are taken into account.

230 3.2.3. Chebyshev polynomials

The Chebyshev polynomials are widely used to interpolate functions and are thus an interesting alternative for the condensation functions [29]. They can be defined recursively by the following relations:

$$\left\{ \begin{array}{l} T_0(X) = 1 \\ T_1(X) = X \\ T_{n+2}(X) = 2XT_{n+1}(X) - T_n(X) \end{array} \right. \quad (13)$$

The scalar product associated to the Chebyshev polynomials takes into account the weight function $\frac{1}{\sqrt{s(L-s)}}$:

$$\begin{aligned} \mathcal{C}^0 \times \mathcal{C}^0 &\rightarrow \mathbb{C} \\ \langle f, g \rangle &\mapsto \frac{L}{\pi} \int_{\Gamma} f(s)g^*(s) \frac{1}{\sqrt{s(L-s)}} ds \end{aligned} \quad (14)$$

The weight function ensures the set $\frac{T_0}{\sqrt{2}} \cup (T_n)_{n \in \mathbb{N}^*}$ to be orthonormal in regards to this scalar product and reduces numerical errors by quadratically clustering the nodes at the end of the segment.

3.3. Results

240 The mean (average on surfaces) quadratic transversal velocity on the surface of the two plates coupled together is calculated using the CTF method with

the 3 different condensation functions presented above and is compared to a reference solution. The responses and the relative errors are plotted in Fig. 3 as a function of the frequency. The CTF calculations have been performed taking

245 3 condensation functions ($N = 3$), which means:

- dividing the line junction in 3 segments when the condensation functions are gates;
- taking $i_{\max} = 1$ for the exponential functions, *i.e.*:

$$\varphi(s) \in \left\{ \frac{1}{\sqrt{L}} \exp\left(\frac{-j\pi s}{L}\right); \frac{1}{\sqrt{L}}; \frac{1}{\sqrt{L}} \exp\left(\frac{j\pi s}{L}\right) \right\}$$

- using the 3 Chebyshev polynomials T_0 , T_1 and T_2 ;

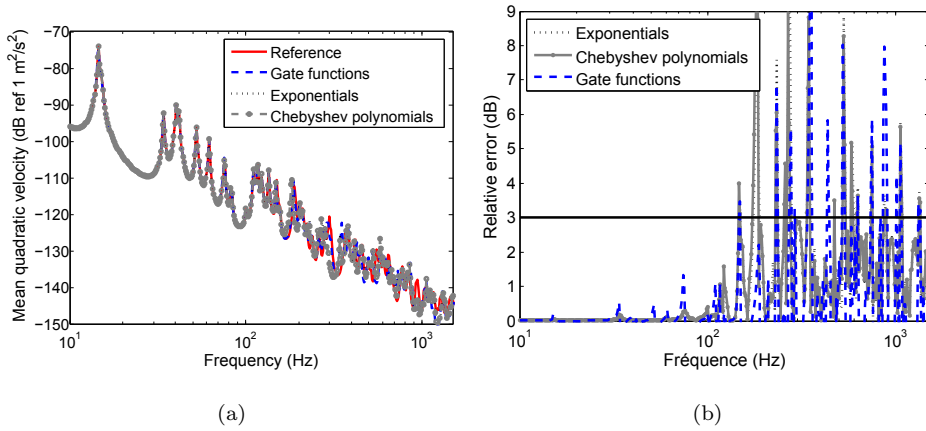


Figure 3: Spatial averaged quadratic transversal velocity on the two coupled plates and excited by a point harmonic force. Comparison between the reference and the CTF methods with $N = 3$. (a) Narrow band response. (b) Relative error (dB).

250 One can observe that all the results agree well until around $f_{\text{lim}} \simeq 150$ Hz. For this test case, some differences up to 1 dB can be seen at the resonance

frequencies in the case of the gate functions. These differences are due to a slight frequency shift in the resonance and can be acceptable for practical applications. Above this frequency, the transfer functions are not able to describe properly the phenomena. In other terms, the forces and displacements cannot be correctly interpolated by the 3 condensation functions at higher frequencies.

3.4. Convergence criteria

Assuming that at least 2 points per wavelength are necessary to sample a signal (*cf.* Nyquist-Shannon sampling theorem), one can propose criteria defining the characteristics of the set of condensation functions $(L_s, i_{\max}, N_{\max})$ as a function of the flexural wavelength λ_f of the plate at the higher frequency limit f_{\lim} :

- for gate functions, two segments are needed to describe a wavelength:

$$L_s \leq \frac{\lambda_f}{2} \quad (15)$$

- for exponential functions, noting that the index i can take negative values, the criterion is:

$$i_{\max} \geq \frac{L_y}{\lambda_f} - \frac{1}{2} \quad (16)$$

- for Chebyshev polynomials, the degree of the polynomial must be at least equal to the number of points that the function needs to interpolate:

$$N_{\max} \geq \frac{2L_y}{\lambda_f} - 1 \quad (17)$$

These criteria are adapted for each type of condensation function, but give the same number of transfer functions for a given frequency limit. In the case of

270 a 17 mm thick plate, $N = 3$ leads to a frequency limit of $f_{\text{lim}} = 168$ Hz, which fits the observations in Fig. 3.

Applying the criterion for Chebyshev polynomials, the convergence of the results is ensured up to more than 1500 Hz with $N = 10$ transfer functions, as seen in Fig. 4a. For the sake of succinctness, the results of the CTF method
 275 with 10 transfer functions with the gate functions and the complex exponentials are not plotted here but shows also good convergence. At this stage of the study, it cannot be said if one of the three condensation functions perform best. The gate functions however present the advantages of being easy to implement and of having a lower condition number, being thus less sensitive to numerical
 280 errors [30]. In Fig. 4b, the amplitude of the transverse force is plotted as a function of the frequency and the condensation functions. For each frequency, the values are normalized with regard to the highest amplitude. Considering the dispersion relation for a plate, Eq. (17) yields :

$$N_{\text{max}} \geq \sqrt{\frac{2f}{\pi}} L_y \left(\frac{Eh^2}{12(1-\nu^2)\rho_p} \right)^{1/4} - 1 \quad (18)$$

N_{max} is an integer and rounded toward positive infinity. N_{max} is plotted as a
 285 function of the frequency in Fig. 4b using a white line. It clearly shows that the higher the frequency, the more Chebychev polynomials play a role in the method. It also shows that, except for some frequency values below 55 Hz, the criterion is very well suited to properly approximate the forces at the junction.

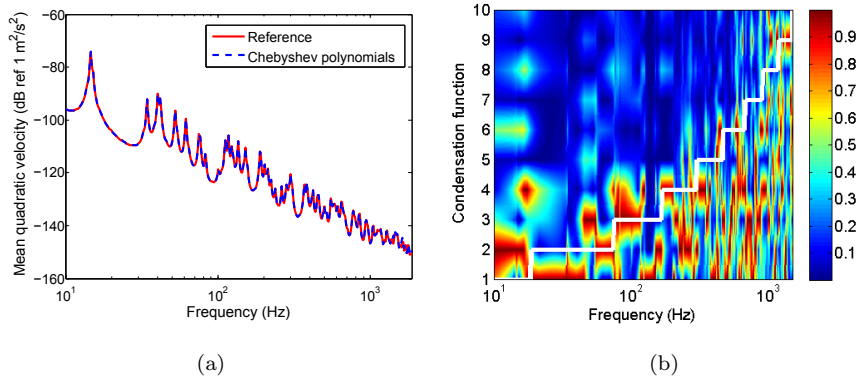


Figure 4: CTF method with $N = 10$ Chebychev polynomials. (a) Mean quadratic velocity as a function of the frequency. (b) Normalized amplitude of the transverse force at the junction projected on the condensation functions as a function of the frequency.

4. Cylindrical shell with non-axisymmetric internal frames

290 In order to validate the method for our case of interest and to illustrate its advantages in coupling different models, it is applied for the case of an axisymmetric stiffened shell coupled with non-axisymmetric internal structures. First, the principle of the approach is described for the general case in subsection 4.1 before highlighting the procedure to calculate the condensed transfer functions from a dedicated CAA model [1] in subsection 4.2. Then, for validation purpose, an *in vacuo* shell is considered, so that results can be easily compared with a full FEM calculation. Finally, the method is applied to an example of submerged stiffened shell with non-axisymmetric internal structures to discuss the influence of the non-axisymmetric structures on the vibroacoustic behavior.

300 4.1. Principle of the CTF approach in the case of a cylindrical shell

Let us consider a stiffened cylindrical shell with a non-axisymmetric internal frame, as shown on the sketch in Fig. 5. The junctions between the two sub-systems are arcs at the ends of the ring stiffeners flange, extending between θ_0 and θ_{N+1} .

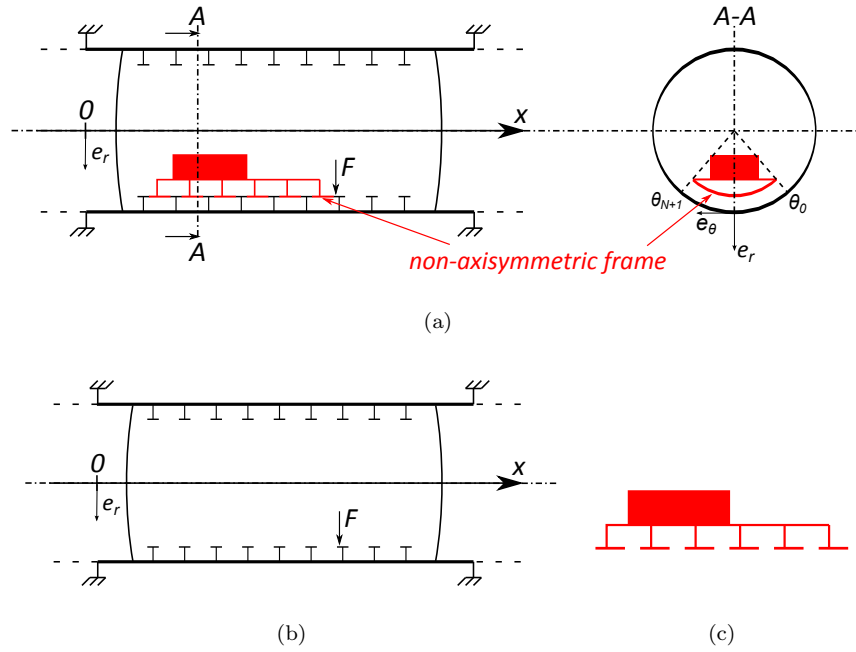


Figure 5: Sections of a stiffened cylindrical shell. (a) Including a non-axisymmetric internal frame. (b) Axisymmetric partition described using CAA. (c) Example of non-axisymmetric internal frame.

305 The Condensed Transfer Function method presented in the previous section enables to take into account non-axisymmetric internal frames in an immersed stiffened shell, as shown on the diagram in Fig. 6. On one hand, the admittances of the axisymmetric submerged stiffened shell are estimated by the CAA. During

this step, a numerical model of an immersed shell is coupled with Finite Element
 310 models of stiffeners and bulkheads to calculate the admittance terms needed as
 an input of the CTF method. On the other hand, the admittances of the non-
 axisymmetric internal frames are calculated by FEM. Finally, Eq. 7 and 8 are
 used to deduce the shell displacements and the radiated pressure field.

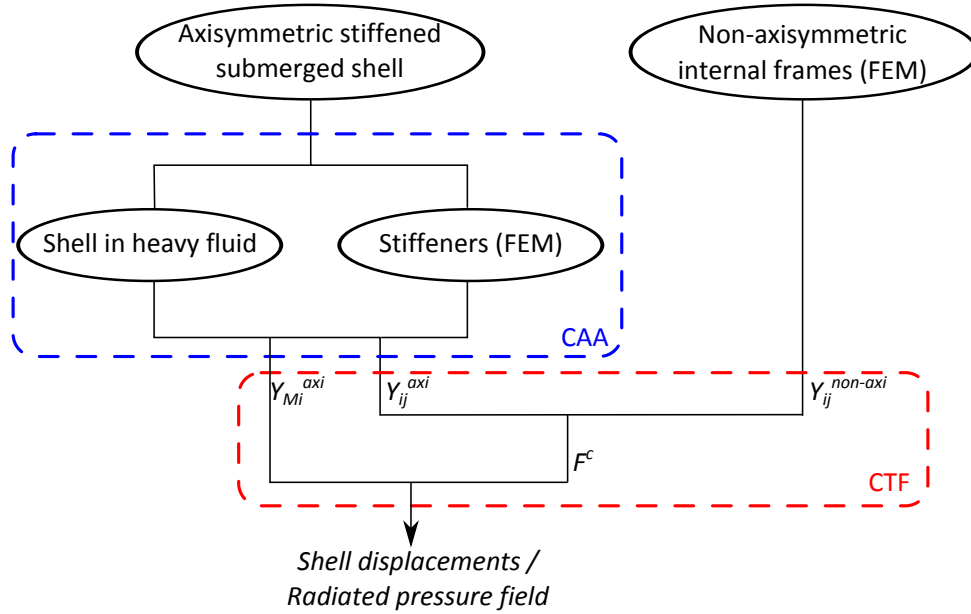


Figure 6: Sketch of the method to account for non-axisymmetric internal frames in a non periodically stiffened submerged shell.

4.2. Calculation of the Condensed Transfer Functions of an axisymmetric stiff-
 315 ened shell by the Circumferential Admittance Approach (CAA)

In this part, the Circumferential Admittance Approach (CAA) [1] is used for modeling the vibroacoustic behavior of a non periodically stiffened submerged shell, and to calculate the admittances needed as an input for the CTF approach.

The CAA consists in partitioning the system and considering the submerged
 320 shell separately from the internal frames (ring stiffeners, bulkheads, end caps).
 Considering cylindrical coordinates (x, r, θ) , as shown in Fig. 5, all the physical
 variables (*i.e.* forces, shell displacements, pressure,...) can be written as Fourier
 series depending on circumferential orders k_θ :

$$f(\theta) = \sum_{k \in \mathbb{Z}} \tilde{f}(k_\theta) e^{jk_\theta \theta} \quad (19)$$

where $k_\theta \in \mathbb{Z}$, because the system is 2π -periodic along the circumference, and
 325 with

$$\tilde{f}(k_\theta) = \frac{1}{2\pi} \int_{-\pi}^{\pi} f(\theta) e^{-jk_\theta \theta} d\theta \quad (20)$$

In this approach, the shell and the frames are axisymmetric and the fluid
 domain is infinite. Under these assumptions, the circumferential orders are
 independent from each other [31].

On one hand, the circumferential admittances of the fluid loaded shell are
 330 estimated using the Flügge equations of motions [32, 33] and by solving the
 problem in the wavenumber space. The resolution of these equations are per-
 formed using an accelerated spectral approach, as it has proven very good results
 in terms of accuracy and calculation costs. On the other hand, different types of
 internal frames can be modeled using axisymmetric FEM. The coupling forces
 335 between the shell and the internal frames are then calculated using the circum-
 ferential admittances of the subsystems. The forces are finally injected in the
 shell model to deduce the shell displacements and the radiated pressure. Details

on this method can be found in [1].

In order to use the CTF approach to add a non-axisymmetric internal frame,
 340 two quantities are needed from the CAA: the condensed transfer functions Y_{ij}^{axi}
 at the junctions with the non-axisymmetric system, and the transfer function
 Y_{Mi}^{axi} between a point M and a condensation function φ_i applied on one of the
 junctions, in order to use Eq. (8) in the last step of the CTF calculation. If M
 is a point on the cylindrical shell surface, the latter transfer function represents
 345 the displacement of the point when the axisymmetric shell is excited by the
 condensation function φ_i . If M is a point in the fluid domain outside the shell,
 Y_{Mi}^{axi} represents the pressure at the point when the axisymmetric shell is excited
 by the condensation function φ_i . As the system is axisymmetric, the response
 (displacement or pressure) of any point M with the coordinates (x_M, r_M, θ_M)
 350 in response to a point harmonic force on the structure at a point A with the
 coordinates (x_A, r_A, θ_A) yields the following admittances:

$$Y_{MA}^{axi} = Y_{M'A'}^{axi} \quad (21)$$

where M' is the point with the coordinates $(x_M, r_M, \theta_M - \theta_A)$ and A' is the
 point with the coordinates $(x_A, r_A, 0)$. As the CAA enables to calculate any
 Y_{MA}^{axi} , let us then consider for the sake of clarity that $\theta_A = 0$. In the following,
 355 Y^{axi} is written as a function of θ meaning that it is the value at the point of
 coordinate θ in response to an excitation in $\theta = 0$.

The displacement $\bar{U}_j(\theta)$ of a point of coordinate θ in response to a condensed
 force φ_j is then calculated by convolution:

$$\bar{U}_j(\theta) = \int_{\theta_0}^{\theta_{N+1}} Y^{axi}(\theta - \alpha) \varphi_j(\alpha) d\alpha \quad (22)$$

The condensed transfer functions are then calculated by:

$$\begin{aligned} Y_{ij}^{axi} &= \frac{\langle \bar{U}_j(\theta), \varphi_i(\theta) \rangle}{\langle \varphi_j(\theta), \varphi_j(\theta) \rangle} \\ &= \left\langle \int_{\theta_0}^{\theta_{N+1}} Y^{axi}(\theta - \alpha) \varphi_j(\alpha) d\alpha, \varphi_i(\theta) \right\rangle \end{aligned} \quad (23)$$

360

$$\begin{aligned} Y_{Mj}^{axi} &= \frac{\bar{U}_j(\theta)}{\langle \varphi_j(\theta), \varphi_j(\theta) \rangle} \\ &= \int_{\theta_0}^{\theta_{N+1}} Y^{axi}(\theta - \alpha) \varphi_j(\alpha) d\alpha \end{aligned} \quad (24)$$

These variables can now be used as an input to the CTF method to calculate the coupling forces between the axisymmetric stiffened shell and the non-axisymmetric internal frames, and to deduce the displacements and pressure for the coupled system.

365 4.3. Validation of an in vacuo shell

4.3.1. Definition of the system

A cylindrical shell of radius $R = 5$ m, length $L = 4$ m and thickness $e = 30$ mm is clamped at both ends. It is stiffened by two identical stiffeners with T cross-section at $x = 1$ and $x = 2$ m from the boundary of the shell. A T-stiffener consists of two perpendicular parts called the flange and the web, the web being the one in the (Oyz) plane (see Fig. 7). The web is characterized by its height h_w and thickness t_w and the flange is characterized by its width w_f

370

and thickness t_f . Both the web and the flange are modeled by shell elements.

In this example, the T-stiffeners have the following dimensions: $(h_w \times t_w/w_f \times$
 375 $t_f) = (200 \times 15/200 \times 15 \text{ mm})$. A curved plate with a curvature radius of
 $R_{int} = 4.8 \text{ m}$ links the two stiffeners as shown in Fig. 7. The shell along with
 the two stiffeners will be referred to as the axisymmetric subsystem, whereas
 the plate is the non-axisymmetric subsystem, extending between θ_0 and θ_{N+1} ,
 with $-\theta_0 = \theta_{N+1} = 0.2083 \text{ rad}$. The dimension of the plate is thus $0.8 \times 2 \text{ m}^2$
 380 and it is 15 mm thick. An unitary external load is applied at the joint between
 the first stiffener and the plate at $\theta = 0$. The shell is not immersed in heavy
 fluid so that a reference calculation can easily be done by FEM.

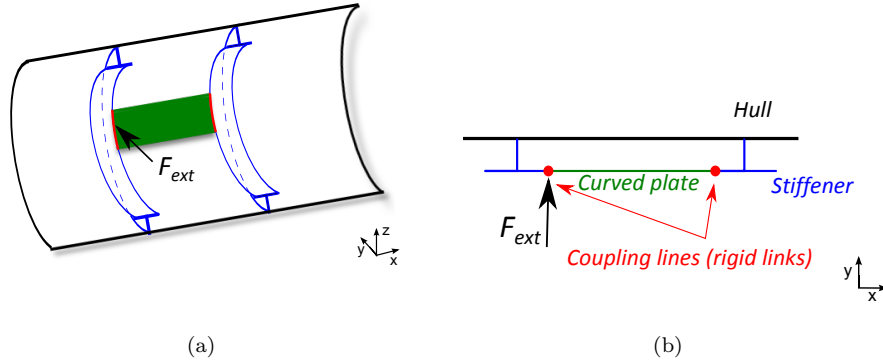


Figure 7: Cylindrical stiffened shell with a non-axisymmetric internal structure. (a) 3D-view of a section. (b) Section in the plane $\theta = 0$.

4.3.2. CTF calculations

The condensation functions chosen for this example are the gate functions
 385 described in 3.2.1. Indeed, among the three condensation functions tested, the
 gate functions are the easiest to implement. Their length match the criterion

proposed in Eq. (15) up to 1 kHz. At this frequency, the flexural wavelength of a 15 mm thick plate is $\lambda_f = 0.38$ m. As the curvature increases the stiffness of the plate, the wavelength at a given frequency increases as well, and the criterion is more restrictive than it could be. The junction is on a circular arc
 390 of radius 4.8 m. Thus, 10 gates per junction, of angular length $\theta_s = 0.0417$ rad (equivalent to a curvilinear length of $L_s = 0.2$ m) are considered to ensure good convergence up to 1 kHz.

In this configuration, the gates are functions of θ ($\varphi_i(\theta) = 1$ between θ_1^i and
 395 θ_2^i , and 0 elsewhere). Writing the terms Y^{axi} as Fourier series, Eq. (23) leads to the admittance Y_{ij}^{axi} of the axisymmetric system in the physical space:

$$\begin{aligned}
 Y_{ij}^{axi} &= \frac{1}{\sqrt{\theta_2^i - \theta_1^i}} \int_{\theta_1^i}^{\theta_2^i} \left(\frac{1}{\sqrt{\theta_2^j - \theta_1^j}} \int_{\theta_1^j}^{\theta_2^j} \sum_{k_\theta} \tilde{Y}^{axi}(k_\theta) e^{jk_\theta(\theta-\alpha)} d\alpha \right) d\theta \\
 &= \sqrt{\theta_2^j - \theta_1^j} \sqrt{\theta_2^i - \theta_1^i} \tilde{Y}^{axi}(0) \\
 &\quad + \frac{1}{\sqrt{\theta_2^i - \theta_1^i}} \frac{1}{\sqrt{\theta_2^j - \theta_1^j}} \sum_{k_\theta \neq 0} \frac{1}{k_\theta^2} \tilde{Y}^{axi}(k_\theta) \left(e^{-jk_\theta\theta_2^j} - e^{-jk_\theta\theta_1^j} \right) \left(e^{jk_\theta\theta_2^i} - e^{jk_\theta\theta_1^i} \right)
 \end{aligned} \tag{25}$$

with \tilde{Y}^{axi} the projection of the admittance on the circumferential orders. Similarly, Eq. (24) yields:

$$\begin{aligned}
 Y_{Mj}^{axi} &= \frac{1}{\sqrt{\theta_2^j - \theta_1^j}} \int_{\theta_1^j}^{\theta_2^j} \sum_{k_\theta} \tilde{Y}^{axi}(k_\theta) e^{jk_\theta(\theta-\alpha)} d\alpha \\
 &= \sqrt{\theta_2^j - \theta_1^j} \tilde{Y}^{axi}(0) + \frac{j}{\sqrt{\theta_2^j - \theta_1^j}} \sum_{k_\theta \neq 0} \frac{1}{k_\theta} \tilde{Y}^{axi}(k_\theta) \left(e^{-jk_\theta\theta_2^j} - e^{-jk_\theta\theta_1^j} \right) e^{jk_\theta\theta}
 \end{aligned} \tag{26}$$

In practice, Eq. (26) and (27) are truncated to a maximal circumferential order
 400 \bar{N} . This number is defined considering the natural wavenumbers of the shell,

the frames and the acoustic fluid, as explained in [1].

On the other hand, the non-axisymmetric plate is modeled by FEM. The responses are estimated by modal superposition including residual modes (see Appendix A) and its condensed transfer functions are calculated by projection
 405 on the condensation functions.

4.3.3. Results

Equation (7) gives the condensed coupling forces \mathbf{F}^c between the plate and the axisymmetric system. According to Eq. (8), the pressure P at a point M_1 in the fluid domain and the displacement U at a point M_2 on the shell are finally
 410 given by:

$$\begin{cases} P(M_1) = \tilde{P}(M_1) + \sum_{i=1}^N Y_{M_1 i}^{axi} F_i^c \\ U(M_2) = \tilde{U}(M_2) + \sum_{i=1}^N Y_{M_2 i}^{axi} F_i^c \end{cases} \quad (27)$$

where $\tilde{P}(M_1)$ (resp. $\tilde{U}(M_2)$) is the pressure at the point M_1 (resp. the displacement at the point M_2) in response to the external point force of the axisymmetric system (without the plate).

The frequency response of the velocity in the radial direction at the excitation
 415 point and the mean quadratic velocity on the outer surface of the shell are given in Fig. 8. They are given as a function of frequency between 100 and 600 Hz for the reference case of the whole system calculated by FEM and for the CTF method presented here. The upper frequency limit is set to 600 Hz in order to calculate the FEM reference solution more easily. The black dotted lines are the
 420 responses of the axisymmetric system (*i.e.* the stiffened shell without the plate)

calculated by FEM. The blue dashed lines are the results of the CTF method that couples the stiffened shell described by CAA with the plate described by FEM. They are to compare with the references calculated by FEM and plotted in red solid lines. For the velocity plotted in Fig. 8a, a gray dotted line with cross markers represents the results of the CTF method, and when the stiffened shell admittances are calculated by FEM. It shows that this curve fits very well with the reference, whereas some differences can be seen with the CTF method using CAA. These differences can be explained by the fact that the CAA is, as all numerical methods, only an approximation of the physical phenomena and can lead to slight deviations. Different parameters can be tuned to refine the results (as for example the maximum number of circumferential orders or the definition of the longitudinal wavenumber space) in exchange for higher computational costs. However, these results show that the CTF method is able to get close to the reference calculation and is thus validated for this case.

4.4. Vibroacoustic behavior of a non-axisymmetric submerged shell

4.4.1. Description of the system

In this section, the CTF method is applied to a submerged test case. The case considered is shown in Fig. 9 and consists of a 5 m radius, 42.3 m length and 30 mm thick cylindrical shell stiffened with 51 stiffeners and 2 spherical bulkheads (10 mm thick, 30 m curvature radius). There are three different types of stiffeners and their spacing varies between 0.6 and 1 m. The whole system is made of steel ($\eta = 0.02$) and is immersed in water. Clamped boundary conditions are used at the ends of the shell, 2 m away from the first and the last

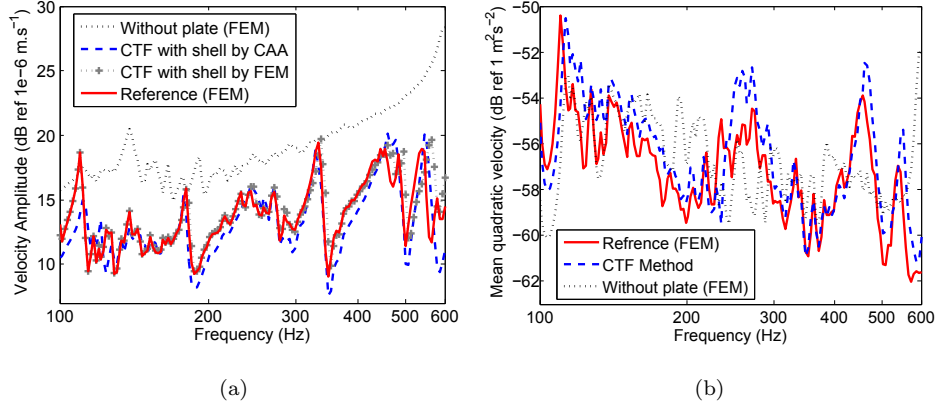


Figure 8: (a) Radial velocity amplitude (dB ref 10^{-6} m.s^{-1}) of the excitation point as a function of the frequency. (b) Mean quadratic velocity (dB ref $1 \text{ m}^2.\text{s}^{-2}$) as a function of the frequency.

stiffeners. Non-axisymmetric internal frames are added between frames 13 and
 445 19. They are composed of 6 identical curved plate, with the same dimensions
 as in section 4.3 (2 m long with a curvature radius of 4.8 m, 0.8 m wide and
 15 mm thick). A point force is applied on frame 18 at the junction between the
 flange and the web. The plates and the excitation are chosen so that the system
 remains symmetric with regard to the plane $\theta = 0$.

450 The only difference with the validation case presented in the previous subsection
 lies in the shell admittance calculation, which accounts, in the submerged
 case, for the heavy fluid loading. There are 12 line junctions, which are each
 divided in 10 segments, resulting in a set of 120 condensation functions. The
 admittances for a radial displacement in response to a radial force projected on
 455 these condensation functions are plotted in Fig. 10 at $f = 1000 \text{ Hz}$. In Fig. 10a,

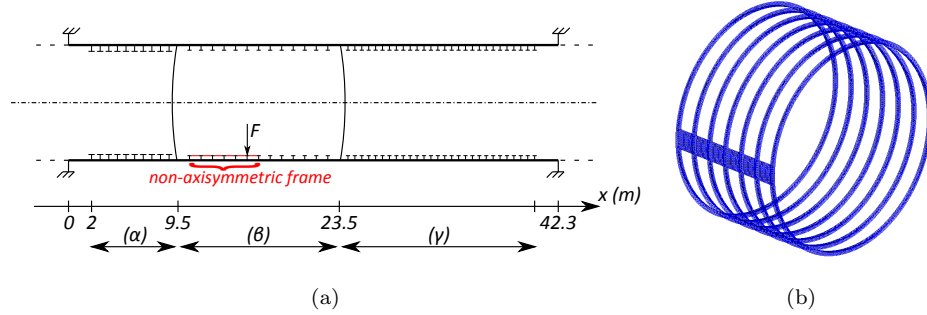


Figure 9: Submerged hull. Cylindrical shell: 5 m radius, 42.3 m length, 30 mm thick. Axisymmetric stiffeners: (α) spacing 0.75 m, T-cross-section (mm): $300 \times 60/60 \times 300$; (β) spacing 1 m, T-cross-section (mm): $200 \times 15/15 \times 200$; (γ) spacing 0.6 m, T-cross-section (mm): $200 \times 25/15 \times 200$. (a) Section in the plane $\theta = 0$. (b) Non-axisymmetric part (without the cylindrical shell).

the 12 diagonal blocks show the admittance amplitude when the displacements and forces are on the same junction, and have thus the biggest amplitudes. As there are 10 gate functions per junction, these blocks have a size of 10×10 , and one of them is circled in black. Every other block of the diagonals above and below the main one also has an important amplitude, due to the fact that the junctions are on the same T-cross-section stiffener. There are 10 of these extra-diagonal blocks with a higher amplitude and one of them is circled in white. One can also see that the amplitude decreases with the distance to the excitation along the shell. In Fig. 10b, it shows that the non-axisymmetric internal frames are uncoupled one from the other as there are only diagonal blocks linking two consecutive junctions.

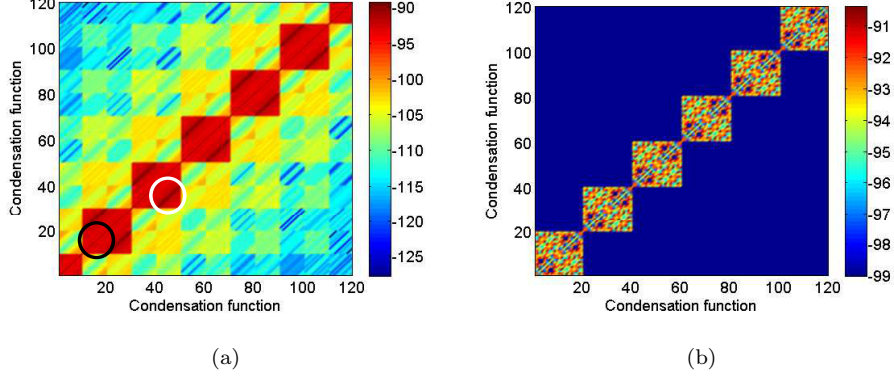


Figure 10: Amplitude of the admittance (T_r, F_r) (dB ref 1) at $f = 1000$ Hz of the (a) axisymmetric shell (the black circle shows a diagonal block and the white circle shows an extra-diagonal block) and the (b) non-axisymmetric internal frames.

4.4.2. Results

The mean quadratic velocity averaged on the outer surface of the shell is plotted as a function of the frequency in Fig. 11a. To describe properly the resonance peaks, 400 values are logarithmically spread over the frequency domain between 100 and 1000 Hz. It shows that the non-axisymmetric internal frames have a weak influence on the mean quadratic velocity. Nevertheless, it can be said that a slight apparent damping effect appears, as predicted by the theory of fuzzy internals by Soize [34]. The amplitude of the peaks of the mean quadratic velocity between 350 and 600 Hz is indeed lower in the non-axisymmetric case than in the axisymmetric case. The radiation efficiency σ is plotted on Fig. 11b. It is defined as the ratio between the actual mean far-field radiated power W_a and the power that would be radiated by a cylindrical shell of the same radiating

surface S , having an uniform radial velocity V_0 :

$$\sigma = \frac{W_a}{\rho_e c_e S V_0^2} \quad (28)$$

480 for $\rho_e = 1000 \text{ kg.m}^{-3}$ the fluid density and $c_e = 1500 \text{ m.s}^{-1}$ the speed of sound
in water.

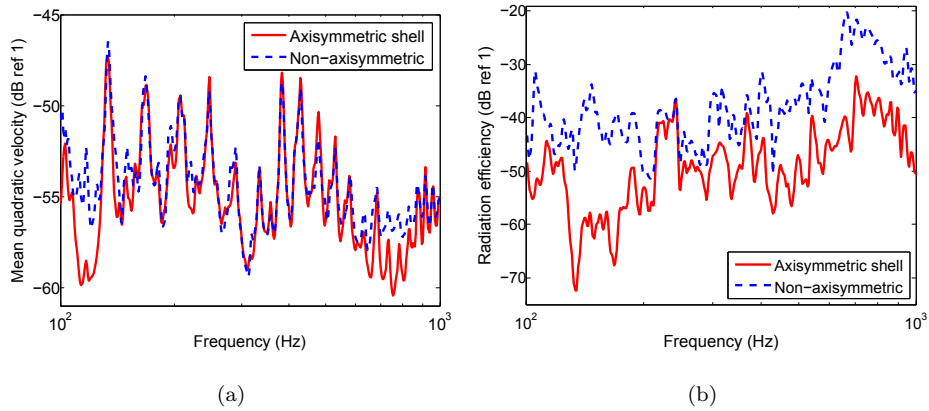


Figure 11: Frequency responses of the system excited by a radial point force, with and without the non-axisymmetry: (a) Amplitude (dB ref 1) of the mean quadratic velocity on the outer surface of the shell. (b) Radiation efficiency.

To explain these differences in the radiation efficiency, although the mean quadratic velocity is only slightly changed, a wavenumber analysis is done [35]. The shell radial acceleration level at $f = 1000 \text{ Hz}$ is plotted in the wavenumber space in Fig. 12 for the two configurations (with and without the plates). As the
 485 problem is symmetrical, the variables are even functions of the circumferential orders and thus only the positive circumferential orders have been plotted. The white line shows the radiation circle (elliptical in Fig. 12a and c due to the

plotting aspect ratio), defined by:

$$\left(\frac{k_\theta}{R}\right)^2 + k_x^2 = \left(\frac{2\pi f}{c_e}\right)^2 \quad (29)$$

490 The radiation circle represents the supersonic acoustic domain, in which the components radiate to the far-field for a flat plate. The radiation circle remains also a good indicator for localizing the radiating waves of a shell having a low curvature. On the overall plot, it can be seen that adding the plates has little influence on the highest values of the acceleration spectrum in the wavenumber
505 space (in red in Fig. 12a,c). This indicates that the most contributing waves in terms of the vibration energy propagation on the shell are globally the same for the two cases. It results in few changes on the mean quadratic velocity, as shown in Fig. 11a. Nevertheless, when zooming in on the radiation circle, one can observe that the components (which amplitudes are clearly lower than
500 the highest values outside the circle) are significantly influenced by the plates (see Fig. 12b,d). As these components radiate sound efficiently, it explains the difference in the radiation efficiency observed in Fig. 11b. In general, an axisymmetric shell is not an efficient radiator, but it can be seen that breaking the axisymmetry by adding 3D internal structures increases the radiation ef-
505 ficiency. This trend can be explained by the fact that the non-axisymmetric frames couple circumferential orders together. These results are consistent with the literature [17, 21].

The radial displacements for the submerged stiffened shell, with and without added plates, are presented in Fig. 13. The results are given at 1000 Hz
510 and the values are normalized to the highest displacement amplitude for each

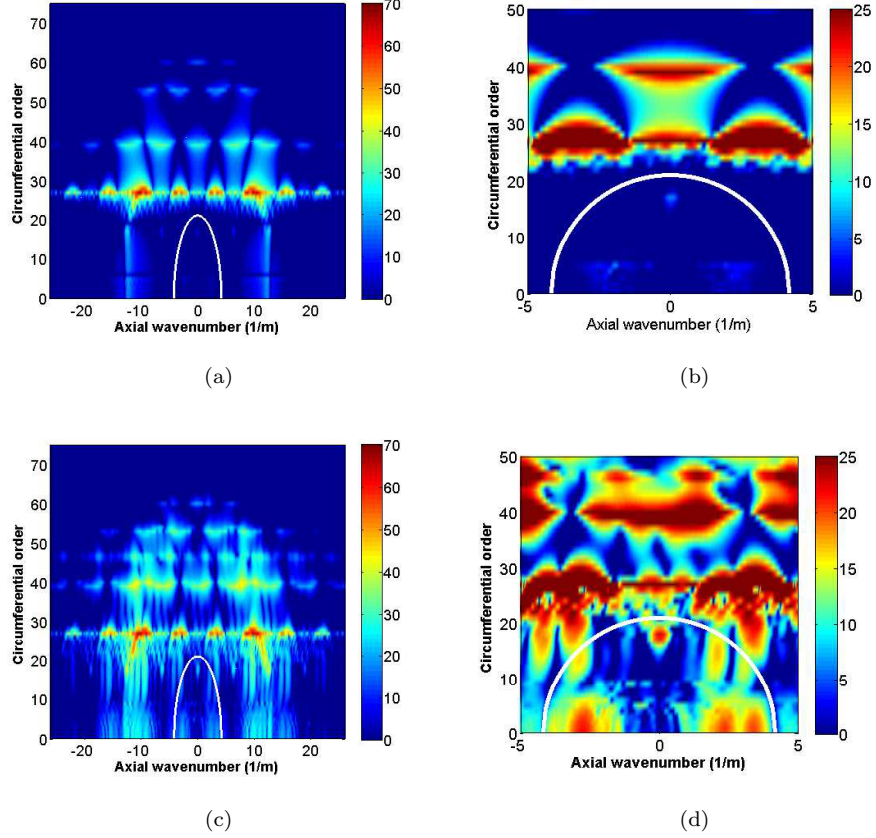


Figure 12: Radial acceleration of the shell (dB ref $10^{-6}g$) in the wavenumber space under a radial unitary force excitation at 1000 Hz. (a) Axisymmetric shell. (b) Axisymmetric shell (zoom on the radiation circle). (c) Non-axisymmetric shell. (d) Non-axisymmetric shell (zoom on the radiation circle).

plot. In Fig. 13a and Fig. 13c, the excitation is radial while in Fig. 13b and Fig. 13d the excitation is in the longitudinal direction. One can see that adding non-axisymmetric internal frames modifies the vibroacoustic behavior of the stiffened submerged shell. More particularly in this case, the vibrational energy propagates easily in the longitudinal direction due to the strong stiffness

of the plates in-plane motion, and is transmitted to the connected stiffeners. Thus, the high displacements are spread further from the point load in the non-axisymmetric cases, especially when the excitation is longitudinal.

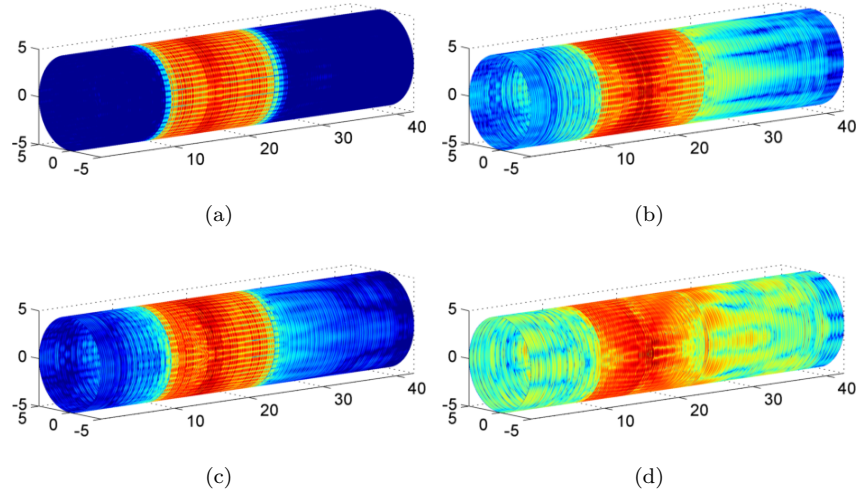


Figure 13: Radial displacements level (dB ref $10^{-6}g$) normed to the maximum value (for each load case) of the cylinder to a harmonic unitary force excitation at 1000 Hz. (a) Axisymmetric shell under radial excitation. (b) Axisymmetric shell under longitudinal excitation. (c) Non-axisymmetric shell under radial excitation. (d) Non-axisymmetric shell under longitudinal excitation.

In Fig. 14, the far-field sound pressure level at 100 m is plotted at 1000 Hz for
 520 the axisymmetric and non-axisymmetric shell. The same color scale is used for
 the two subplots. The shell is oriented in the same way as in the representation
 of the shell displacements in Fig. 13. First, consistently with Fig. 11, it is clear
 that the radiated sound level is higher for the non-axisymmetric case. Then,
 because of the coupling of different circumferential orders, it can be said that
 525 the non-axisymmetric internal frames alter the directivity pattern by increasing

its complexity.

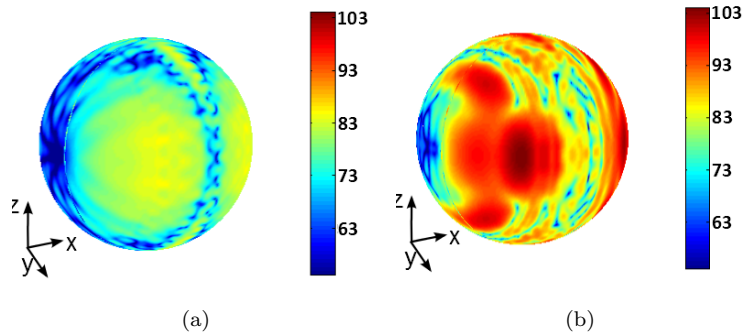


Figure 14: 3D representation of the far-field sound pressure level at 100 m (dB ref 10^{-6} Pa) of the cylinder to a radial harmonic unitary force excitation at $f = 1000$ Hz. (a) Axisymmetric shell. (b) Non-axisymmetric shell.

From a computational point of view, adding these non-axisymmetric internal frames lengthen the calculation by about 60 % in comparison with the axisymmetric stiffened shell. Assuming that the frames admittances used in CAA were
 530 already stored in a database and did not need to be calculated again, one frequency for the axisymmetric case was performed in about 75 seconds. Adding the non-axisymmetric internal frames represents thus a difference of about 45 seconds for each frequency of calculation on the computer used for the tests (24 Gb RAM, 6 core processors at 2.66 GHz). It is worth noting that the calcula-
 535 tion time for the admittances of the non-axisymmetric internal frame is short as modal superposition with residual modes is used. It is hard to compare these results to some other numerical methods, because very few of them are able to predict the behavior of a submerged hull in the considered frequency range, but it can be said that the computational time remains acceptable for practical

540 applications.

5. Conclusions

A sub-structuring method has been proposed to couple subsystems along lines by condensing transfer functions. These transfer functions are calculated for each uncoupled subsystem separately. Different methods can be used depending on the characteristics of the subsystem, which gives great flexibility of the method. Once the condensed transfer functions calculated, a linear system is solved to deduce the coupling forces at the junctions. Finally, the response at any point of the considered coupled system can be calculated.

In this paper, three different condensation functions have been presented and validated on a basic test case made of two coupled plates. Moreover, CTF calculations using the gate functions have been used to couple together a numerical model of an *in vacuo* axisymmetric stiffened shell and finite element models of the non-axisymmetric internal frames. It has shown good agreement with FEM results for this complex test case. The proposed method has then been applied to study the influence of non-axisymmetric internal frames on the vibroacoustic behavior of a submerged stiffened shell.

This last example illustrates well the interest of this approach for coupling different numerical models (*i.e.* CAA with FEM) and for taking the fluid loading on the cylindrical shell into account easily. From these results, as non-axisymmetries tend to couple circumferential orders together, it can be said that including non-axisymmetric internal frames can alter greatly the vibroacoustic

behavior of the shell. On the example of plates linking adjacent stiffeners, it is clear that they play a key role as they tend to increase the radiation efficiency of the system and can alter the vibrational and acoustic energy distribution.

565 More generally, the present approach can be used to partition vibroacoustic problems into several subsystems coupled along lines, and can be applied to a wide range of practical problems. Another advantage of this approach is the ability to quickly reanalyze subsystems for optimization. For instance, if one of the subsystems properties is modified, it is not necessary to recalculate the
570 condensed transfer functions of the other subsystems. Computation time can thus be saved by reusing a database of condensed transfer functions.

Appendix A. Calculation of condensed transfer functions by FEM

To calculate the condensed transfer functions matrix and the free displacement vectors of the isolated subsystems, the harmonic responses to the force
575 corresponding to the condensation functions on the coupling junction and to external forces must be calculated. When a subsystem is modeled by FEM, different methods can be used to calculate a frequency response. Three of them have been tested and are recalled in this section.

Direct calculation: It extracts the mass and stiffness matrices, respectively
580 \mathbf{M} and \mathbf{K} , from the FE model and introduces structural damping η through a complex stiffness value $\mathbf{K}^* = \mathbf{K}(1 + j\eta)$. At a given angular frequency ω , the displacement amplitude \mathbf{U}_0 is calculated from the dynamics equation in the frequency domain :

$$\mathbf{U}_0 = (-\omega^2 \mathbf{M} + \mathbf{K}^*)^{-1} \mathbf{F}_0 \quad (\text{A.1})$$

The direct calculation gives accurate results but is time consuming.

585 **Modal superposition:** It solves the eigenvalue problem of the conservative dynamic system to build a basis of mode shapes Φ_n :

$$\omega_n^2 \mathbf{M} \Phi_n = \mathbf{K} \Phi_n \quad (\text{A.2})$$

Physically speaking, ω_n represent the eigenfrequencies of the system while Φ_n are the associated mode shapes. The basis is theoretically of infinite dimension but for obvious practical reasons it must be truncated to an integer N_m . The frequency response is then a linear combination of these modes:

590

$$\mathbf{U}_0 = \sum_{n=1}^{N_m} a_n \Phi_n \quad (\text{A.3})$$

where a_n is called the modal coefficient and is calculated from the reduced mass and stiffness matrices, $\underline{\mathbf{M}} = \Phi^T \mathbf{M} \Phi$ and $\underline{\mathbf{K}} = \Phi^T \mathbf{K} \Phi$ and the reduced force $\underline{\mathbf{F}} = \Phi^T \mathbf{F}$:

$$a_n = (\underline{\mathbf{K}}^* - \omega^2 \underline{\mathbf{M}})^{-1} \underline{\mathbf{F}} \quad (\text{A.4})$$

595 The damping can be introduced in the reduced stiffness matrix: $\underline{\mathbf{K}}^* = \underline{\mathbf{K}}(1 + j\eta)$. Comparing to the direct calculation, this method is much

faster but has a poor convergence in some frequency bands (*i.e.* outside of resonance peaks), because of the basis truncation.

Modal superposition + residual modes: A quasi-static mode shape Ψ (*i.e.*

600 a particular response at a very low frequency ω_0) is calculated as follow:

$$\Psi = (\mathbf{K} - \omega_0^2 \mathbf{M})^{-1} \mathbf{F}_0 \quad (\text{A.5})$$

It is then added to the modal basis to define a new basis $\mathbf{P} = \{\Phi_n \Psi\}$ and to compensate the effect of the truncation. It is worth noting that the basis \mathbf{P} is generally not orthogonal and needs to be diagonalized. To do so, the following eigenvalue problem is solved:

$$(\underline{\mathbf{K}} - \underline{\omega}_n^2 \underline{\mathbf{M}}) \mathbf{Q} = 0 \quad (\text{A.6})$$

605 with $\underline{\mathbf{M}} = \mathbf{P}^T \mathbf{M} \mathbf{P}$ and $\underline{\mathbf{K}} = \mathbf{P}^T \mathbf{K} \mathbf{P}$. As $(\underline{\mathbf{K}} - \underline{\omega}_n^2 \underline{\mathbf{M}})$ is a symmetric semi-definite matrix, the eigenvectors \mathbf{Q} are orthogonal. One defines new reduced mass and stiffness matrices:

$$\begin{cases} \underline{\underline{\mathbf{M}}} &= \mathbf{Q}^T \underline{\underline{\mathbf{M}}} \mathbf{Q} \\ \underline{\underline{\mathbf{K}}} &= \mathbf{Q}^T \underline{\underline{\mathbf{K}}} \mathbf{Q} \end{cases} \quad (\text{A.7})$$

along with a new reduced force vector $\underline{\underline{\mathbf{F}}} = \mathbf{Q}^T \mathbf{P}^T \mathbf{F}_0$. Introducing again damping in the reduced stiffness matrix, one deduces the displacement
610 through the following equations:

$$\mathbf{U}_0 = \sum_{n=1}^{N_m} a_n (\mathbf{P}\mathbf{Q})_n \quad (\text{A.8})$$

with

$$a_n = (\underline{\underline{\mathbf{K}}}^* - \omega^2 \underline{\underline{\mathbf{M}}})^{-1} \underline{\underline{\mathbf{F}}} \quad (\text{A.9})$$

Comparing to the previous alternative, the convergence is greatly increased and the calculation time remains low.

Acknowledgment

615 This work was funded by DCNS and performed within the framework of the LabEx CeLyA of Université de Lyon, operated by the French National Research Agency (ANR-10-LABX-0060/ANR-11-IDEX-0007).

References

- [1] L. Maxit, J.-M. Ginoux, Prediction of the vibro-acoustic behavior of a
620 submerged shell non periodically stiffened by internal frames, The Journal of the Acoustical Society of America 128 (1) (2010) 137–151.
- [2] F. A. Firestone, The mobility method of computing the vibration of linear mechanical and acoustical systems: Mechanical-electrical analogies, Journal of applied Physics 9 (6) (1938) 373–387.
- 625 [3] E. L. Hixson, Mechanical impedance, Shock and vibration handbook (1976) 10–1.

- [4] M. R. Peterson, D. E. Boyd, Free vibrations of circular cylinders with longitudinal, interior partitions, *Journal of Sound and Vibration* 60 (1) (1978) 45–62.
- 630 [5] R. S. Langley, A dynamic stiffness technique for the vibration analysis of stiffened shell structures, *Journal of Sound and Vibration* 156 (3) (1992) 521–540.
- [6] J. Missaoui, L. Cheng, Vibroacoustic analysis of a finite cylindrical shell with internal floor partition, *Journal of Sound and Vibration* 226 (1) (1999) 101–123.
- 635 [7] Y.-S. Lee, M.-H. Choi, Free vibrations of circular cylindrical shells with an interior plate using the receptance method, *Journal of Sound and Vibration* 248 (3) (2001) 477–497.
- [8] Z. Zhao, M. Sheng, Y. Yang, Vibration transmission of a cylindrical shell with an interior rectangular plate with the receptance method, *Advances in Acoustics and Vibration* 2012.
- 640 [9] E. Rebillard, B. Laulagnet, J.-L. Guyader, Influence of an embarked spring-mass system and defects on the acoustical radiation of a cylindrical shell, *Applied Acoustics* 36 (2) (1992) 87–106.
- 645 [10] J. D. Achenbach, J. Bjarnason, T. Igusa, Effect of a vibrating substructure on acoustic radiation from a cylindrical shell, *Journal of Vibration and Acoustics* 114 (3) (1992) 312–318.

- [11] J. Bjarnason, J. D. Achenbach, T. Igusa, Acoustic radiation from a cylindrical shell with an internal plate, *Wave Motion* 15 (1) (1992) 23–41.
- 650 [12] S.-H. Choi, J. D. Achenbach, T. Igusa, The effect of periodically attached substructures on the excitation of submerged cylindrical shells, *Journal of Sound and Vibration* 177 (3) (1994) 379–392.
- [13] S.-H. Choi, T. Igusa, J. D. Achenbach, Nonaxisymmetric vibration and acoustic radiation of a submerged cylindrical shell of finite length containing
655 internal substructures, *The Journal of the Acoustical Society of America* 98 (1) (1995) 353–362.
- [14] S.-H. Choi, T. Igusa, J. D. Achenbach, Acoustic radiation from a finite-length shell with non-axisymmetric substructures using a surface variational principle, *Journal of Sound and Vibration* 197 (3) (1996) 329–350.
- 660 [15] B. Laulagnet, J.-L. Guyader, Sound radiation from finite cylindrical shells, partially covered with longitudinal strips of compliant layer, *Journal of Sound and Vibration* 186 (5) (1995) 723–742.
- [16] J. M. Cuschieri, D. Feit, Influence of circumferential partial coating on the acoustic radiation from a fluid-loaded shell, *The Journal of the Acoustical
665 Society of America* 107 (6) (2000) 3196–3207.
- [17] D. M. Photiadis, B. H. Houston, E. G. Williams, J. A. Bucaro, Resonant response of complex shell structures, *The Journal of the Acoustical Society of America* 108 (3) (2000) 1027–1035.

- [18] D. M. Photiadis, J. A. Bucaro, B. H. Houston, The effect of internal oscillators on the acoustic response of a submerged shell, The Journal of the Acoustical Society of America 101 (2) (1997) 895–899.
- [19] J. A. Bucaro, A. J. Romano, A. Sarkissian, D. M. Photiadis, B. H. Houston, Local admittance model for acoustic scattering from a cylindrical shell with many internal oscillators, The Journal of the Acoustical Society of America 103 (4) (1998) 1867–1873.
- [20] G. Maidanik, Response of ribbed panels to reverberant acoustic fields, the Journal of the Acoustical Society of America 34 (6) (1962) 809–826.
- [21] M. H. Marcus, B. H. Houston, The effect of internal point masses on the radiation of a ribbed cylindrical shell, The Journal of the Acoustical Society of America 112 (3) (2002) 961–965.
- [22] S. Sadiq, Submerged double cylinder multi-excitation analysis through linear superposition method with FEM-BEM experimental approach, in: Proceedings of International Bhurban Conference on Applied Sciences & Technology, Islamabad, Pakistan, 2010.
- [23] H. Peters, R. Kinns, N. J. Kessissoglou, Effects of internal mass distribution and its isolation on the acoustic characteristics of a submerged hull, Journal of Sound and Vibration 333 (6) (2014) 1684–1697.
- [24] M. M. Ettouney, R. P. Daddazio, N. N. Abboud, The interaction of a submerged axisymmetric shell and three-dimensional internal systems, In-

- 690 ternational Journal for Numerical Methods in Engineering 37 (17) (1994)
2951–2970.
- [25] M. C. C. Bampton, R. R. Craig Jr, Coupling of substructures for dynamic
analyses., AIAA Journal 6 (7) (1968) 1313–1319.
- [26] G. M. L. Gladwell, Branch mode analysis of vibrating systems, Journal of
695 Sound and Vibration 1 (1) (1964) 41–59.
- [27] C. Lesueur, Rayonnement acoustique des structures: vibroacoustique, in-
teractions fluide-structure (In French), Eyrolles, 1988.
- [28] S. Rubin, Improved component-mode representation for structural dynamic
analysis, AIAA journal 13 (8) (1975) 995–1006.
- 700 [29] B. Fornberg, A practical guide to pseudospectral methods, Vol. 1, Cam-
bridge university press, 1998.
- [30] V. Meyer, L. Maxit, J.-L. Guyader, T. Leissing, C. Audoly, A condensed
transfer function method as a tool for solving vibroacoustic problems,
NOVEM 2015, Dubrovnik, Croatia, 2015.
- 705 [31] A. Harari, B. E. Sandman, Radiation and vibrational properties of sub-
merged stiffened cylindrical shells, The Journal of the Acoustical Society
of America 88 (4) (1990) 1817–1830.
- [32] W. Flügge, Statik und dynamik der schalen, Springer, 1962.

- [33] A. W. Leissa, *Vibration of shells*, Vol. 288, Scientific and Technical Information Office, National Aeronautics and Space Administration Washington, DC, USA, 1973.
- 710
- [34] C. Soize, Probabilistic structural modeling in linear dynamic analysis of complex mechanical systems, I-theoretical elements, *La Recherche Aérospatiale* (English edition) 5 (1986) Pages-23.
- 715
- [35] E. G. Williams, B. H. Houston, J. A. Bucaro, Experimental investigation of the wave propagation on a point-driven, submerged capped cylinder using k-space analysis, *The Journal of the Acoustical Society of America* 87 (2) (1990) 513-522.